


POWER: 5 V feed (take only), LM27762 +3.3 V_A / −2.07 V, bleed

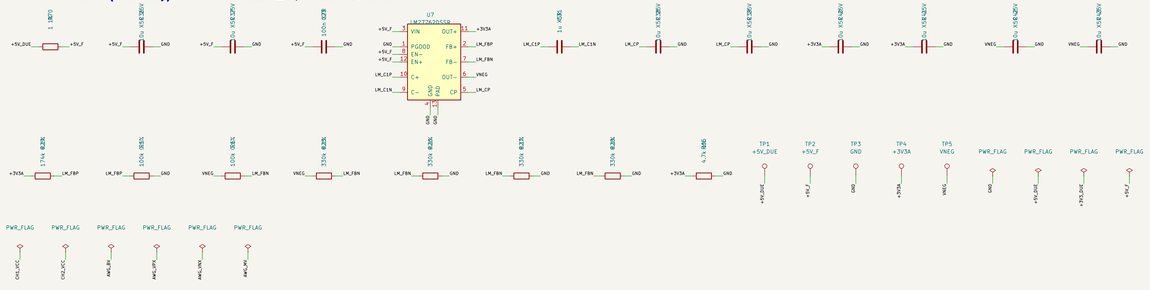


SCOPE CH1 (A1): 1 Mohm compensated divider, OPA354, range switch across RF, ADC-pin clamp

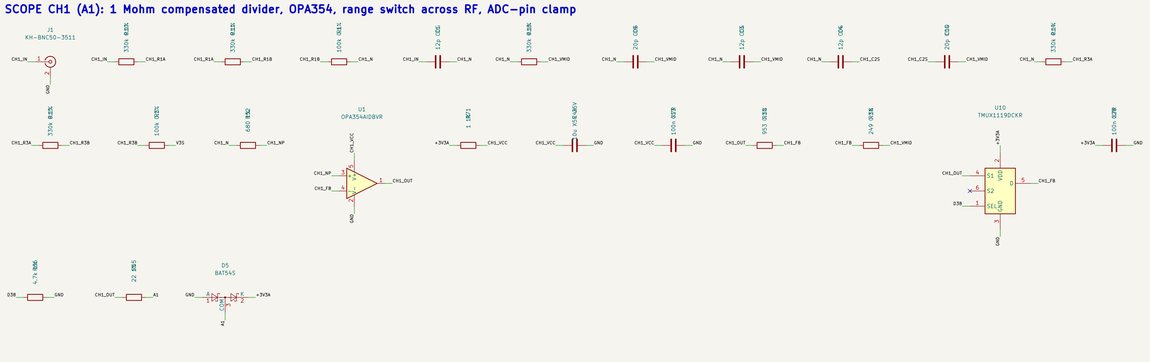


AWG: DAC0 buffer, attenuator and gain stage, own fast Vmid, 49.9 ohm out

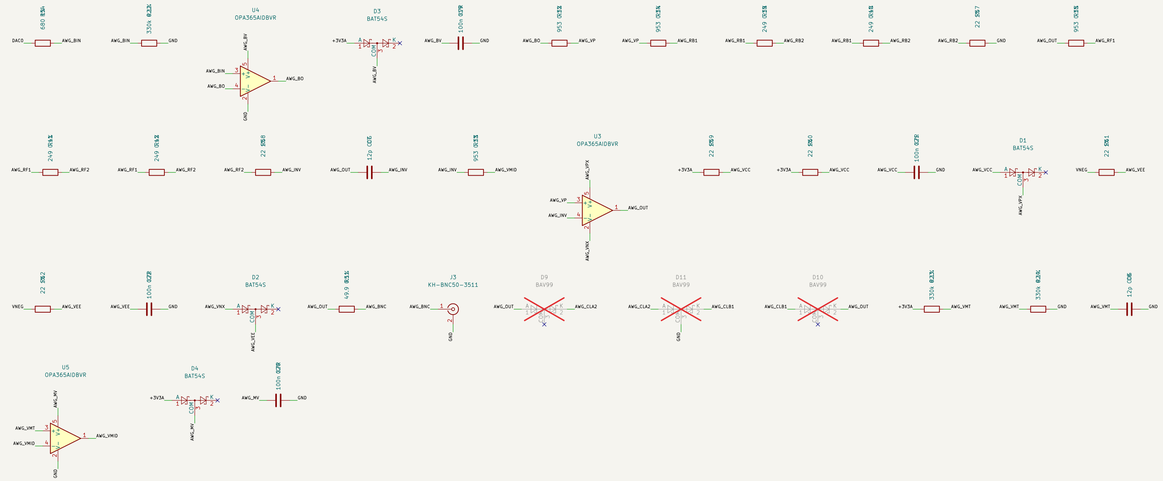


SCOPE Vmid: Due 3.3 V sense filter, 330k / 330k tap, TLV9062 one half per channel

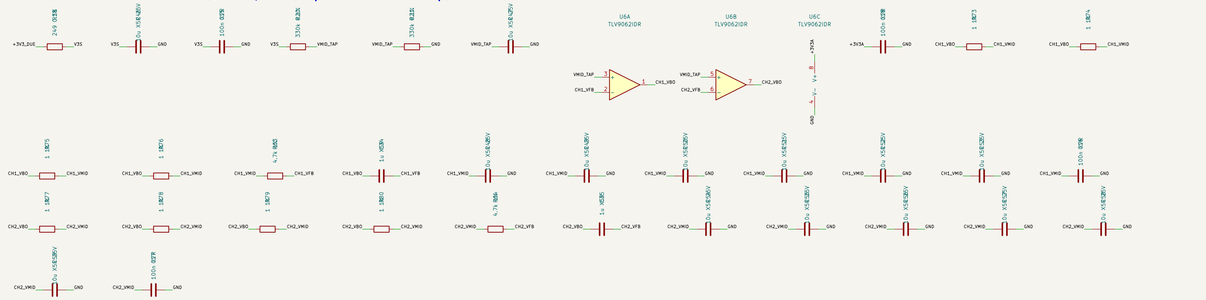

SCOPE CH2 (A0): as CH1

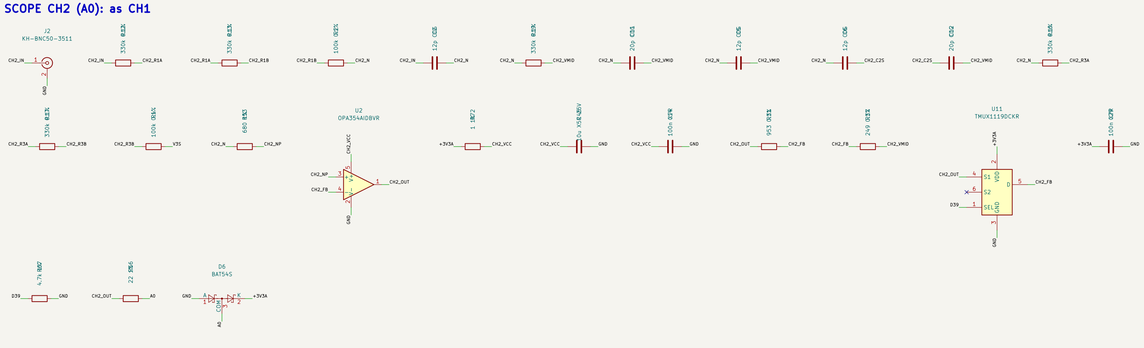

CALIBRATION: REF3030E, 249 ohm ladder (A2..A7), ADS124S08, AWG-sense divider and ratio switch

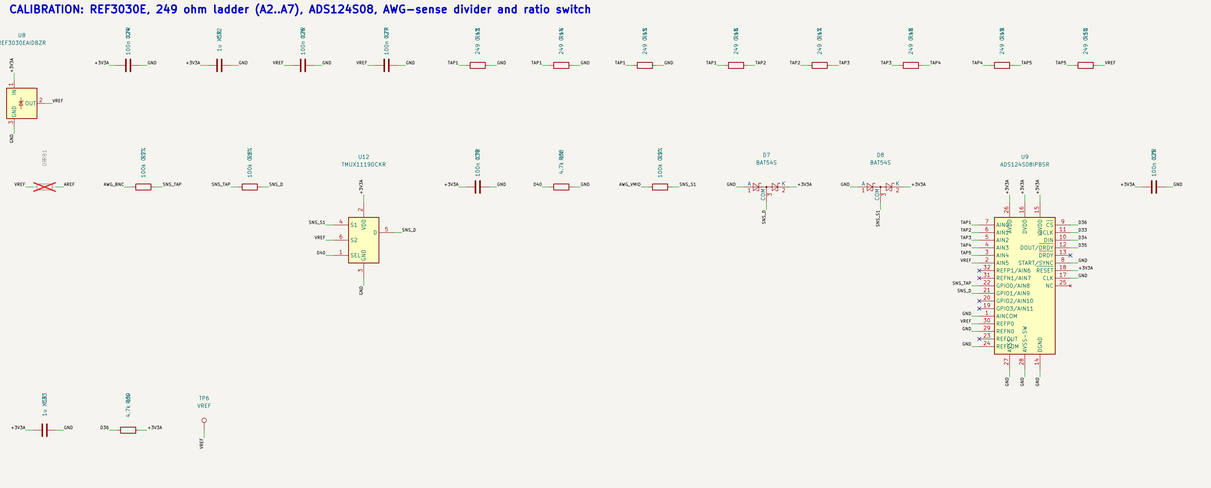

DUE HEADERS (V03 positions), mounting, test points



Own work, CC BY-SA 4.0
Values and parts: whatif/bom.txt. Connectivity: the simulated circuit (docs/architecture.md) ;
Generated by hardware/afe-proto/kicad/build_sch.py from design.py; edit those, not this file

Sheets: /
File: afe-proto.kicad_sch

Title: AFE full range design 01: AFE shield for the Arduino Due

Size: User	Date:	Rev: FR-01
KiCad E.D.A. 10.0.8		Id: 1/1