CE EMC Test Report

APPLICANT	:	**Magne AI Global tech limited**
EQUIPMENT	:	**MAG1**
BRAND NAME	:	**MaQ**
MODEL NAME	:	**MA1**
STANDARD	:	**EN 55032 : 2015 + A11: 2020 Class B** **EN 55035 : 2017 + A11: 2020** **EN IEC 61000-3-2 : 2019 + A1 : 2021** **EN 61000-3-3 : 2013 + A2 : 2021**
TEST DATE(S)	:	**Feb. 10, 2026 ~ Mar. 20, 2026**

The measurement shown in this test report is tested in accordance with the test procedures given in, EN 55032 : 2015 + A11: 2020, Class B, EN 55035 : 2017 + A11: 2020, EN IEC 61000-3-2 : 2019 + A1 : 2021, EN 61000-3-3 : 2013 + A2 : 2021.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

Cert #5145.02

Sporton International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
EC612311	Rev. 01	Initial issue of report	May 25, 2026

SUMMARY OF TEST RESULT

CLAUSE (EN55032 AND EN55035)	TEST ITEMS	TEST STANDARD	RESULT (PASS/FAIL)	REMARK
EMC Emission Measurements				
EN 55032	Conducted Emission	EN 55032 : 2015 + A11: 2020 Class B	PASS	Under limit 4.02 dB at 3.381 MHz
EN 55032	Radiated Emission	EN 55032 : 2015 + A11: 2020 Class B	PASS	Under limit 3.12 dB at 93.050 MHz for Quasi-Peak
EN 55032	Conducted Differential Voltage Emissions for Class B Equipment	EN 55032 : 2015 + A11: 2020 Class B	Not Required	-
-	Harmonic Current Emission	EN IEC 61000-3-2 : 2019 + A1 : 2021	PASS	-
-	Voltage Fluctuations and Flicker	EN 61000-3-3 : 2013 + A2 : 2021	PASS	-
EMC Immunity Tests				
EN 55035 4.2.1	Electrostatic Discharge	IEC 61000-4-2:2008	PASS	-
EN 55035 4.2.4	Electrical Fast Transients	IEC 61000-4-4:2012	PASS	-
EN 55035 4.2.2.2	Continuous RF electromagnetic field disturbances	IEC 61000-4-3:2006+A1:2007+A2:2010	PASS	-
EN 55035 4.2.2.3	Continuous Conducted Disturbances	IEC 61000-4-6:2008	PASS	-
EN 55035 4.2.3	Power-Frequency Magnetic Fields	IEC 61000-4-8:2009	PASS	-
EN 55035 4.2.5	Surges	IEC 61000-4-5:2005	PASS	-
EN 55035 4.2.6	Voltage Dips and Interruptions	IEC 61000-4-11:2004	PASS	-

Note: Not required means after assessing, test items are not necessary to carry out.

Conformity Assessment Condition:
The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section “Measurement Uncertainty”.
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

APPLIED STANDARDS

According to the specifications of the manufacturer, the EUT must complies with the requirements of

- **EN 55032 : 2015 + A11: 2020 Class B**
- **EN 55035 : 2017 + A11: 2020**
- **EN IEC 61000-3-2 : 2019 + A1 : 2021**
- **EN 61000-3-3 : 2013 + A2 : 2021**

Below are basic standards version used for all test items in this report.

Emission Test Items	Basic Standard Version used in this report	Remark
Radiated Emission	EN 55032 : 2015 + A11: 2020	There is no additional test requirement for this EUT, when EN 55032: 2015 is updated to 55032 : 2015/A11: 2020 versions.
Conducted Emission	EN 55032 : 2015 + A11: 2020	
Harmonics Current Emission	EN IEC 61000-3-2 : 2019 + A1 : 2021	-
Voltage Fluctuation and Flicker	EN 61000-3-3 : 2013 + A2 : 2021	-

Immunity Test Items	Basic Standard Version used in this report	Remark
Electrostatic Discharge (ESD)	IEC 61000-4-2:2008	-
Electrical fast transients (EFT/BURST)	IEC 61000-4-4:2012	-
Continuous Radiated Disturbances (RS)	IEC 61000-4-3:2006+A1:2007+A2:2010	-
Continuous Conducted Disturbances (CS)	IEC 61000-4-6:2008	-
Surges	IEC 61000-4-5:2005	-
Voltage Dips and Interruptions	IEC 61000-4-11:2004	-
Power-Frequency Magnetic Fields	IEC 61000-4-8:2009	-

1. General Description of Equipment under Test

1.1 Applicant

Magne AI Global tech limited
FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.2 Manufacturer

Magne AI Global tech limited
FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	MAG1
Brand Name	MaQ
Model Name	MA1
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
WCDMA Operating Band(s)	FDD Band I / II / IV / V / VIII
LTE Operating Band(s)	FDD Band 1 / 2 / 3 / 5 / 7 / 8 / 12 / 13 / 17 / 20 / 25 / 26 /28 / 66 / 71 TDD Band 38 / 40 / 41 / 42
5G NR	n1 / n3 / n5 / n7 / n8 / n20 / n28 / n66 / n71 / n38 / n40 / n41 / n77 / n78 /n79
Wi-Fi Specification	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
Bluetooth Version	Bluetooth BR / EDR / LE
GNSS	BDS/Galileo/GPS
NFC	Type A/B/F/V
WPT	WPT
IMEI Code	Radiation/Conduction: 016813000001873 RS: 016813000002418/016813000002426 CS: 016813000000651/016813000000669 Harmonic/Flicker/Surge/Dips/EFT/MF: 016813000002632/016813000002640 ESD : 016813000001873/016813000001881
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this Test Standard	
Transmitter Frequency Range	GSM900: 880 MHz ~ 915 MHz GSM1800: 1710 MHz ~ 1785 MHz WCDMA Band I: 1920 MHz ~ 1980 MHz WCDMA Band V: 824 MHz ~ 849 MHz WCDMA Band VIII: 880 MHz ~ 915 MHz LTE Band 1: 1920 MHz ~ 1980 MHz LTE Band 3: 1710 MHz ~ 1785 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 8: 880 MHz ~ 915 MHz LTE Band 20: 832 MHz ~ 862 MHz LTE Band 28: 703 MHz ~ 748 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 40: 2300 MHz ~ 2400 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3400 MHz ~ 3600 MHz 5G NR n1: 1920 MHz ~ 1980 MHz 5G NR n3: 1710 MHz ~ 1785 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n8: 880 MHz ~ 915 MHz 5G NR n20: 832 MHz ~ 862 MHz 5G NR n28: 703 MHz ~ 748 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n40: 2300 MHz ~ 2400 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n77: 3300 MHz ~ 4200 MHz 5G NR n78: 3300 MHz ~ 3800 MHz 5G NR n79: 4400 MHz ~ 5000 MHz WLAN 802.11b/g/n: 2400 MHz ~ 2483.5 MHz WLAN 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz; 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC: 13.56 MHz

Receiver Frequency Range	GSM900: 925 MHz ~ 960 MHz GSM1800: 1805 MHz ~ 1880 MHz WCDMA Band I: 2110 MHz ~ 2170MHz WCDMA Band V: 869 MHz ~ 894 MHz WCDMA Band VIII: 925 MHz ~ 960 MHz LTE Band 1: 2110 MHz ~ 2170 MHz LTE Band 3: 1805 MHz ~ 1880 MHz LTE Band 5 : 869MHz ~ 894 MHz LTE Band 7: 2620 MHz ~ 2690 MHz LTE Band 8: 925 MHz ~ 960 MHz LTE Band 20: 791 MHz ~ 821 MHz LTE Band 28: 758 MHz ~ 803 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 40: 2300 MHz ~ 2400 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3400 MHz ~ 3600 MHz 5G NR n1: 2110 MHz ~ 2170 MHz 5G NR n3: 1805 MHz ~ 1880 MHz 5G NR n5: 869MHz ~ 894 MHz 5G NR n7: 2620 MHz ~ 2690 MHz 5G NR n8: 925 MHz ~ 960 MHz 5G NR n20: 791 MHz ~ 821 MHz 5G NR n28: 758 MHz ~ 803 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n40: 2300 MHz ~ 2400 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n77: 3300 MHz ~ 4200 MHz 5G NR n78: 3300 MHz ~ 3800 MHz 5G NR n79: 4400 MHz ~ 5000 MHz WLAN 802.11b/g/n: 2400 MHz ~ 2483.5 MHz WLAN 802.11a/n/ac: 5150 MHz ~ 5250 MHz 5250 MHz ~ 5350 MHz 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz GNSS : 1559 MHz ~ 1610 MHz NFC: 13.56 MHz WPT: 100kHz~ 205 kHz
Antenna Type	WWAN : LDS Antenna WLAN : LDS Antenna Bluetooth : LDS Antenna GNSS: LDS Antenna NFC: FPC Antenna WPT: FPC Antenna

Type of Modulation	GSM/GPRS: GMSK WCDMA : BPSK HSPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) :π/4-DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK WPT: ASK

Note: The device supports WPT RX only.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

2. Test Configuration of Equipment under Test

2.1 Details of EUT Test Modes

Details of Test line Items		
Radiated Emission		
Mode 1	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera (Rear) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 2	:	GSM1800 Idle + Bluetooth Link + WLAN (5G) Link + Camera (Front) + Earphone + Battery + USB Cable (Charging from Adapter) + ANT 4 + SIM 2
Mode 3	:	WCDMA Band I Link + Bluetooth Link + WLAN (2.4G) Link + MPEG4 (Run Color Bar) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 4	:	LTE Band 7 Idle + Bluetooth Link + WLAN (5G) Link + NFC On + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 5	:	DC_1A_n78A Idle + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + Earphone + Battery + USB Cable (EUT (eMMC) USB Data Link to NB) + SIM 1
Mode 6	:	WCDMA Band I Link + Bluetooth Link + WLAN (5G) Link + MPEG4 (Run Color Bar) + Earphone + Battery + USB Cable (NB USB Data Link to EUT (eMMC)) + SIM 1
Mode 7	:	WCDMA Band I Link + Bluetooth Link + WLAN (2.4G) Link + MPEG4 (Run Color Bar) + Earphone + Battery + USB Cable (Typec to Typec)(EUT Charging to other phones) + SIM 1
Mode 8	:	WCDMA Band I Link + Bluetooth Link + WLAN (5G) Link + MPEG4 (Run Color Bar) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1
Mode 9	:	WCDMA Band I Link + Bluetooth Idle + WLAN Idle + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Conducted Emission		
Mode 1	:	WWAN Link + Bluetooth Link + WLAN (2.4G) Link + Camera (Rear) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 2	:	WWAN Link + Bluetooth Link + WLAN (5G) Link + Camera (Front) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 2
Mode 3	:	WWAN Link + Bluetooth Link + WLAN (5G Band IV) Link + MPEG4 (Run Color Bar) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 4	:	WWAN Link + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 5	:	WWAN Idle + Bluetooth Idle + WLAN Idle + NFC On + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 6	:	WWAN Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1
Harmonic Current Emissions		
Mode 1	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 2	:	GSM1800 Idle + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 2
Mode 3	:	WCDMA Band I Link + Bluetooth Link + WLAN (5G Band IV) Link + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 4	:	LTE Band 7 Idle + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 5	:	DC_1A_n78A Idle + Bluetooth Idle + WLAN Idle + NFC On + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 6	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1
Voltage Fluctuations and Flicker		
Mode 1	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1

Mode 2	:	GSM1800 Idle + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 2
Mode 3	:	WCDMA Band I Link + Bluetooth Link + WLAN (5G Band IV) Link + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 4	:	LTE Band 7 Idle + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 5	:	DC_1A_n78A Idle + Bluetooth Idle + WLAN Idle + NFC On + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 6	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1
Electrostatic Discharge		
Mode 1	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 2	:	GSM1800 Idle + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 2
Mode 3	:	WCDMA Band I Link + Bluetooth Link + WLAN (2.4G) Link + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 4	:	LTE Band 7 Idle + Bluetooth Link + WLAN (5G) Link + NFC On + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 5	:	DC_1A_n78A Idle + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + Earphone + Battery + USB Cable (EUT (eMMC) USB Data Link to NB) + SIM 1
Mode 6	:	GSM900 Link + Bluetooth Link + WLAN (5G) Link + Camera(Rear) + Earphone + Battery + USB Cable (NB USB Data Link to EUT (eMMC)) + SIM 1
Mode 7	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable(Typec to Typec)(EUT Charging to other phones) + SIM 1
Mode 8	:	GSM900 Link + Bluetooth Idle + WLAN Idle + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1
Mode 9	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + SIM 1
Continuous RF electromagnetic field disturbances		
Mode 1	:	WCDMA Band I Link (BER) + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + SIM1 + Battery + USB Cable(Charging from Adapter) + Earphone
Mode 2	:	LTE Band 5 Link (Throughput) + Bluetooth Link + WLAN (5G) Link + Camera(Front) + SIM1 + Battery + USB Cable(Charging from Adapter) + Earphone
Mode 3	:	DC_1A_n77A Link (Throughput) + Bluetooth Link + WLAN (5G Band IV) Link + MPEG4(Run Color Bar) + SIM1 + Battery + USB Cable(Charging from Adapter) + Earphone
Mode 4	:	DC_8A_n3A Link (Throughput) + Bluetooth Link + WLAN (5G) Link + NFC On + SIM1 + Battery + USB Cable (EUT (eMMC) USB Data Link to NB) + Earphone
Mode 5	:	DC_41A_n78A Link (Throughput) + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + SIM1 + Battery + USB Cable (EUT (eMMC) USB Data Link to NB) + Earphone
Mode 6	:	WCDMA Band I Idle + Bluetooth Idle + WLAN Idle + Camera(Rear) + SIM1 + Battery + USB Cable (Charging from wireless charging cradle) + Earphone
Mode 7	:	WCDMA Band I Link (BER) + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Battery + USB Cable(Typec to Typec)(EUT Charging to other phones)
Mode 8	:	Color Bar Earphone(L) + Battery + Audio Mode
Mode 9	:	Color Bar Earphone(R) + Battery + Audio Mode
Mode 10	:	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Mode 11	:	Color Bar Earphone Port + Battery + Audio Mode + USB Cable(Charging from Adapter)
Electrical Fast Transients		
Mode 1	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 2	:	GSM1800 Idle + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 2
Mode 3	:	WCDMA Band I Link + Bluetooth Link + WLAN (5G Band IV) Link + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 4	:	LTE Band 7 Idle + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 5	:	DC_1A_n78A Idle + Bluetooth Idle + WLAN Idle + NFC On + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1

Mode 6	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1
Voltage Dips and Interruptions		
Mode 1	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 2	:	GSM1800 Idle + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 2
Mode 3	:	WCDMA Band I Link + Bluetooth Link + WLAN (5G Band IV) Link + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 4	:	LTE Band 7 Idle + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 5	:	DC_1A_n78A Idle + Bluetooth Idle + WLAN Idle + NFC On + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 6	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1
Surges		
Mode 1	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 2	:	GSM1800 Idle + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 2
Mode 3	:	WCDMA Band I Link + Bluetooth Link + WLAN (5G Band IV) Link + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 4	:	LTE Band 7 Idle + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 5	:	DC_1A_n78A Idle + Bluetooth Idle + WLAN Idle + NFC On + Earphone + Battery + USB Cable(Charging from Adapter) + SIM 1
Mode 6	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1
Continuous Conducted Disturbances		
Mode 1	:	WCDMA Band I Link (BER) + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + SIM 1 + Battery + USB Cable (Charging from Adapter) + Earphone
Mode 2	:	LTE Band 5 Link (Throughput) + Bluetooth Link + WLAN (5G) Link + Camera(Front) + SIM 1 + Battery + USB Cable (Charging from Adapter) + Earphone
Mode 3	:	DC_1A_n77A Link (Throughput) + Bluetooth Link + WLAN (5G Band IV) Link + MPEG4(Run Color Bar) + SIM 1 + Battery + USB Cable (Charging from Adapter) + Earphone
Mode 4	:	DC_8A_n3A Link (Throughput) + Bluetooth Link + WLAN (5G) Link + NFC On + SIM 1 + Battery + USB Cable (Charging from Adapter) + Earphone
Mode 5	:	DC_41A_n78A Link (Throughput) + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + SIM 1 + Battery + USB Cable (Charging from Adapter) + Earphone
Mode 6	:	WCDMA Band I Idle + Bluetooth Idle + WLAN Idle + SIM 1 + Battery + USB Cable (Charging from wireless charging cradle)
Mode 7	:	Color Bar Earphone(L) + Battery + Audio Mode + USB Cable (Charging from Adapter)
Mode 8	:	Color Bar Earphone(R) + Battery + Audio Mode + USB Cable (Charging from Adapter)
Mode 9	:	Color Bar Handfree + Battery + Audio Mode + USB Cable(Charging from Adapter)
Mode 10	:	Color Bar Earphone Port + Battery + Audio Mode + USB Cable (Charging from Adapter)
Power-Frequency Magnetic Fields		
Mode 1	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 2	:	GSM1800 Idle + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 2
Mode 3	:	WCDMA Band I Link + Bluetooth Link + WLAN (2.4G) Link + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 4	:	LTE Band 7 Idle + Bluetooth Link + WLAN (5G) Link + NFC On + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 1
Mode 5	:	DC_1A_n78A Idle + Bluetooth Link + WLAN (2.4G) Link + GNSS Rx + Earphone + Battery + USB Cable (EUT (eMMC) USB Data Link to NB) + SIM 1

Mode 6	:	GSM900 Link + Bluetooth Link + WLAN (5G) Link + Camera(Rear) + Earphone + Battery + USB Cable (NB USB Data Link to EUT (eMMC)) + SIM 1
Mode 7	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable(Typec to Typec)(EUT Charging to other phones) + SIM 1
Mode 8	:	GSM900 Link + Bluetooth Idle + WLAN Idle + Camera(Rear) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1
Mode 9	:	GSM900 Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + SIM 1

Remark: Data Linking with Notebook means data application transferred mode between EUT and Notebook.

Worst mode of all test items listed in section 2.1

Test items	Worst mode
Radiated Emission	8
Conducted Emission	6
Harmonic Current Emissions	1
Voltage Fluctuations and Flicker	1
Continuous Radiated Disturbances (RS)	10
Electrostatic Discharge	-
Fast Transient, Common Mode	-
Continuous Conducted Disturbances (CS)	10
Voltage Dips and Interruptions	-
Surges	-
Power-Frequency Magnetic Fields	-

Remark: Only data of worst mode (if test item has) was reported in test result.

2.2 Connection Diagram of Test System

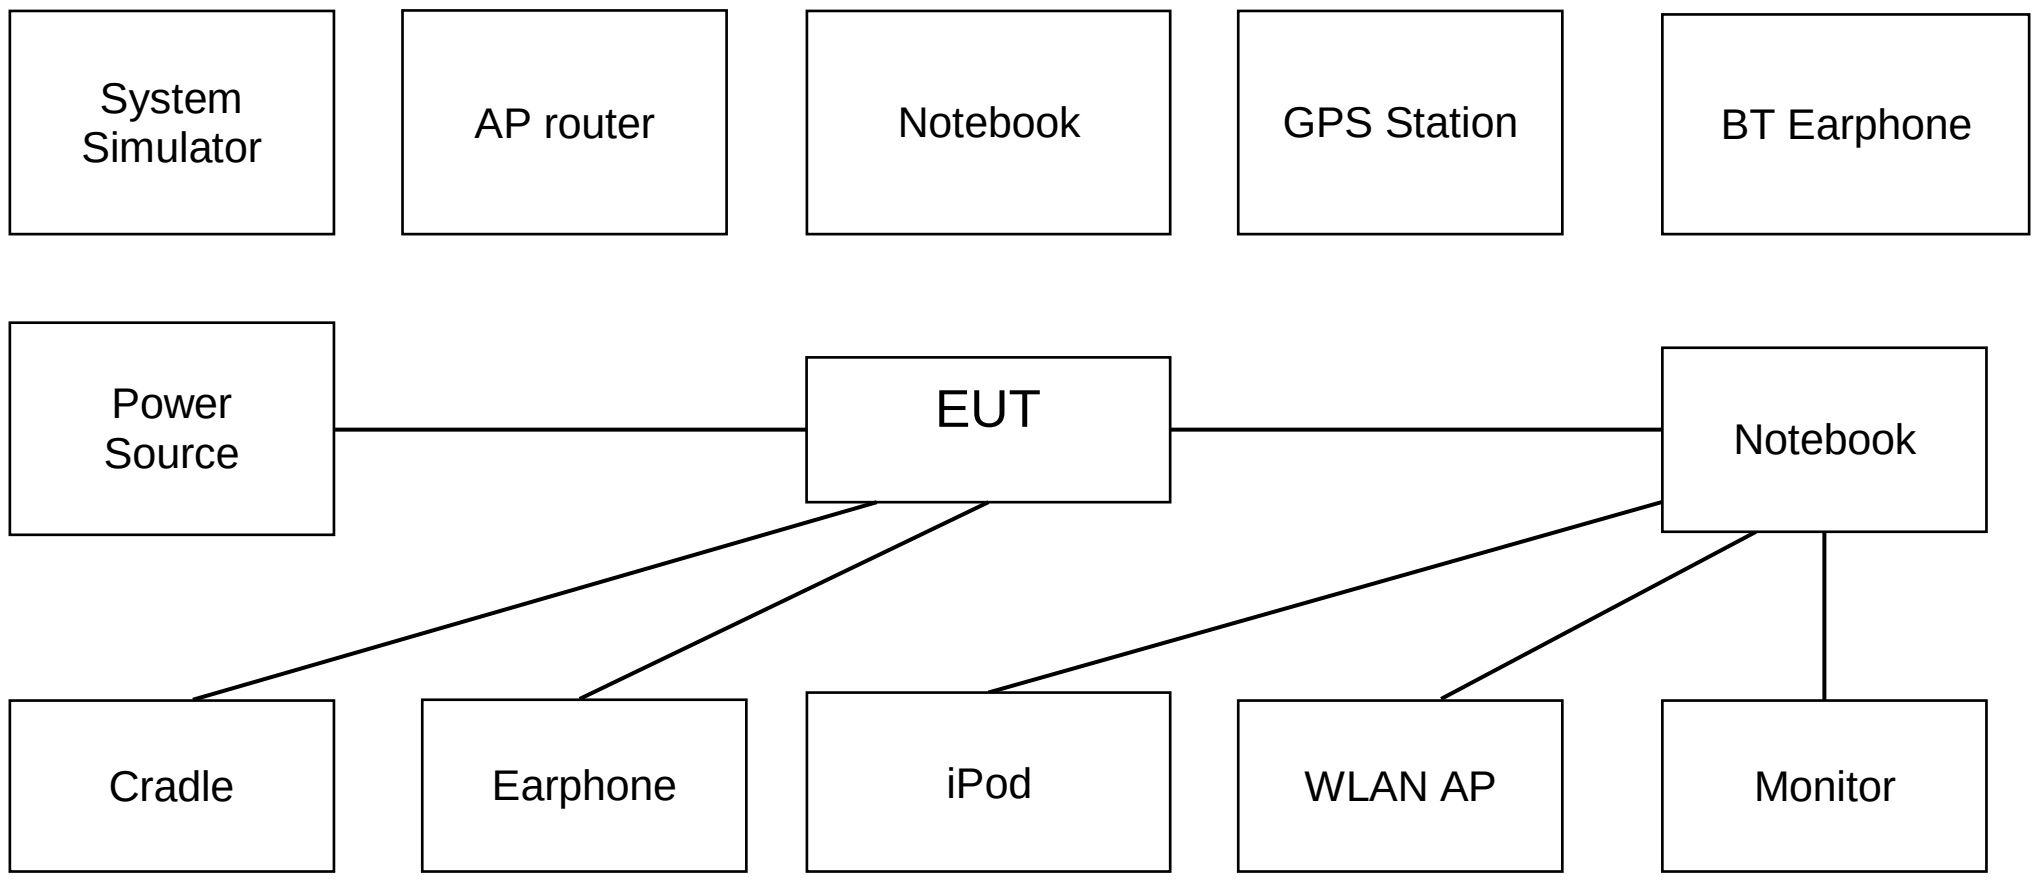

This example is connection diagram of EUT test configurations.
. For detail, please refer to test mode configuration and setup photographs for each test item.

2.3 Supported Unit Used in Test Configuration and System

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
2.	5GNR Base Station	Anritus	MT8000A	N/A	N/A	Unshielded,1.8m
3.	LABSAT GPS Simulator	RACELOGIC	RLLS03-2RP	N/A	N/A	Unshielded,1.8m
4.	GNSS Station	R&S	SMBV100A	N/A	N/A	Unshielded, 1.8m
5.	WLAN AP	D-Link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
6.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded,1.8m
7.	WLAN AP	D-Link	DIR-815	KA21R815A1	Unshielded,1.8m	Unshielded,1.8m
8.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
9.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
10.	Notebook	Lenovo	G410	N/A	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
11.	Notebook	acer	N20C5	N/A	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
12.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m
13.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
14.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A
15.	SD Card	Kingston	4/8GB	N/A	N/A	N/A
16.	NFC Card	N/A	N/A	N/A	N/A	N/A

2.4 EUT Operation Test Setup

The EUT was set in below conditions during EMI and EMS testing.

Read/Write and Storage of Data

1. Let EUT be connected with notebook or PC.
2. Execute the program for files transferring between EUT and storage device.
3. Monitor the data transmission by checking whether there some error or abnormal action occurred.

NFC

1. Turn on the NFC function of EUT.
2. NFC signal is kept transmitting, and monitoring it by using RF receiver.

Display (Color bar)

1. Continuously play color bar image.
2. Monitor the display quality of color bar image.

GNSS

1. Execute program to make the EUT continuously receive signals from GNSS simulator.
2. The GNSS receiver performance is kept monitoring.

WLAN

1. Enable WLAN function of the EUT.
2. The EUT links with supported units
3. Execute “PING IP” function under the “ cmd “ of Window system to transfer packet bi-directionally between the EUT and supported units.
4. Monitor the packet loss and WLAN radio performance.

Bluetooth (include Bluetooth Data Link and Bluetooth Headset)

1. Link with supported unit via Bluetooth radio function.
2. Monitor the status of connection by checking the Bluetooth link performance without radio link drop.

GSM Link

1. The GSM radio function is linked with system simulator, and set GSM900 PCL=5, and DCS1800 PCL=0 for maximum output power.
2. The Uplink/Downlink radio quality and audio quality are monitored via the system simulator.

WCDMA Link

1. The WCDMA (RMC12.2Kbps) radio function is linked with system simulator, and set all up bits for maximum output power, and the DTX is disabled.
2. The Uplink/Downlink radio quality, and audio quality are monitored via the system simulator.
3. For call established mode, check from the phone display that the call is maintained throughout the test.

LTE Link

1. The LTE radio function is linked with system simulator, and set all up bits for maximum output power, and the DTX is disabled.

5G NR Mode

For data transmitting, the throughput shall be monitored via the system simulator.

GSM/WCDMA/LTE/5GNR Idle

For Idle mode, the connection between EUT and GSM/WCDMA/LTE/5GNR system simulator is established.

Monitor the Bluetooth function

Monitor the WLAN function

EUT with GNSS function linkage, and the GNSS signal is receipt continuously

Monitor the NFC function

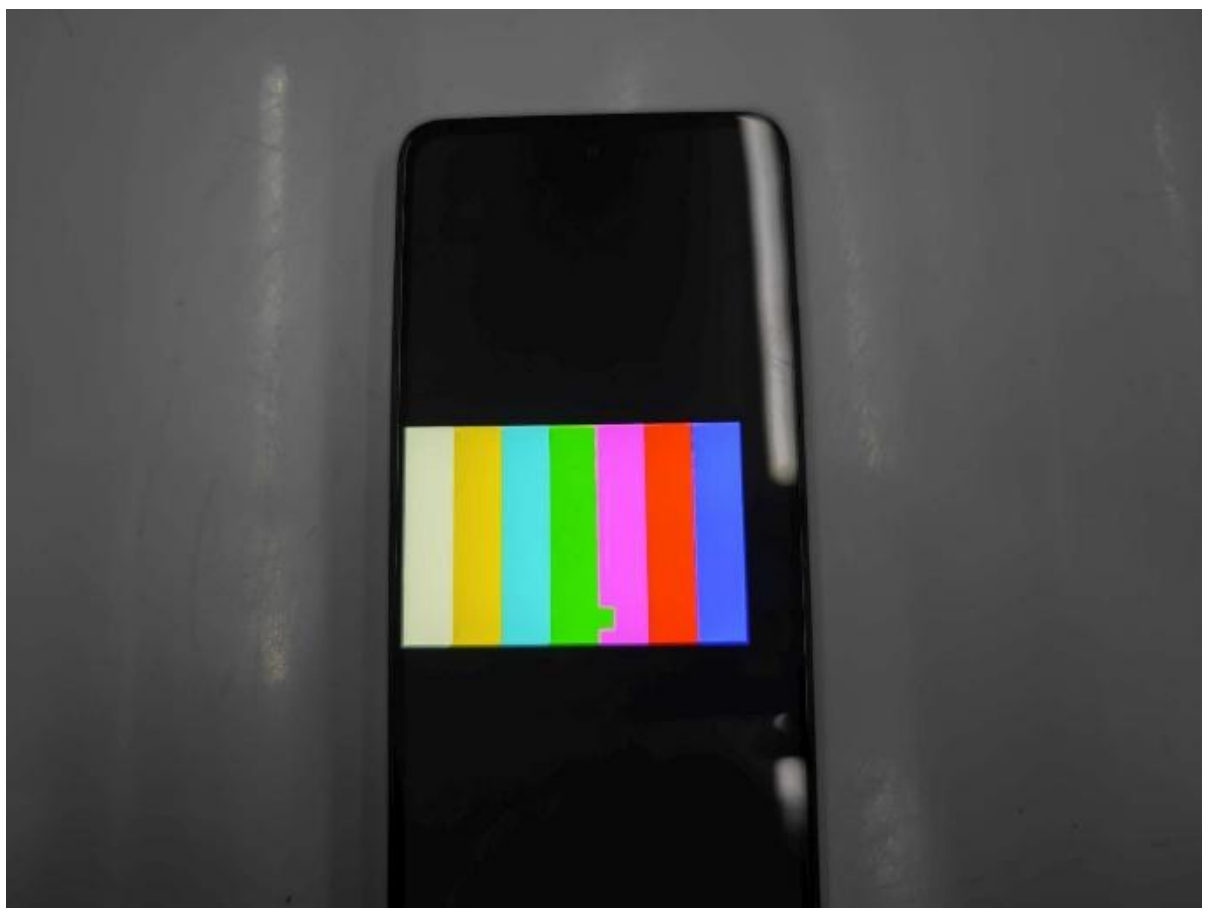

Monitor the MPEG4 function

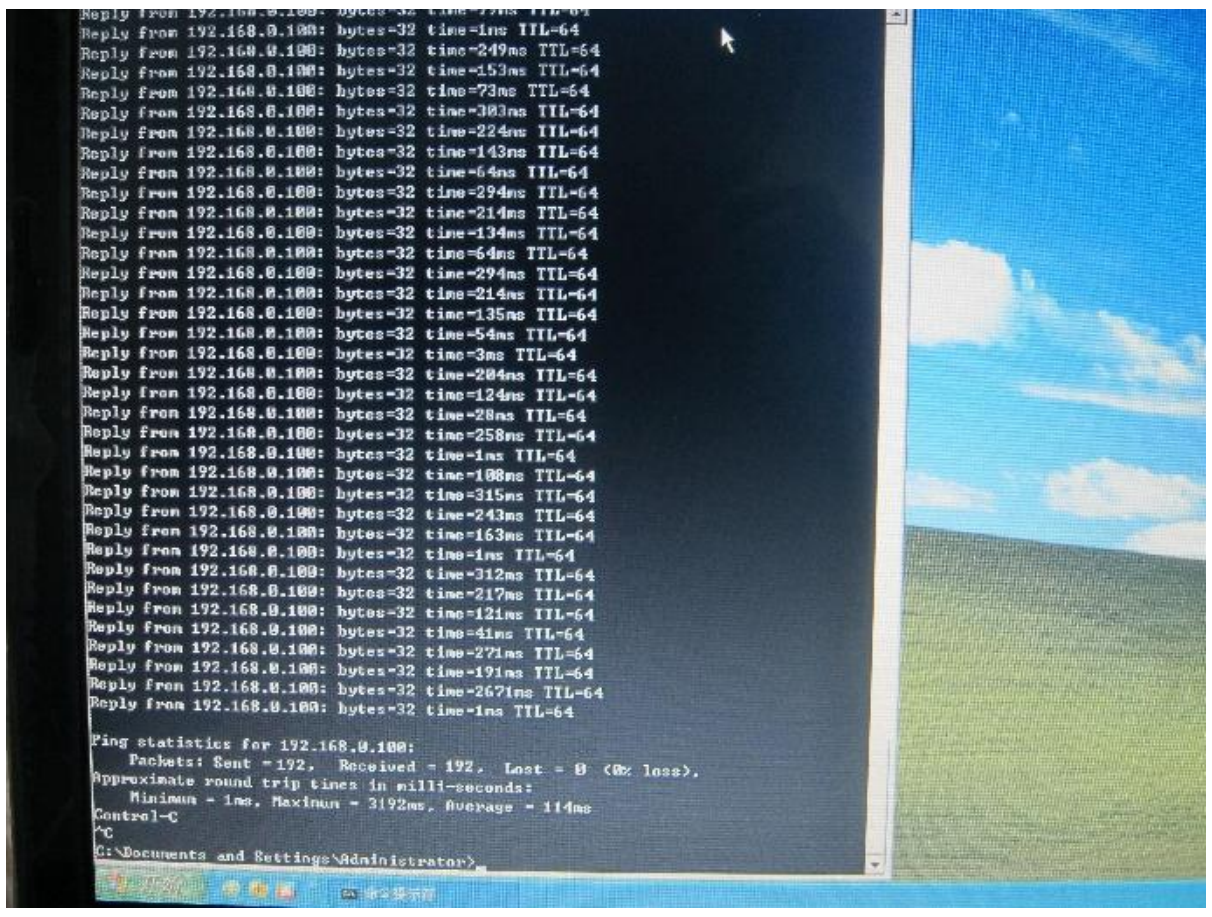

Monitor the WLAN packet lost (0%)

2.5 Summary of Environment Condition, Test Date and Test Engineer for all Test Items

Test items	Ambient Temperature (℃)	Relative Humidity (%)	Atmospheric Pressure (kPa)	Test Date	Test Engineer
Radiated Emission	23.7~24.3	47~48	98	Mar. 20, 2026	Yoke Si
Conducted Emission	24.2~25.6	37~39	98	Feb. 28, 2026	Buck
Harmonic Current Emissions	22~26	33~36	98	Feb. 12, 2026	Eko Guan
Voltage Fluctuations and Flicker	22~26	33~36	98	Feb. 12, 2026	Eko Guan
Electrostatic Discharge (ESD)	23.5~24	43~45	98	Feb. 10, 2026	sun
Continuous Radiated Disturbances (RS)	18~19	45~46	98	Mar. 08, 2026	DAHE
Electrical Fast Transients (EFT/BURST)	22~26	33~36	98	Feb. 12, 2026	Eko Guan
Continuous Conducted Disturbances (CS)	21~23	43~45	98	Mar. 10, 2026	LUYU
Surges	22~26	33~36	98	Feb. 12, 2026	Eko Guan
Voltage Dips and Interruptions	22~26	33~36	98	Feb. 12, 2026	Eko Guan
Power-Frequency Magnetic Fields	22~26	33~36	98	Feb. 12, 2026	Eko Guan

2.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	210616
2.	10CH01-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24
4.	RS01-KS	R&S	EMC32	10.50.00
5.	CS01-KS	R&S	EMC32	10.50.00
6.	EX01-KS (surge Dips EFT)	TQSEQ	win3000	1.3.2
7.	EX01-KS (H&F)	TQSEQ	Win2100V4	4.30.0

3. EMC Emission Measurements

3.1 Radiated Emission Test (Refer to EN55032)

3.1.1 Limits for Radiated Emission Test

<Class B limit>

Frequency Range (MHz)	Measurement		Class B limits dB (μV/m)
	Distance (m)	Detector Type/ Bandwidth	OATS/SAC
30 ~ 230	10	Quasi Peak / 120 kHz	30
230 ~ 1000			37
30 ~ 230	3		40
230 ~ 1000			47

Frequency Range (MHz)	Measurement		Class B limits dB(μV/m)
	Distance (m)	Detector Type/ Bandwidth	FSOATS
1000 ~ 3000	3	Average / 1 MHz	50
3000 ~ 6000			54
1000 ~ 3000		Peak / 1 MHz	70
3000 ~ 6000			74

Conditional testing frequency:

Highest measured frequency	Highest measured frequency
Fx ≦ 108 MHz	1 GHz
108 MHz ＜ Fx ≦ 500 MHz	2 GHz
500 MHz ＜ Fx ≦ 1 GHz	5 GHz
Fx ＞ 1 GHz	5 x Fx up to a maximum of 6 GHz

3.1.2 Test Setup

<Radiated Emissions Frequency: 30 MHz to 1000 MHz>

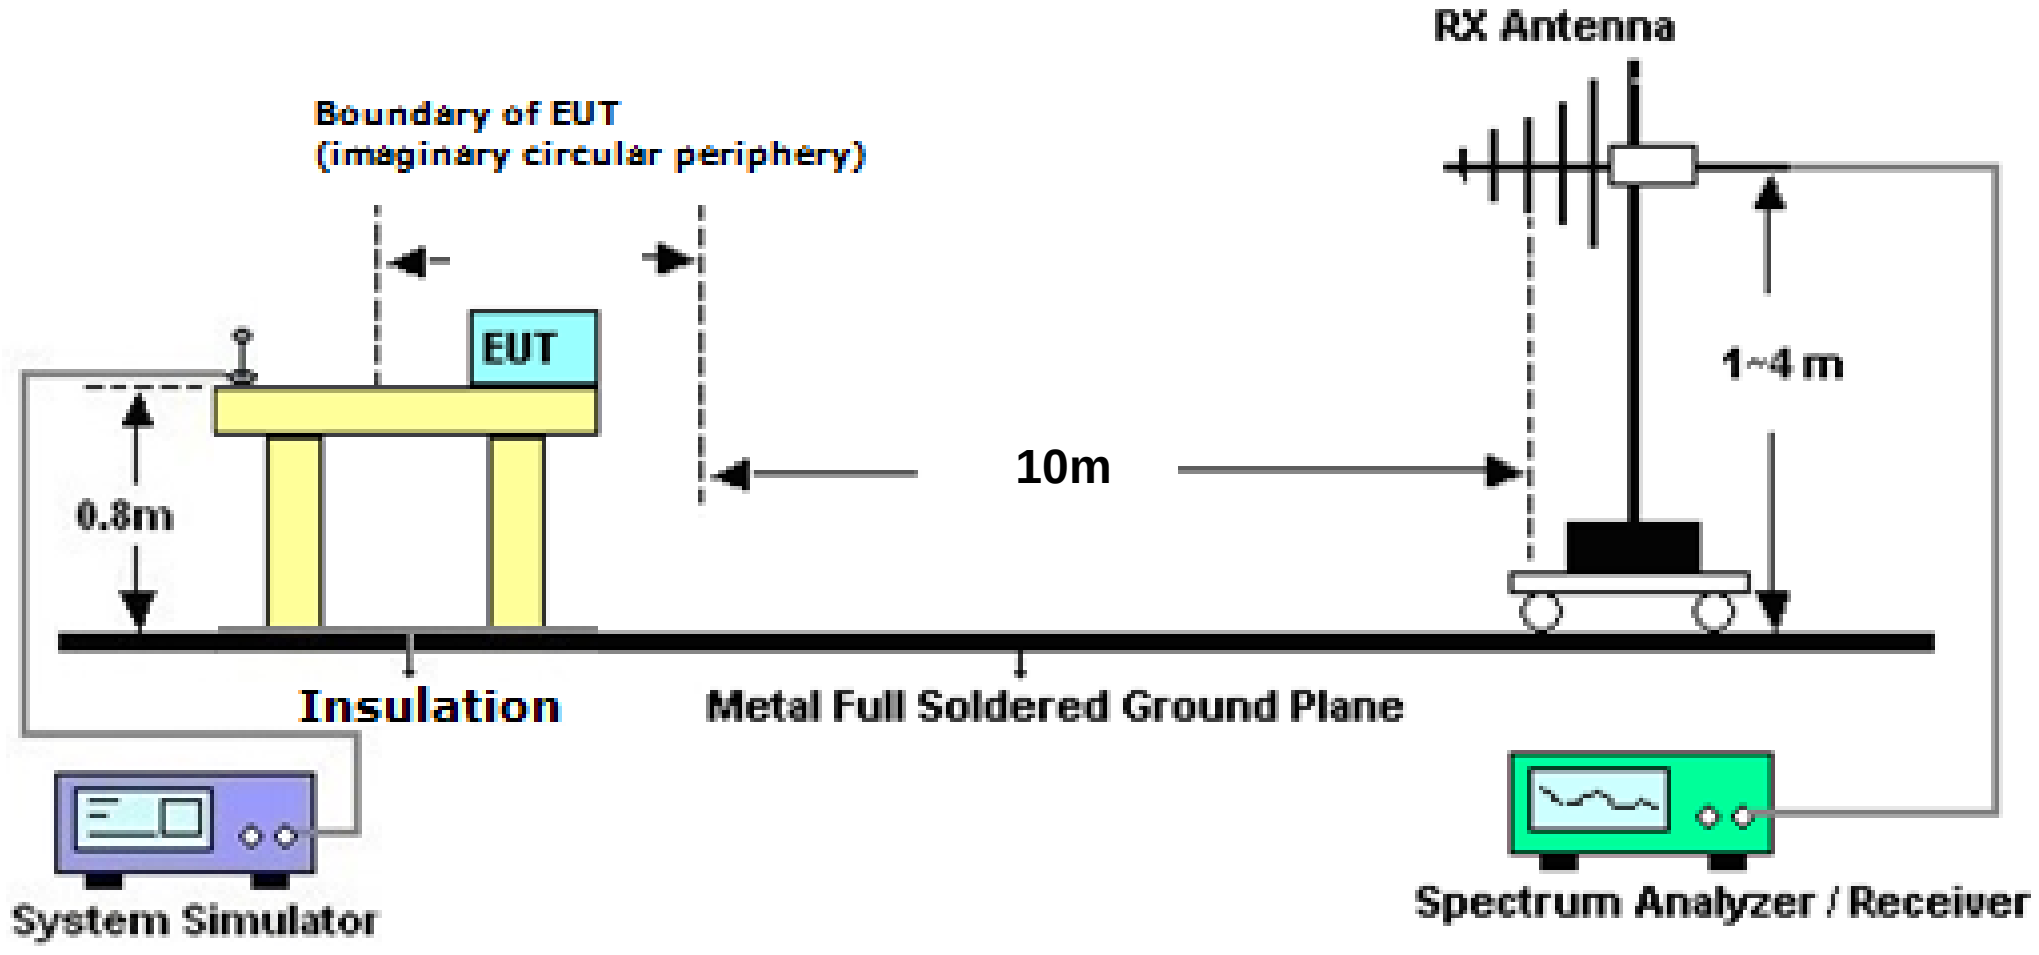

<Radiated Emissions Frequency: 1000 MHz to 6000 MHz>

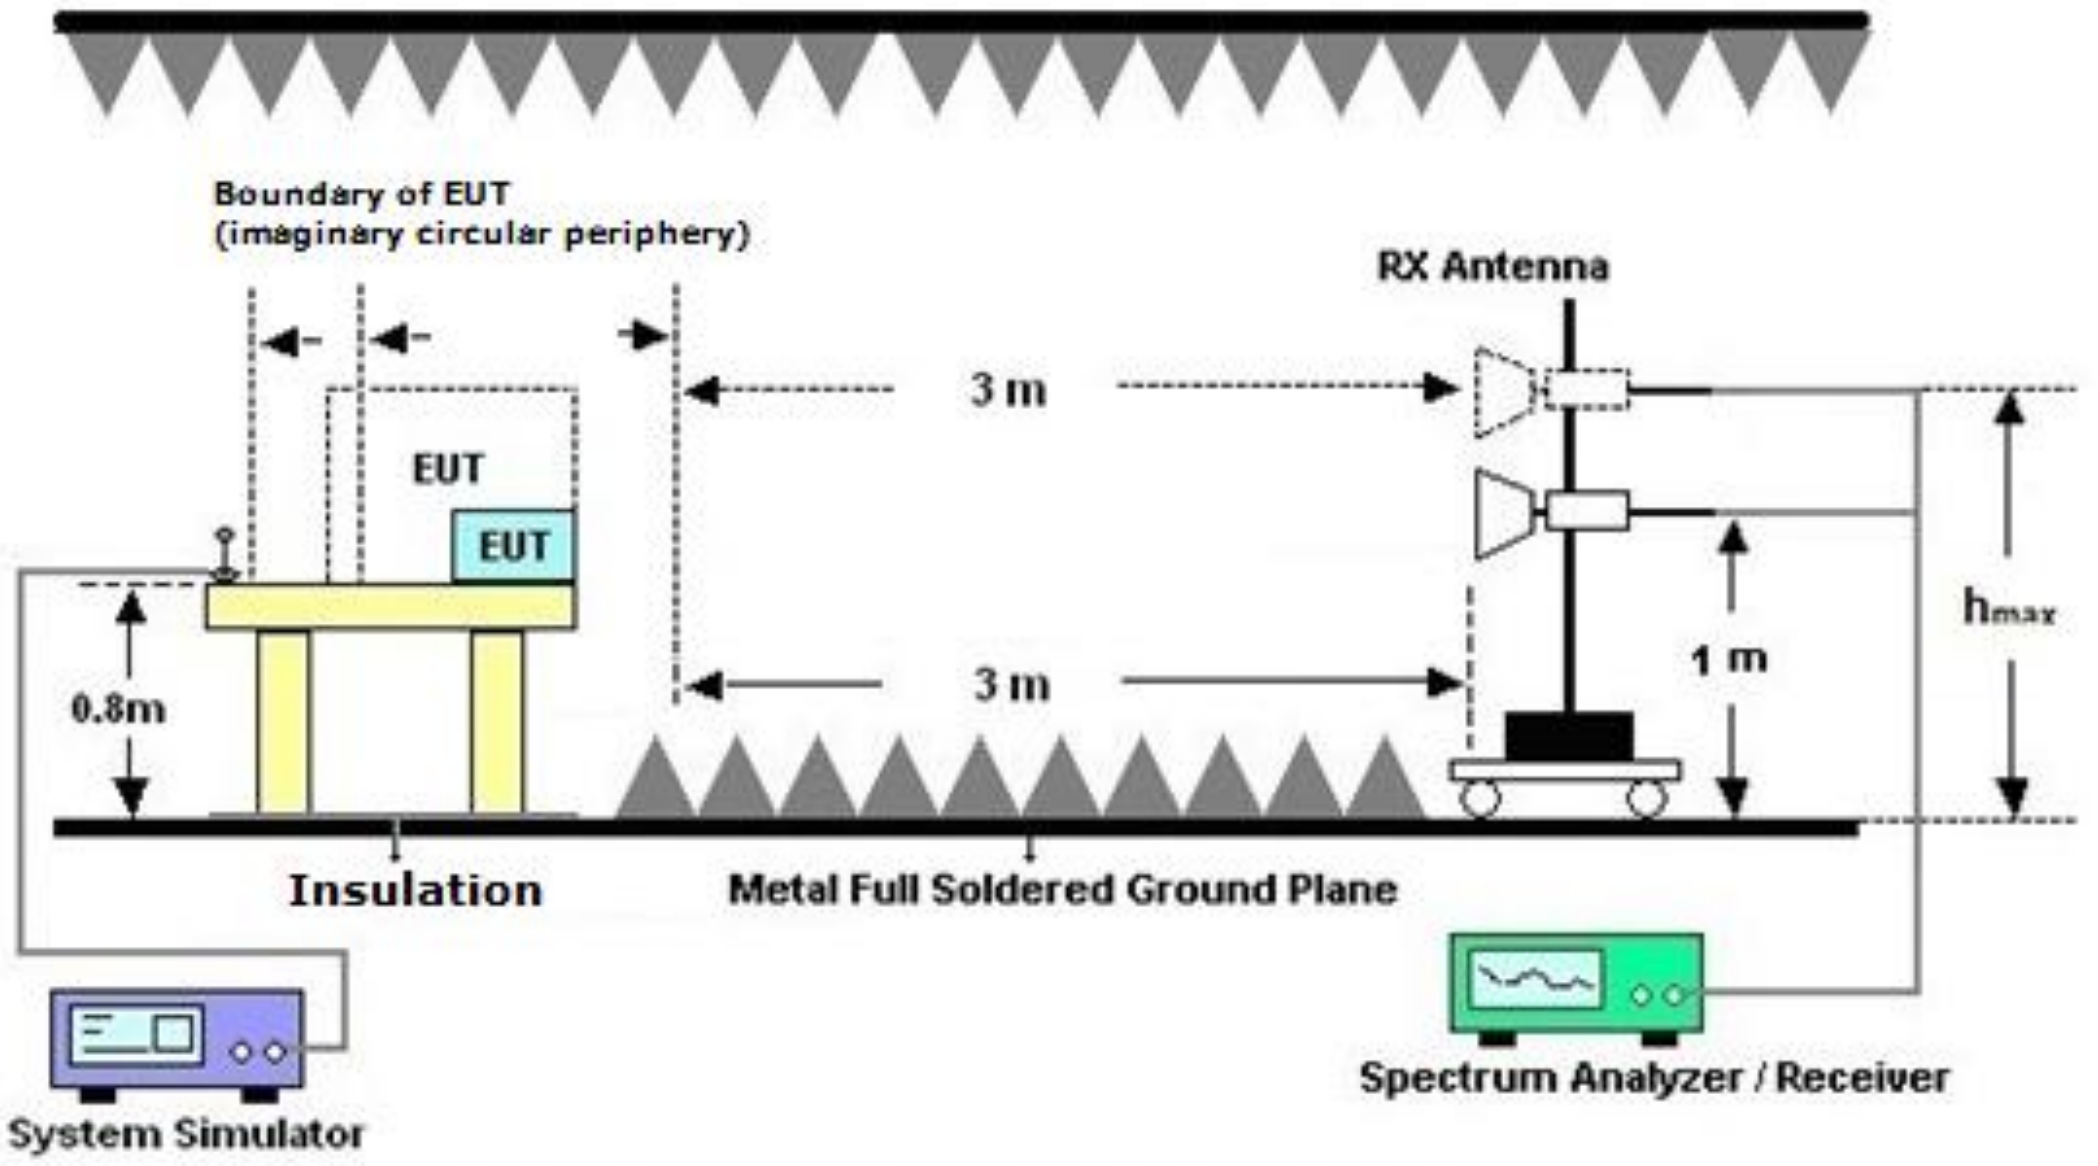

Remark: When EUT's height is over 172cm, h_{max} = top of EUT

<Radiated Emissions Setup Configuration>

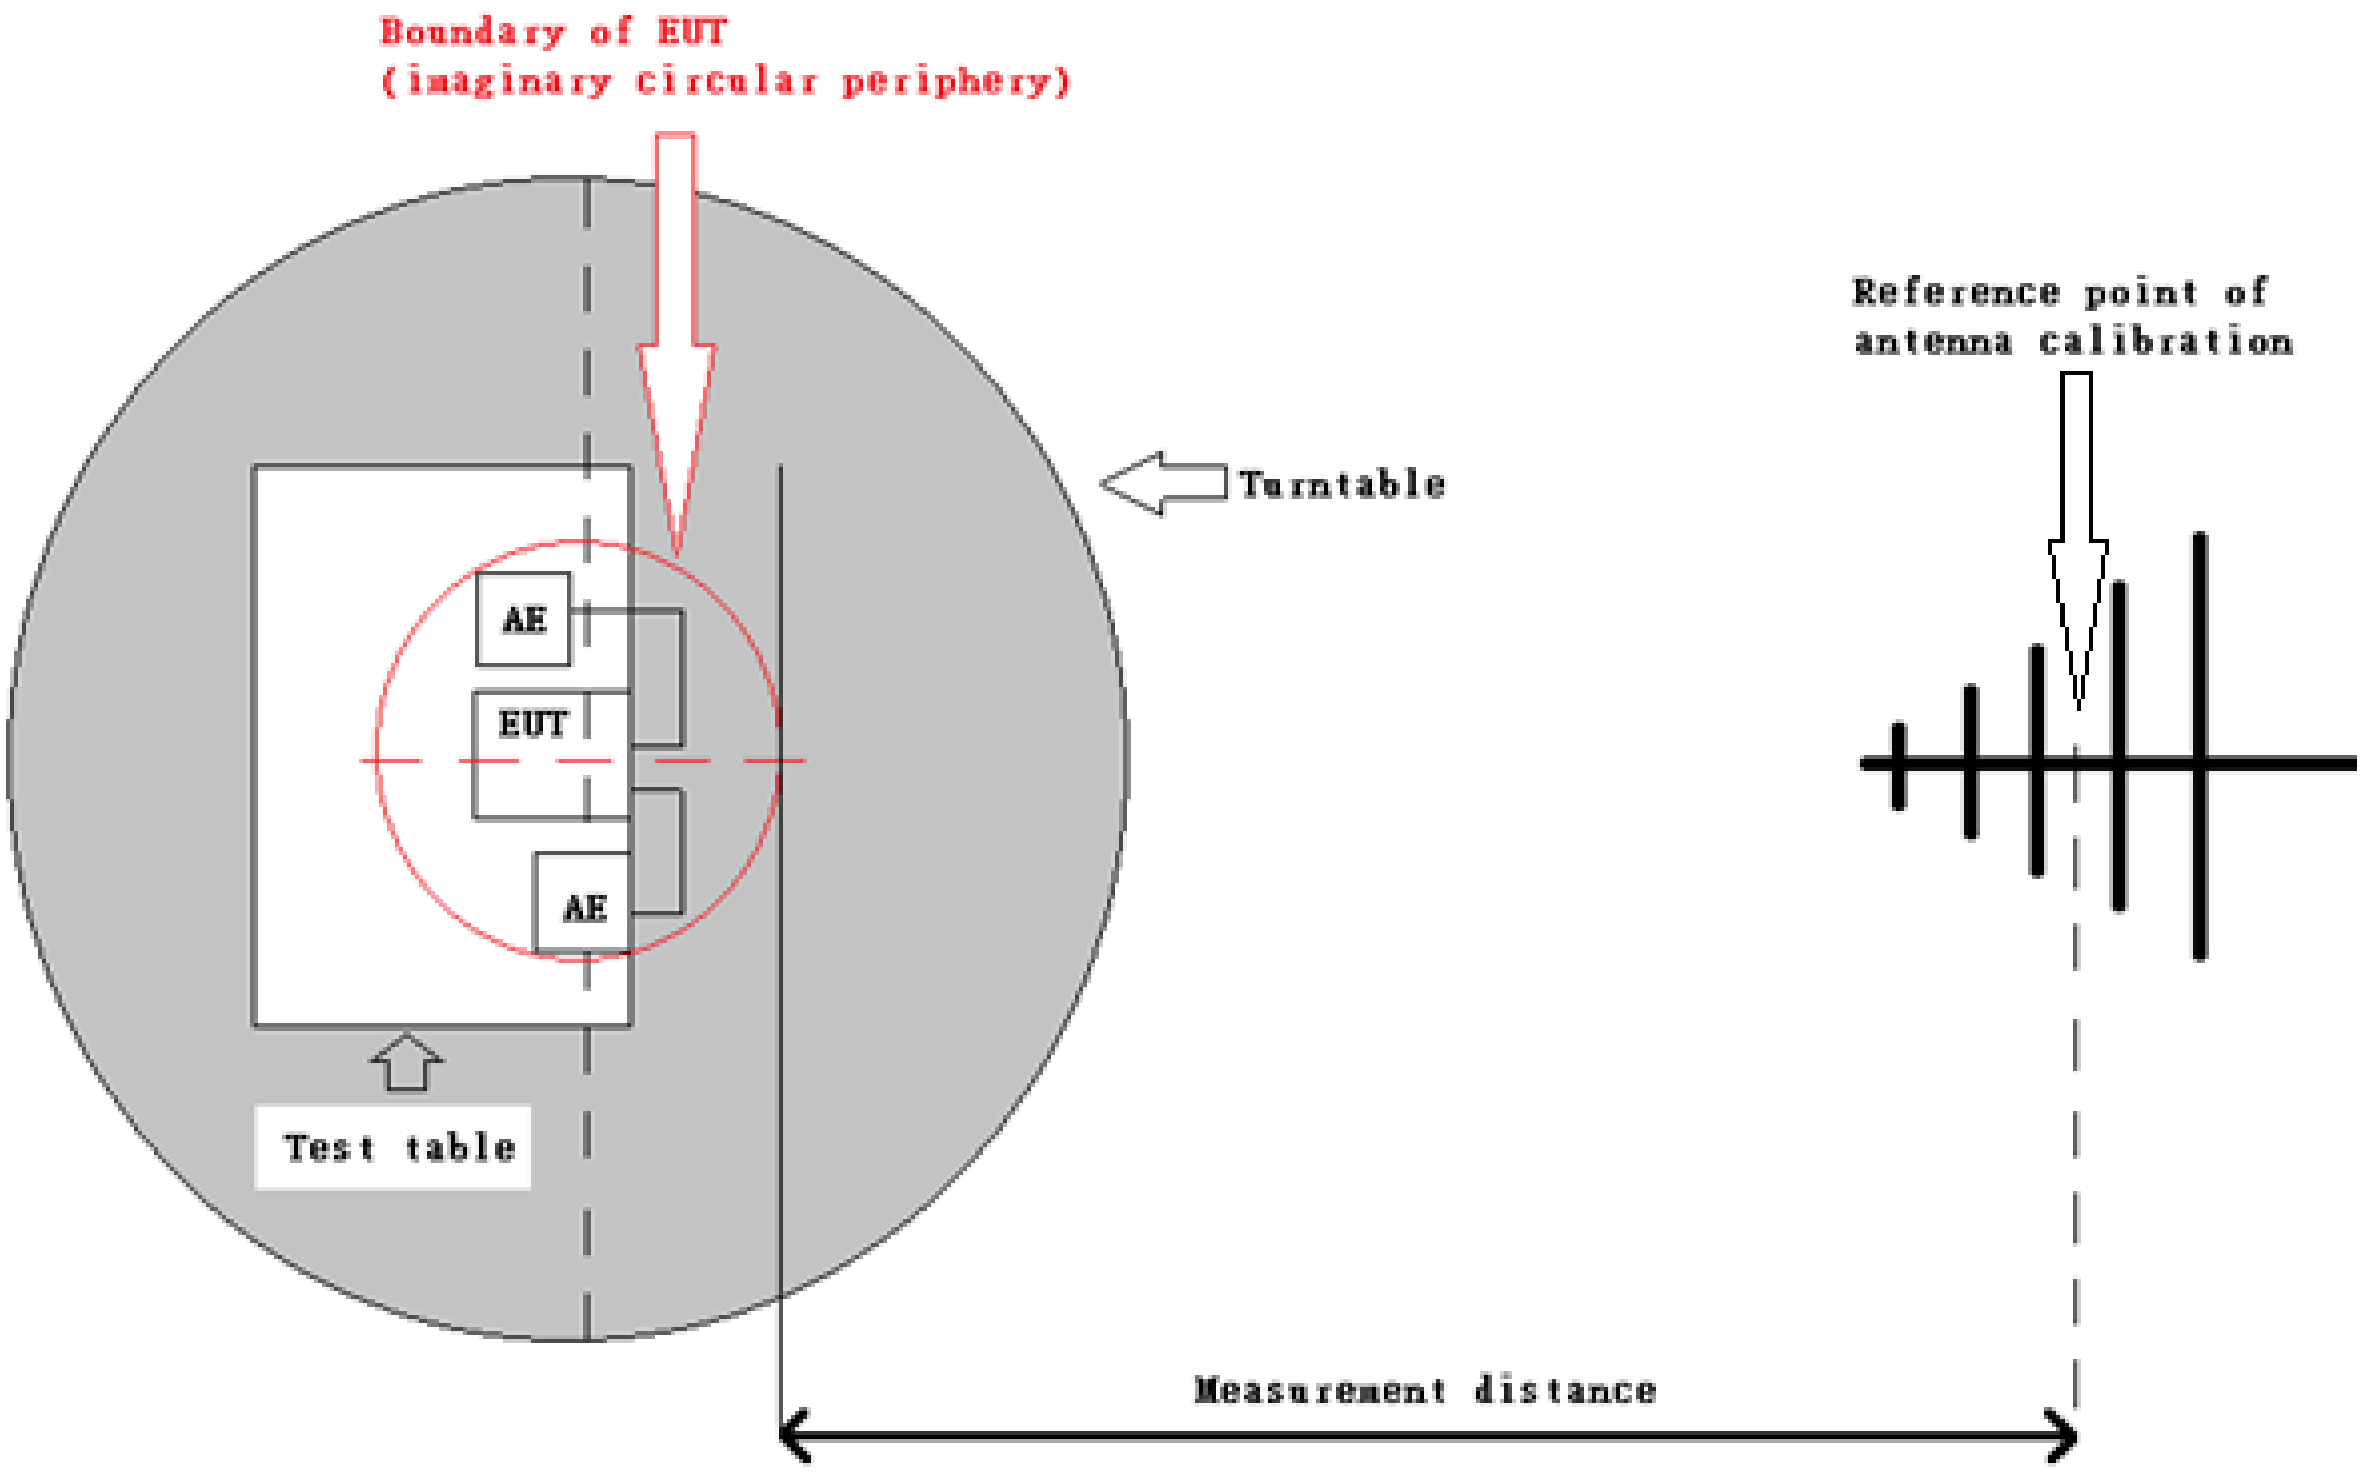

3.1.3 Test Procedures

a. The EUT shall be placed upon a non-conductive table 0,8 m above the horizontal ground reference plane of the test site.
b. The boundary of EUT was set 10 meters(30 MHz~1G) and 3 meters(1G~6G) from the receiving antenna which was mounted on the top of a variable height antenna tower. Cables connecting to outside area is directly dropped to, but with an insulation holder less than 150mm height, the reference ground plane.
c. The table was rotated 360 degrees to determine the position of the highest radiation.
d. The height of the antenna is varied between 1 m and 4 m above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
e. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading values.
f. Ideally, the central point of the arrangement shall be positioned at the centre of the turntable and the rear of the arrangement shall be flush with the back of the supporting tabletop unless that would not be possible or typical of normal use.
g. All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0,1 m separation is achieved between the neighboring units.
h. Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0,4 m, so that its length is shortened to 1 m.
i. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported for frequency range below 1GHz.
j. If emission level of the EUT in Peak measurement mode is 20dB lower than Peak limit line (that means the emission level in Peak measurement mode complies with both Peak and Average limit lines), then only Peak measurement result is reported. Otherwise, emissions in Average measurement mode shall be measured, and reported.
k. Test Results Explanation:
   Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
   Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

3.1.4 Test Result

Test Mode :	Mode 8		
Test Distance :	10m	**Polarization :**	Horizontal
Function Type :	WCDMA Band I Link + Bluetooth Link + WLAN (5G) Link + MPEG4 (Run Color Bar) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1		

- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
- The test that passed at the minimum margin was marked by the frame in the following test record

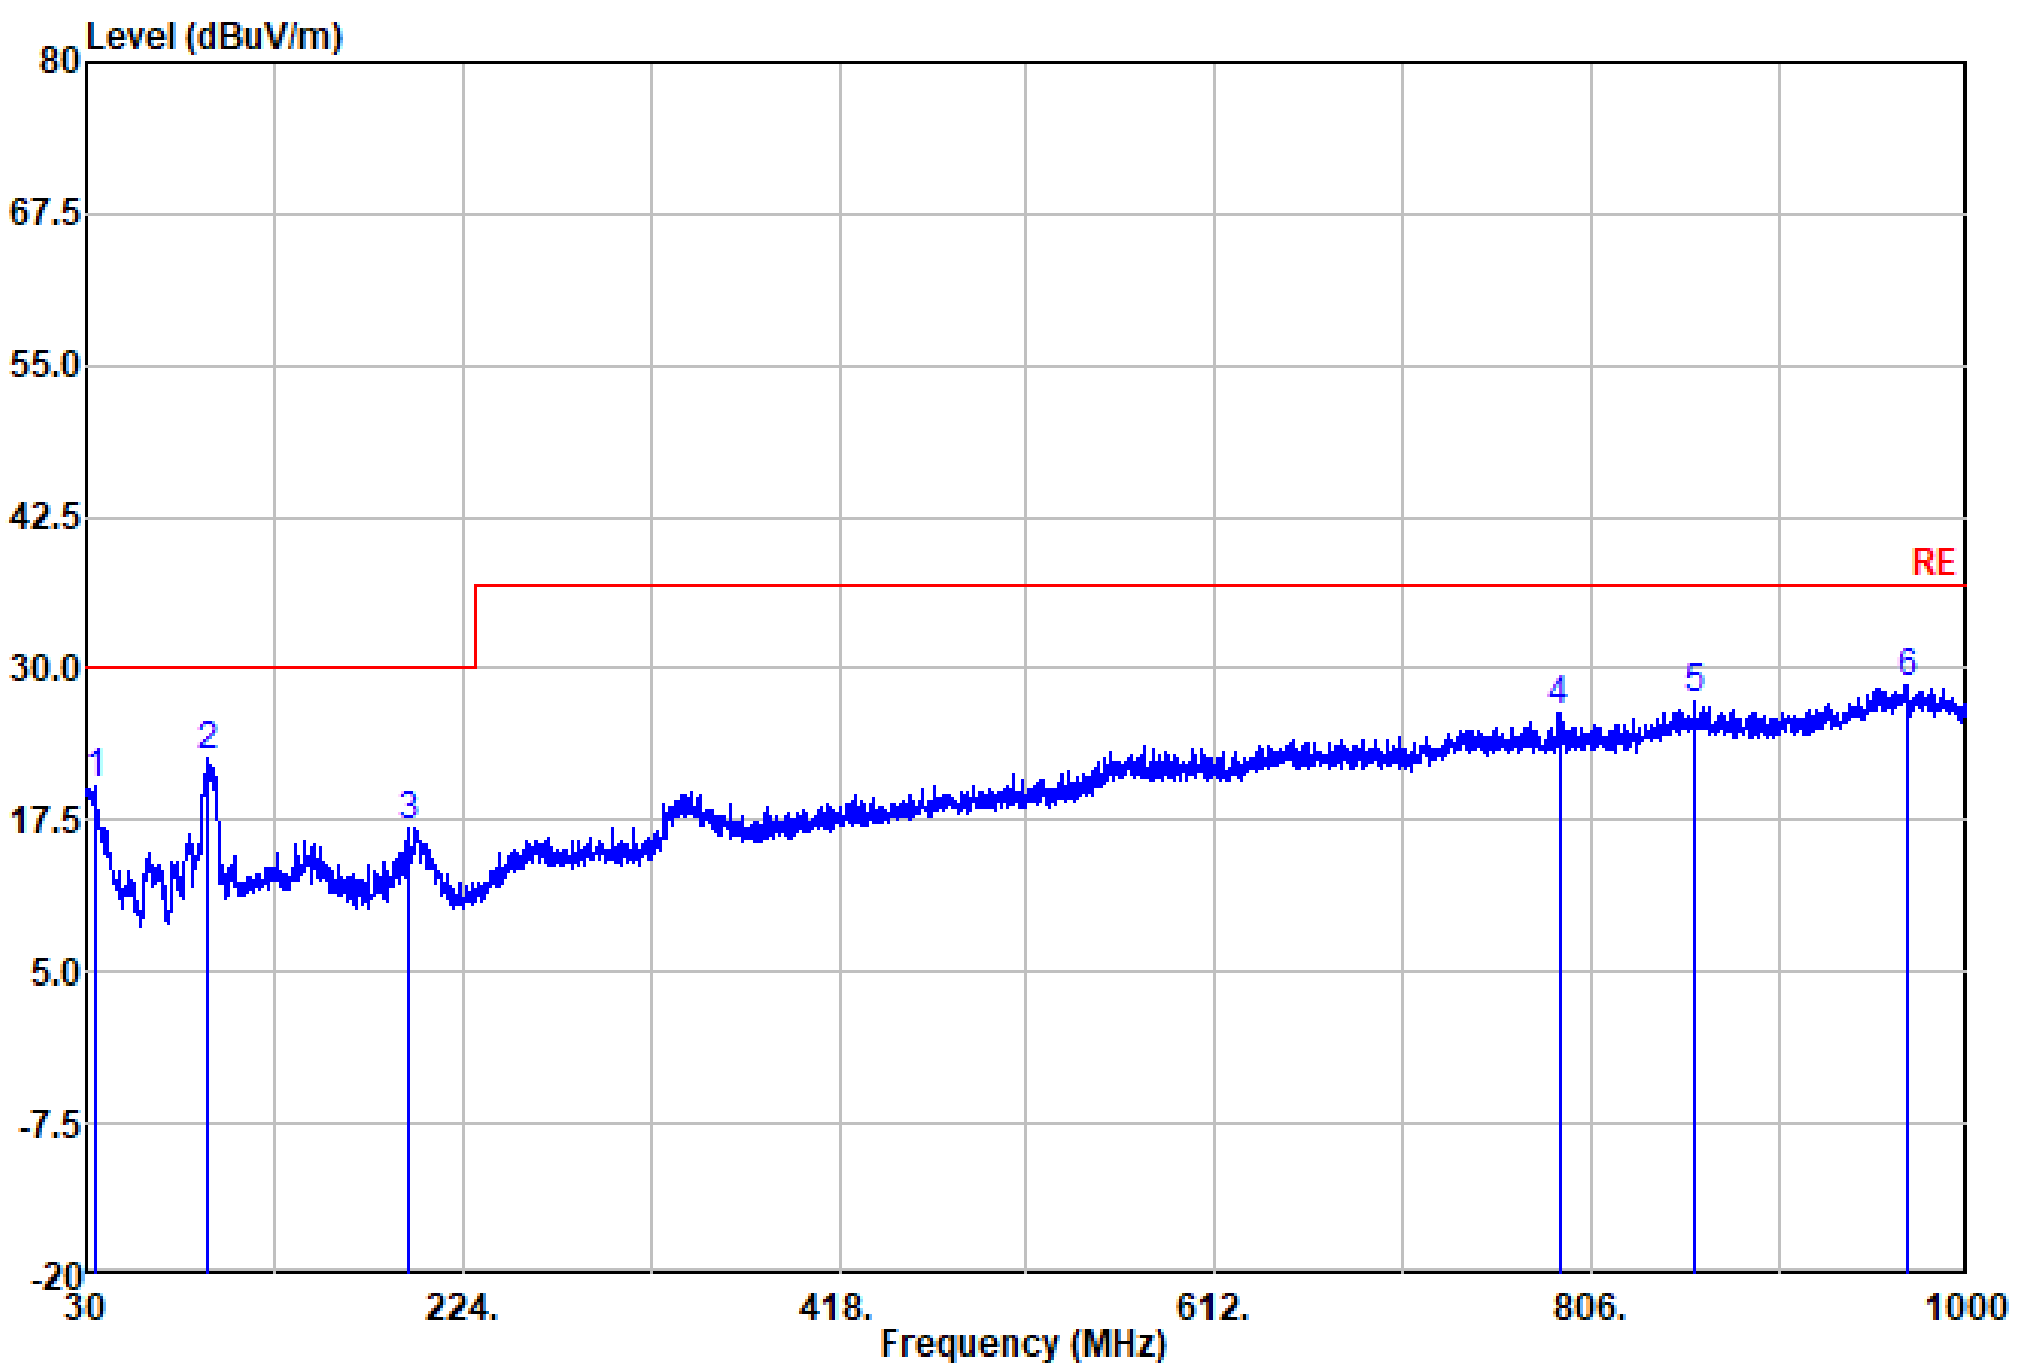

Site : 10CH01-KS
Condition: RE 10m CBL6111D SN 63755 10.24 Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	34.12	20.33	30.00	-9.67	29.49	23.00	0.48	32.64	---	---	Peak
2	92.57	22.51	30.00	-7.49	38.90	15.30	0.97	32.66	---	---	Peak
3	196.60	16.90	30.00	-13.10	33.14	15.00	1.45	32.69	---	---	Peak
4	789.27	26.30	37.00	-10.70	27.63	28.48	2.91	32.72	---	---	Peak
5	858.62	27.30	37.00	-9.70	26.79	29.78	3.05	32.32	---	---	Peak
6	968.48	28.67	37.00	-8.33	25.25	31.65	3.22	31.45	---	---	Peak

Test Mode :	Mode 8		
Test Distance :	3m	**Polarization :**	Horizontal
Function Type :	WCDMA Band I Link + Bluetooth Link + WLAN (5G) Link + MPEG4 (Run Color Bar) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1		
Remark :	#6 is RF signal which comes from WLAN Access Point used to connect the EUT, and which can be ignored.		

■ Emission level (dBuV/m) = 20 log Emission level (uV/m)
■ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
■ The test that passed at the minimum margin was marked by the frame in the following test record

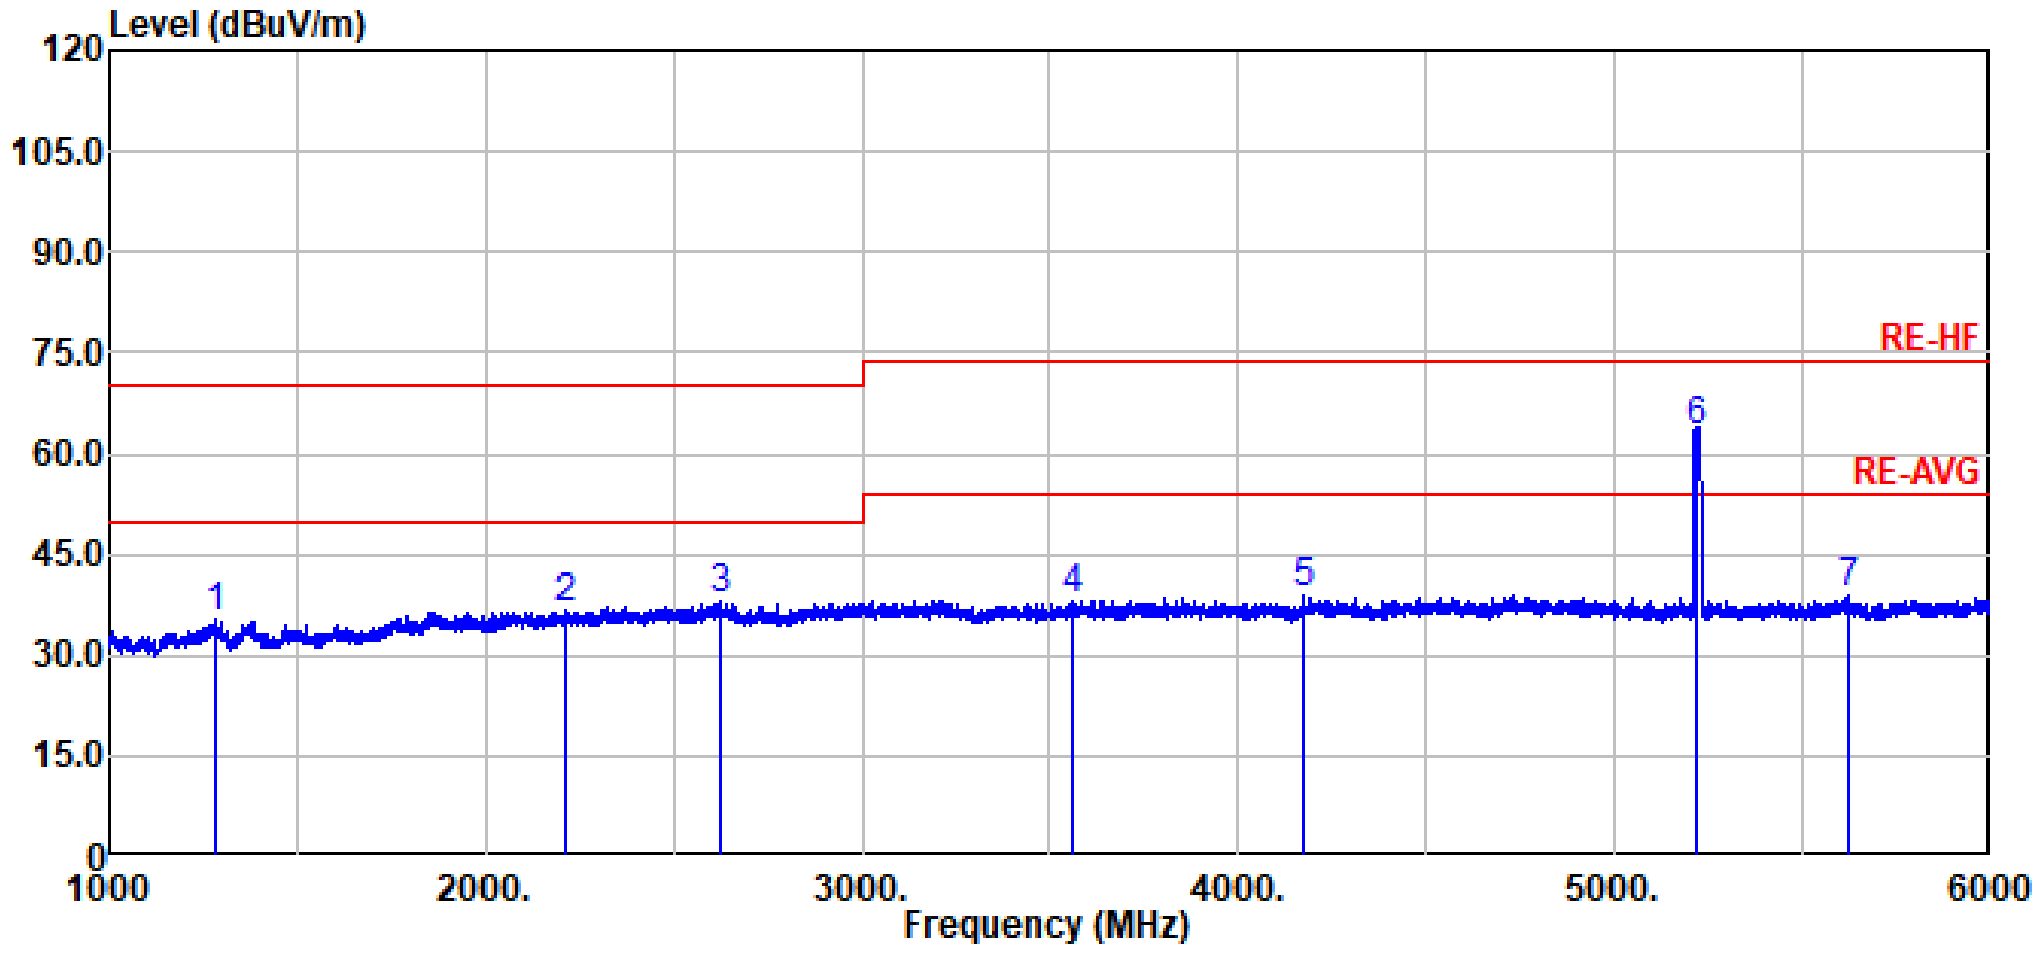

Site : 03CH07-KS
Condition: RE-HF 3m 3117-00240132 Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	1281.00	35.15	70.00	-34.85	64.25	29.15	3.87	62.12	---	---	Peak
2	2212.50	36.56	70.00	-33.44	62.72	32.05	5.08	63.29	---	---	Peak
3	2626.00	37.87	70.00	-32.13	62.36	32.90	5.55	62.94	---	---	Peak
4	3562.50	38.14	74.00	-35.86	61.66	33.20	6.48	63.20	---	---	Peak
5	4176.50	38.83	74.00	-35.17	61.34	34.48	7.06	64.05	---	---	Peak
6	5217.00	62.86			84.61	34.80	7.95	64.50	---	---	Peak
7	5618.00	39.01	74.00	-34.99	60.44	34.90	8.29	64.62	---	---	Peak

Test Mode :	Mode 8		
Test Distance :	10m	Polarization :	Vertical
Function Type :	WCDMA Band I Link + Bluetooth Link + WLAN (5G) Link + MPEG4 (Run Color Bar) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1		

■ Emission level (dBuV/m) = 20 log Emission level (uV/m)
■ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
■ The test that passed at the minimum margin was marked by the frame in the following test record

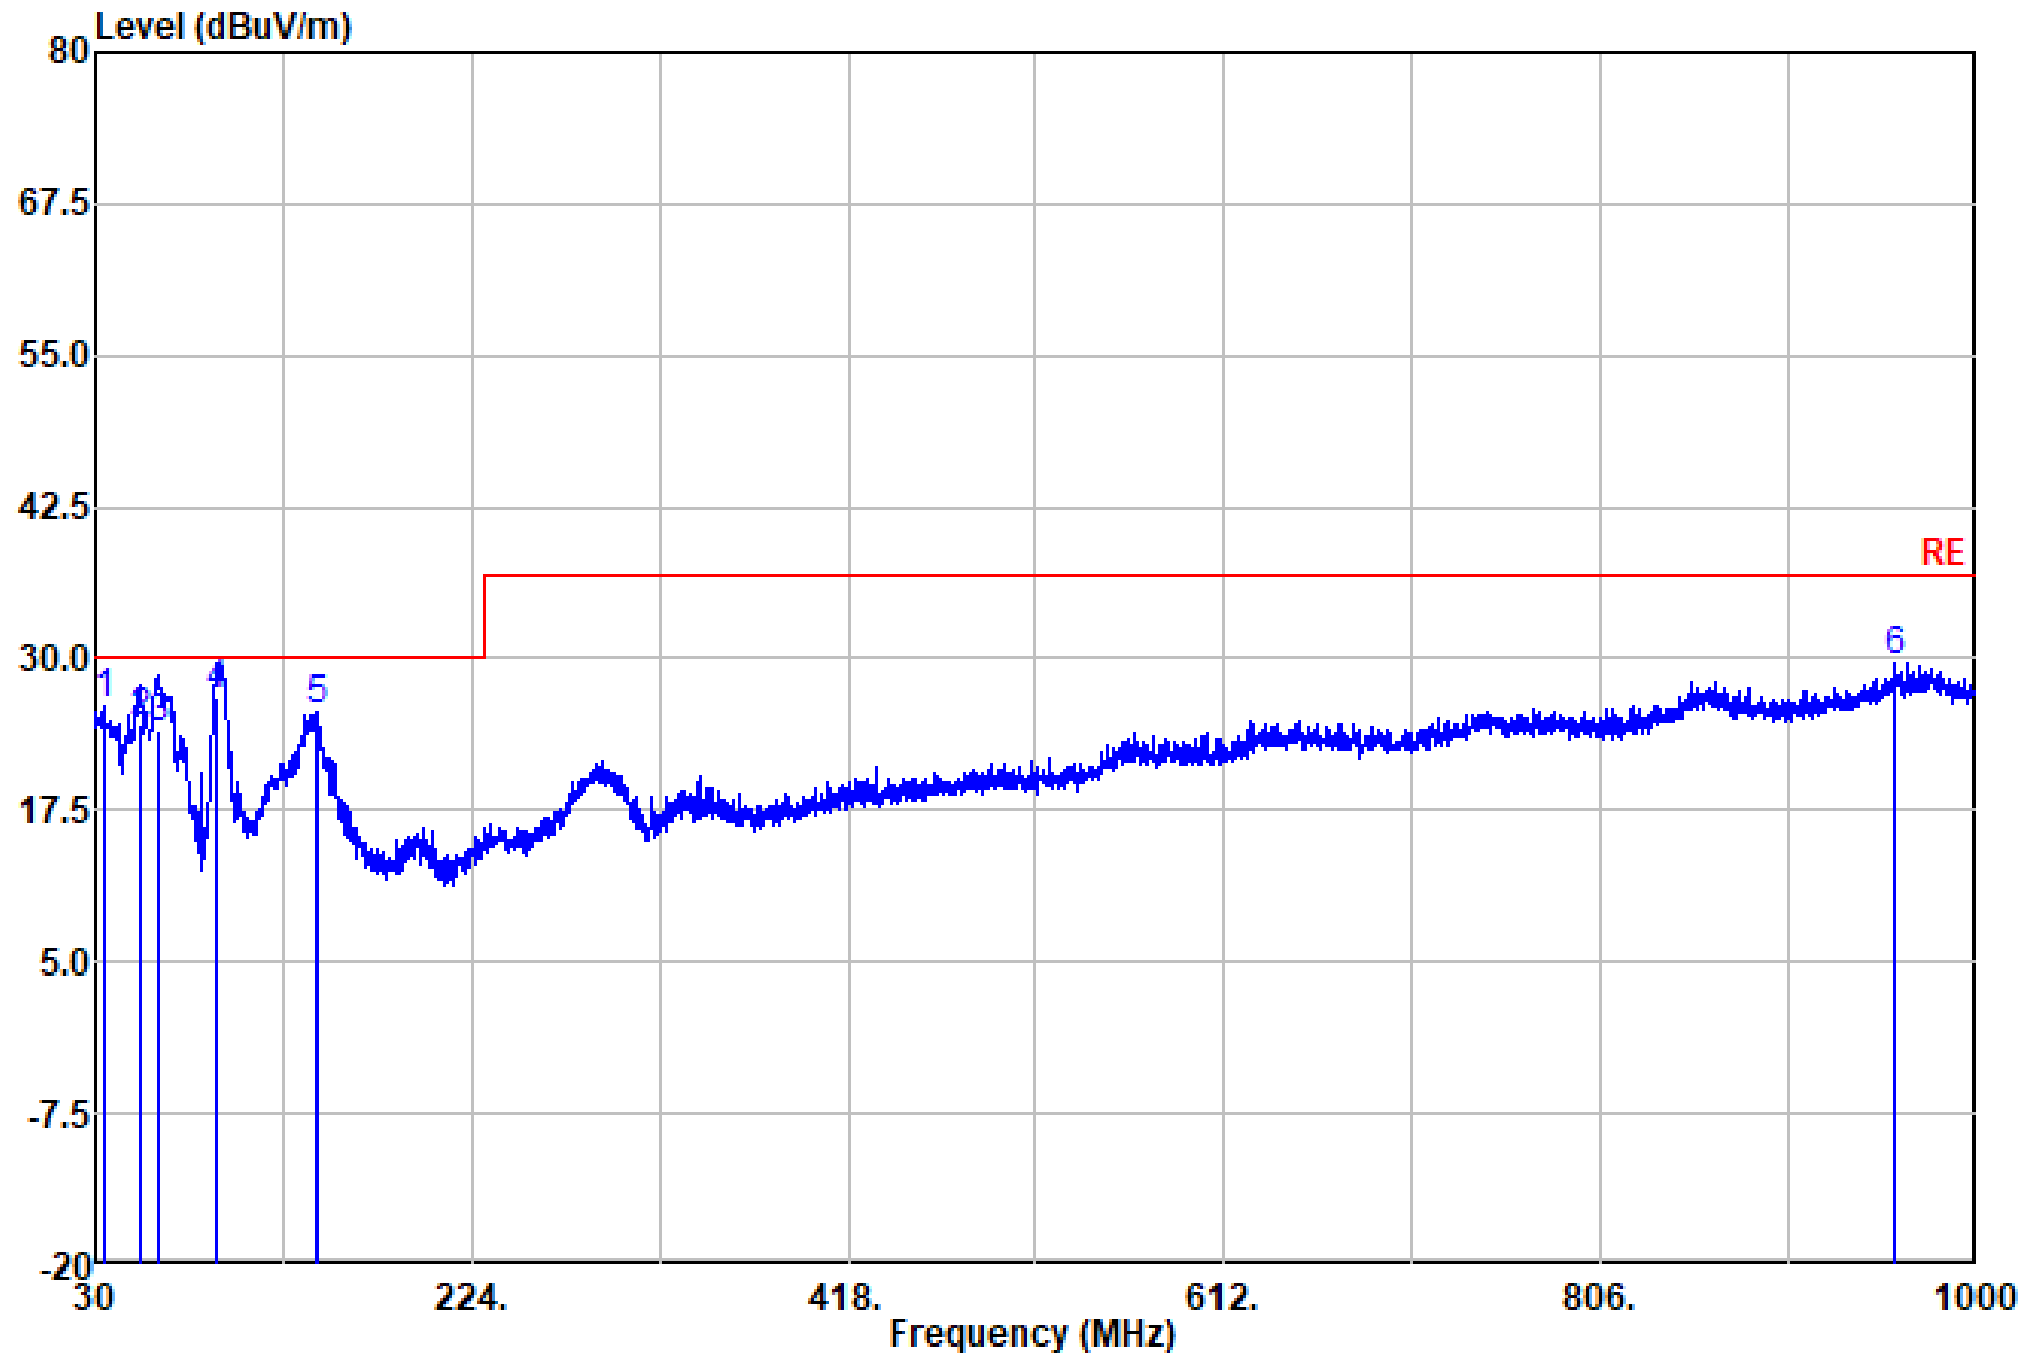

Site : 10CH01-KS
Condition: RE 10m CBL6111D SN 63161 10.24 Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	34.12	26.02	30.00	-3.98	35.20	22.96	0.52	32.66	---	---	Peak
2	53.28	24.68	30.00	-5.32	43.34	13.29	0.71	32.66	100	20	QP
3	62.74	24.22	30.00	-5.78	44.13	11.96	0.80	32.67	300	360	QP
4	93.05	26.88	30.00	-3.12	43.26	15.27	1.03	32.68	100	345	QP
5	144.46	25.53	30.00	-4.47	39.36	17.50	1.32	32.65	---	---	Peak
6	957.81	29.66	37.00	-7.34	26.50	31.28	3.36	31.48	---	---	Peak

Test Mode :	Mode 8		
Test Distance :	3m	Polarization :	Vertical
Function Type :	WCDMA Band I Link + Bluetooth Link + WLAN (5G) Link + MPEG4 (Run Color Bar) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1		
Remark :	#6 is RF signal which comes from WLAN Access Point used to connect the EUT, and which can be ignored.		

- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
- The test that passed at the minimum margin was marked by the frame in the following test record

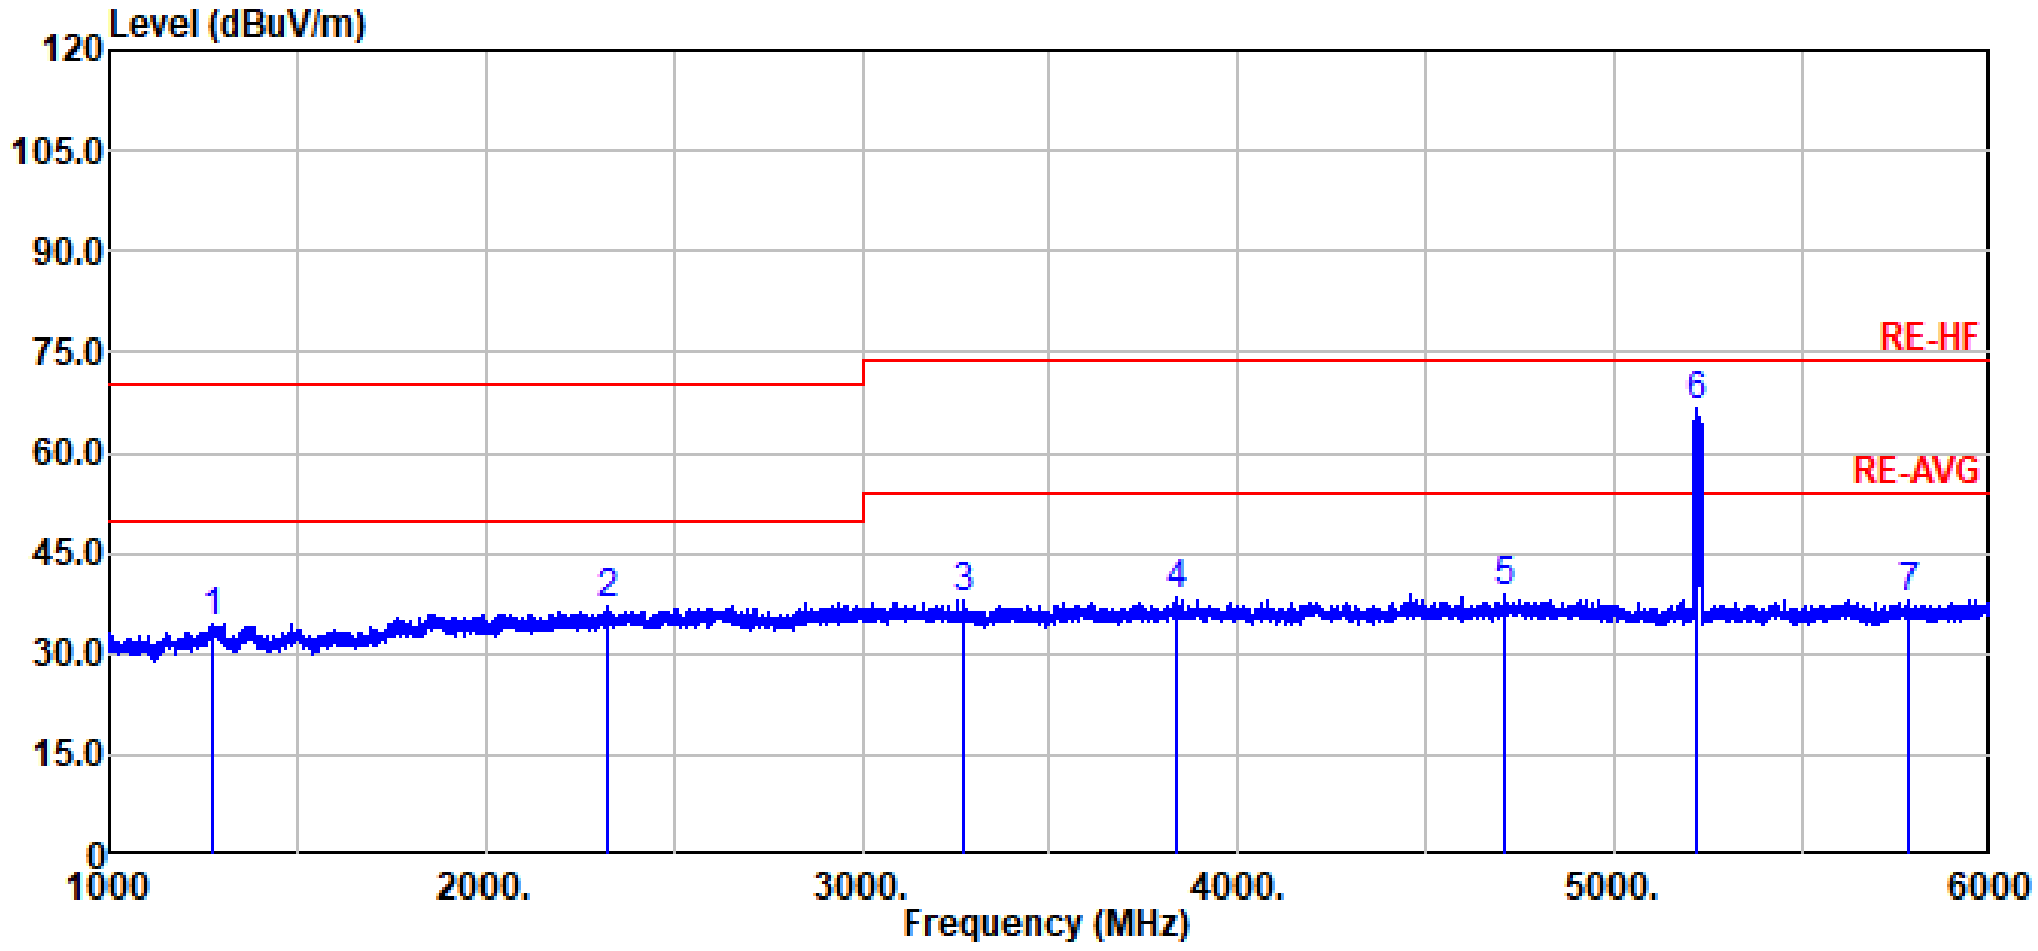

Site : 03CH07-KS
Condition: RE-HF 3m 3117-00240132 Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	1273.00	34.53	70.00	-35.47	63.72	29.08	3.86	62.13	---	---	Peak
2	2324.00	37.12	70.00	-32.88	62.96	32.19	5.21	63.24	---	---	Peak
3	3271.50	38.19	74.00	-35.81	62.12	32.99	6.22	63.14	---	---	Peak
4	3832.50	38.46	74.00	-35.54	61.48	33.67	6.76	63.45	---	---	Peak
5	4708.50	38.75	74.00	-35.25	60.68	34.72	7.55	64.20	---	---	Peak
6	5217.00	66.40			88.15	34.80	7.95	64.50	---	---	Peak
7	5780.50	38.17	74.00	-35.83	59.44	35.06	8.45	64.78	---	---	Peak

3.1.5 Setup Photographs

Mode 8

Frequency: 30 MHz to 1000 MHz

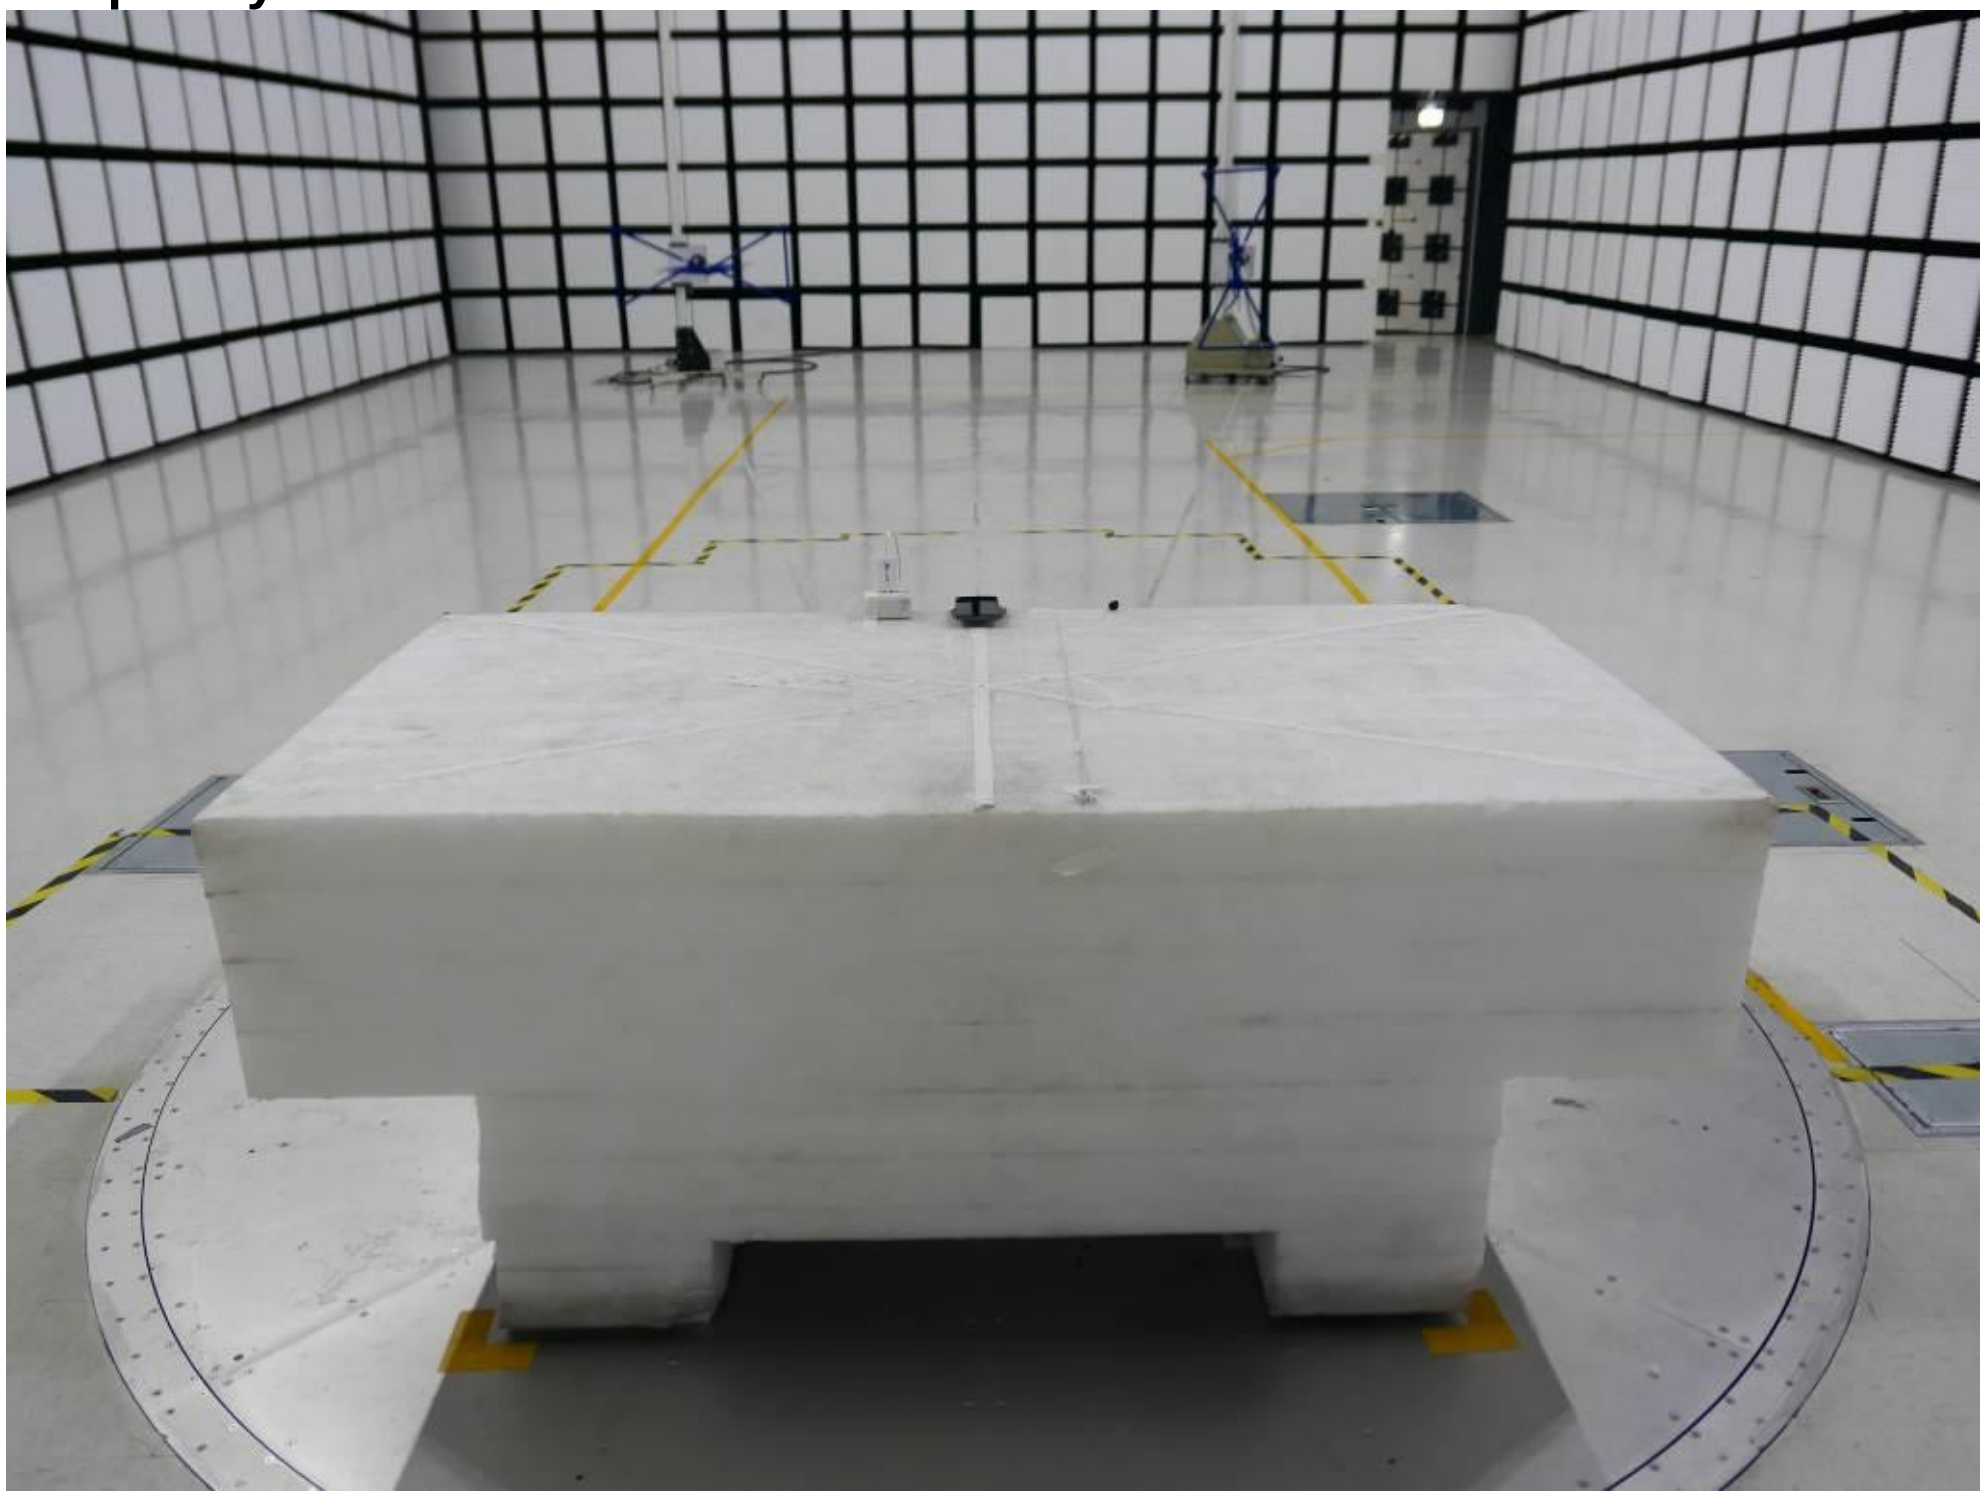

Frequency: 1000 MHz to 6000 MHz

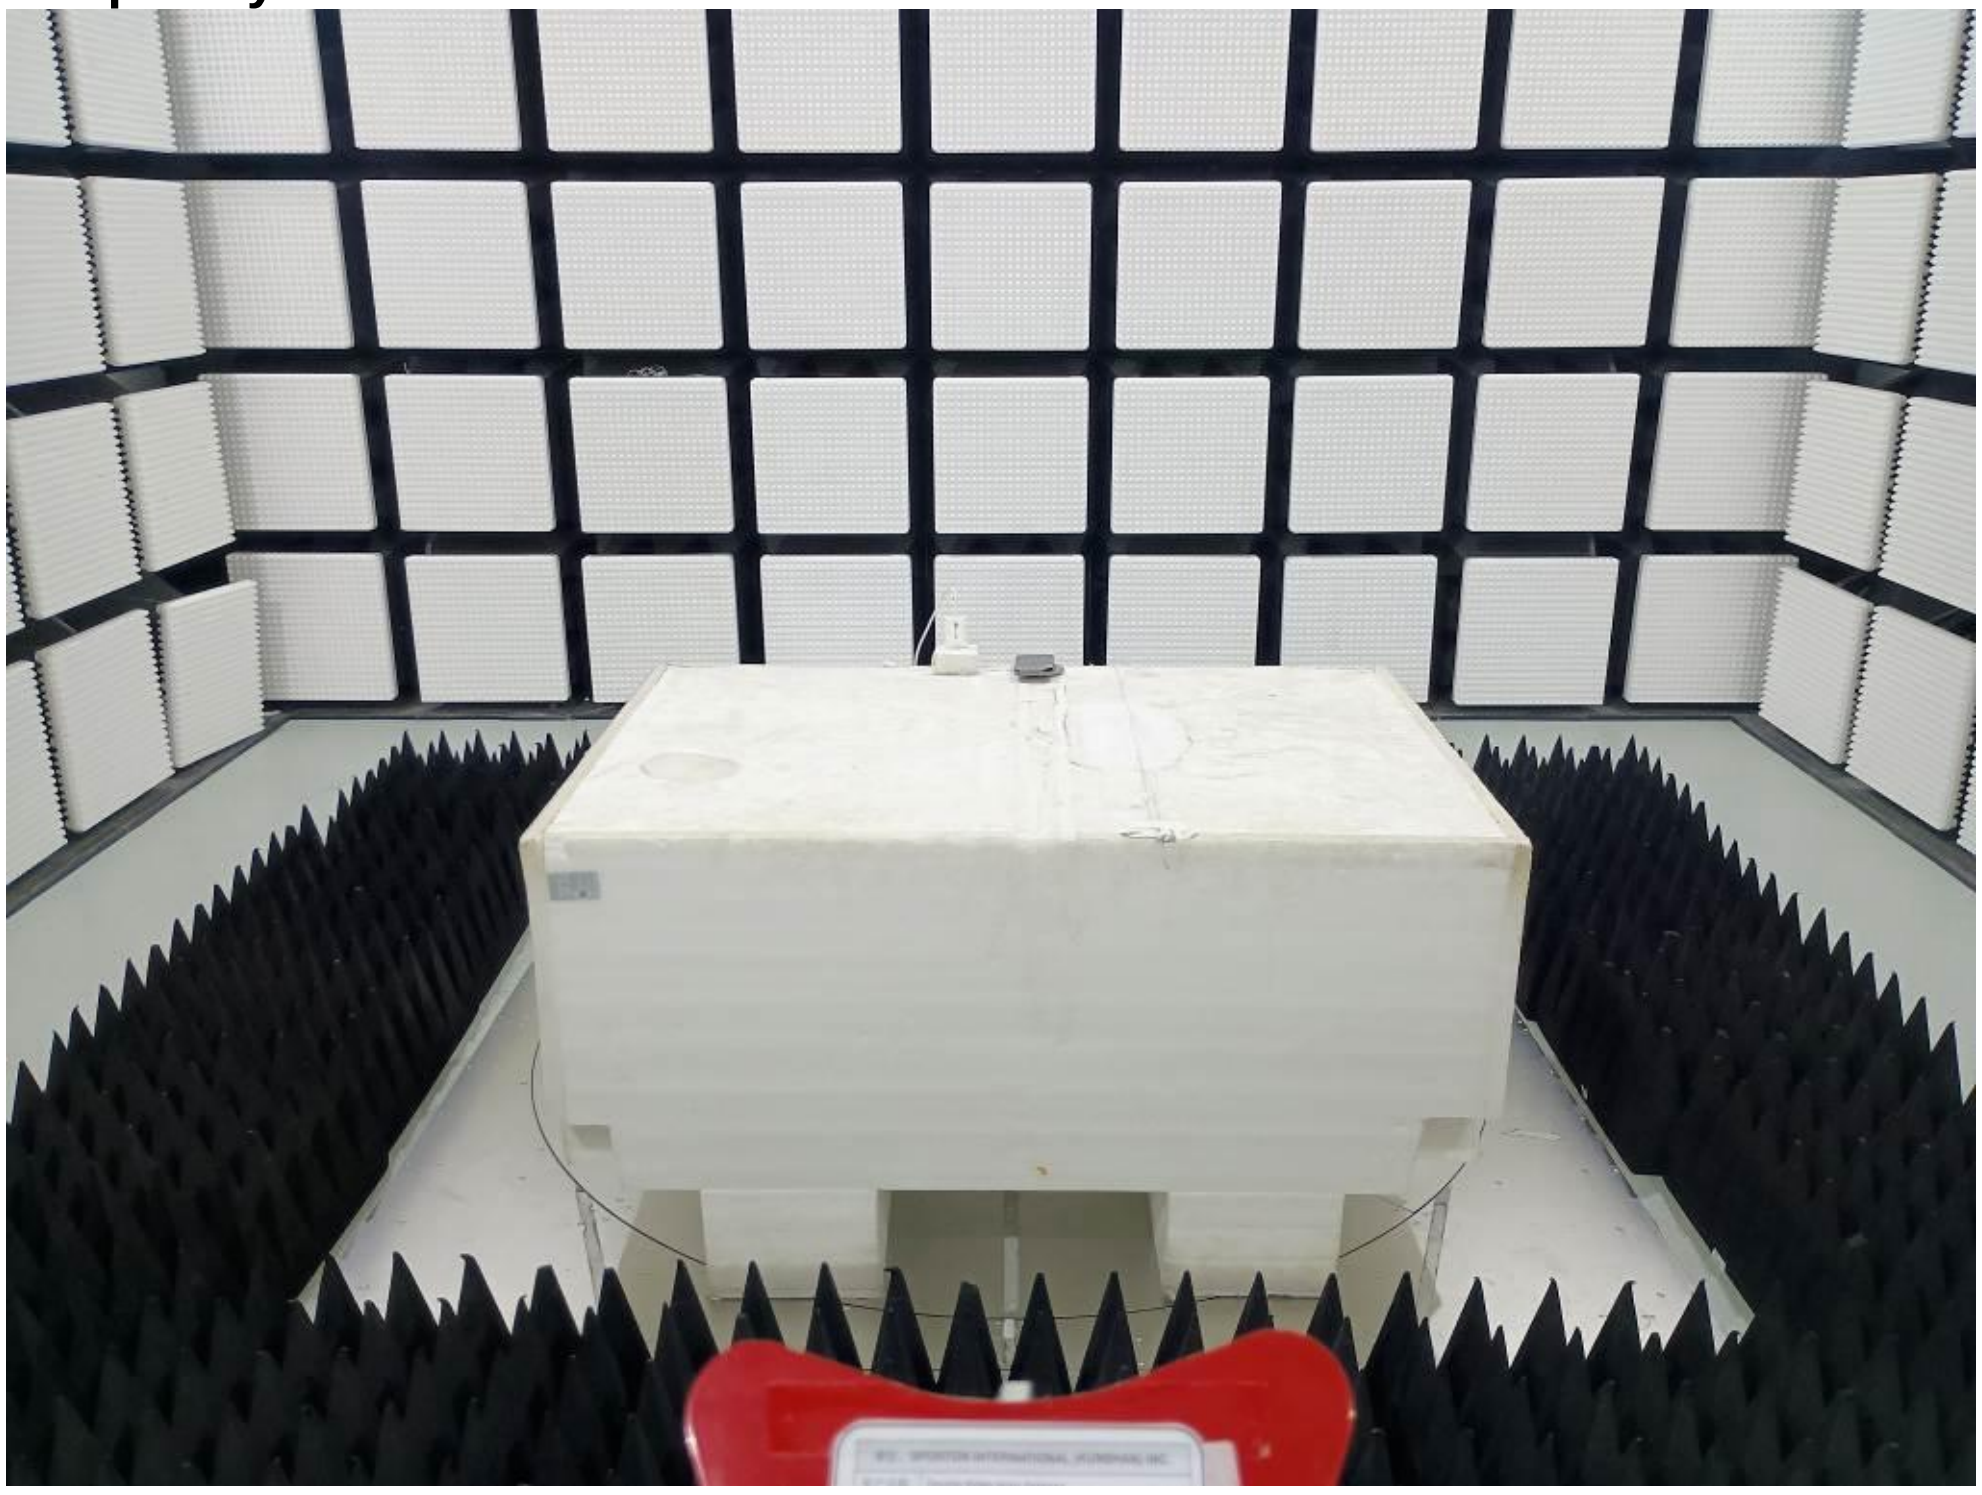

3.2 Conducted Emission Test (Refer to EN55032)

3.2.1 Limits for Conducted Emissions

<Class B>

Applicable to AC mains power ports			
Frequency Range (MHz)	**Coupling Device**	**Detector Type / Bandwidth**	**Class B limits dB(μV)**
0.15~0.5	AMN	Quasi Peak / 9 kHz	66~56
0.5~5			56
5~30			60
0.15~0.5	AMN	Average / 9 kHz	56~46
0.5~5			46
5~30			50

The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

3.2.2 Test Setup

<AC power port>

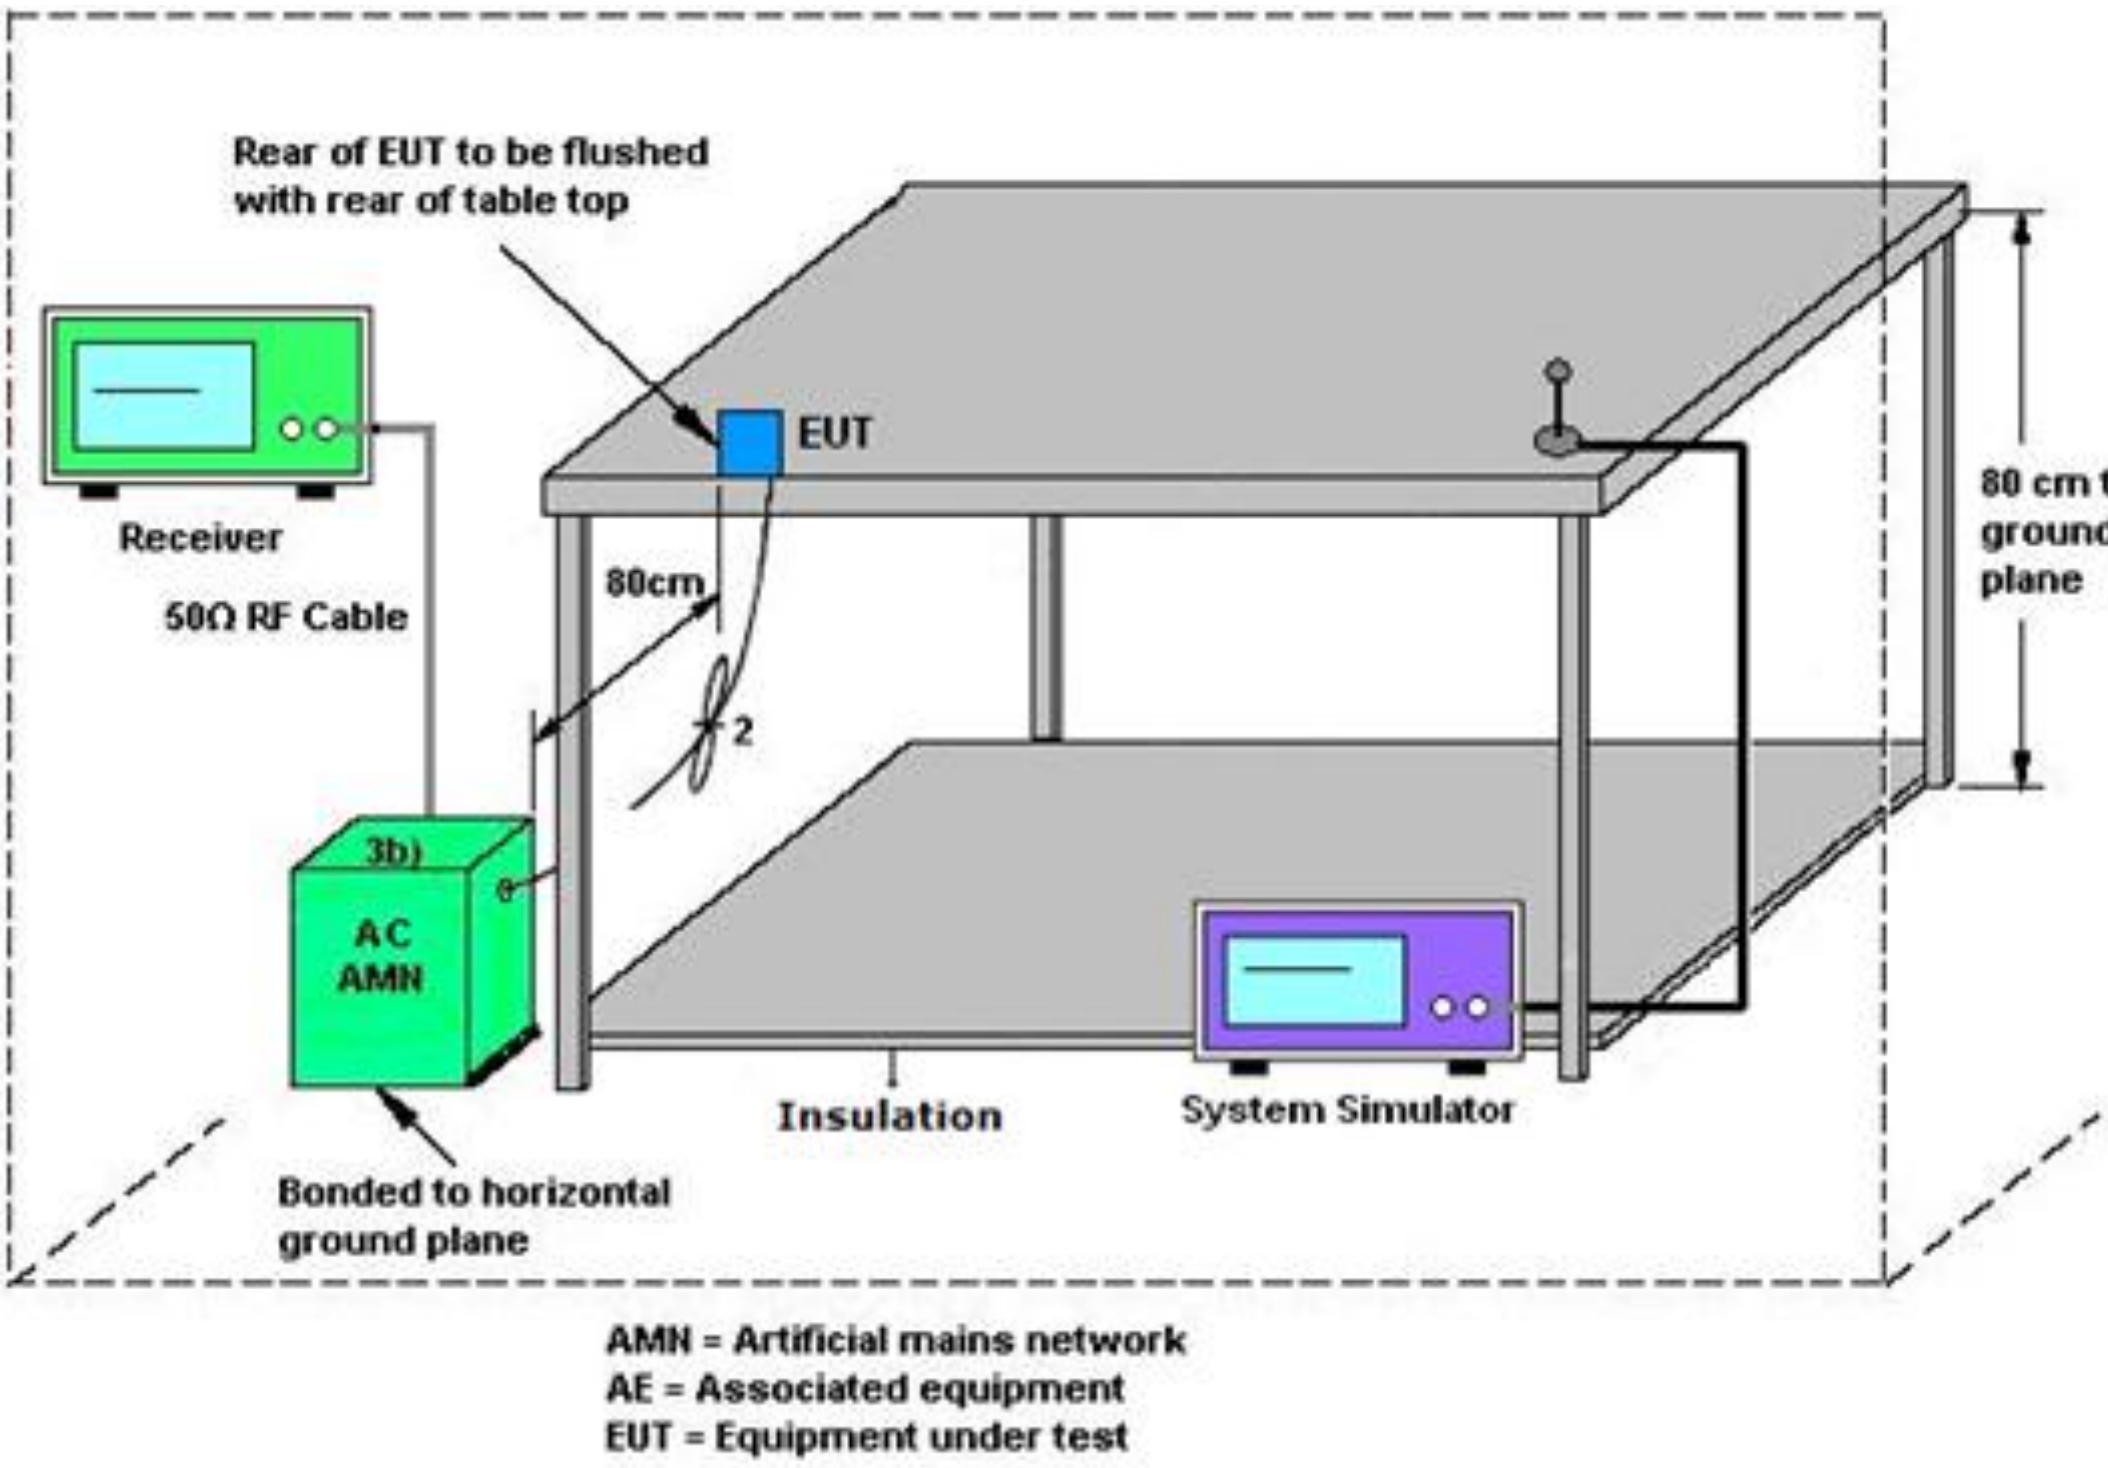

3.2.3 Test Procedure

a. Finish the requirements of test setup for EUT.

b. The EUT was placed on a desk 0.8 m height from the metal ground plane and 0.4 m from the conducting wall of the shielding room and it was kept at least 0.8 m from any other grounded conducting surface. The size of the table will nominally be 1,5 m × 1,0 m.

c. The rear of the arrangement shall be flush with the back of the supporting tabletop unless that would not be possible or typical of normal use.

d. All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0,1 m separation is achieved between the neighboring units.

e. Connect EUT to the power mains through an artificial mains network (AMN). Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0,4 m, so that its length is shortened to 1 m.

f. All the support units are connecting to the other AMN.

g. The AMN provides 50 ohm coupling impedance for the measuring instrument.

h. The CISPR states that the AMN with 50 ohm and 50 microhenry should be used.

i. The frequency range from 150 kHz to 30 MHz was sweep.

j. Set the test-receiver system to Quasi Peak detect function and Average detect function, and to measure the conducted emissions values.

k. Test Results Explanation:
Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

3.2.4 Test Results

Test Mode :	Mode 6		
Test Voltage :	230Vac / 50Hz	Phase :	Line
Function Type :	WWAN Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1		

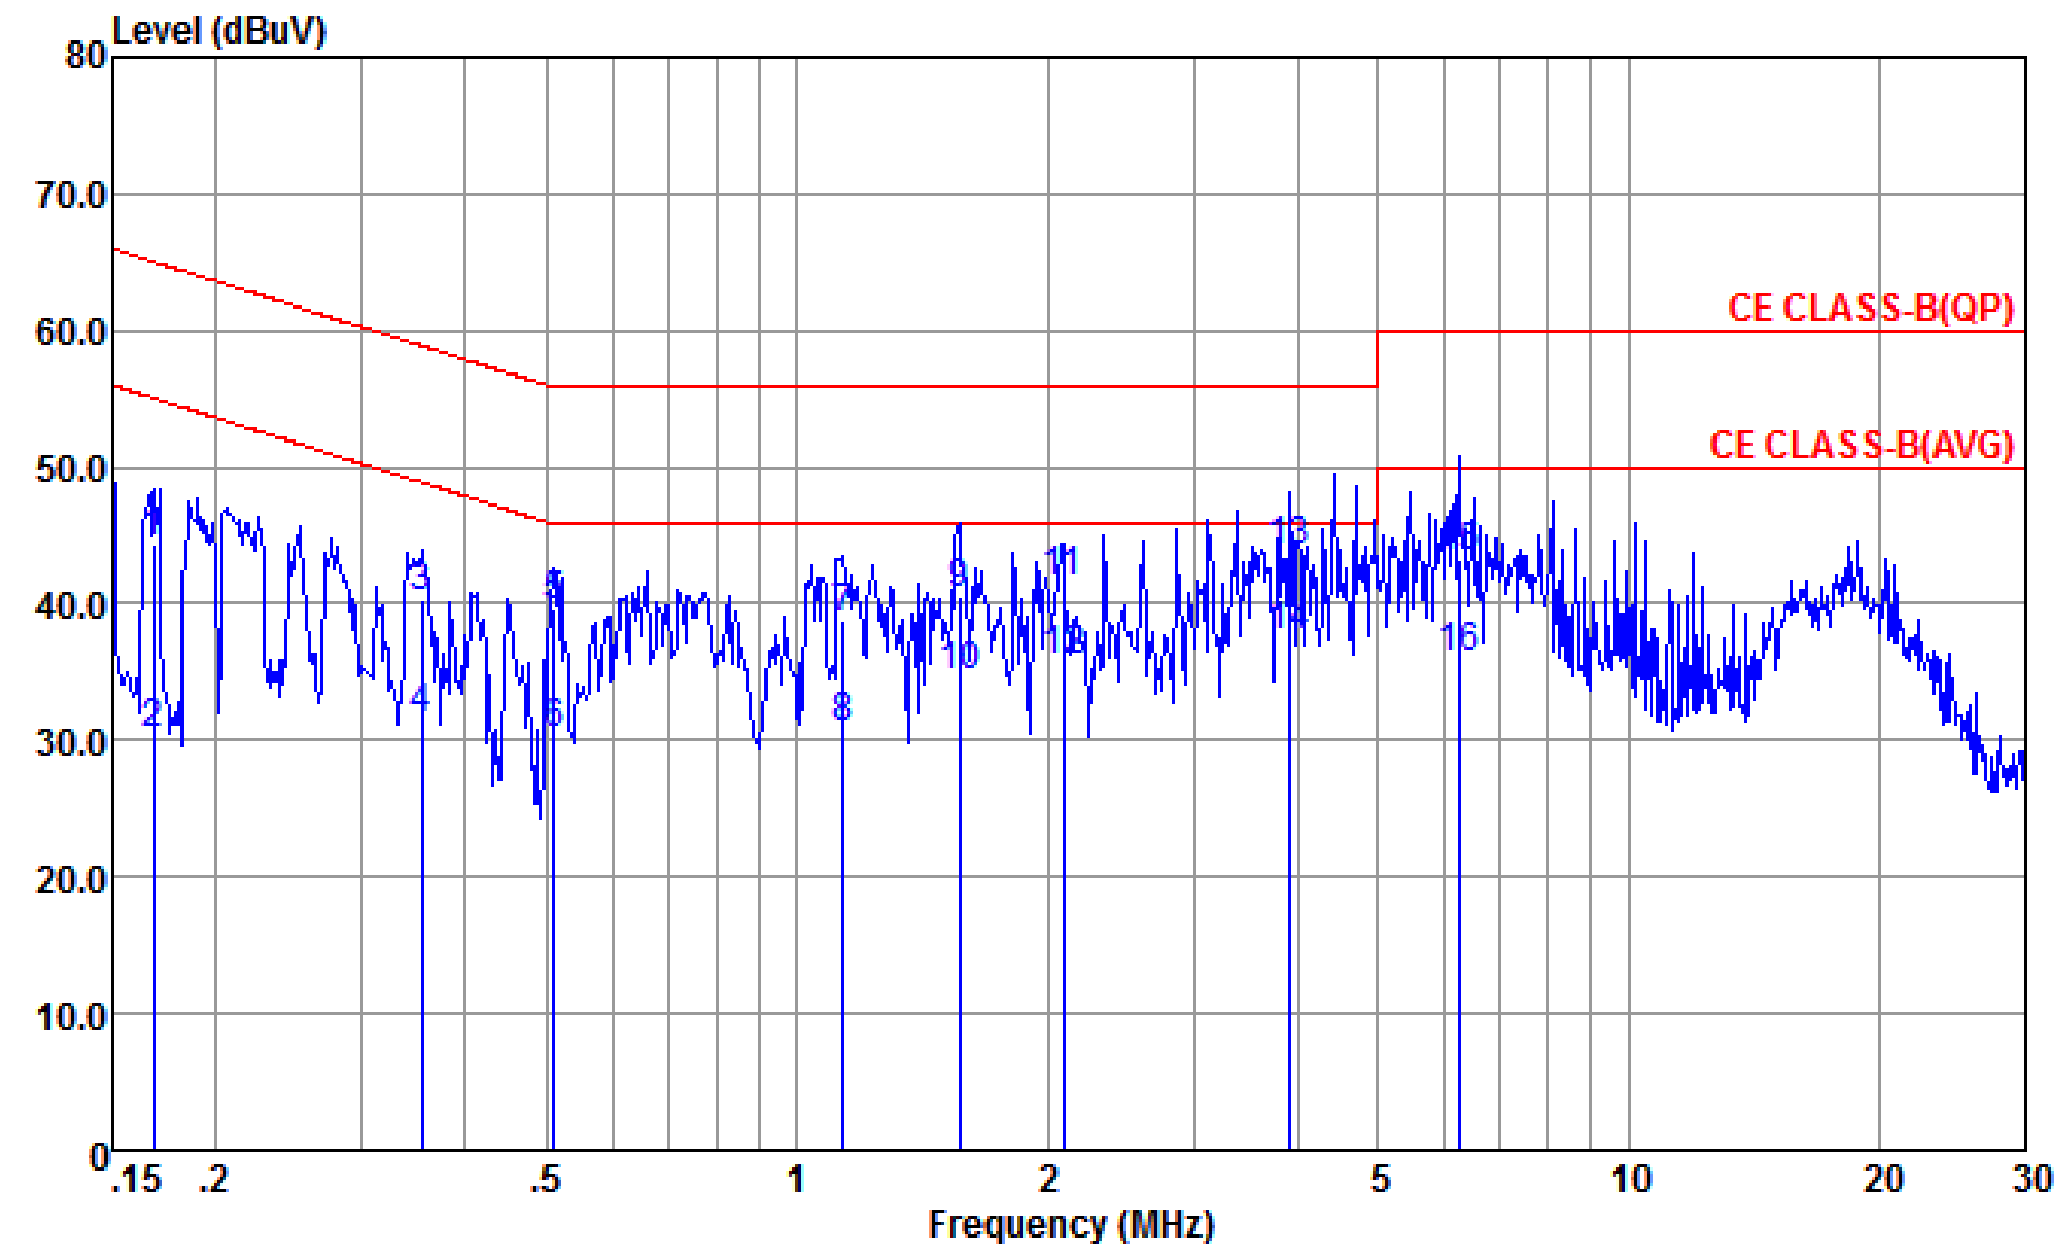

Site : CO01-KS
Condition : CE CLASS-B(QP) LISN-100334-L 2025 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.169	44.32	-20.71	65.03	24.30	9.55	10.47	QP
2	0.169	30.32	-24.71	55.03	10.30	9.55	10.47	Average
3	0.354	40.33	-18.54	58.87	20.20	9.64	10.49	QP
4	0.354	31.53	-17.34	48.87	11.40	9.64	10.49	Average
5	0.510	39.60	-16.40	56.00	19.50	9.59	10.51	QP
6	0.510	30.20	-15.80	46.00	10.10	9.59	10.51	Average
7	1.135	38.86	-17.14	56.00	18.71	9.59	10.56	QP
8	1.135	30.66	-15.34	46.00	10.51	9.59	10.56	Average
9	1.568	40.65	-15.35	56.00	20.50	9.60	10.55	QP
10	1.568	34.65	-11.35	46.00	14.50	9.60	10.55	Average
11	2.088	41.34	-14.66	56.00	21.20	9.60	10.54	QP
12	2.088	35.64	-10.36	46.00	15.50	9.60	10.54	Average
13	3.922	43.62	-12.38	56.00	23.50	9.61	10.51	QP
14 *	3.922	37.42	-8.58	46.00	17.30	9.61	10.51	Average
15	6.252	43.18	-16.82	60.00	22.89	9.71	10.58	QP
16	6.252	35.98	-14.02	50.00	15.69	9.71	10.58	Average

Test Mode :	Mode 6		
Test Voltage :	230Vac / 50Hz	Phase :	Neutral
Function Type :	WWAN Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Earphone + Battery + USB Cable (Charging from wireless charging cradle) + SIM 1		

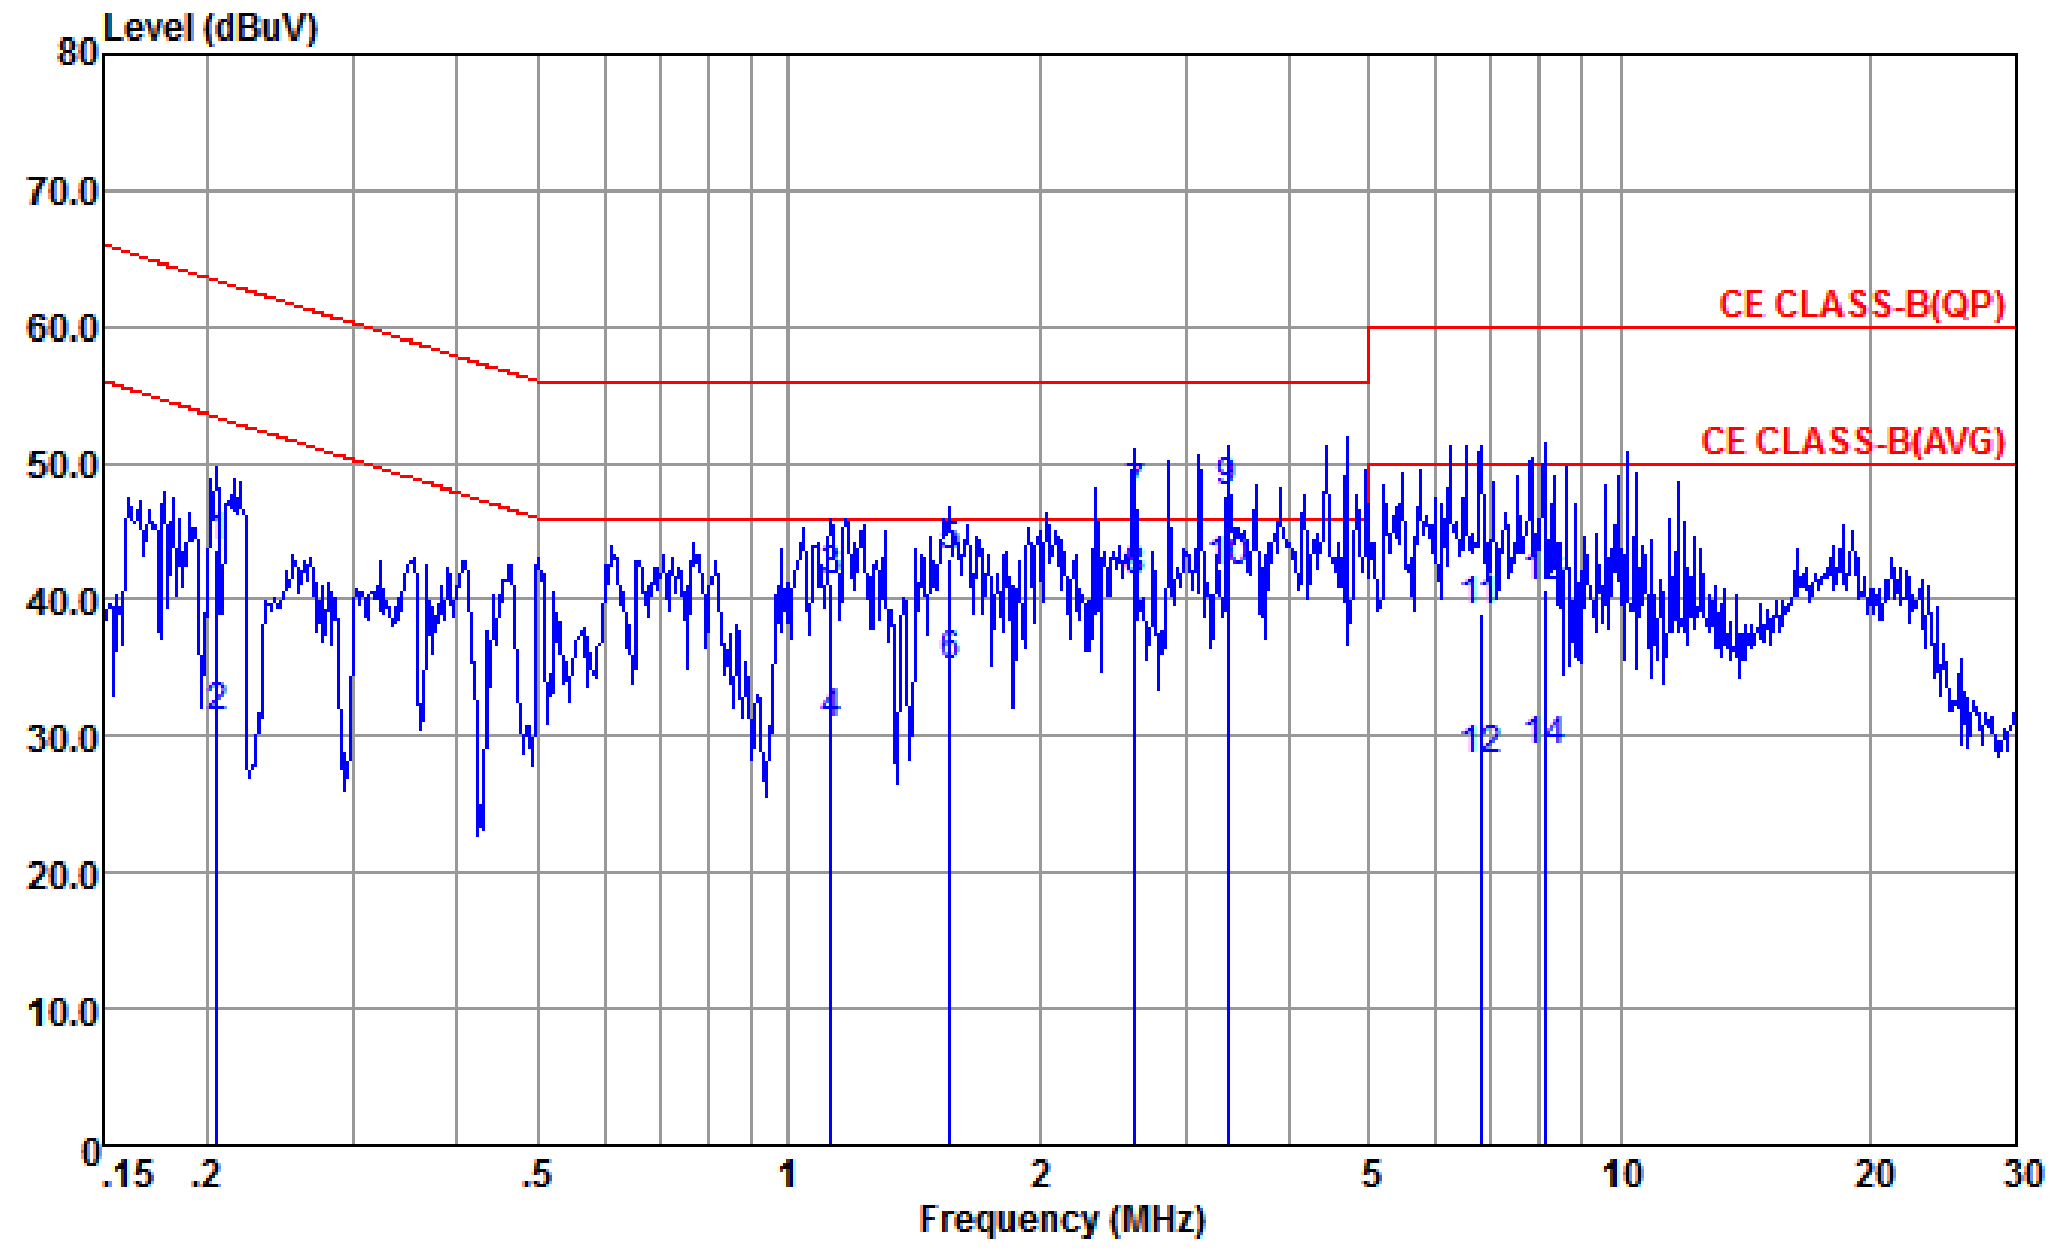

Site : CO01-KS
Condition : CE CLASS-B(QP) LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.205	43.69	-19.71	63.40	23.60	9.61	10.48	QP
2	0.205	31.19	-22.21	53.40	11.10	9.61	10.48	Average
3	1.123	41.31	-14.69	56.00	20.80	9.95	10.56	QP
4	1.123	30.81	-15.19	46.00	10.30	9.95	10.56	Average
5	1.560	42.92	-13.08	56.00	22.50	9.87	10.55	QP
6	1.560	35.02	-10.98	46.00	14.60	9.87	10.55	Average
7	2.608	47.17	-8.83	56.00	26.90	9.74	10.53	QP
8	2.608	41.17	-4.83	46.00	20.90	9.74	10.53	Average
9	3.381	47.78	-8.22	56.00	27.60	9.66	10.52	QP
10 *	3.381	41.98	-4.02	46.00	21.80	9.66	10.52	Average
11	6.805	39.02	-20.98	60.00	18.80	9.65	10.57	QP
12	6.805	28.02	-21.98	50.00	7.80	9.65	10.57	Average
13	8.105	40.72	-19.28	60.00	20.50	9.67	10.55	QP
14	8.105	28.72	-21.28	50.00	8.50	9.67	10.55	Average

3.2.5 Setup Photographs

Mode 6

Remote View

Rear View

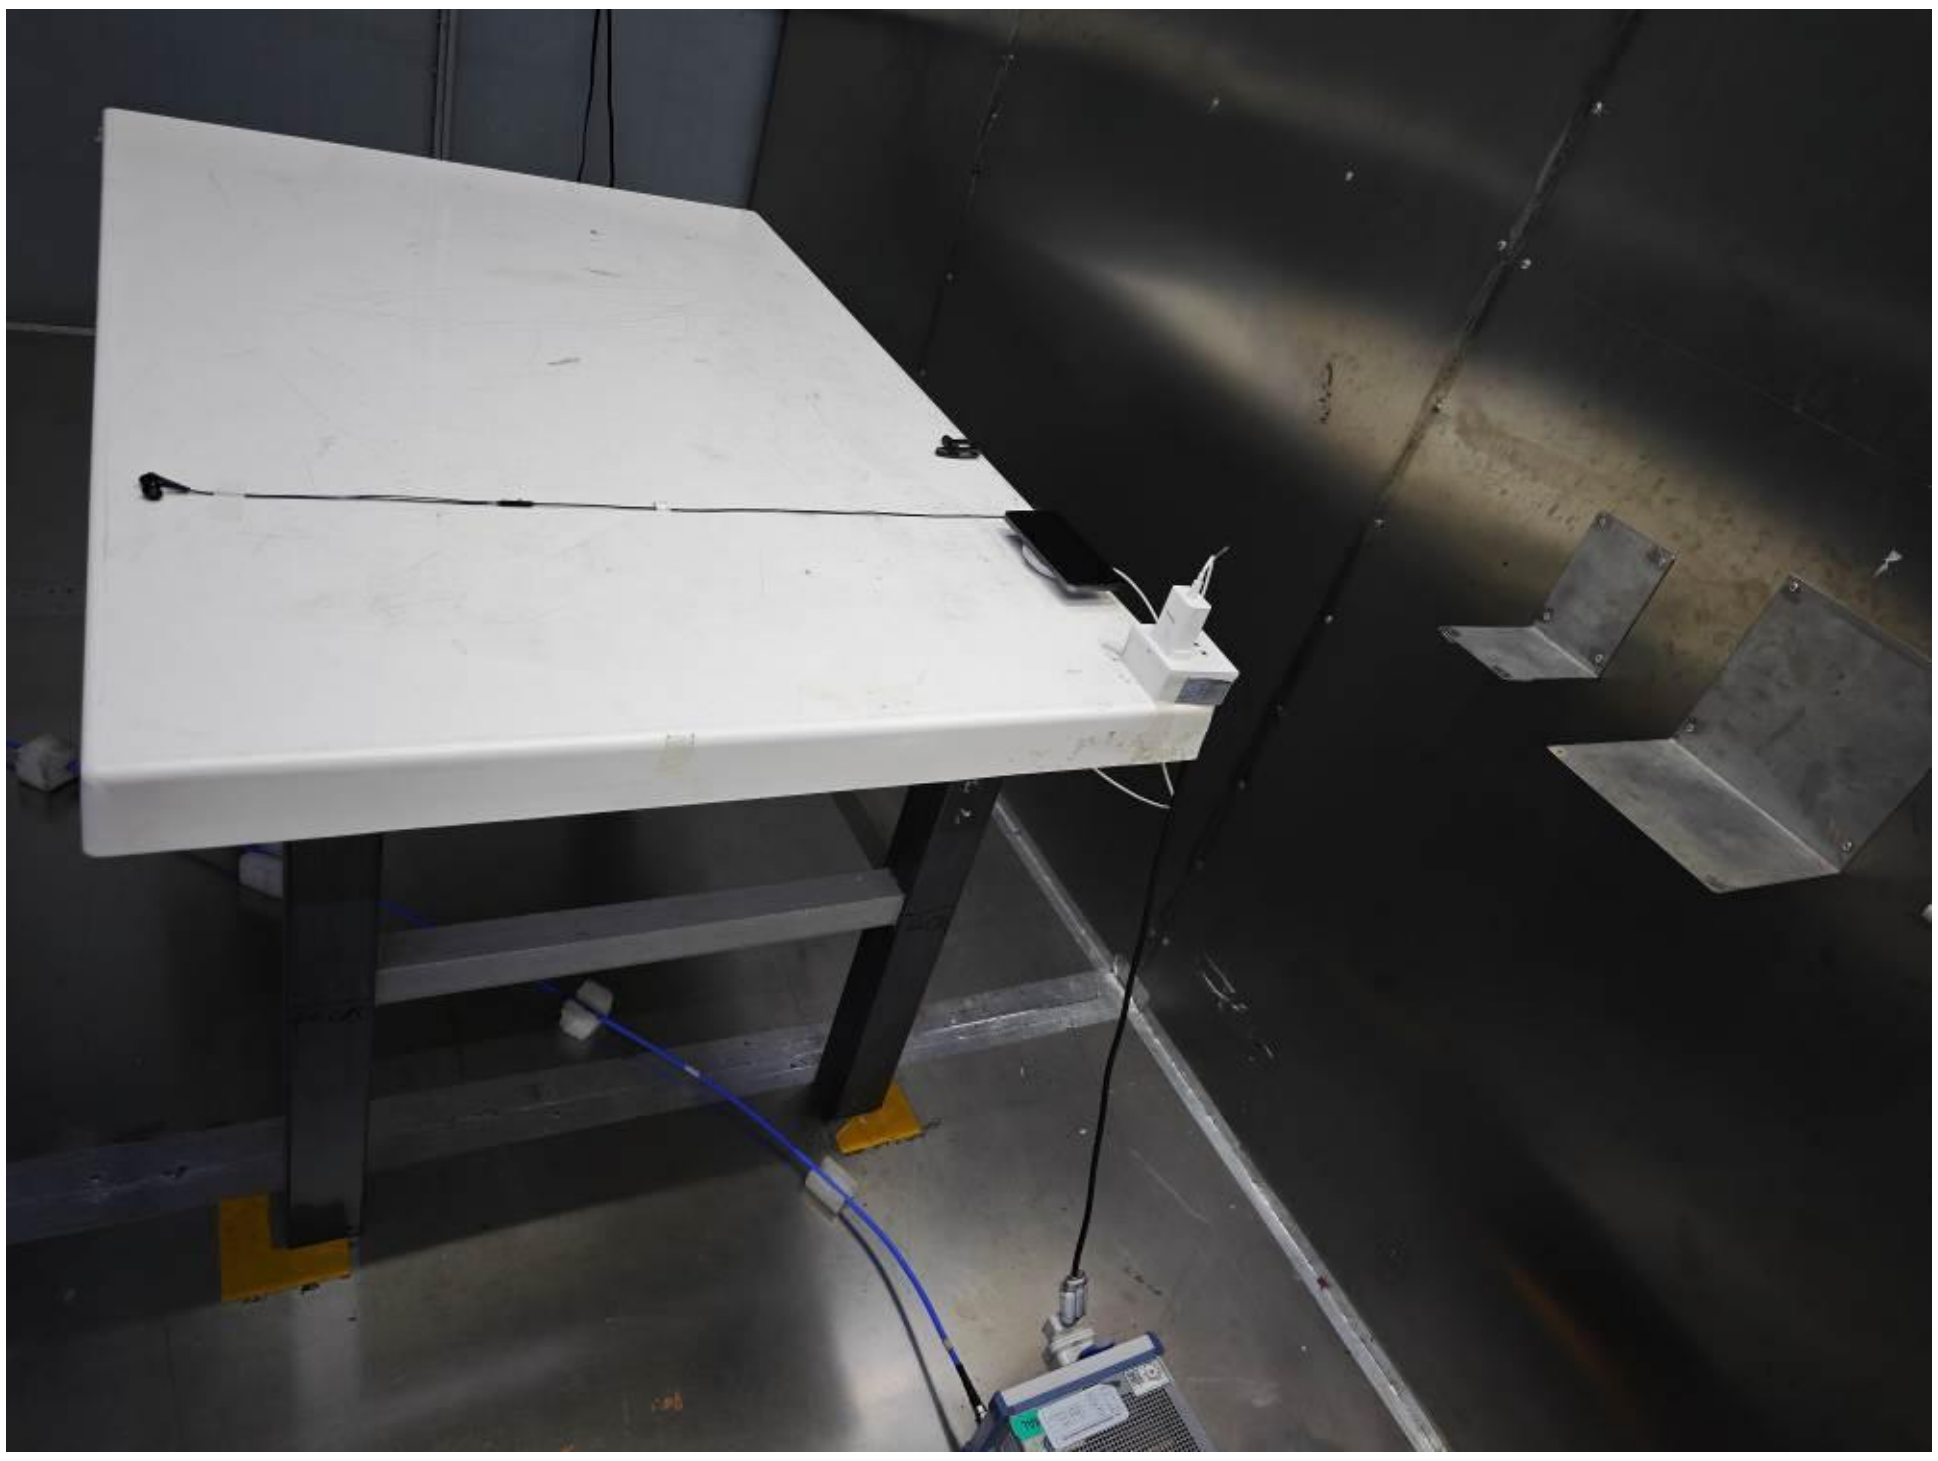

3.3 Harmonics Current Emission Test (Refer to EN61000-3-2)

3.3.1 Limit of Harmonics Current Emission Test

Class A Limits Table:

Harmonic Order	Max. permissible harmonic current (A)
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15 ≦ n ≦ 39	0.15*15/n
Even harmonics	
2	1.08
4	0.43
6	0.30
8 ≦ n ≦ 40	0.23*8/n

3.3.2 Test Setup

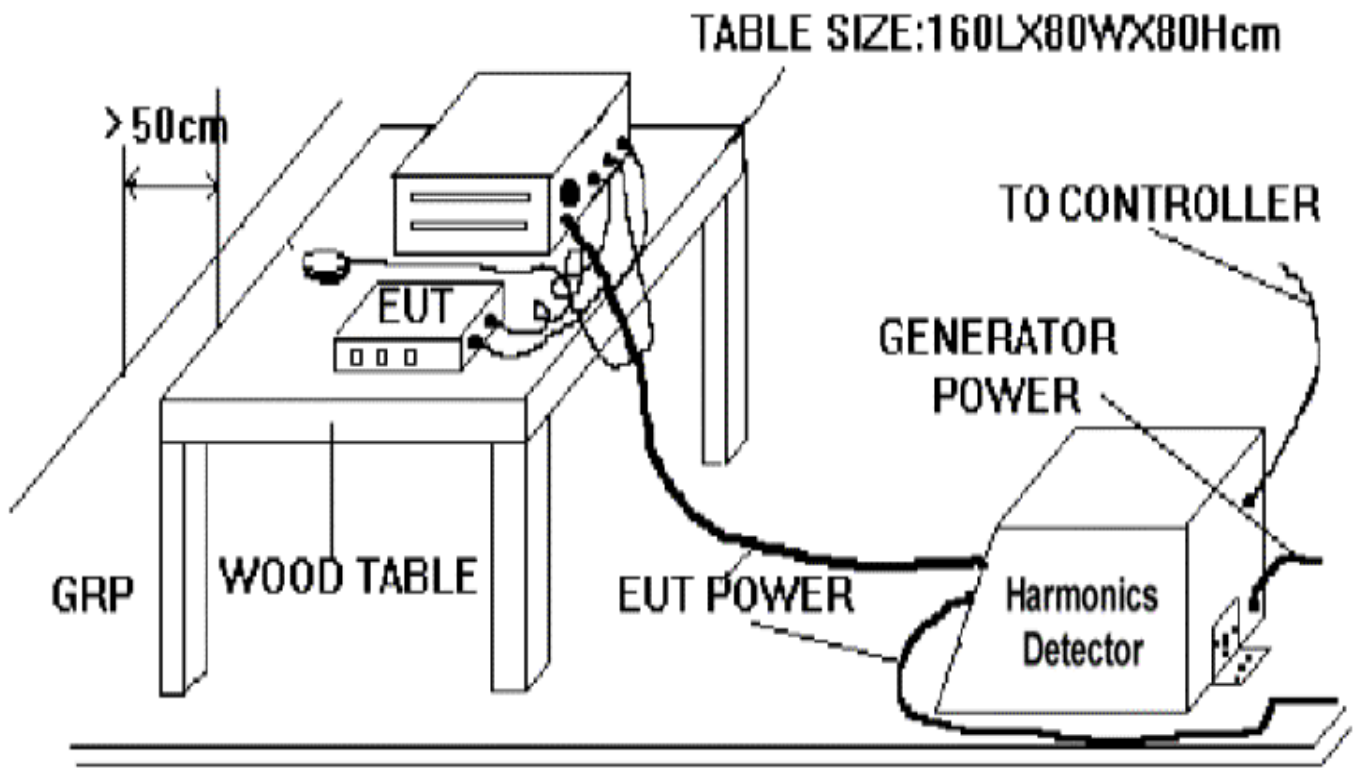

3.3.3 Test Instrument Setting

Harmonic Distortion Tester	Setting
Test Voltage	230 Vac
Test Frequency	50 Hz
Test Duration	10 minutes

3.3.4 Test Procedure

1. Finish the requirements of test setup for EUT.
2. The measurement of harmonic currents shall be performed as follows:
   i. For each harmonic order, measure the 1.5 s smoothed r.m.s. harmonic current in each DFT time window as defined in EN / IEC 61000-4-7: 2009.
   ii. Calculate the arithmetic average of the measured values from the DFT time windows, over the entire observation period Short cyclic (T cycle ≦ 2.5 min). Because of synchronisation to meet the requirements for repeatability in 5%.

3.3.5 Test Result

Pass.
Following is detailed test data

<Mode 1>

Harmonics – Class-A

Test category: Class-A (European limits) **Test Margin: 100**
Test date: 2026/2/12 **Start time: 8:50:01** **End time: 9:00:12**
Test duration (min): 10 **Data file name: H-000310.cts_data**

Test Result: Pass **Source qualification: Normal**

Current & voltage waveforms

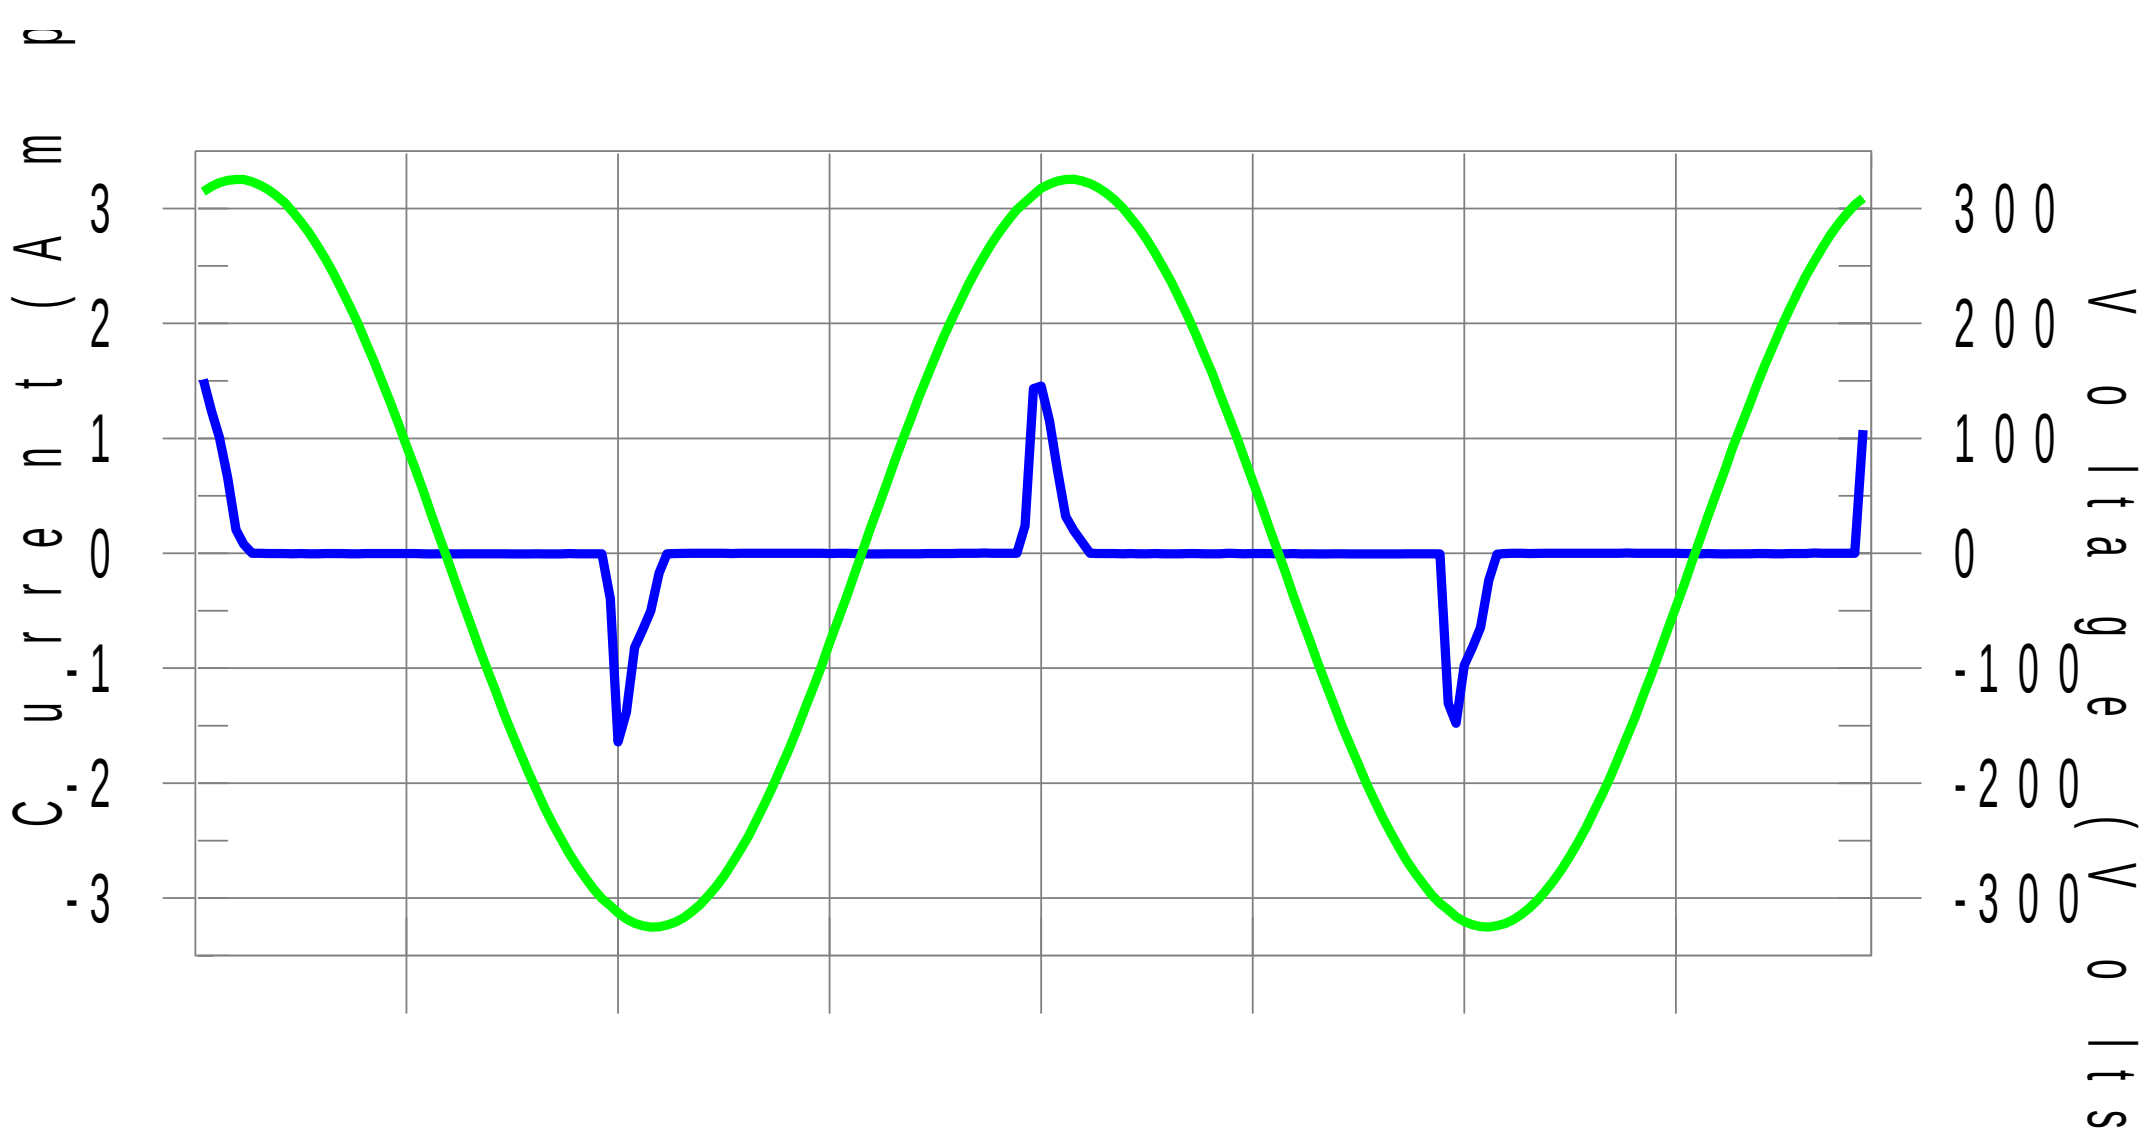

Harmonics and Class A limit line **European Limits**

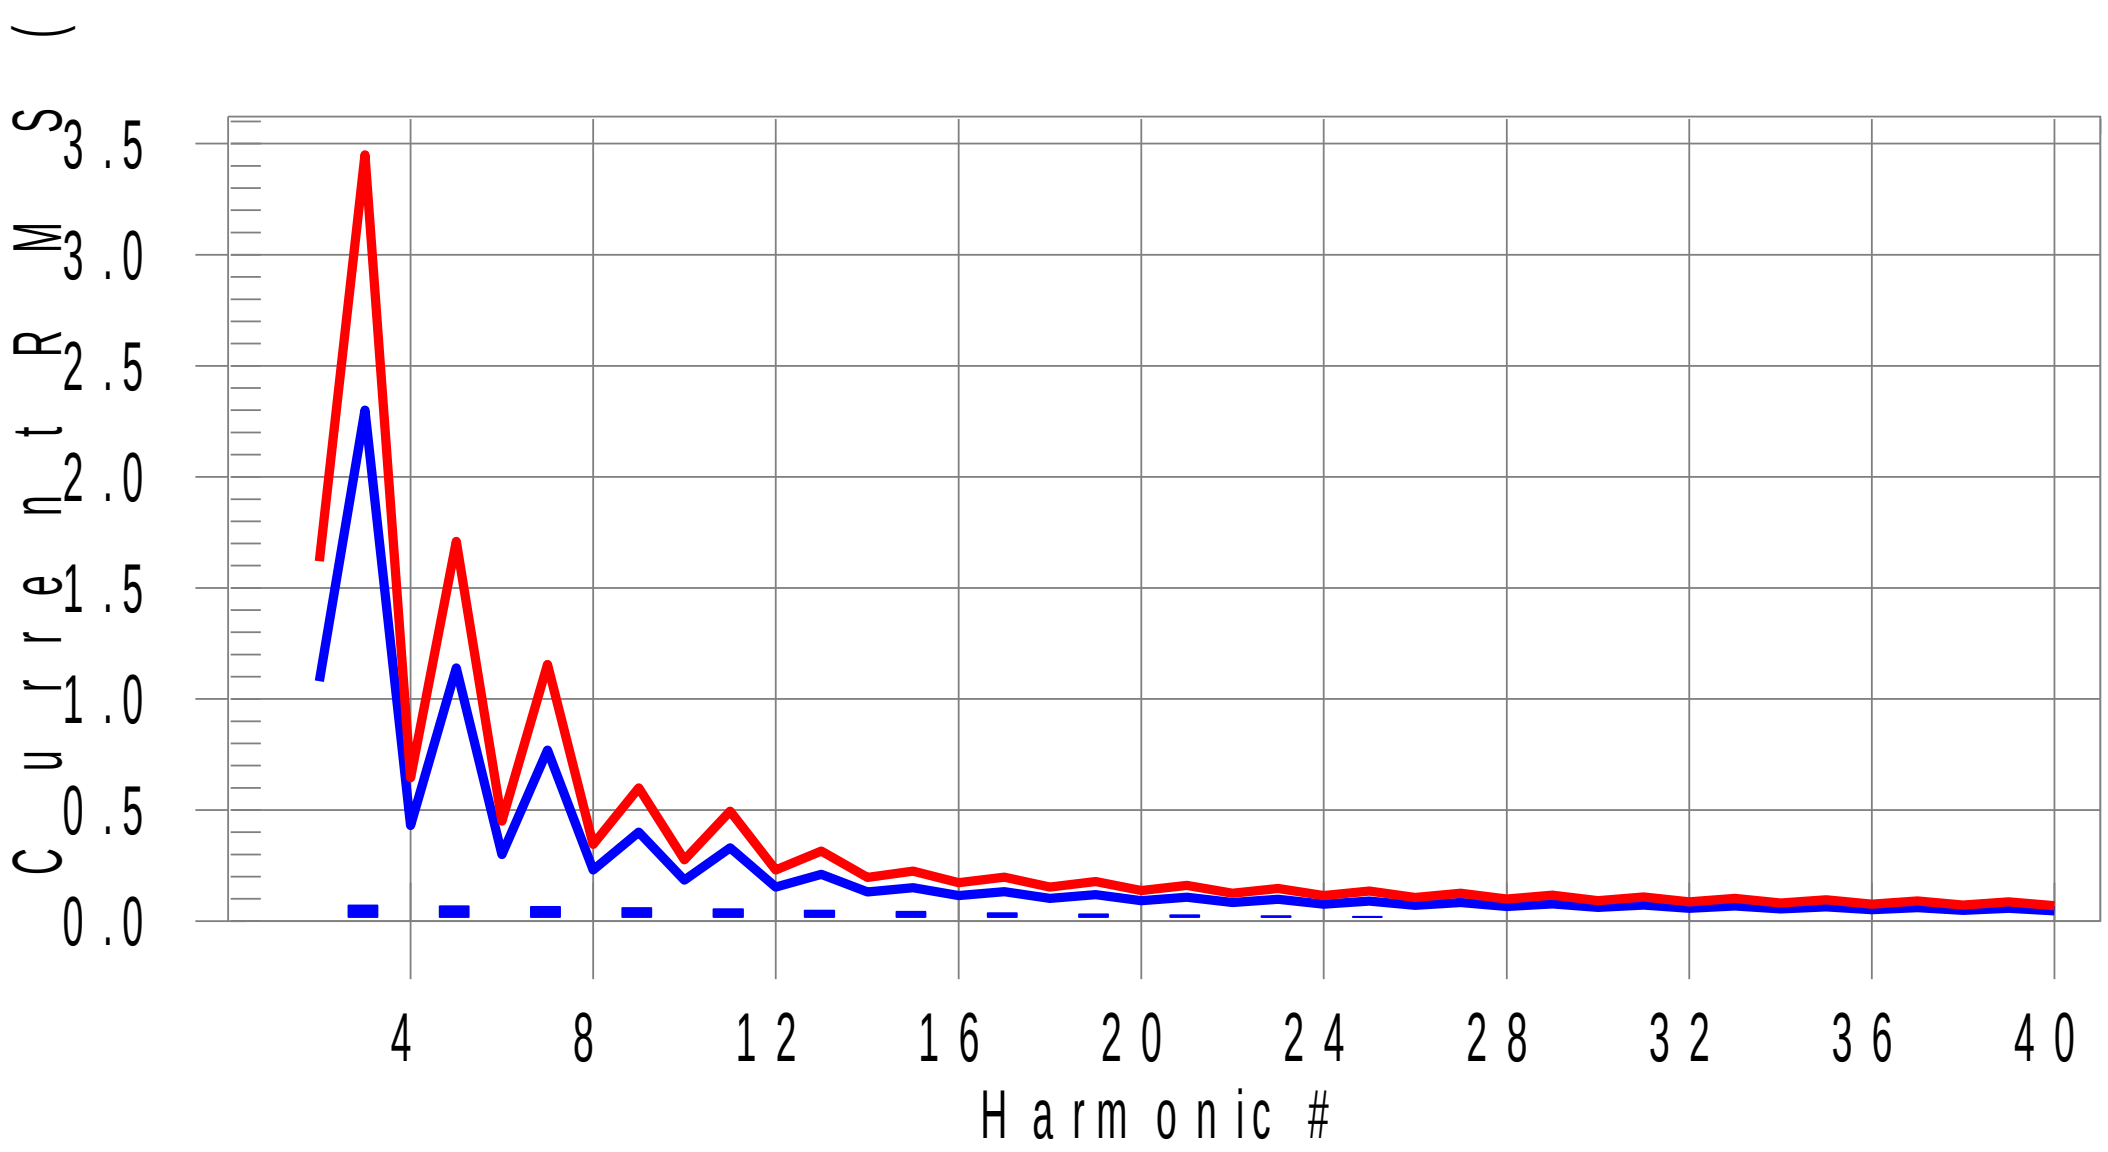

Current Test Result Summary (Run time)

Test category: Class-A (European limits) Test Margin: 100
Test date: 2026/2/12 Start time: 8:50:01 End time: 9:00:12
Test duration (min): 10 Data file name: H-000310.cts_data

Test Result: Pass Source qualification: Normal
THC(A): 0.170 I-THD(%): 110.9 POHC(A): 0.051 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts):	229.95	Frequency(Hz):	50.00
I_Peak (Amps):	1.812	I_RMS (Amps):	0.348
I_Fund (Amps):	0.153	Crest Factor:	9.851
Power (Watts):	34.5	Power Factor:	0.435

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.004	1.080	N/A	0.005	1.620	N/A	Pass
3	0.070	2.300	3.1	0.148	3.450	4.3	Pass
4	0.004	0.430	N/A	0.005	0.645	N/A	Pass
5	0.068	1.140	5.9	0.138	1.710	8.1	Pass
6	0.004	0.300	N/A	0.005	0.450	N/A	Pass
7	0.064	0.770	8.3	0.125	1.155	10.8	Pass
8	0.004	0.230	N/A	0.005	0.345	N/A	Pass
9	0.059	0.400	14.7	0.109	0.600	18.1	Pass
10	0.004	0.184	N/A	0.005	0.276	N/A	Pass
11	0.053	0.330	16.1	0.092	0.495	18.5	Pass
12	0.004	0.153	N/A	0.005	0.230	N/A	Pass
13	0.047	0.210	22.4	0.074	0.315	23.6	Pass
14	0.004	0.131	N/A	0.005	0.197	N/A	Pass
15	0.041	0.150	27.4	0.059	0.225	26.2	Pass
16	0.004	0.115	N/A	0.005	0.173	N/A	Pass
17	0.035	0.132	26.9	0.047	0.198	23.6	Pass
18	0.004	0.102	N/A	0.005	0.153	N/A	Pass
19	0.030	0.118	25.7	0.038	0.178	21.7	Pass
20	0.004	0.092	N/A	0.005	0.138	N/A	Pass
21	0.026	0.107	24.5	0.034	0.161	21.4	Pass
22	0.004	0.084	N/A	0.005	0.125	N/A	Pass
23	0.023	0.098	23.1	0.033	0.147	22.2	Pass
24	0.004	0.077	N/A	0.005	0.115	N/A	Pass
25	0.020	0.090	21.7	0.031	0.135	23.2	Pass
26	0.004	0.071	N/A	0.005	0.107	N/A	Pass
27	0.017	0.083	20.2	0.030	0.125	23.6	Pass
28	0.004	0.066	N/A	0.005	0.099	N/A	Pass
29	0.015	0.078	18.7	0.027	0.116	23.0	Pass
30	0.003	0.061	N/A	0.004	0.092	N/A	Pass
31	0.013	0.073	17.3	0.023	0.109	21.3	Pass
32	0.003	0.058	N/A	0.004	0.086	N/A	Pass
33	0.011	0.068	16.0	0.020	0.102	19.1	Pass
34	0.003	0.054	N/A	0.004	0.081	N/A	Pass
35	0.010	0.064	14.9	0.016	0.096	16.8	Pass
36	0.003	0.051	N/A	0.004	0.077	N/A	Pass
37	0.008	0.061	13.9	0.014	0.091	15.1	Pass
38	0.003	0.048	N/A	0.004	0.073	N/A	Pass
39	0.008	0.058	13.2	0.012	0.087	14.2	Pass
40	0.002	0.046	N/A	0.003	0.069	N/A	Pass

3.3.6 Setup Photographs

Mode 1

3.4 Voltage Fluctuation and Flicker Measurement (Refer to EN61000-3-3)

3.4.1 Limit of Voltage Fluctuation and Flicker Test

Voltage Fluctuation and Flicker Limits:

— the value of Pst shall not be greater than 1.0;

— the value of Plt shall not be greater than 0.65;

— the value of d(t) during a voltage change shall not exceed 3.3 % for more than 500 ms.

— the relative steady-state voltage change, dc, shall not exceed 3.3 %;

— the maximum relative voltage change, dmax, shall not exceed 4.0 %;

Note: Tests need not be made on equipment which is unlikely to produce significant voltage fluctuations or flicker. Test results are for reference only.

3.4.2 Test Setup

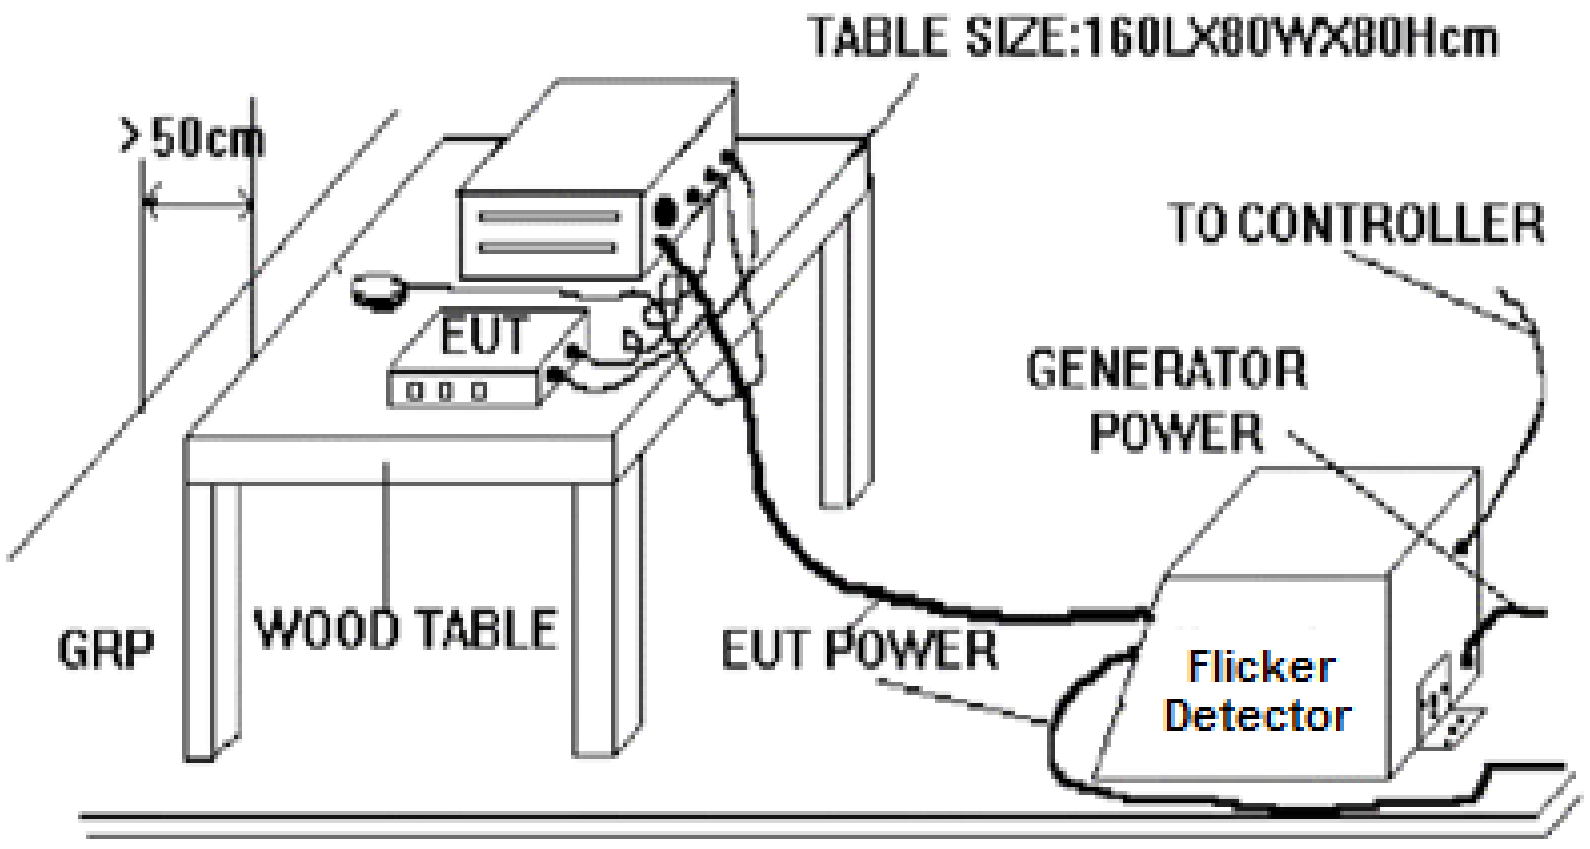

3.4.3 Test Instrument Setting

Voltage Fluctuation and Flicker Tester	Setting
Test Voltage	230 Vac
Test Frequency	50 Hz
Pst Integration Time	10 minutes
Pst Integration Periods	1
Measurement Delay	10.0 seconds
Test Duration	10 minutes

3.4.4 Test Procedure

1. Finish the requirements of test setup for EUT.
2. The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of ±8% is achieved during the whole assessment procedure.

3.4.5 Test Result

Pass.

Following is test data

<Mode 1>

Flicker

Test category: dt,dmax,dc and Pst (European limits) **Test Margin: 100**
Test date: 2026/2/12 **Start time: 9:02:05** **End time: 9:12:32**
Test duration (min): 10 **Data file name: F-000311.cts_data**

Test Result: Pass **Status: Test Completed**

Pst$_i$ and limit line **European Limits**

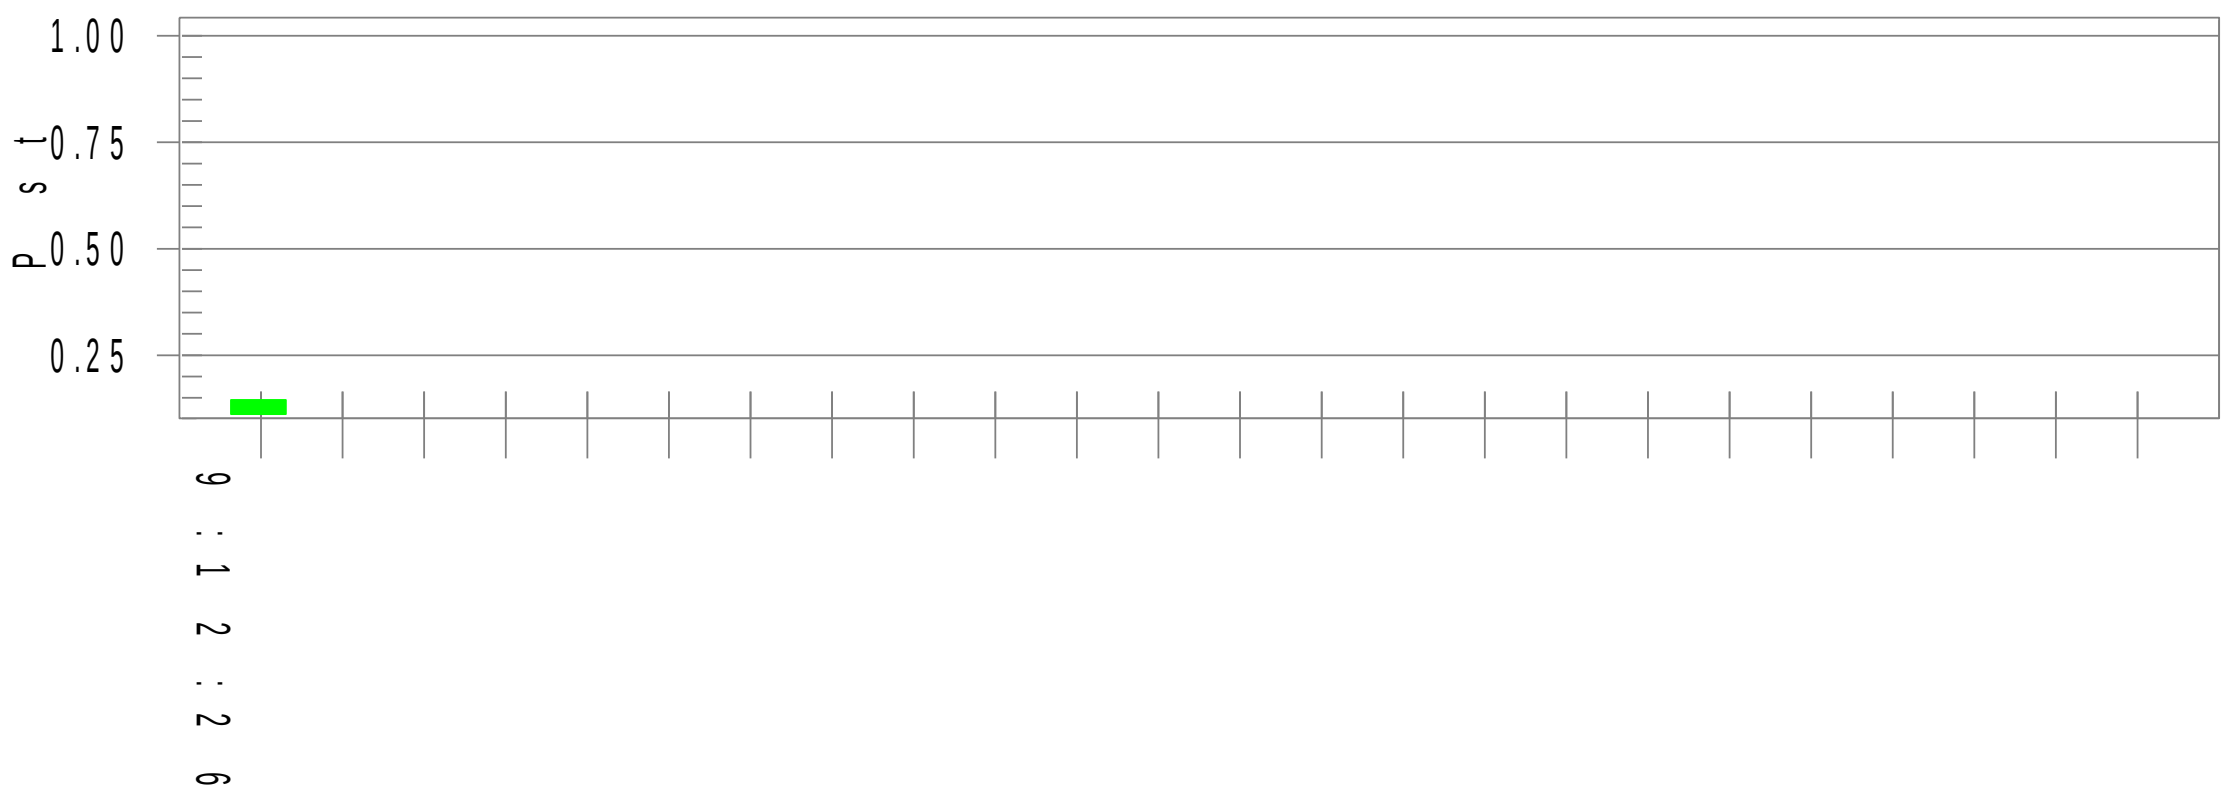

Plt and limit line

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.86			
Highest dt (%):		Test limit (%):		
T-max (mS):	0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.145	Test limit:	1.000	Pass

3.4.6 Setup Photographs

Mode 1

4. Immunity Tests

4.1 Requirements of Limit and EUT Performance Criteria for all Immunity Test Items

Test limit including test level, test frequency range, pulse type, test duration…etc. requirements.
This section is intended to integrate requirements of limit, and required performance criteria for all immunity test Items.

In subsection 4.1.1, includes two parts:

1. Subsection 4.1.1.1 : Support ports list of EUT, accessary, and cable record, where EUT intended to use in. These information will be used for decide test items and test limit
   (1) Supported ports list of EUT: Because test limit are based on supported ports of EUT, this is necessary information.
   (2) Accessary : include adapter type and remark EUT has battery or not.
   (3) Cable record : includes cable type, cable length, indoor/outdoor. These parameters will decide tests shall be carrying out or not.

2. Subsection 4.1.1.2 : tables of immunity test level specified in EN55035 and immunity test level specified by manufacturer.
   If immunity test level specified by manufacturer are higher/stronger than level specified in EN55035, they will be also record in this table. Therefore anyone could distinguish requirements specified by standard or manufacturer from these tables.

In subsection 4.1.2, required performance criteria of EUT per EN55035

Integrated required performance criteria of EN55035, they are used for all immunity test of this report.

4.1.1 Test Limit

4.1.1.1 Information of supported ports of EUT, accessary, cable record where EUT intended to use in.

Supported ports of EUT are listed as below (symbol ☒ means supported port):

☒	Enclosure Port
☒	Input AC power port
☐	Input DC power port
☐	Telecommunication port (Wired network port)

Accessory (symbol ☒ means have used with EUT during test)

☒	☒ AC Adapter ☐ DC Adapter ☐ Car charger ☐ PoE adapter	Pins : ☒ 2pins ☐ 3pins Cable Length : ☐ >3m ☒ <3m
☒	Battery	

As per above information, corresponded test limit (including test level, test frequency range, pulse type, test duration…etc. requirements) specified in below table 1~4 have been selected to carry out test in this report.

4.1.1.2 Tables of Immunity Test Level Specified in EN55035 and Immunity Test Level Specified by Manufacturer

When immunity test level specified by manufacturer are higher (stronger) than level specified in EN55035, they will be also record in this table. But if manufacturer doesn't specify immunity test level, "N/A" is filling in table and test level of all immunity test items are following requirements of EN55035.

Table 1 - Enclosure Port

<table>
<tr><th>Test item</th><th colspan="2">Immunity test level specified in EN55035</th><th>Immunity test level specified by manufacturer</th></tr>
<tr><td rowspan="2">Electrostatic discharge (ESD)</td><td colspan="2">± 2 kV, ± 4 kV contact</td><td>N/A</td></tr>
<tr><td colspan="2">± 2 kV, ± 4 kV, ± 8 kV air</td><td>N/A</td></tr>
<tr><td rowspan="5">Continuous RF electromagnetic field disturbances (RS)</td><td rowspan="3">swept test</td><td>3 V/m</td><td>N/A</td></tr>
<tr><td>Frequency range :
80 MHz – 1 GHz</td><td>N/A</td></tr>
<tr><td>Modulation: 80 % AM at 1kHz</td><td>N/A</td></tr>
<tr><td rowspan="2">spot test</td><td>3 V/m</td><td>N/A</td></tr>
<tr><td>Frequency range (MHz) :
1 800, 2 600, 3 500, 5 000</td><td>N/A</td></tr>
<tr><td>Power frequency magnetic field (MF)</td><td colspan="2">1 A/m
power frequency : 50 Hz or 60 Hz</td><td>N/A</td></tr>
</table>

.

Table 2 – Input AC Power Port

Test Item	Immunity test level specified in EN55035	Immunity Test level specified by manufacturer
Fast transients, common mode (EFT)	± 1 kV 5 kHz repetition frequency	N/A
Surges Line-to-line	± 0,5 kV, ± 1 kV	N/A
Surges Line-to-ground	± 0,5 kV, ± 1 kV, ± 2 kV	N/A
Continuous induced RF disturbances (CS)	Frequency range (MHz) / Test level (V) 0.15 to 10 / 3 10 to 30 / 3 to 1 30 to 80 / 1	N/A
	Modulation: 80 % AM at 1 kHz	N/A
Voltage dips	<5 % residual; 0,5 cycle , 50Hz Phase At 0°, 45°, 90°, 135°, 180°, 225°, 270° and 315°	N/A
	70 % residual; 25 cycles , 50Hz Phase At 0°, 45°, 90°, 135°, 180°, 225°, 270° and 315°	
Voltage interruptions	<5 % residual; 250cycle , 50Hz	N/A

Table 3 – Input DC Power Port (not necessary performed on EUT of this report)

Test Item	Immunity test level specified in EN55035	Immunity Test level specified by manufacturer
Fast transients, common mode (EFT)	± 0.5 kV 5 kHz repetition frequency	N/A
Surges Line-to-Ground	± 0,5 kV for outdoor cable	N/A
Continuous induced RF disturbances (CS)	Frequency range (MHz) / Test level (V) 0.15 to 10 / 3 10 to 30 / 3 to 1 30 to 80 / 1	N/A
	Modulation: 80 % AM at 1 kHz	N/A

Table 4 –Telecommunication Port (Wired network port) (not necessary performed on EUT of this report)

Test Item	Immunity test level specified in EN55035	Immunity Test level specified by manufacturer
Fast transients, common mode (EFT)	± 0.5 kV 5 kHz repetition frequency (100kHz repetition frequency for xDSL port) When cable length >3m	N/A
Surges (Line-to-ground)	Port type: unshielded symmetrical ± 1 kV for outdoor cable ± 1kV and ± 4 kV for outdoor cable, with primary protectors	N/A
	Port type: coaxial or shielded ± 0.5kV	N/A
Continuous induced RF disturbances (CS)	Frequency range (MHz) / Test level (V) 0.15 to 10 / 3 10 to 30 / 3 to 1 30 to 80 / 1	N/A
	Modulation: 80 % AM at 1 kHz	N/A
Broadband impulse noise disturbances, repetitive	Impulse frequency (MHz) / Test level (dBuV) 0.15 to 0.5 / 107 0.5 to 10 / 107 to 36 10 to 30 / 36 to 30	N/A
	Burst duration : 0.7 ms	N/A
	Burst period : 8,3 (for 60 Hz) / 10 (for 50 Hz)	
Broadband impulse noise disturbances, isolated	Impulse frequency (MHz) / Test level (dBuV) 0.15 to 30 / 110	N/A
	Burst duration : 0.24; 10; 30 ms	N/A

4.1.2 Required Performance Criteria of EUT per EN55035

<table>
<tr><th>Criteria</th><th>Performance criteria</th></tr>
<tr><td>A</td><td>The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

The performance criteria of functions of EUT are described as below：
♦ The EUT shall operate as its intended operating condition during and after the test.
♦ Display and Display output
an increase in any degradation greater than just perceptible by observation of the image shall not occur as a consequence of the application of the test.

♦ Network
Where relevant, during the application of the test the network function shall, as a minimum, operate ensuring that:
• established connections shall be maintained throughout the application of the test;
• no change of operational state or corruption of stored data occurs;
• no increase in error rate above the figure defined by the manufacturer occurs. The manufacturer should select the most appropriate performance measurement criteria for the product or system, for example bit error rate, block error rate;
• no request for retry above the figure defined by the manufacturer;
• the data transmission rate does not reduce below the figure defined by the manufacturer;
• no protocol failure occurs;
• the audio noise level at a two-wire analogue interface (supporting telephony) shall satisfy the requirements of limit.

♦ Audio
During the test the audio output function shall be maintained and the requirements of standard G.7 shall be met.</td></tr>
</table>

B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended. The performance criteria of functions of EUT are described as below： ♦ Network Established connections shall be maintained throughout the test, or shall self-recover in a way and timescale that is imperceptible to the user. The error rate, request for retry and data transmission rates may be degraded during the application of the test. Degradation of the performance as described in criterion A is permitted, provided that the normal operation of the EUT is self-recoverable to the condition established prior to the application of the test..
C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer’s instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost. The performance criteria of functions of EUT are described as below： ♦ Network Degradation of performance as described in criteria A and B is permitted provided that the normal operation of the EUT is self-recoverable to the condition immediately before the application of the test, or can be restored after the test by the operator.

4.2 Electrostatic Discharge (ESD) Test (Refer to EN55035 Section 4.2.1)

4.2.1 Test Setup

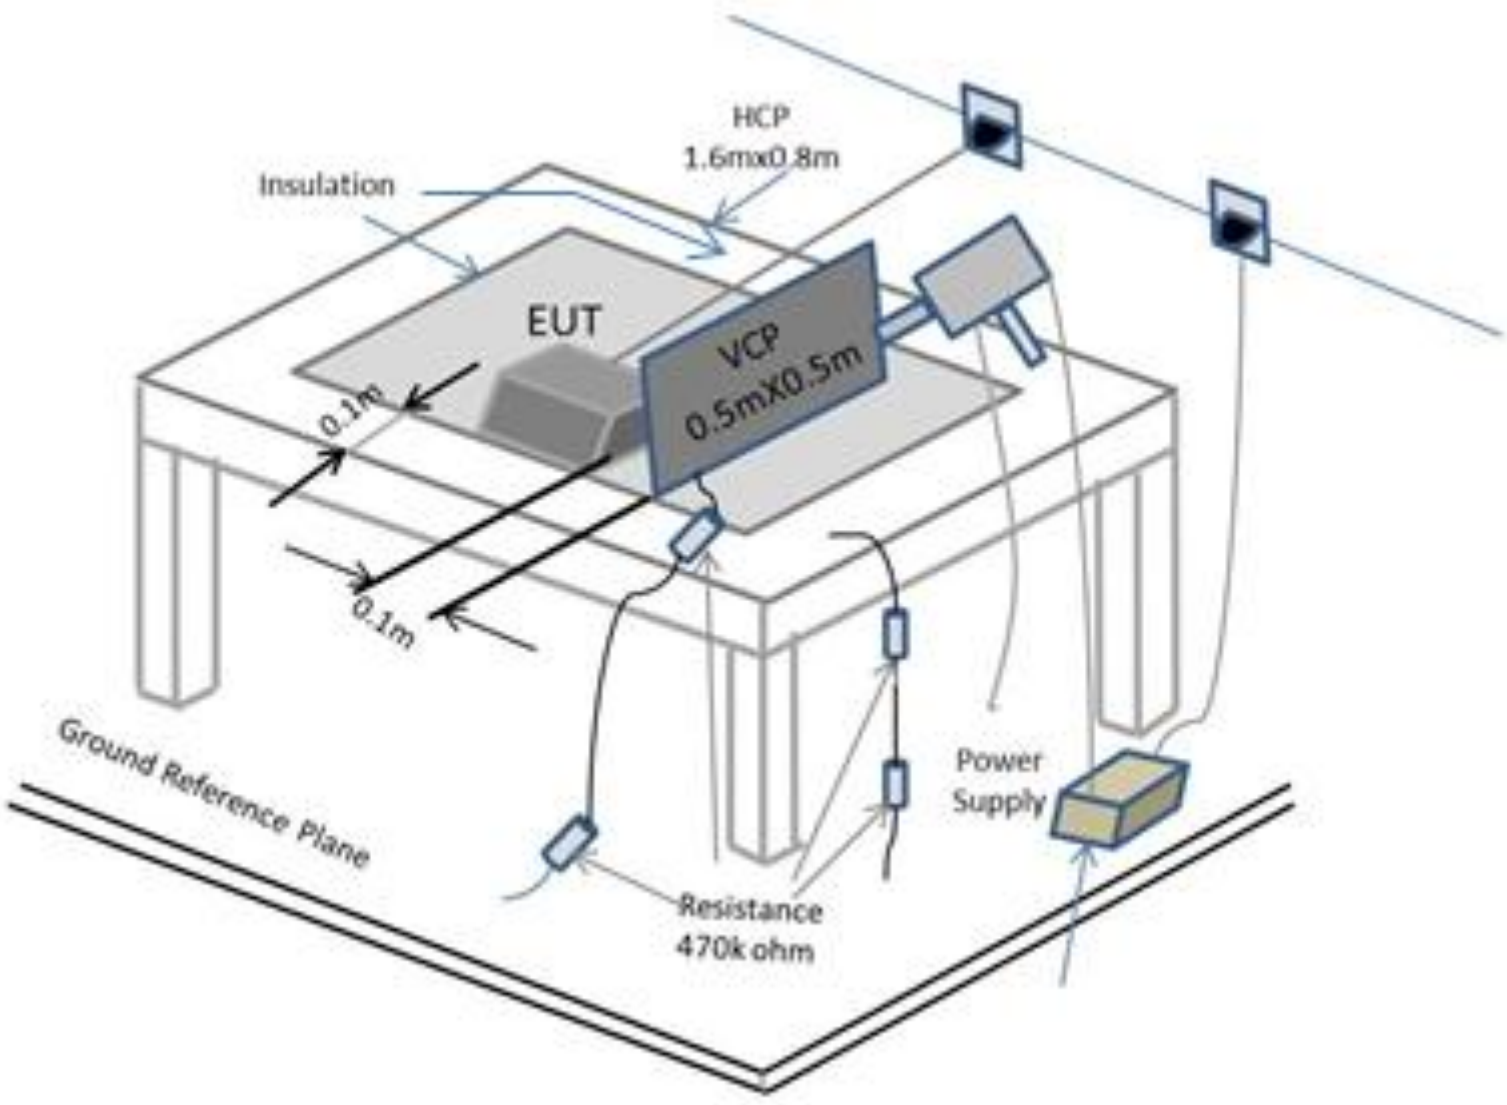

A distance of 1m minimum was provided between the EUT and the wall or any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not be less than 0.2m to other conductive parts in the test setup.

The coupling plane is placed parallel to, and positioned at a distance of 0,1 m from the EUT.

4.2.2 Test Instrument Setting

1. Tested number of air discharge is at least 10 discharges (in the most sensitive polarity). For contact discharge, tested number is at least 10 discharges.
2. For the time interval between successive single discharges an initial value of 1 s is recommended.
3. Sweeping of the EUT with a grounded carbon fibre brush with bleeder resistors (for example, 2 · 470 kΩ) in the grounding cable.
4. Ensure parameters of current waveform of an ESD generator is within specifications before test.

4.2.3 Test Procedure

EUT and auxiliary instrument necessary to perform DIRECT and INDIRECT application of discharges to the EUT, in the following manner:

˙CONTACT DISCHARGE to the conductive surfaces and to the coupling plane;

˙AIR DISCHARGE at insulating surfaces.

a. Contact Discharges to the conductive surfaces and to coupling planes:

In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :

- If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
- Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
- The contact discharge test shall not be applied to such surfaces.

b. Air Discharge to apertures and insulation surfaces:

In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.

c. Ensure that the applied charge on the EUT has been dis-charged before next ESD pulse.

4.2.4 Test Result

Test Standard	IEC 61000-4-2:2008
Product Standard	EN 55035 : 2017 + A11: 2020
EUT operated voltage during test	230Vac, 50Hz
Tested Level	±2 / ±4 / ±8kV for air discharge
	±2 / ±4kV for contact discharge
Required Performance Criteria	B
Performance Criteria of EUT	B
Test Result	PASS

4.2.5 Criteria B situation during Electrostatic Discharge test

Here are only shown ESD test points which criteria B situation have happened, detailed ESD test points please refer to next section of this report.

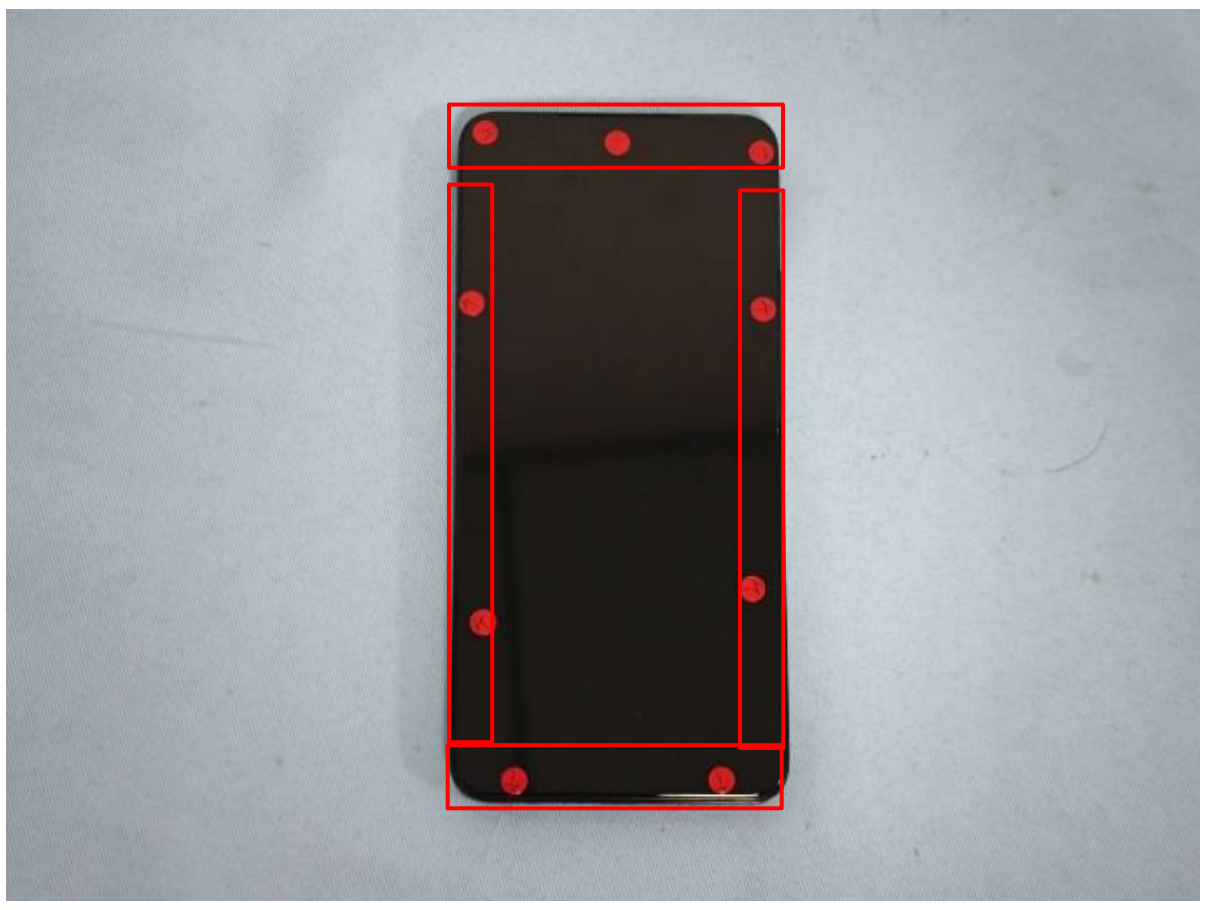

Picture 1**.** Discharge point (Air Discharge)

Remark : When test air discharge with level <u>+</u>8KV at the discharge points remarked above, brightness reduced of the panel, but can automatically recover to normal operation as its intention.

4.2.6 Photos for Identification of ESD Test Points

Remark:

1. Air Discharge points refer to the red arrows on the photo.
2. There is no any contact discharge point on the EUT, only testing for HCP/VCP.

<Mode 1~9>






<Adapter>

<USB Cable>

4.2.7 Setup Photographs

Mode 1~4

Mode 5~6

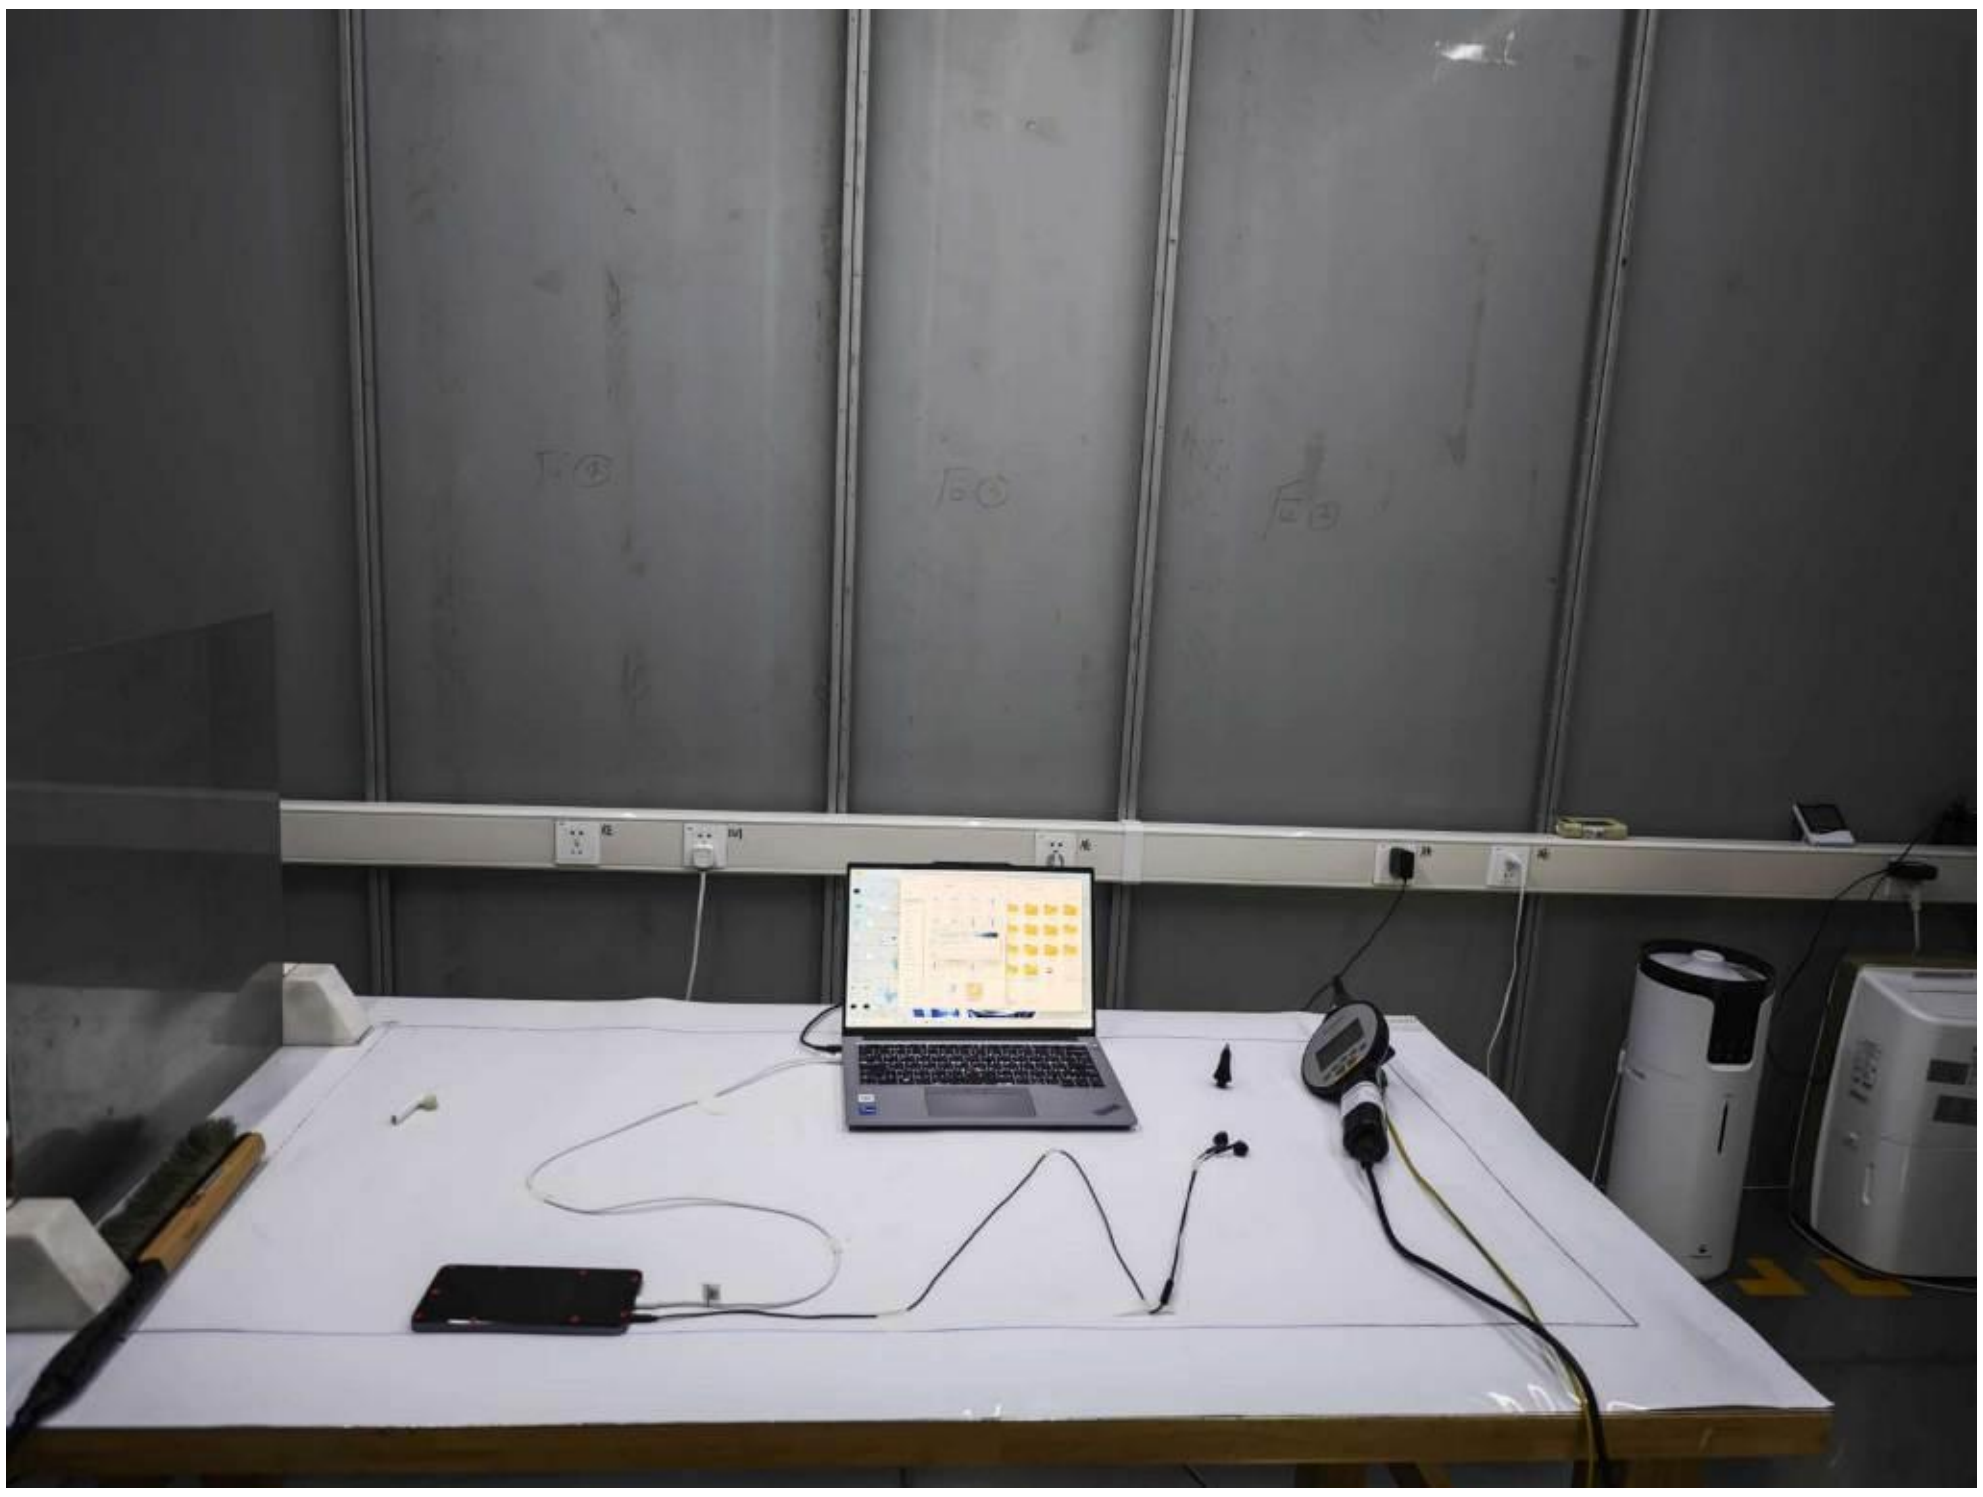

Mode 7

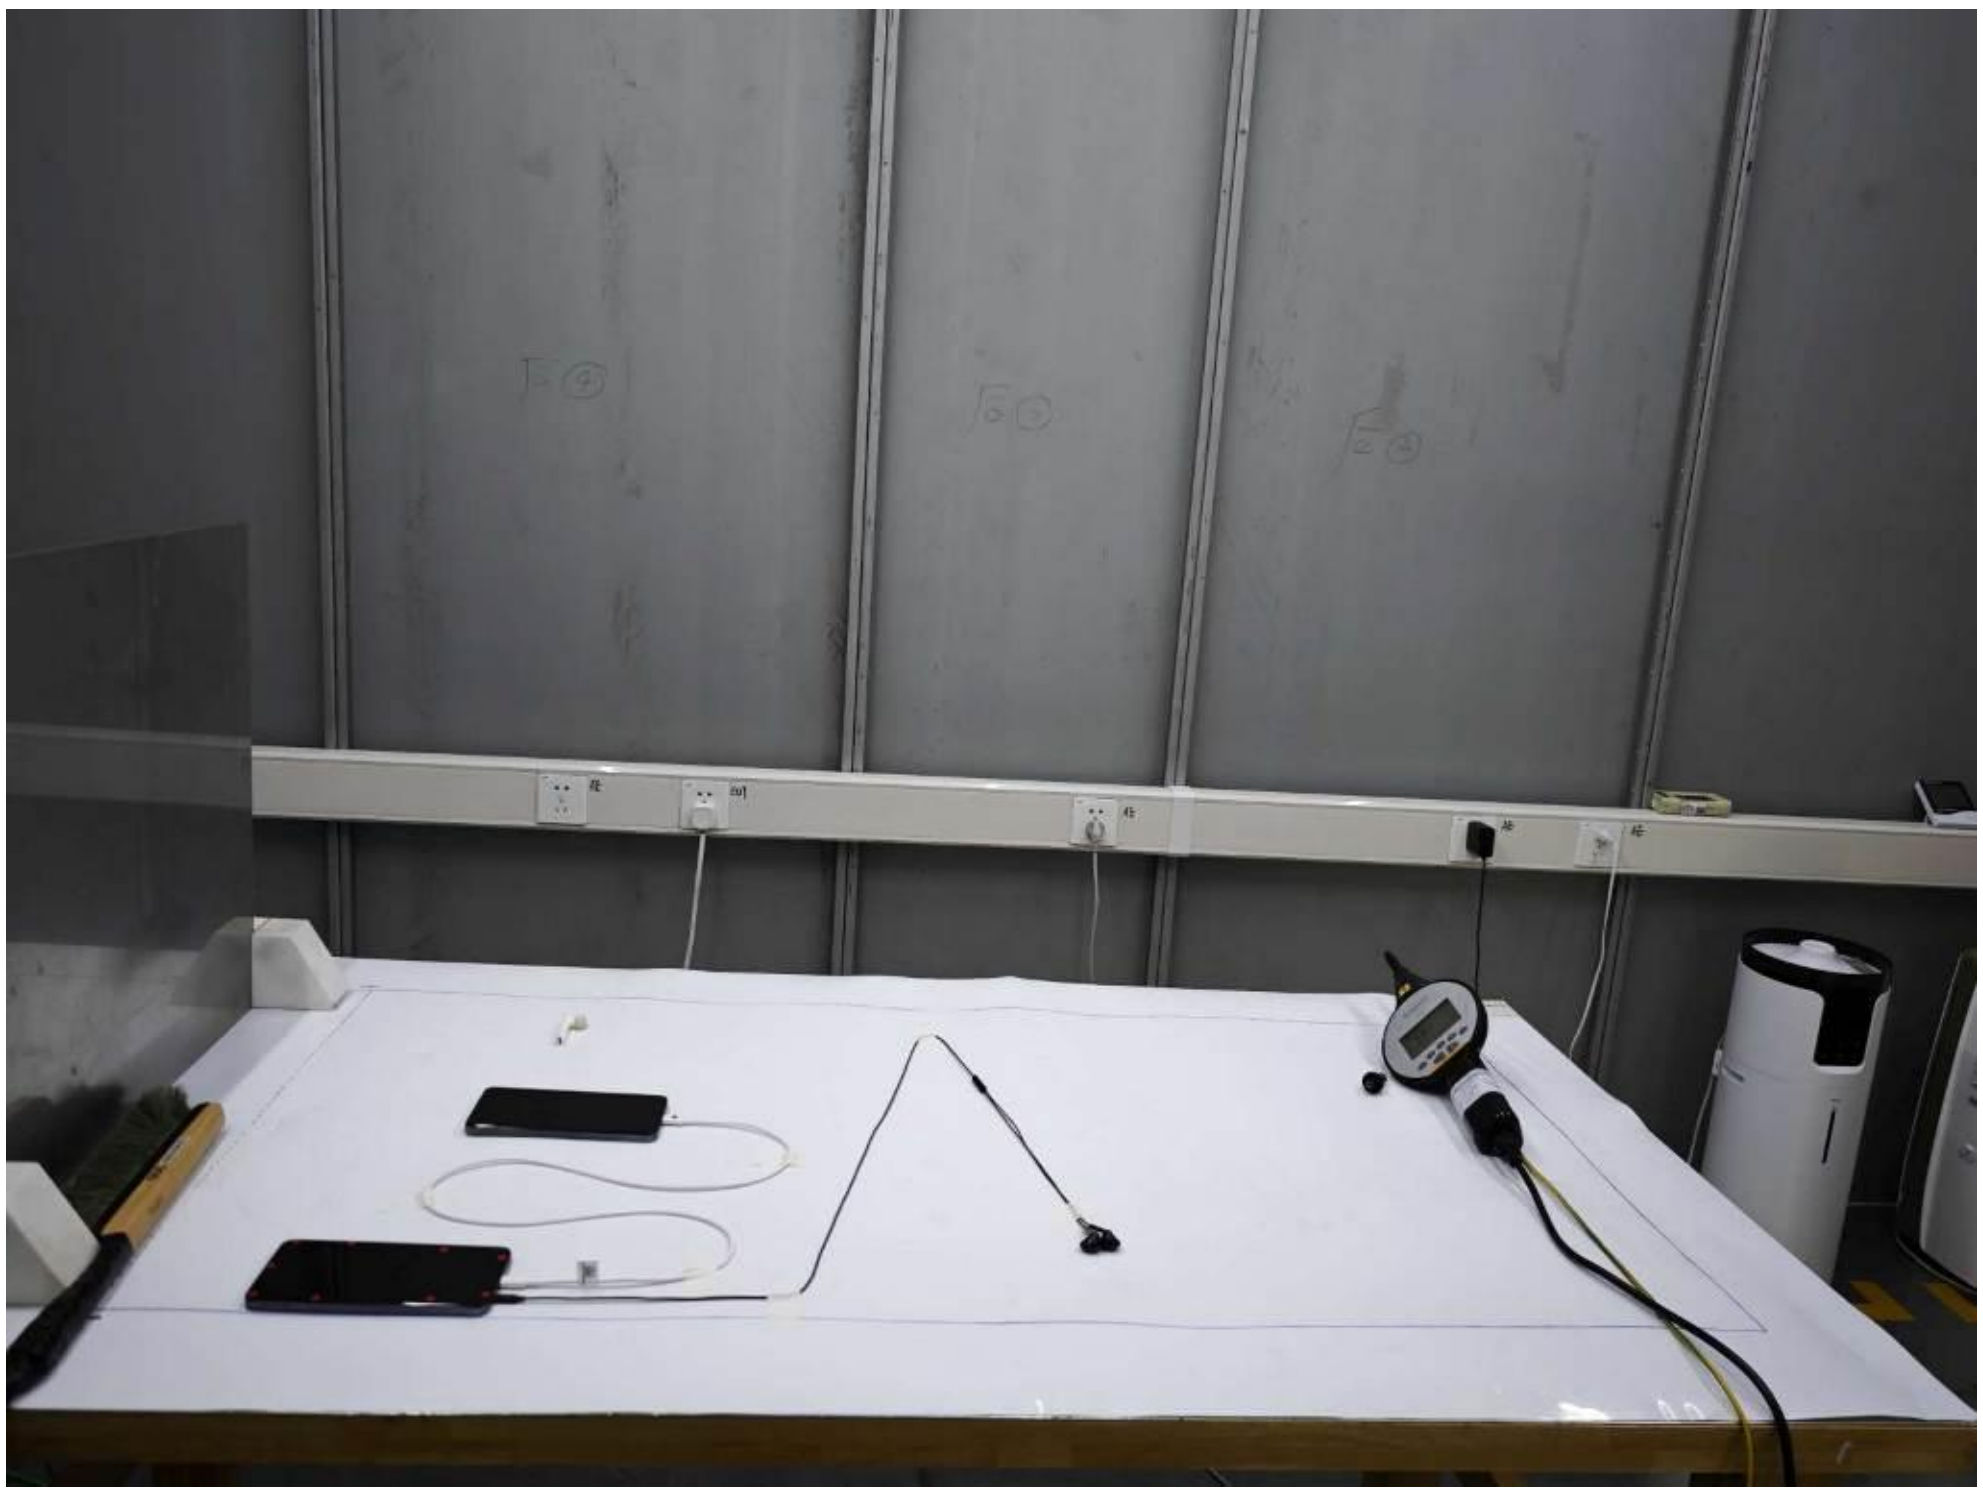

Mode 8

Mode 9

4.3 Electrical fast transients/burst (EFT/BURST) Test (Refer to EN55035 Section 4.2.4)

4.3.1 Test Setup

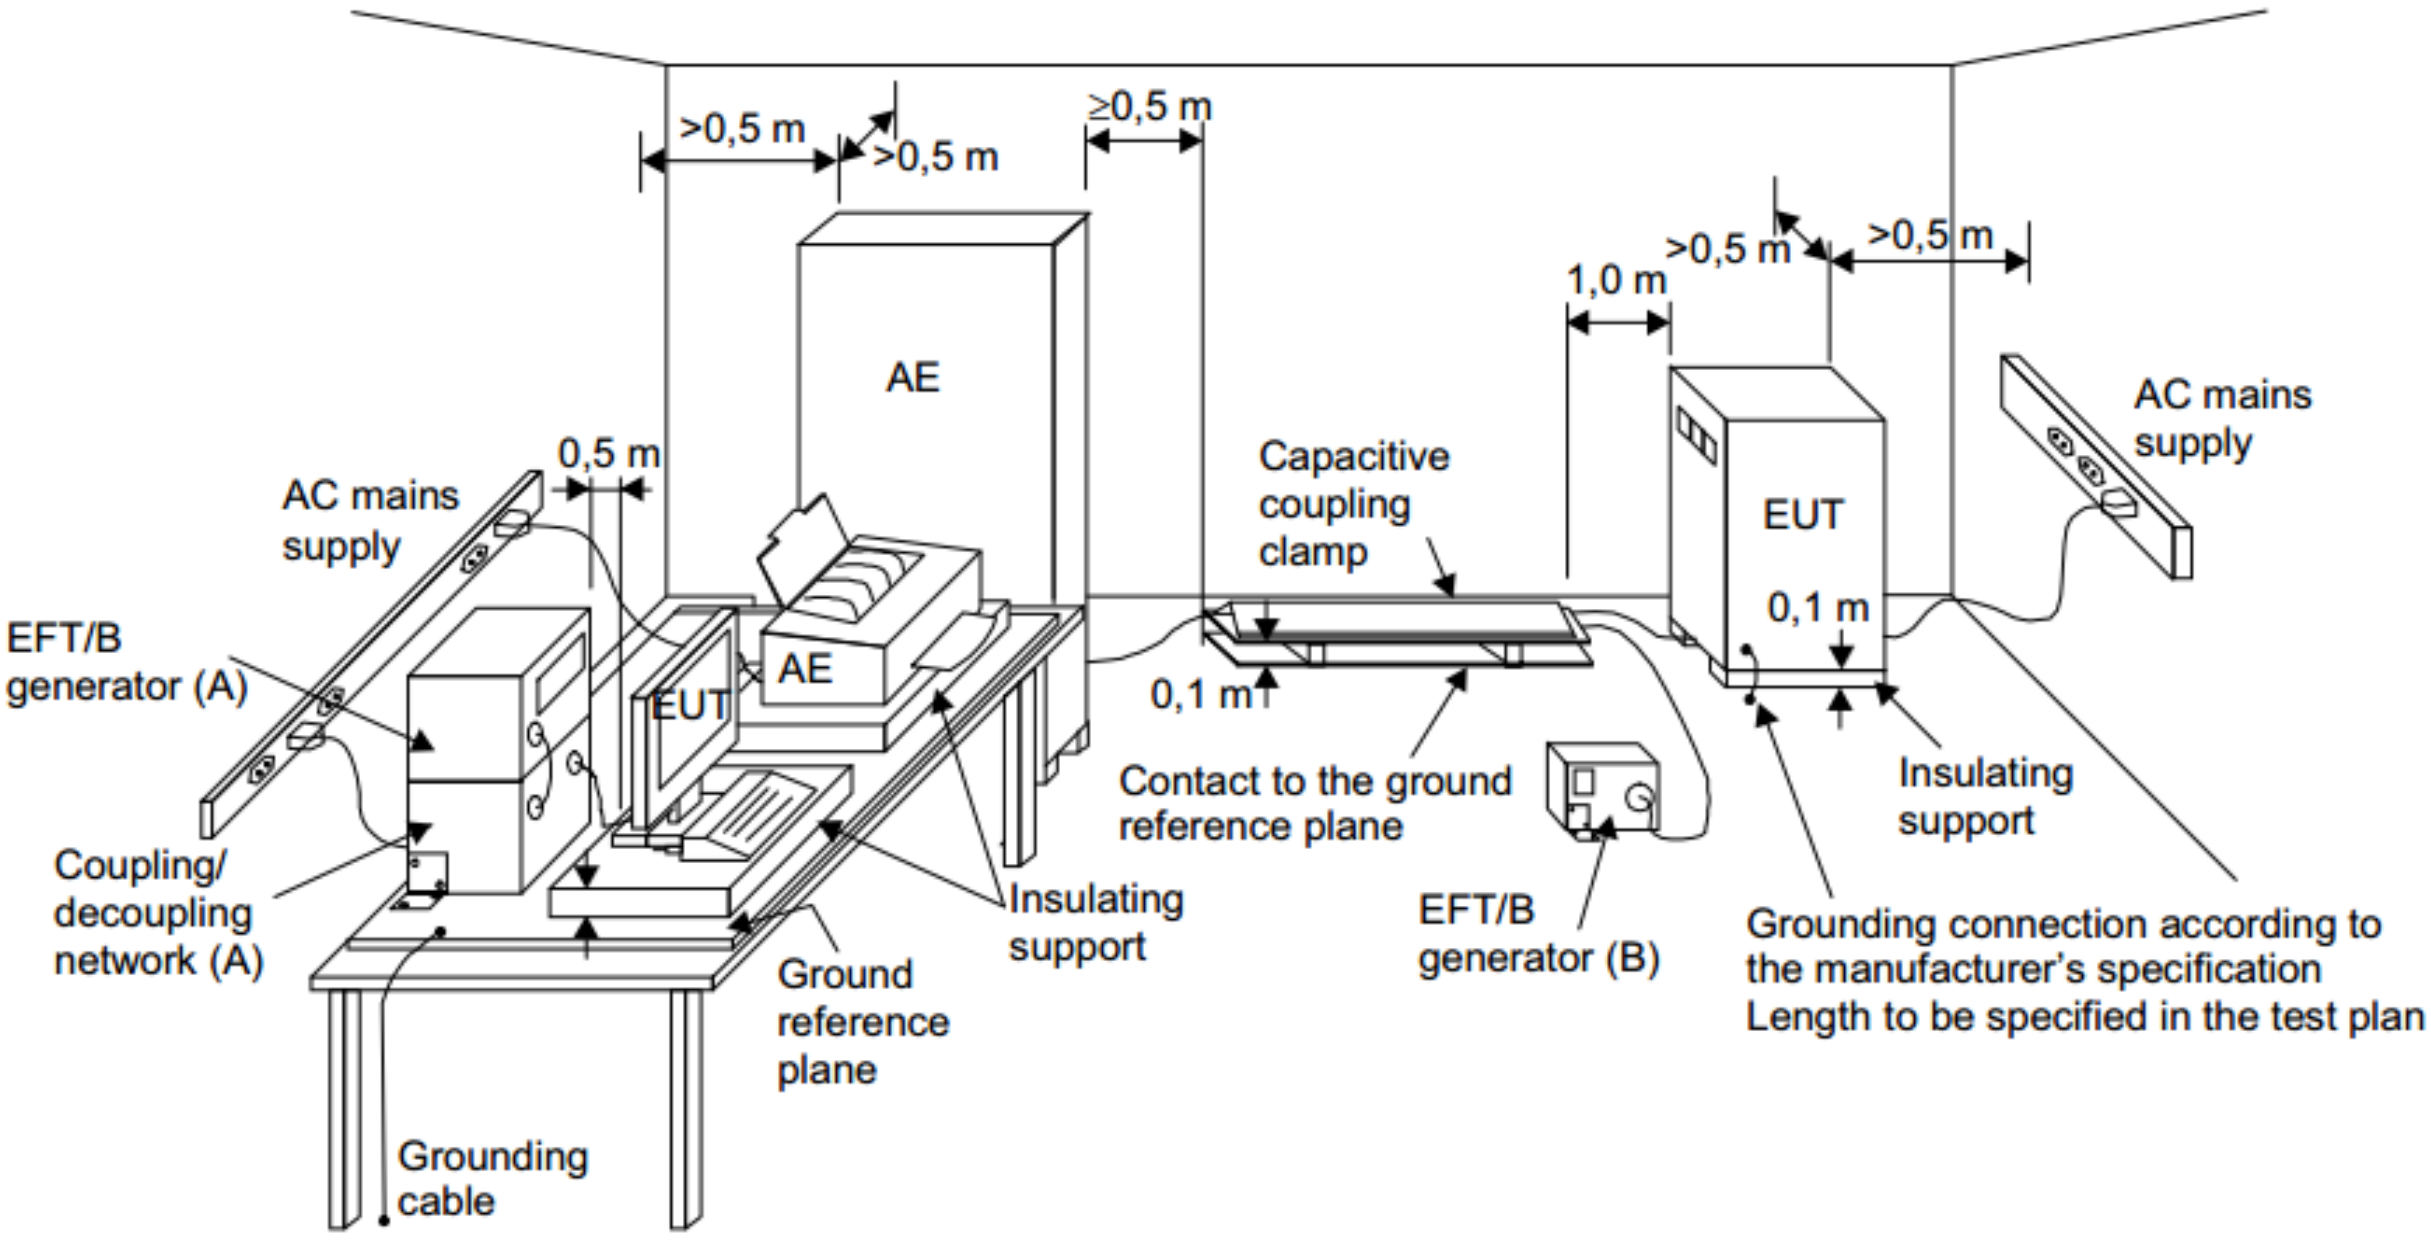

The EUT was placed on a ground reference plane and was insulated from it by an insulating support about 0.1m thick. If the EUT is table-top equipment, it was located approximately 0.8m above the GRP. The GRP was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness.

4.3.2 Test Instrument Setting

Pulse repetition rate	Burst duration/ Burst period	Duration of test per port
5kHz	15 ms / 300 ms	1 minute
100kHz (for xDSL port)	0.75 ms / 300 ms	1 minute

4.3.3 Test Procedure

a. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.

b. Duration of test per port shall be longer than 1 minute.

c. Testing on power port is followed below requirements:

   i. The EFT/B-generator was located on the GRP. The length from the EFT/B-generator to the EUT does not exceed 1 m.

   ii. The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.

   iii. For equipment having a power port with no earth terminal, the test voltage is only applied to L and N lines.

d. Testing on signal input/output parts port is followed below requirements:

   i. The coupling clamp is composed of a clamp unit for cable length more than 3 m, and it was placed on the GRP.

   ii. Telecommunication port whose maximum cable length is less than 3 m in length are excluded Electrical Fast Transients / BURST test

4.3.4 Test Result

Test Standard	IEC 61000-4-4:2012
Product Standard	EN 55035 : 2017 + A11: 2020
EUT operated voltage during test	230Vac, 50Hz
Test Level	on AC Power Port : ±1 kV
Required Performance Criteria	B
Performance Criteria of EUT	A
Test Result	PASS

4.3.5 Setup Photographs

Mode 1~5

Mode 6

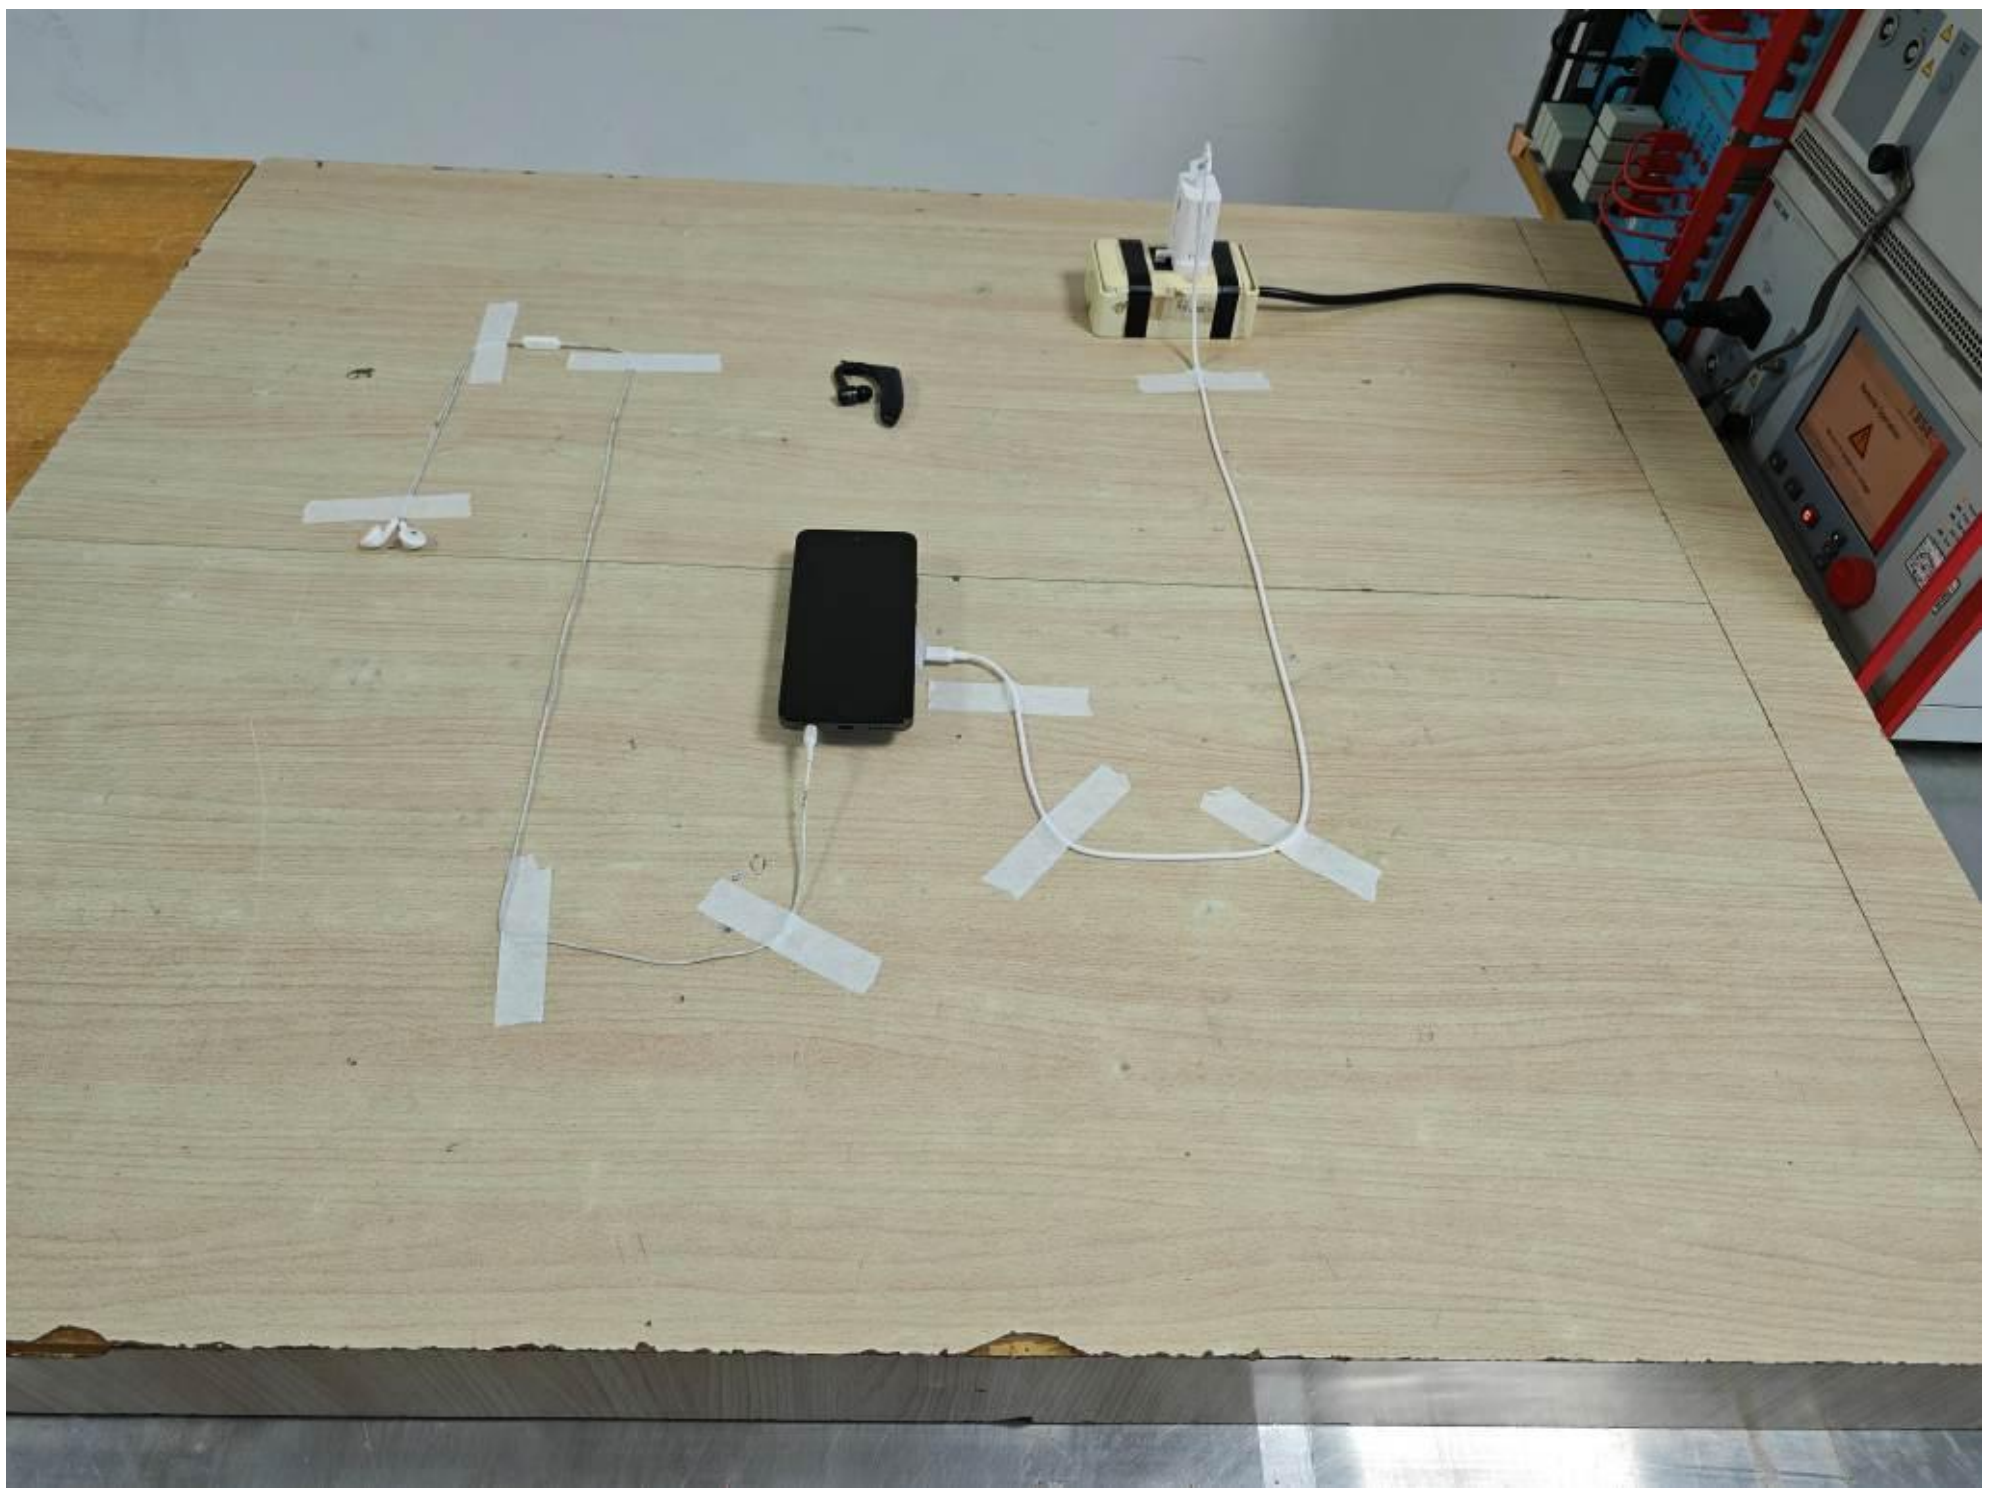

4.4 Continuous RF electromagnetic field disturbances (RS) Test (Refer to EN55035 Section 4.2.2.2)

4.4.1 Test Setup

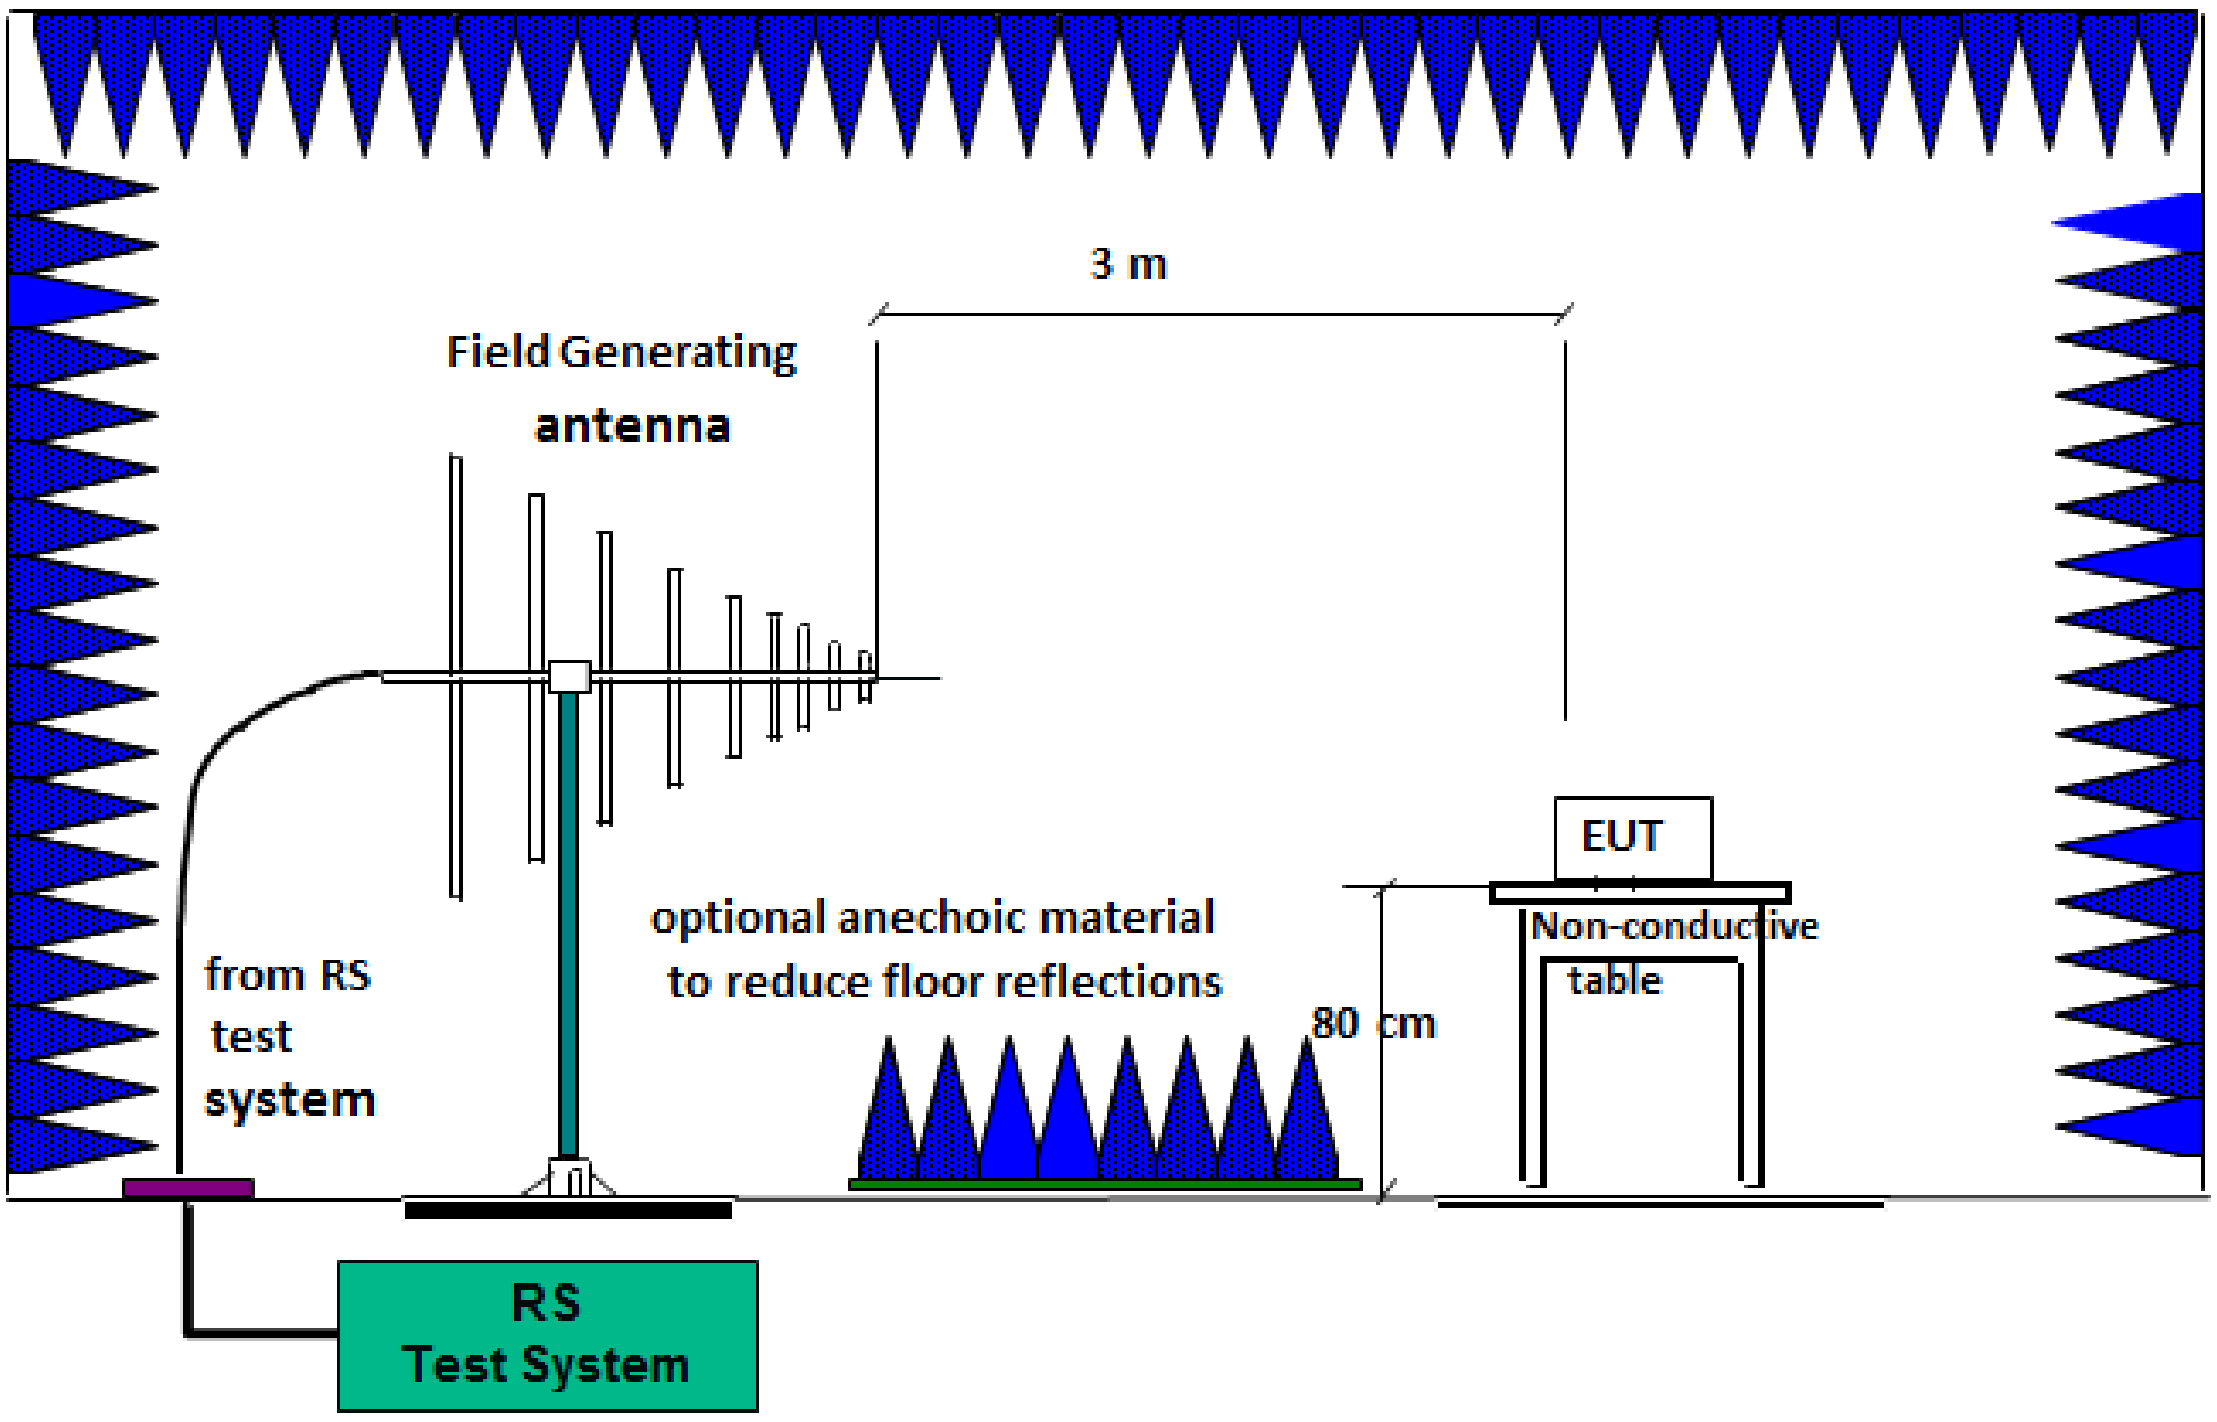

4.4.2 Test Instrument Setting

Frequency Step Size	1% increment
Modulation	80% AM (1kHz)
Dwell Time	3 seconds
Tested Antenna Height	1.55m

4.4.3 Test Procedures

a. The antenna is placed 3m away from the equipment. The required field strength is pre-calibrated and complies with the uniform field area requirement lay down in the IEC/EN 61000-4-3.

b. In EN55035 standard establishes the particular modes of operation and performance criteria applicable to the audio output function during continuous RF disturbance tests

   This method establishes an acoustic reference level using an SPL meter and microphone. During the test, the demodulated audio levels are measured, the interference ratio is then established and the results are compared to the interference ratio limits.

   G.7.1.3The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be –20 dB or better.

4.4.4 Test Result

Test Standard	IEC 61000-4-3:2006+A1:2007+A2:2010
Product Standard	EN 55035 : 2017 + A11: 2020
EUT operated voltage during test	230Vac, 50Hz
Test Frequency Range Swept Test	80 MHz ~ 1GHz
Test Frequency Range Spot Test	1800 MHz, 2600 MHz, 3500 MHz, 5000 MHz.
Test Level	3 V/m
Loudspeaker Mode Test Distance	30cm
Polarity	Horizontal and Vertical
Azimuth	0°, 180°
Required Performance Criteria	A
Performance Criteria of EUT	A
Test Result	PASS

Remark: Loudspeaker Mode Test Distance is 30cm, ensure that there is minimal acoustic loss between EUT and microphone.

<Data>

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	0°
Polarity	80MHz~1GHz Horizontal

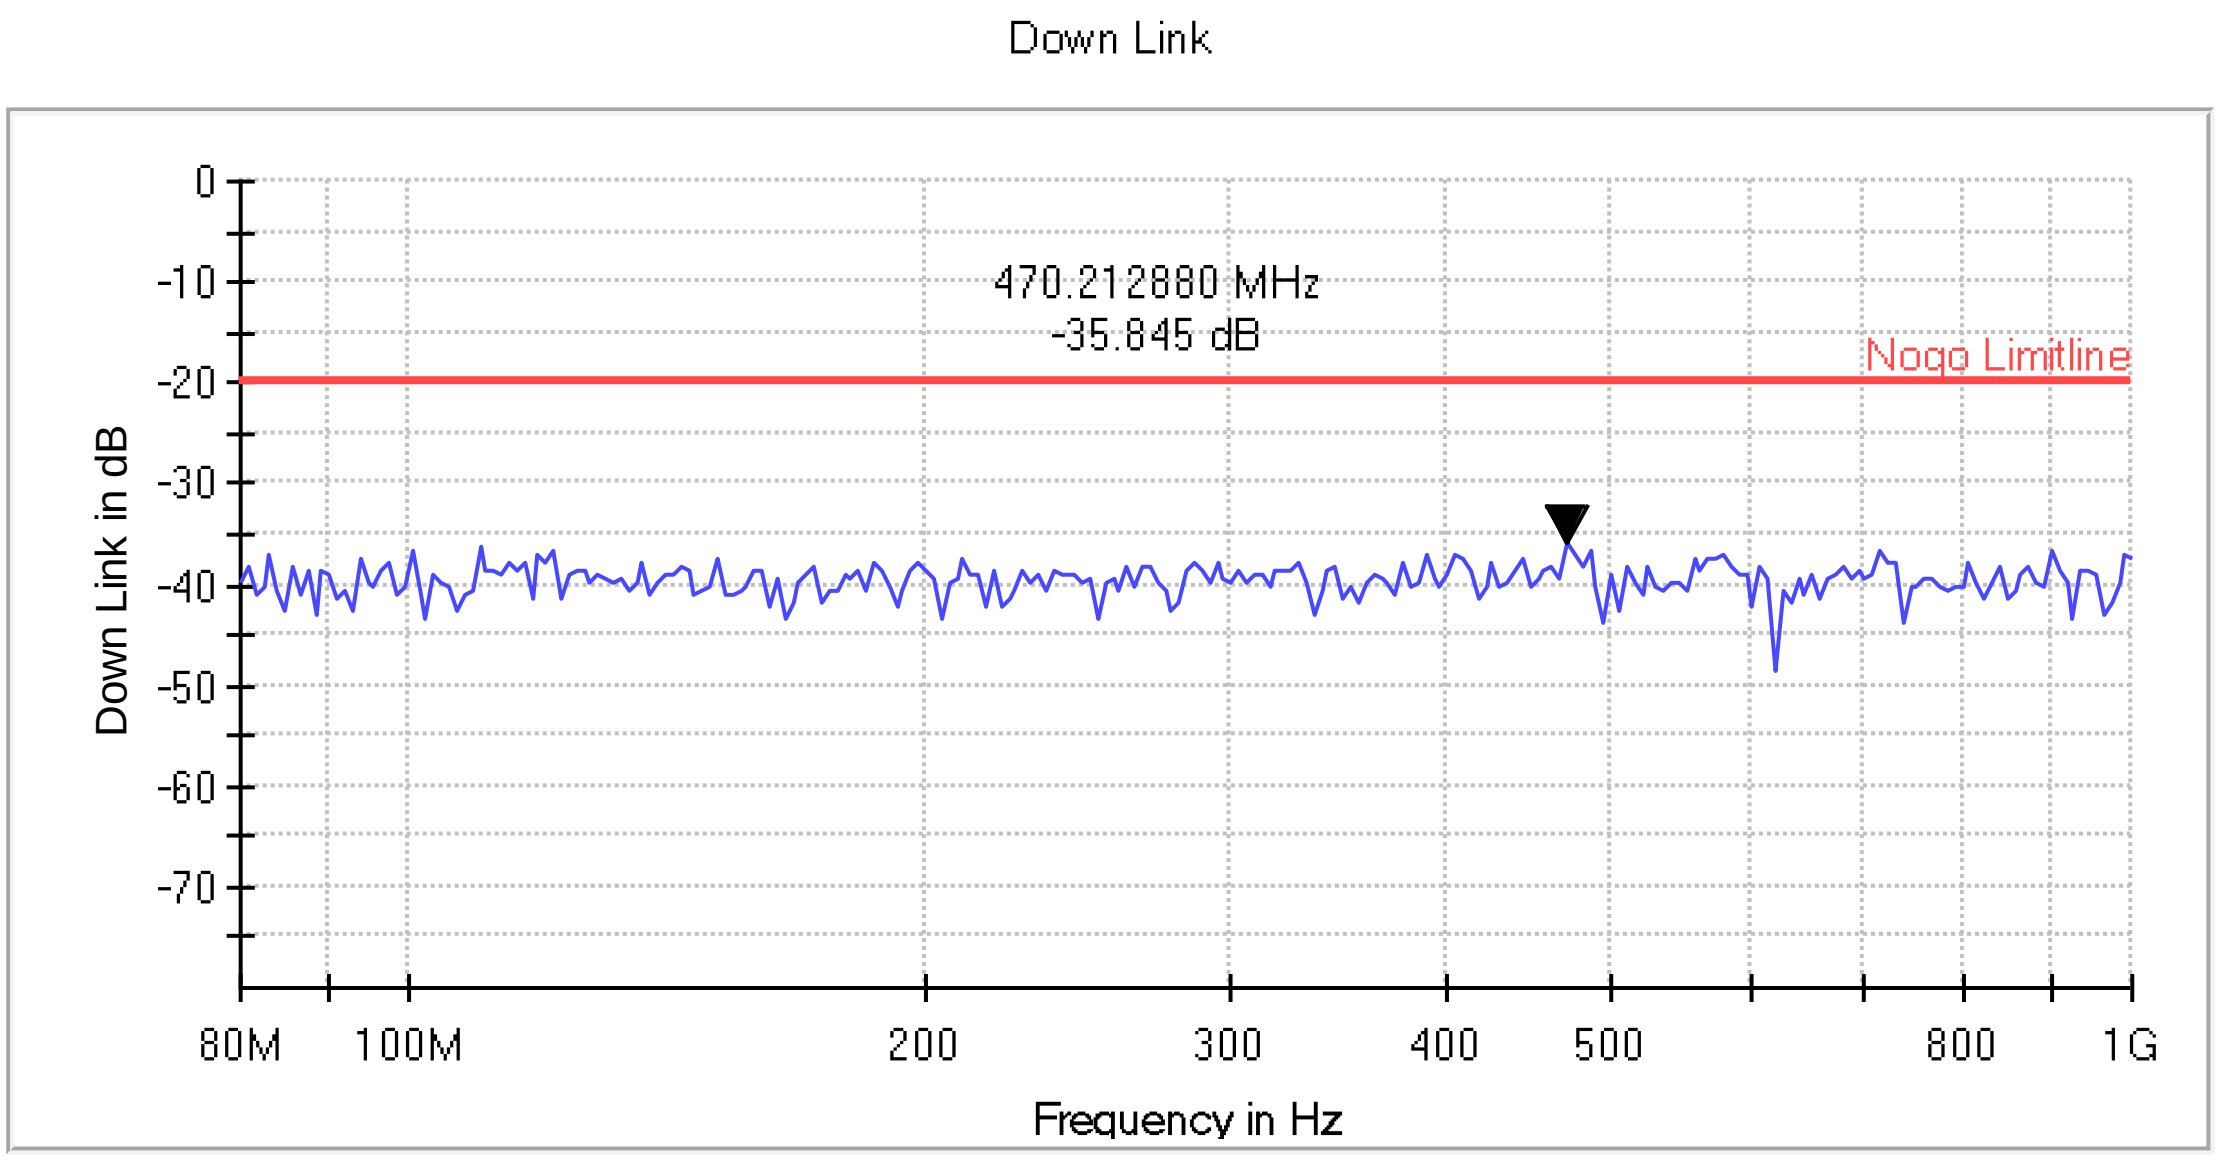

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	0°
Polarity	1800 MHz, 2600 MHz Horizontal

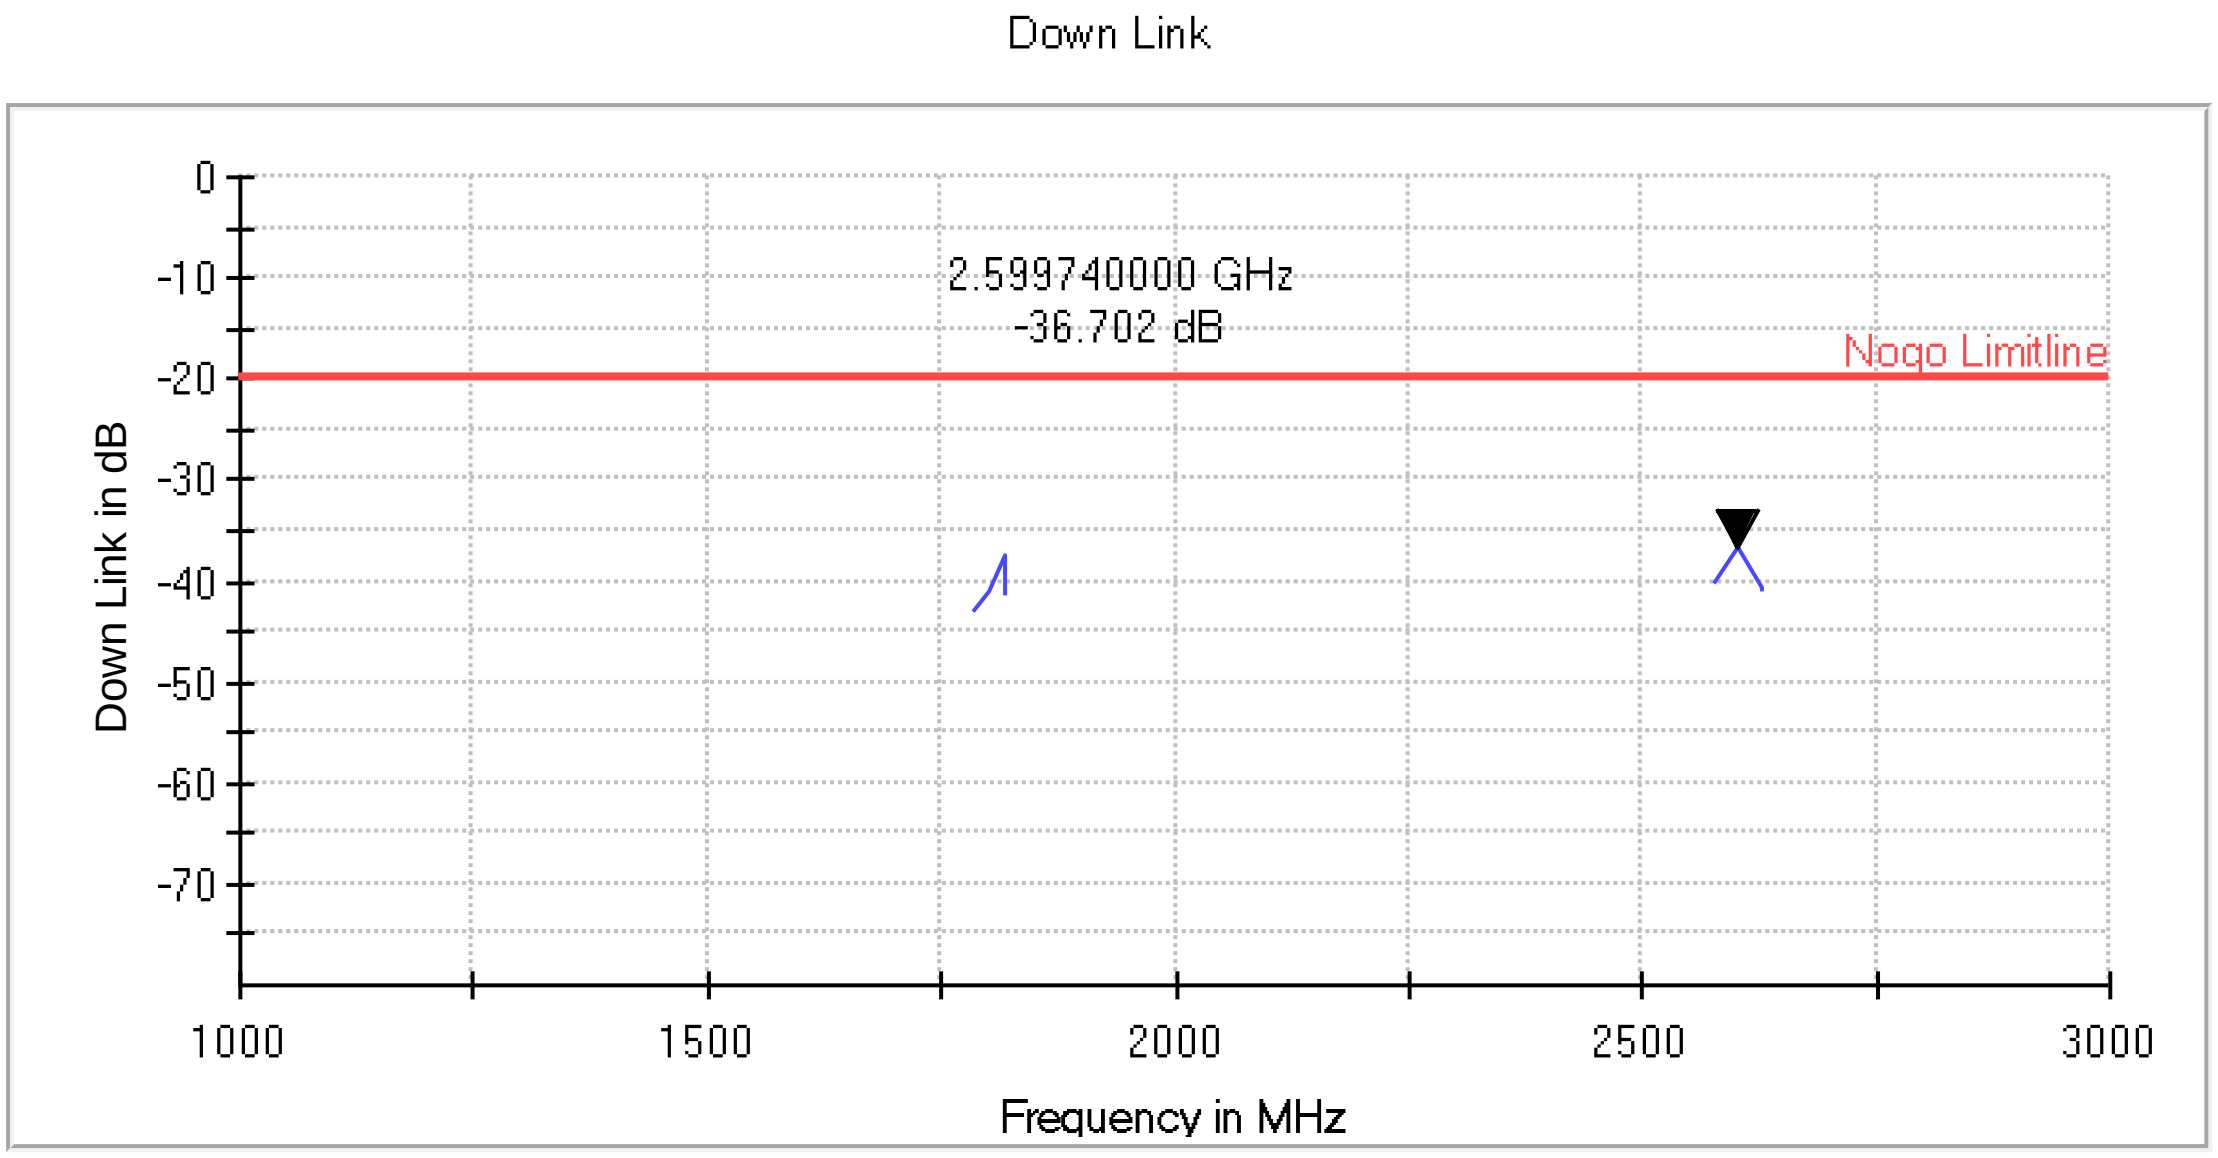

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	0°
Polarity	3500 MHz, 5000 MHz Horizontal

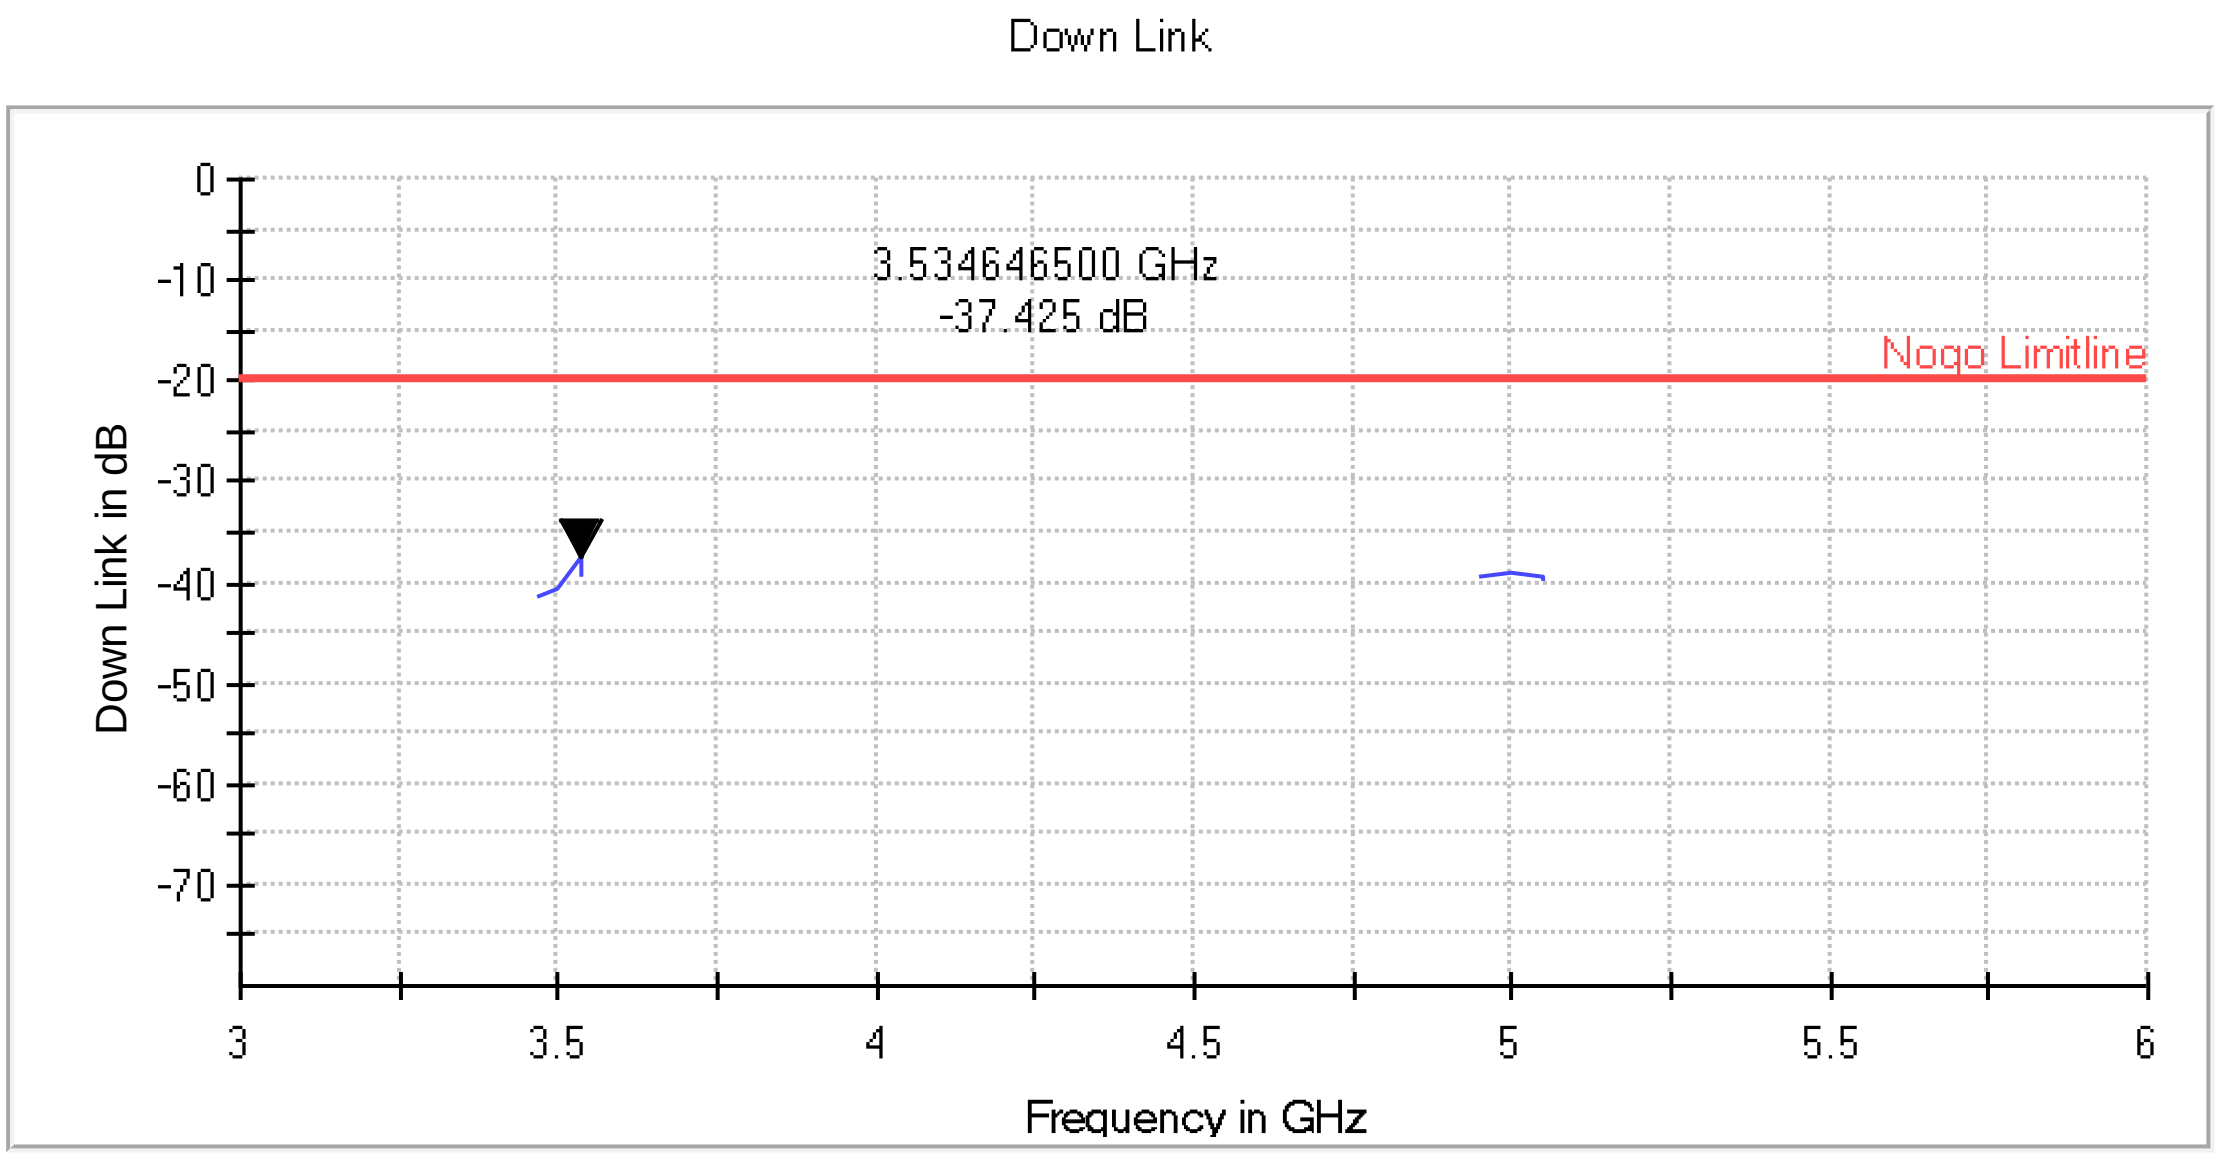

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	0°
Polarity	80MHz~1GHz Vertical

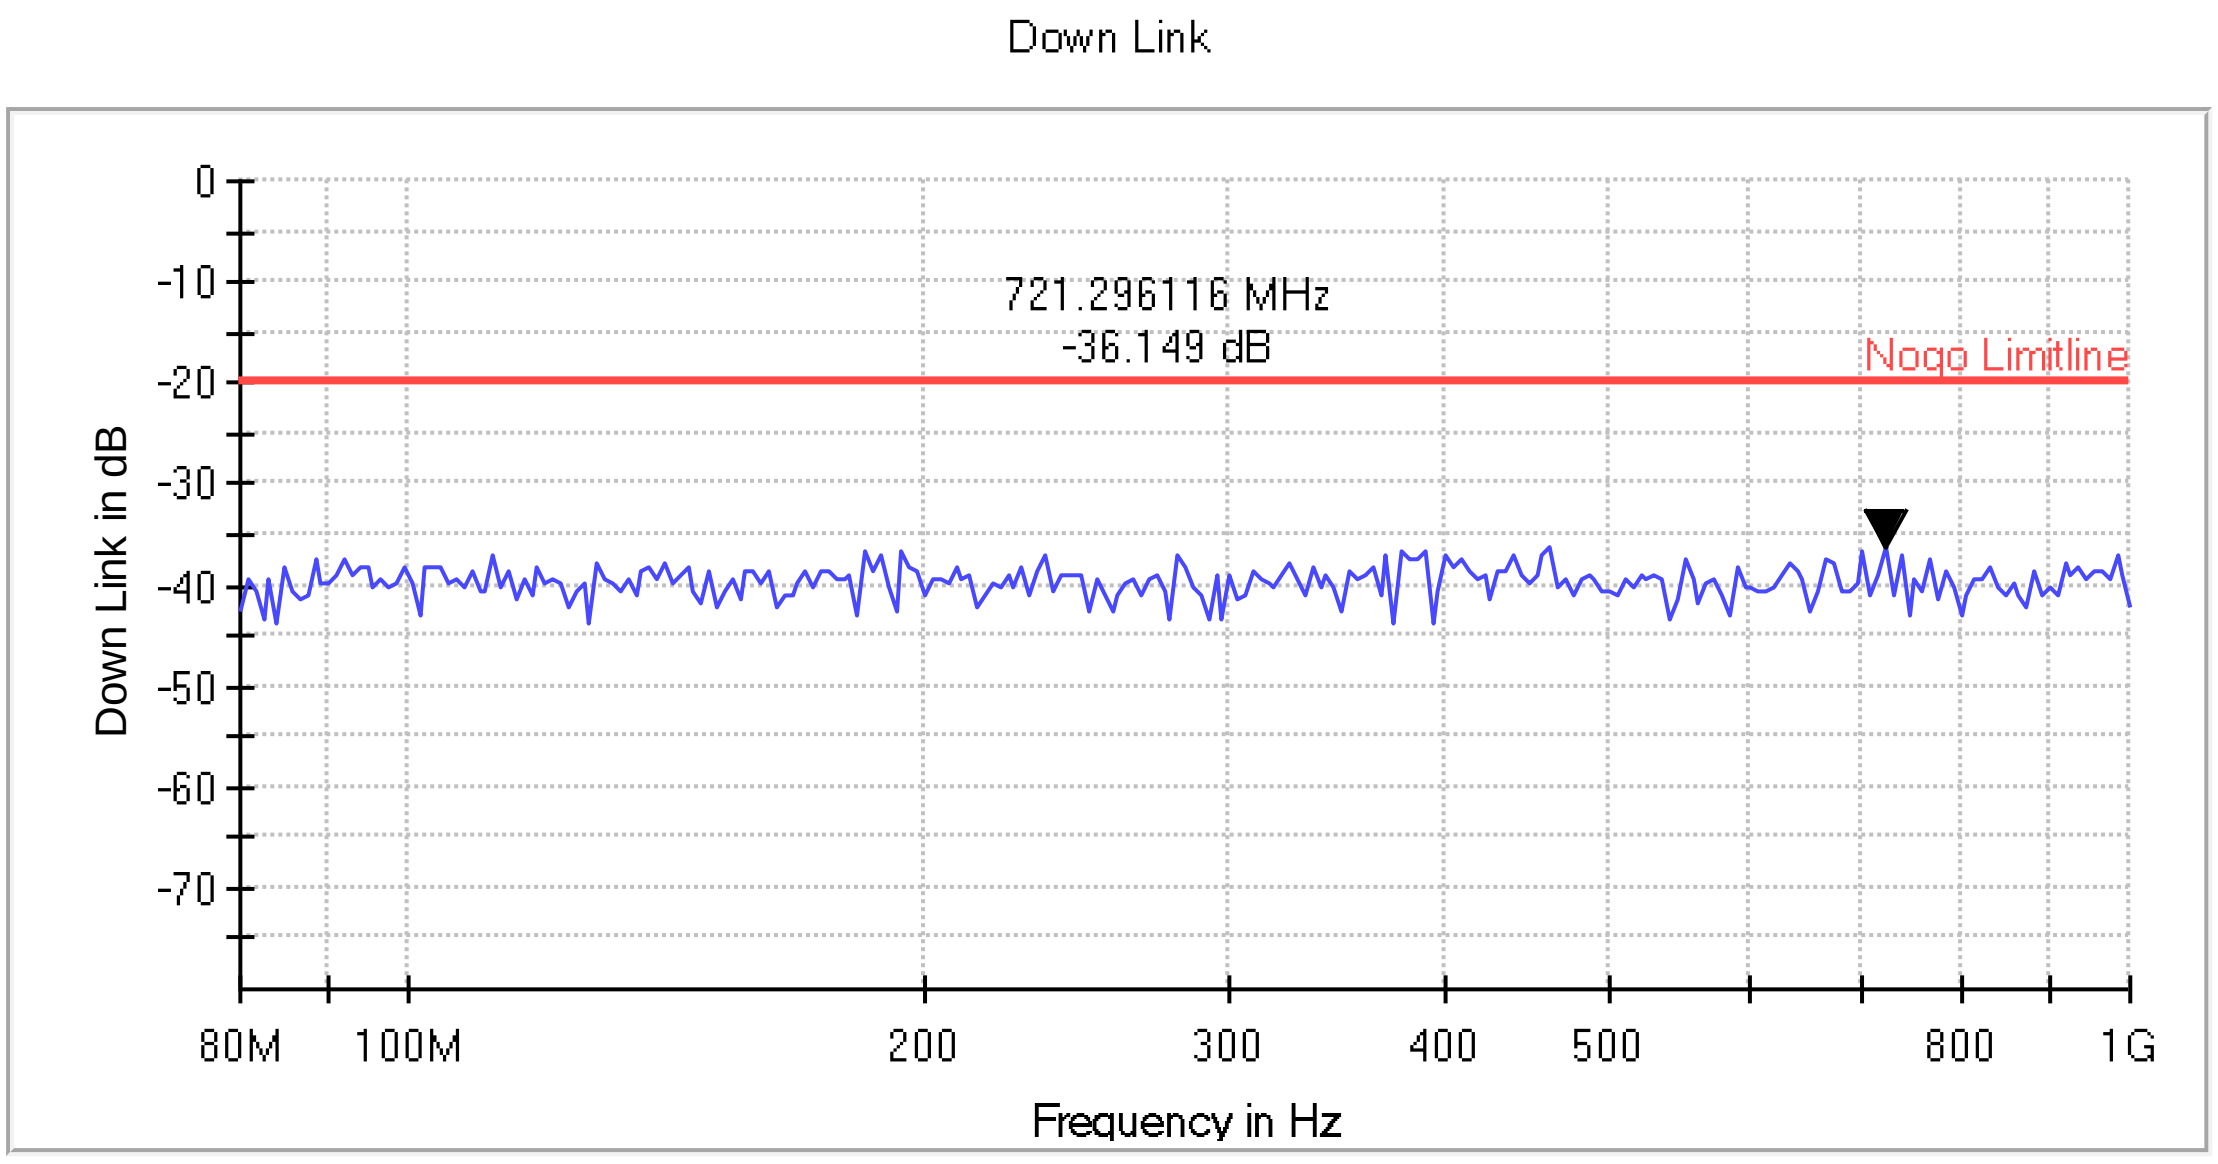

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	0°
Polarity	1800 MHz, 2600 MHz Vertical

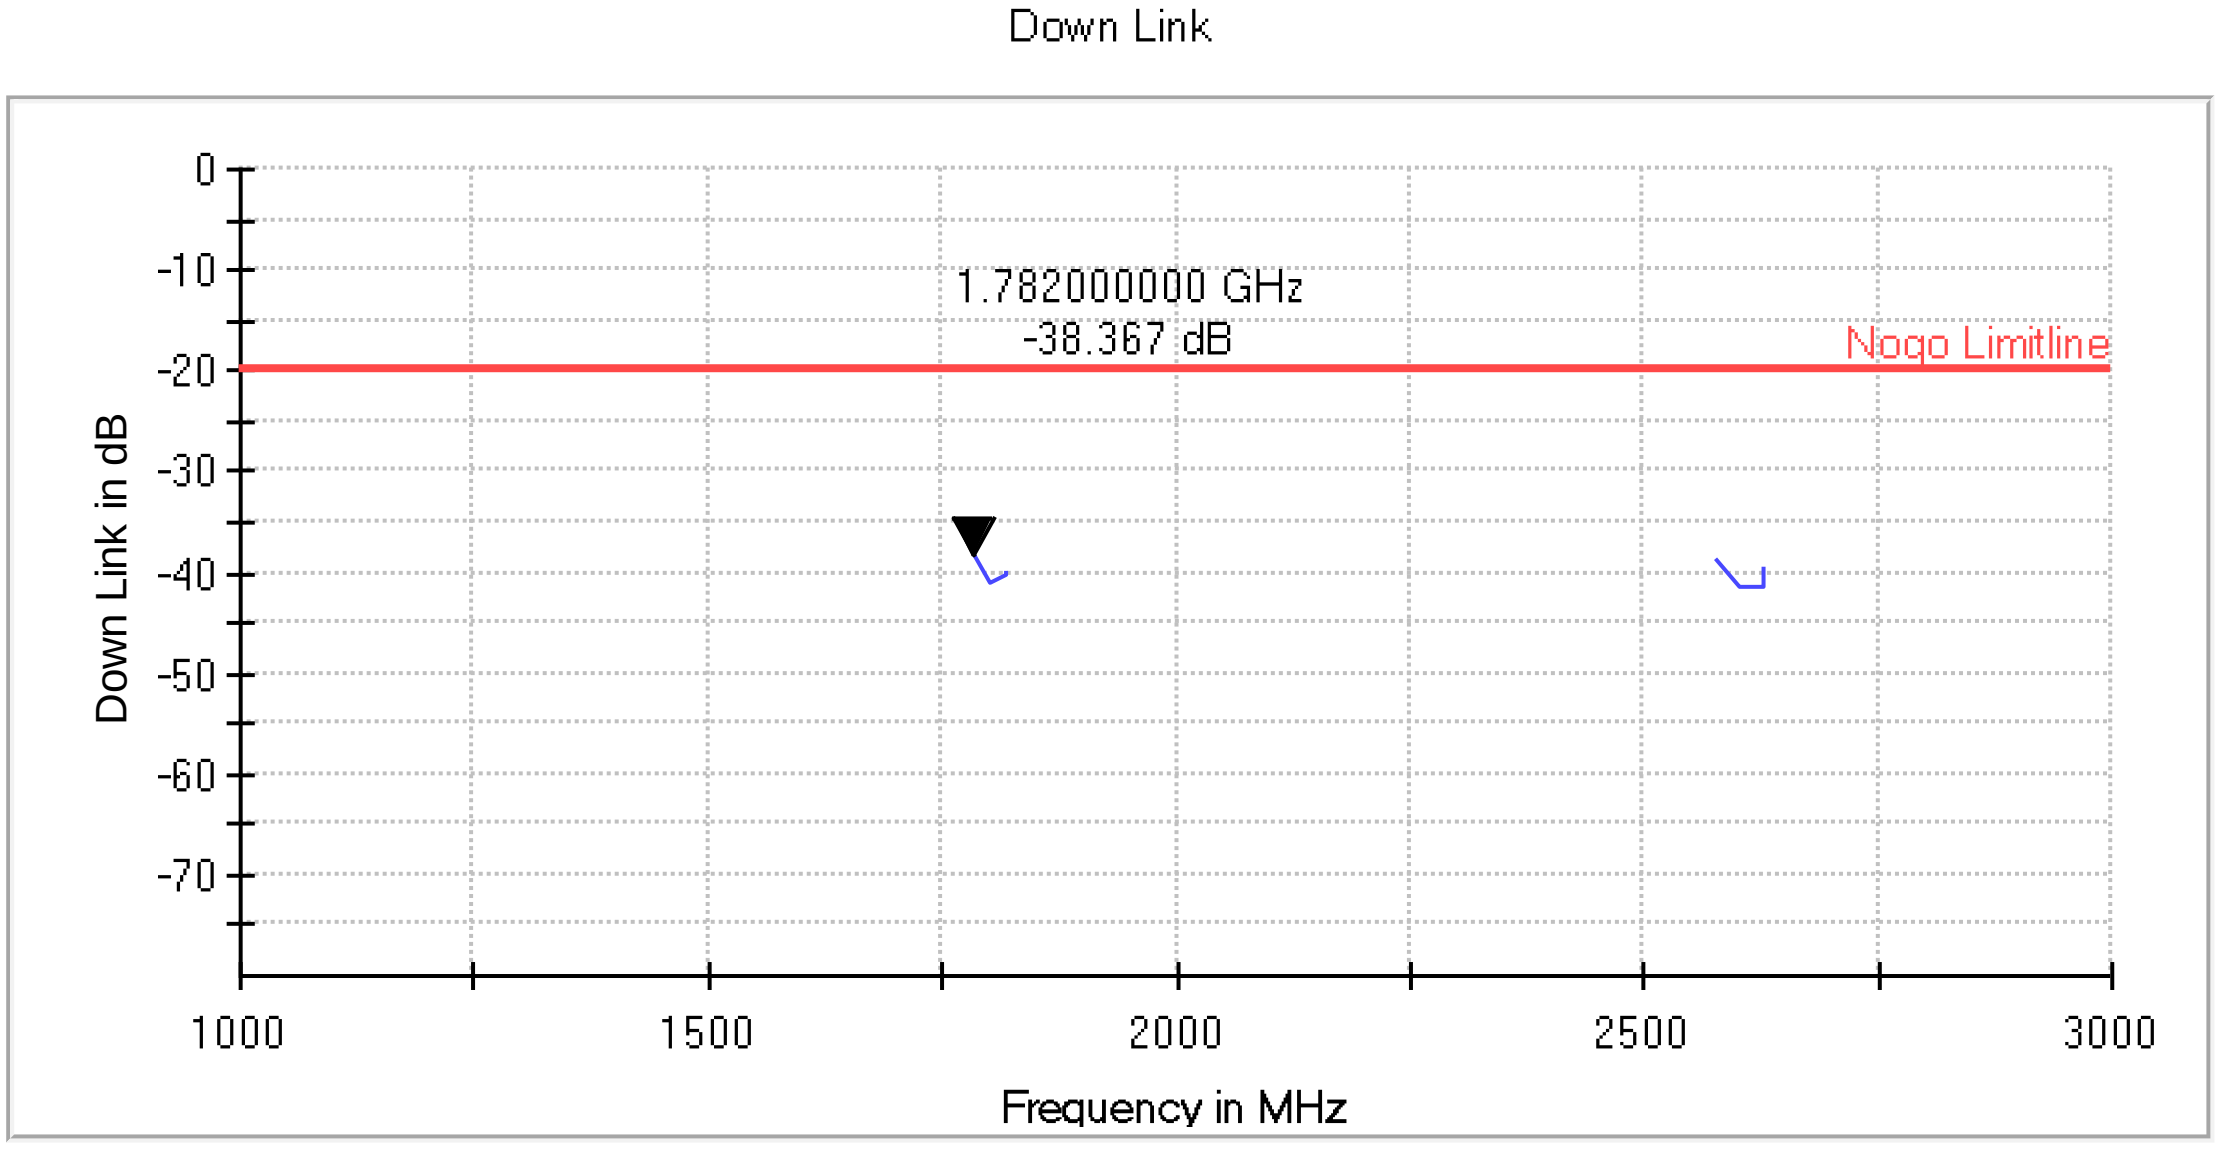

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	0°
Polarity	3500 MHz, 5000 MHz Vertical

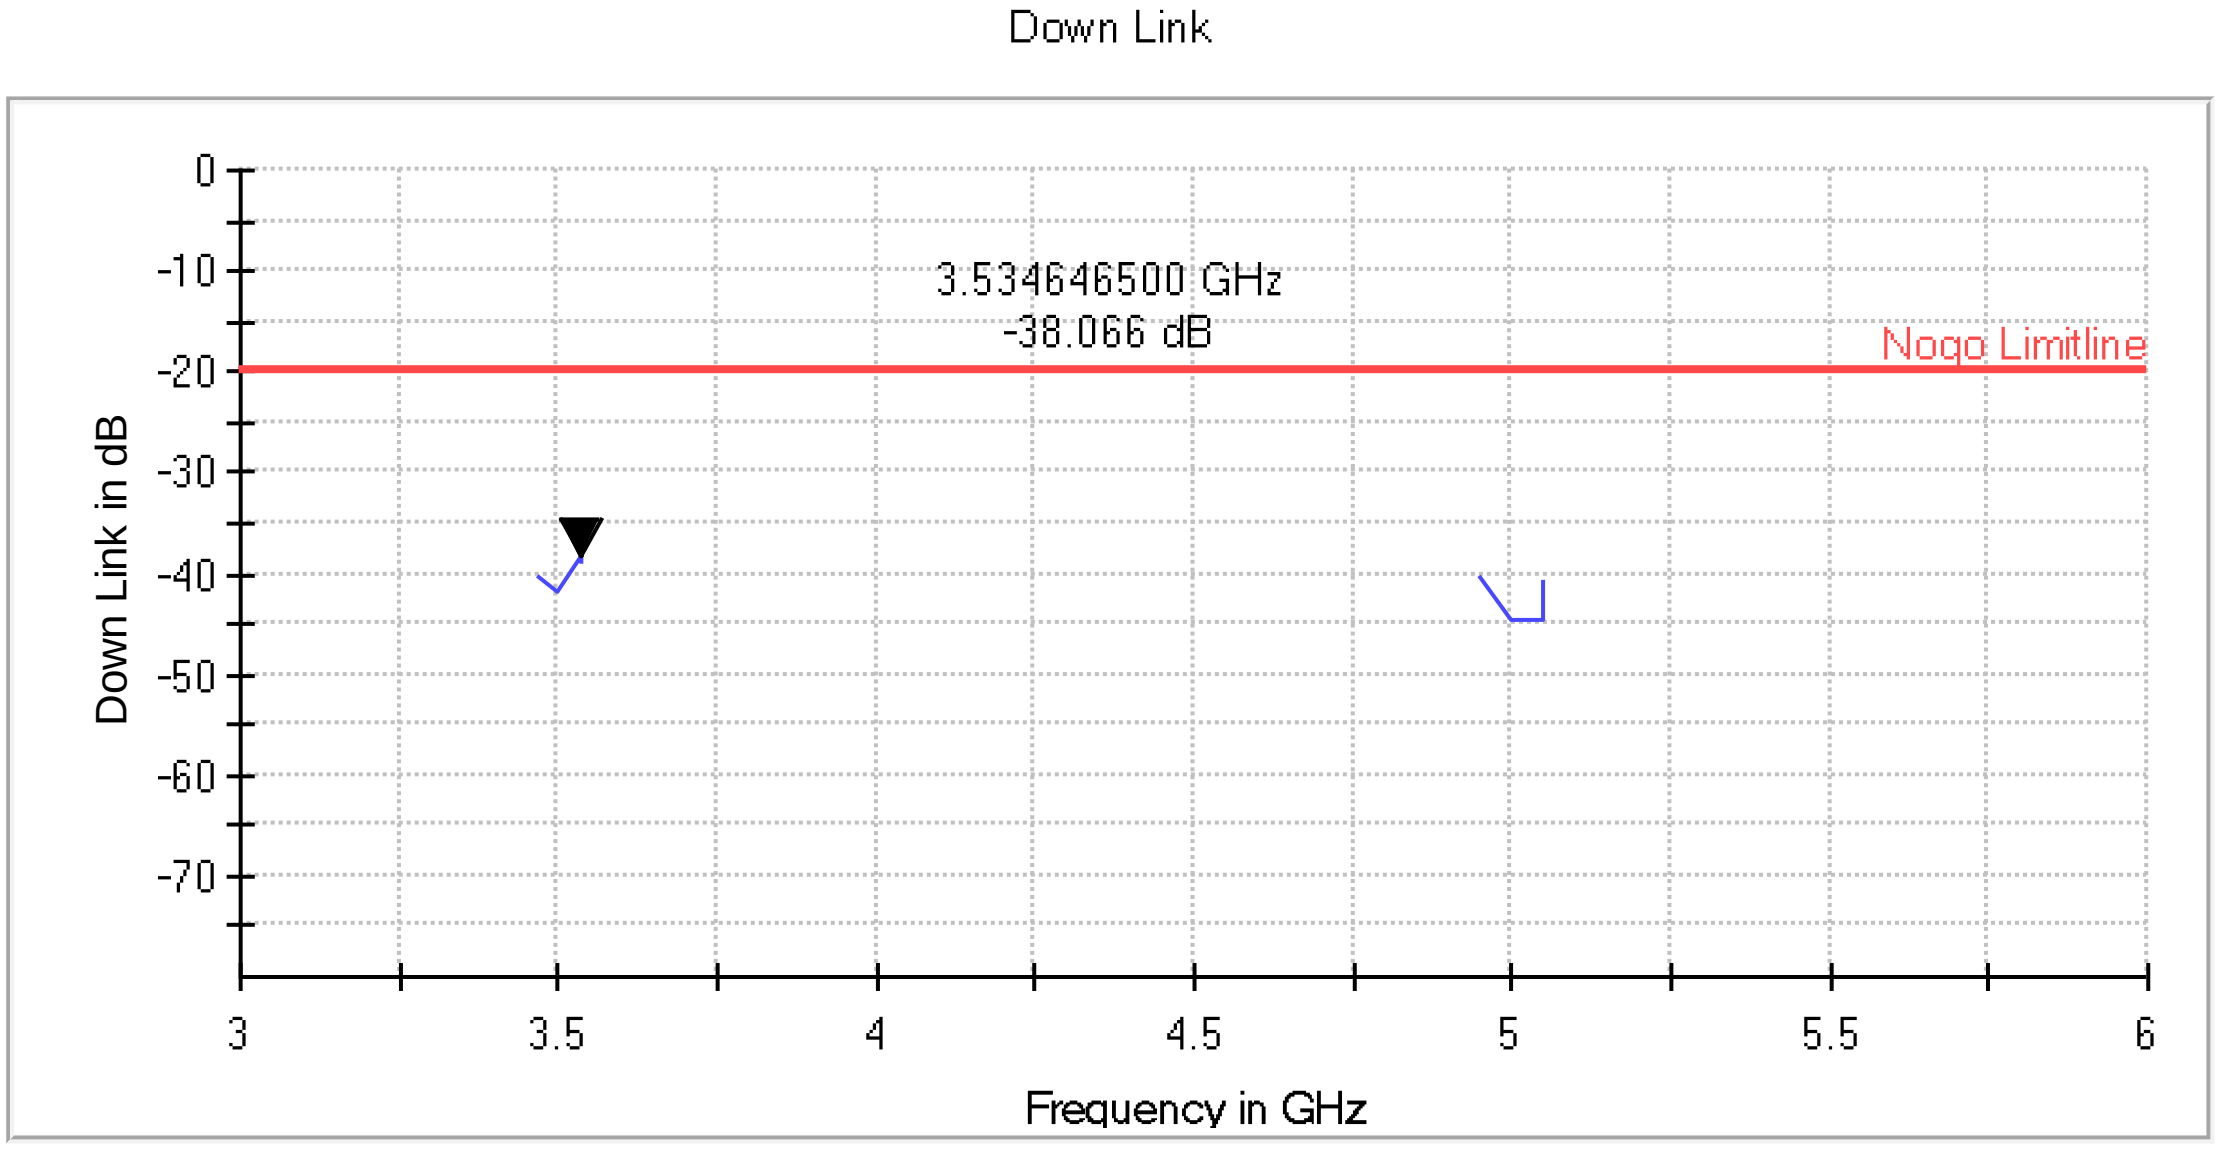

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	180°
Polarity	80MHz~1GHz Horizontal

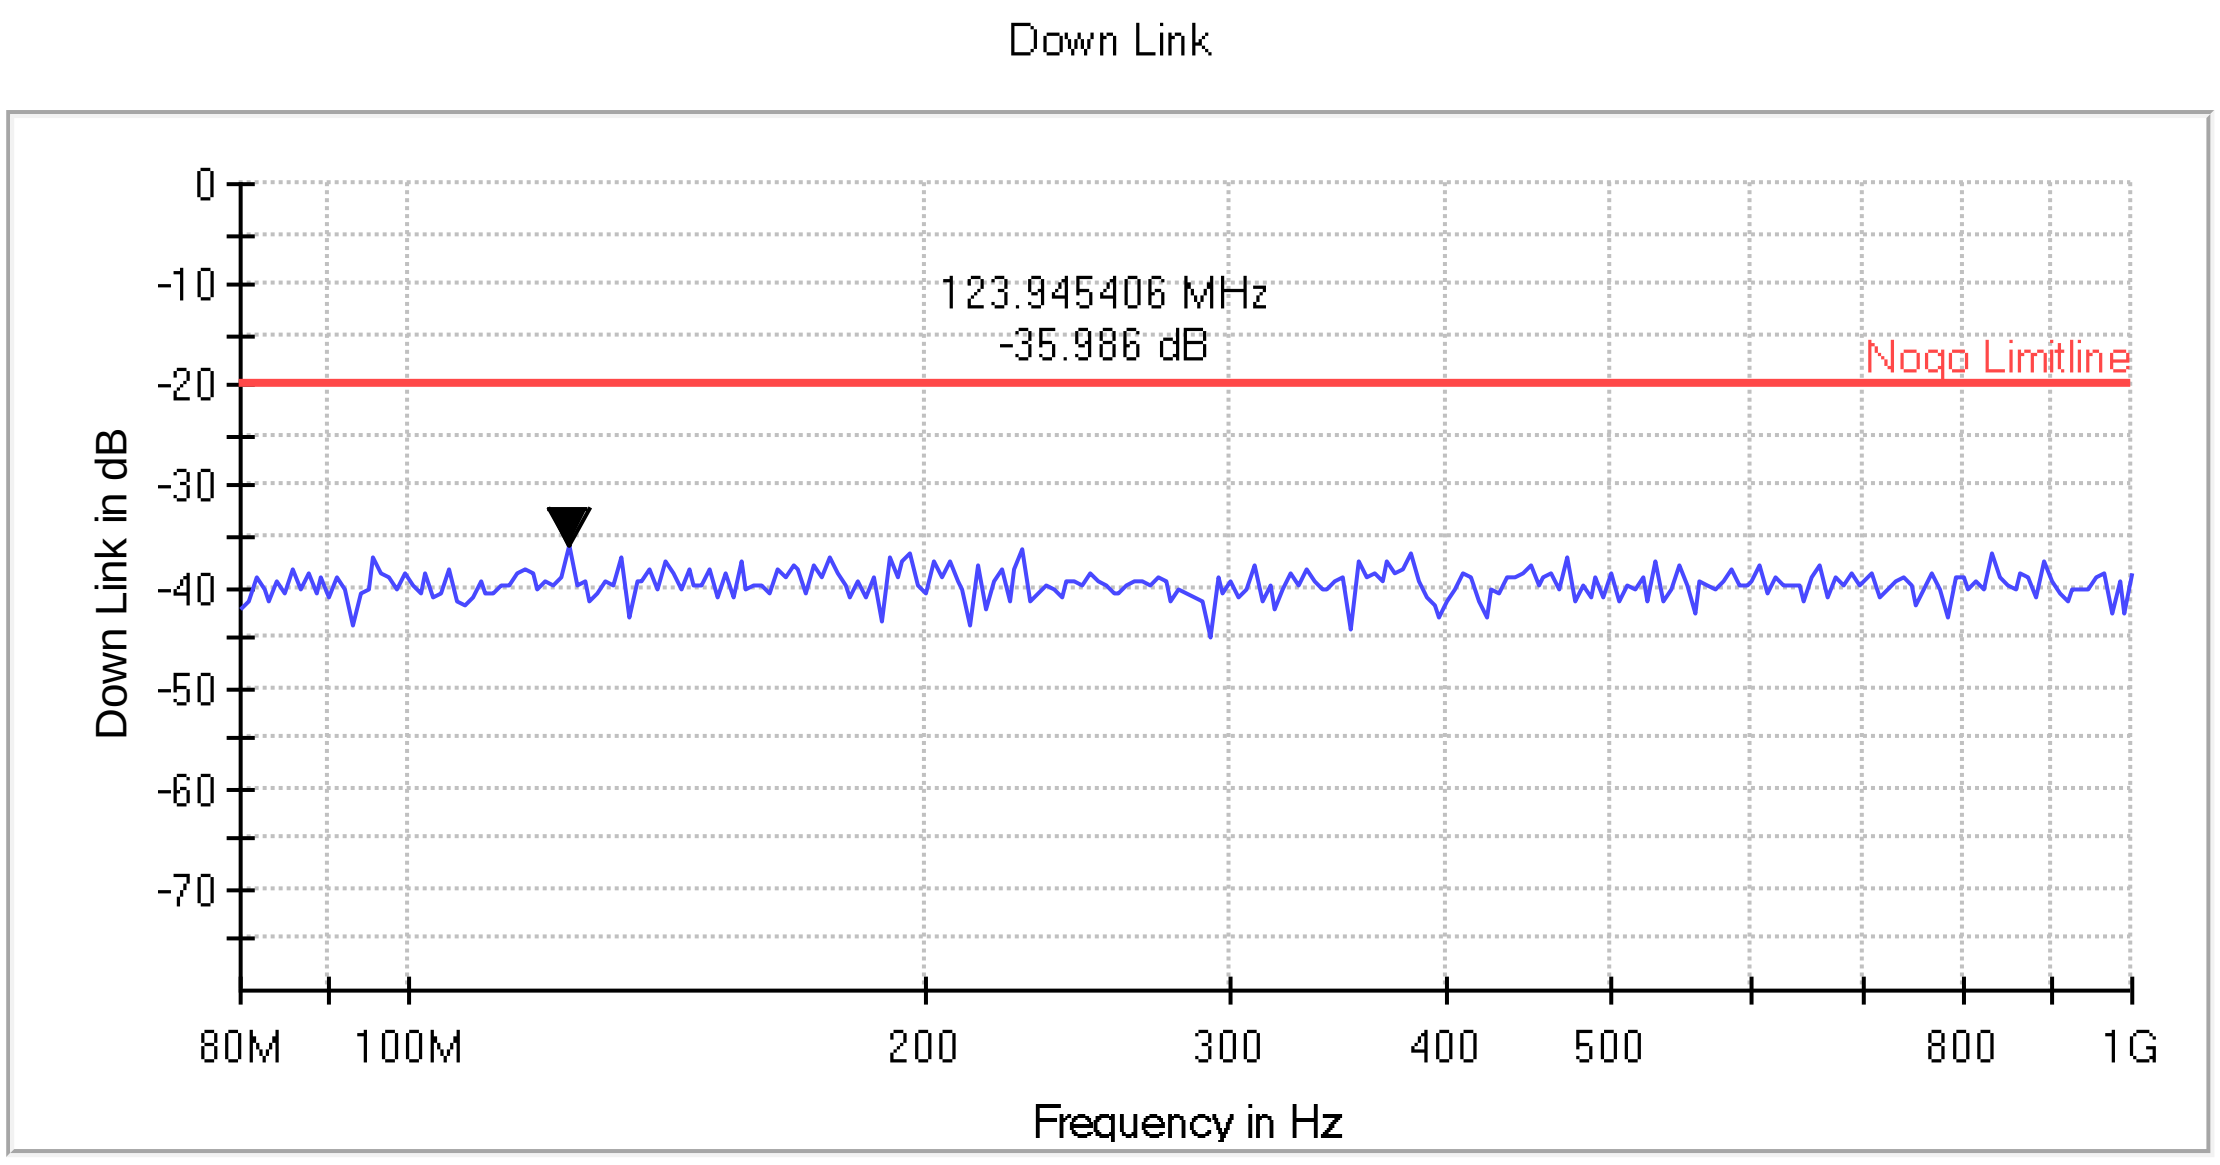

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	180°
Polarity	1800 MHz, 2600 MHz Horizontal

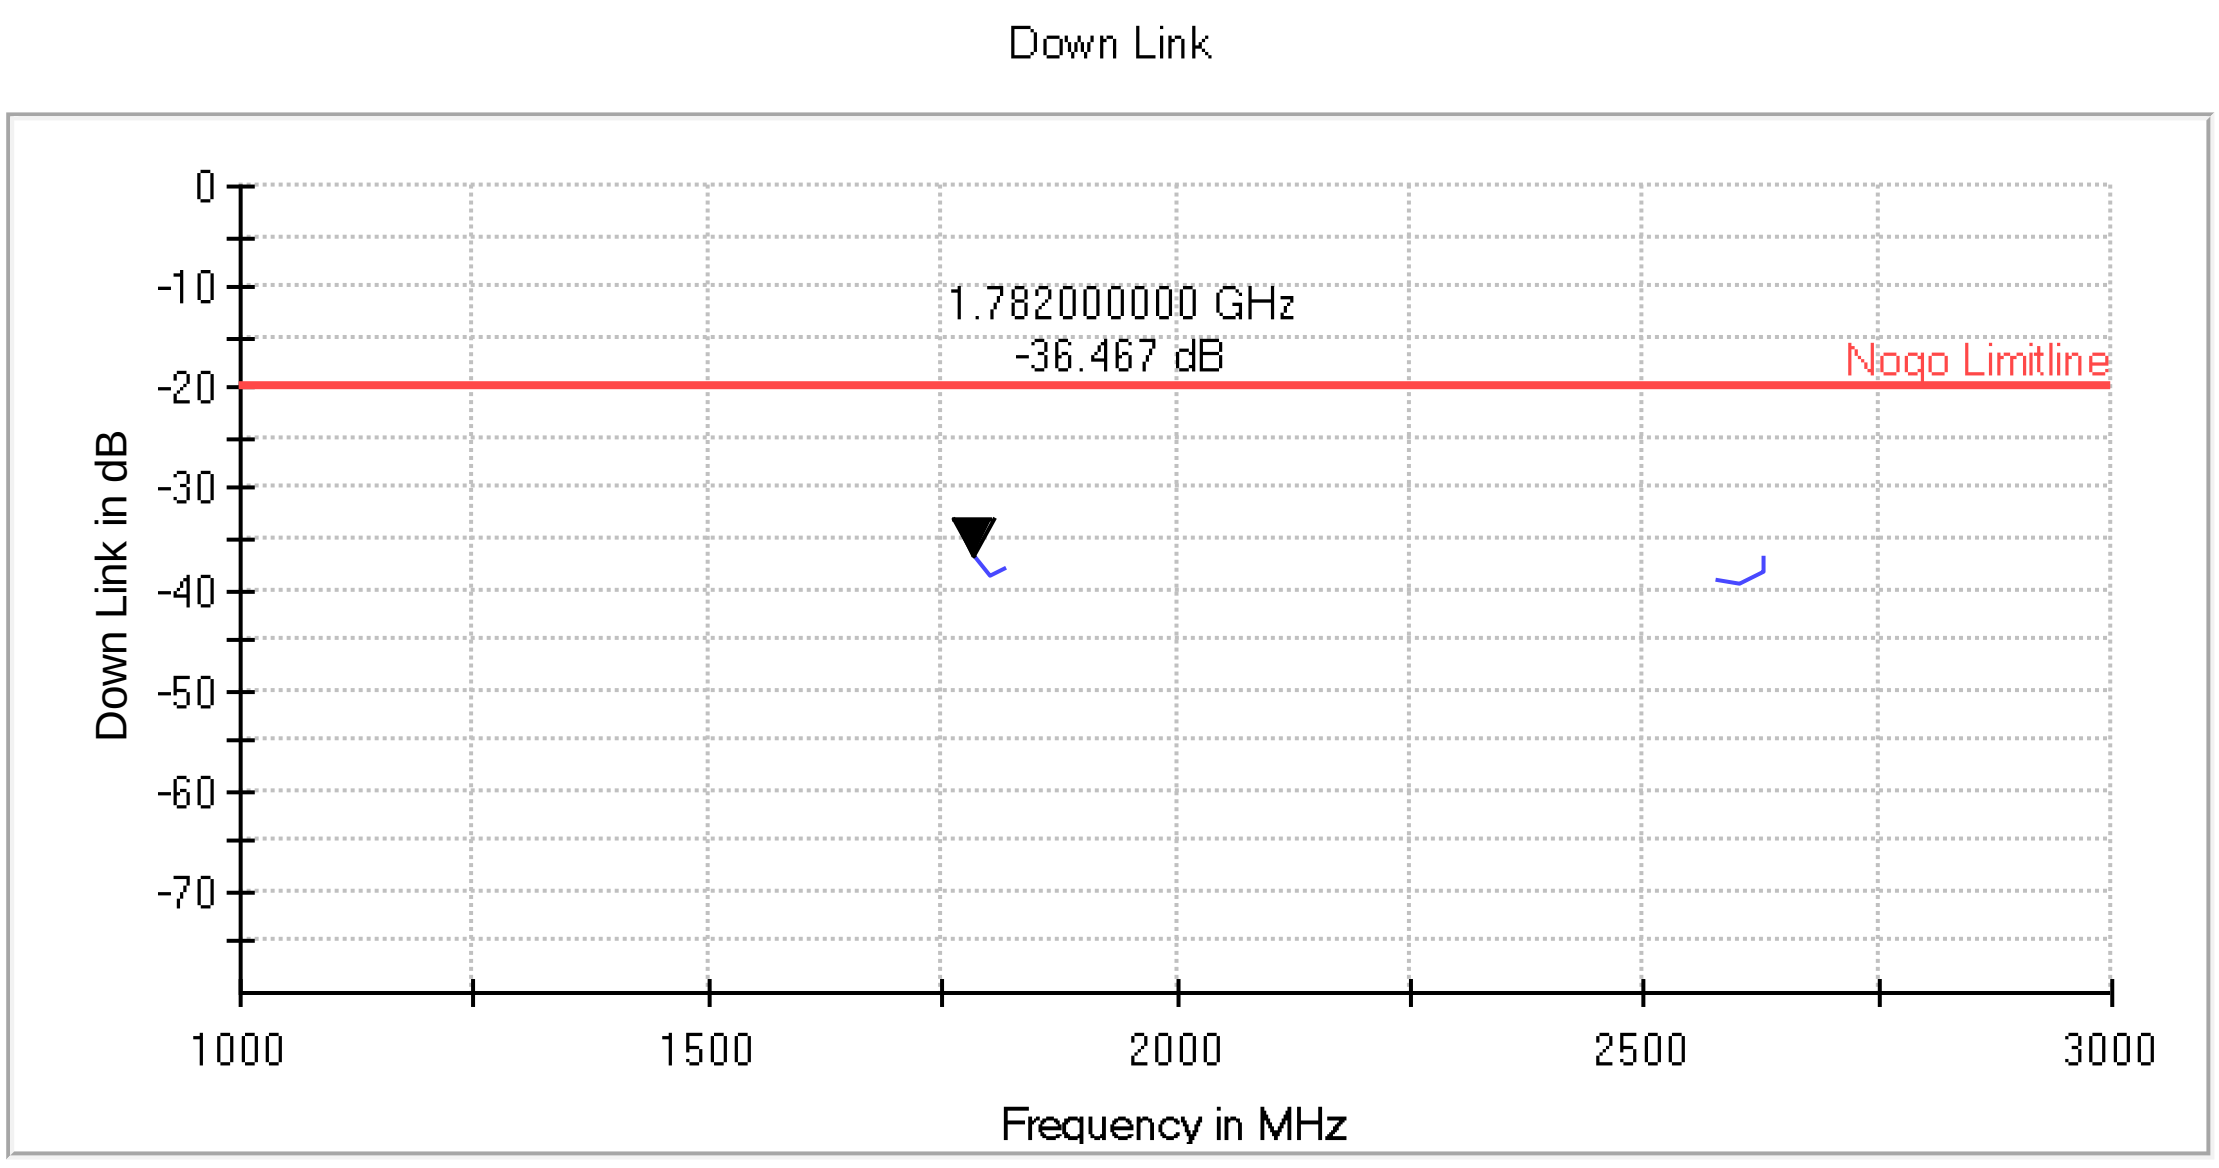

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	180°
Polarity	3500 MHz, 5000 MHz Horizontal

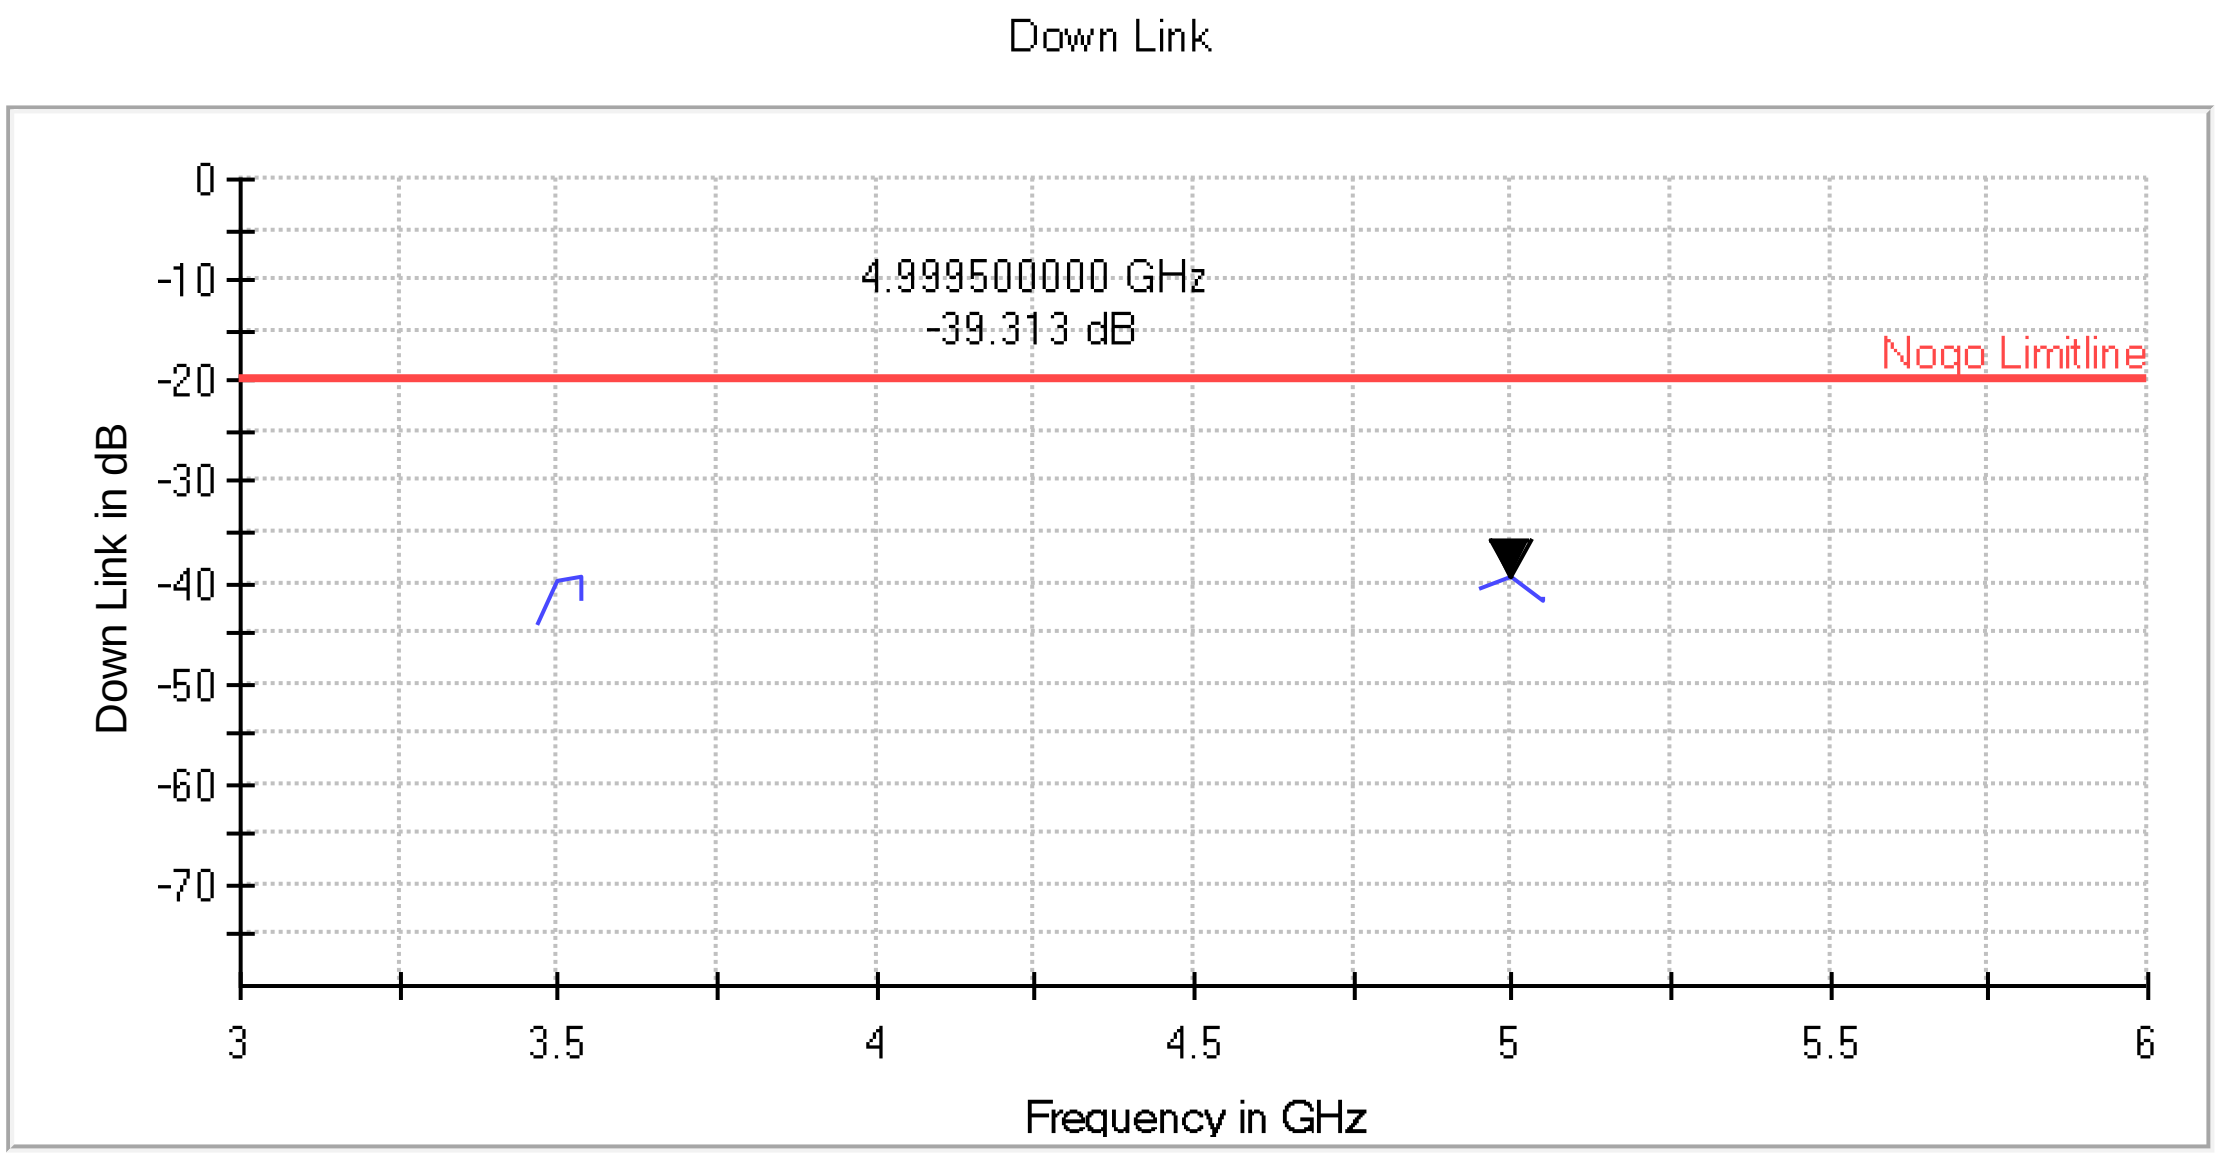

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	180°
Polarity	80MHz~1GHz Vertical

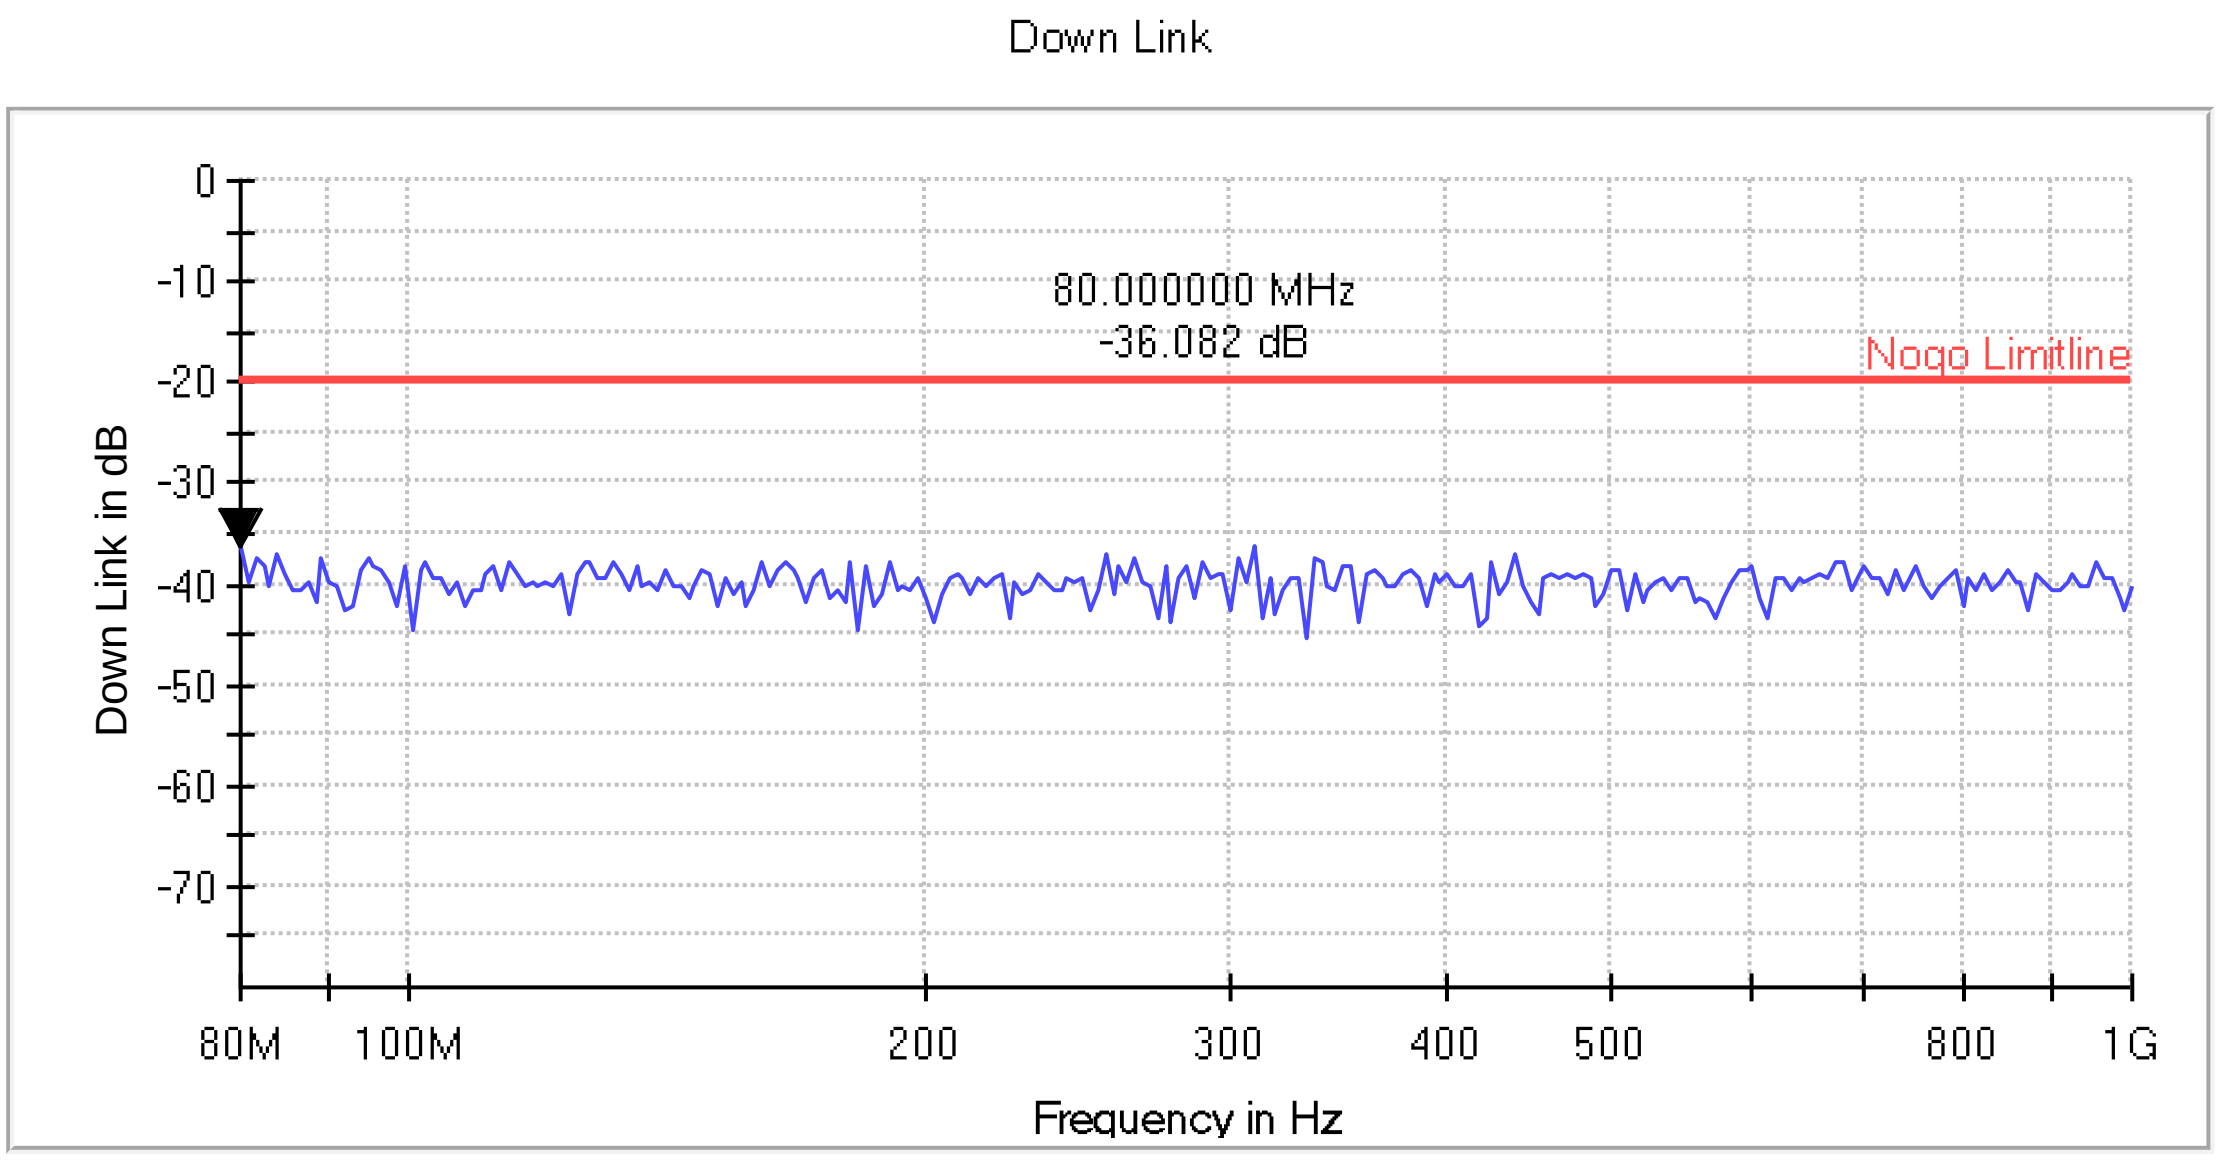

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	180°
Polarity	1800 MHz, 2600 MHz Vertical

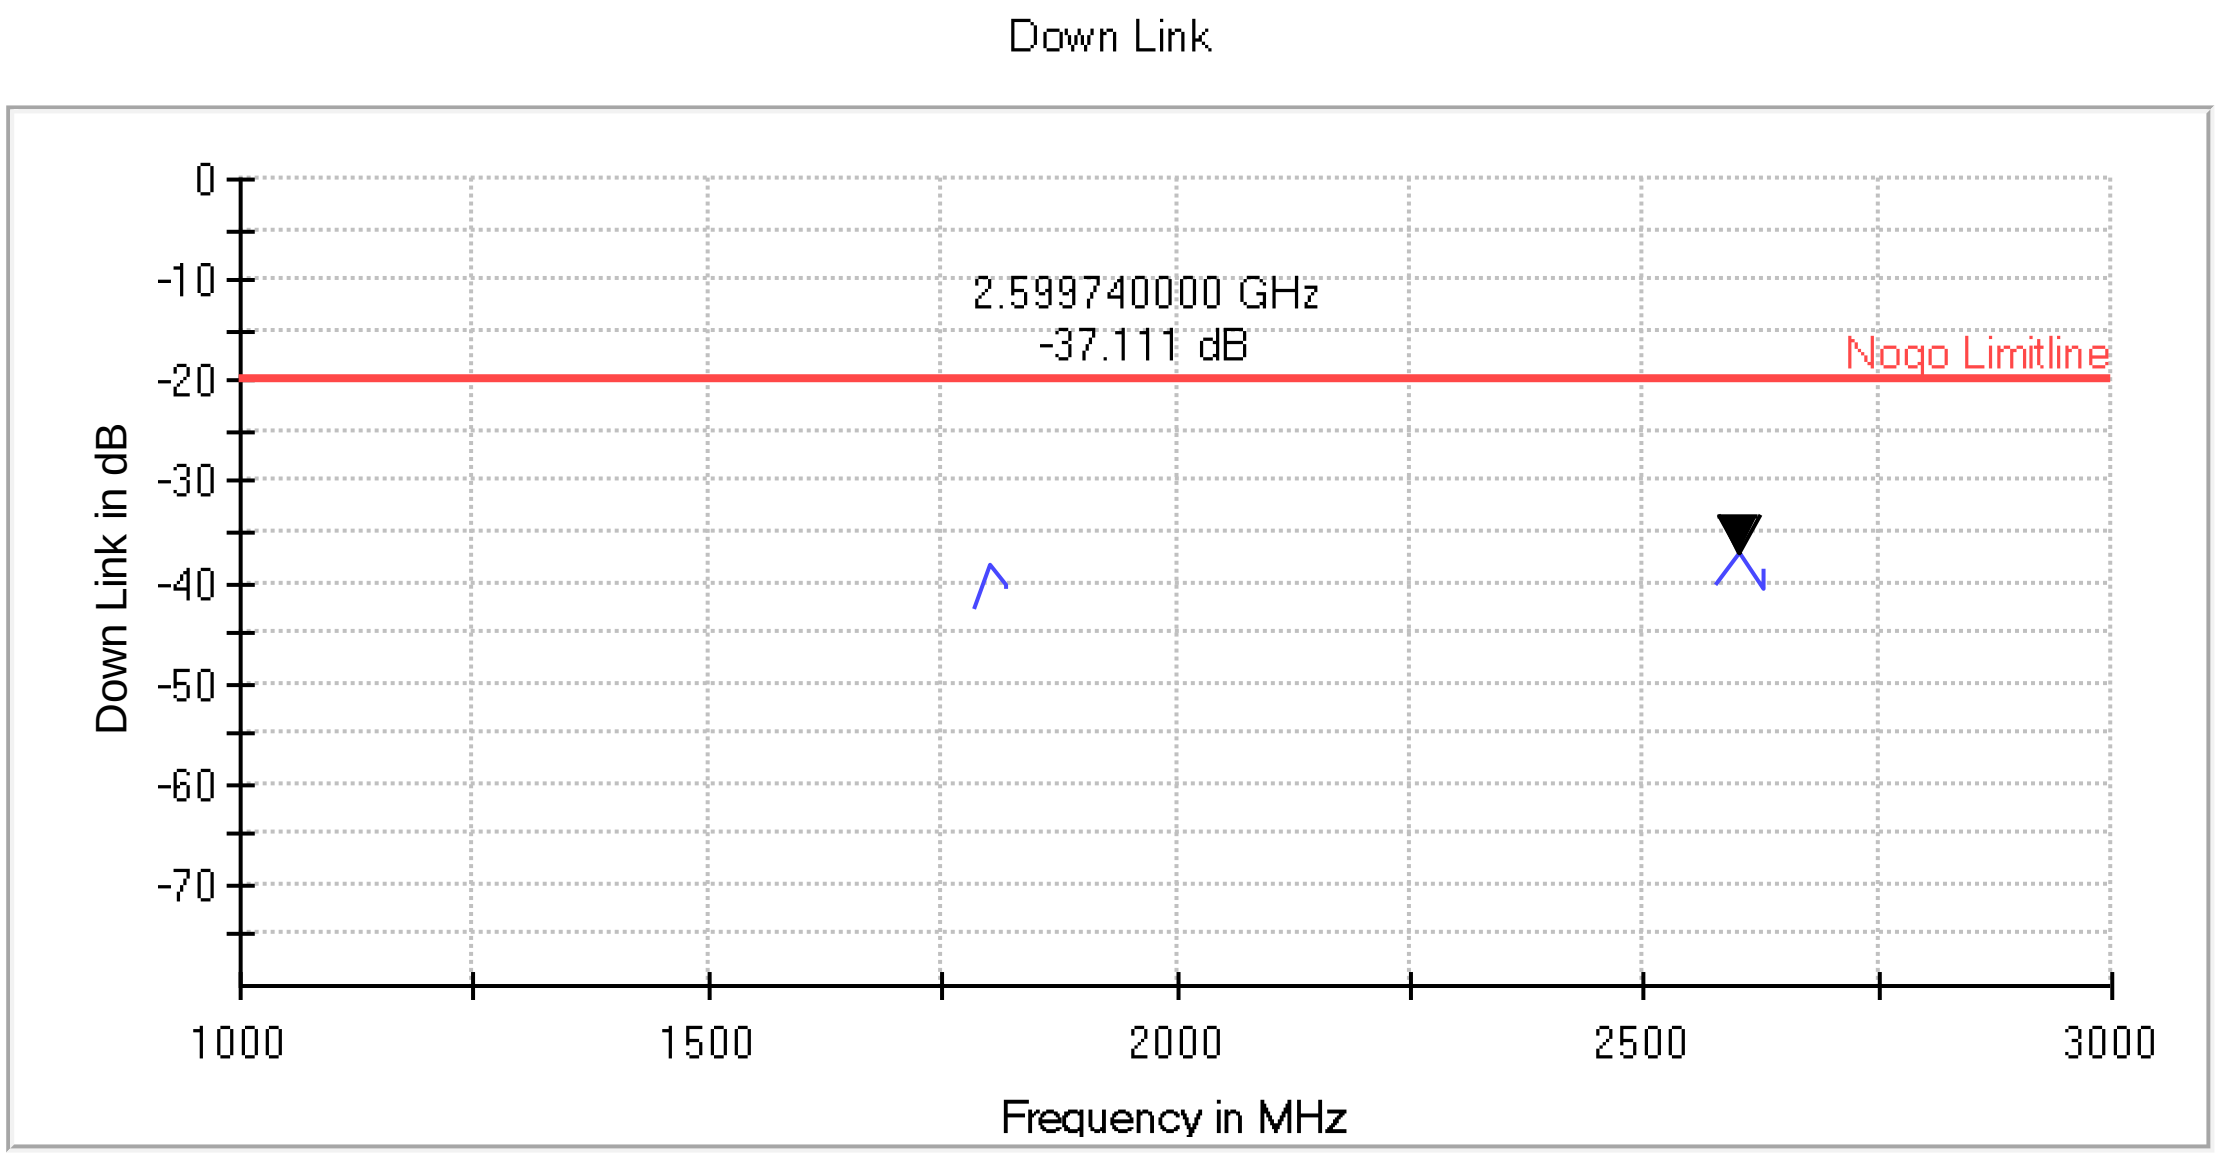

Test Mode :	Mode 10
Function Type :	Color Bar Handfree + Battery + Audio Mode + USB Cable (Charging from Adapter)
Azimuth	180°
Polarity	3500 MHz, 5000 MHz Vertical

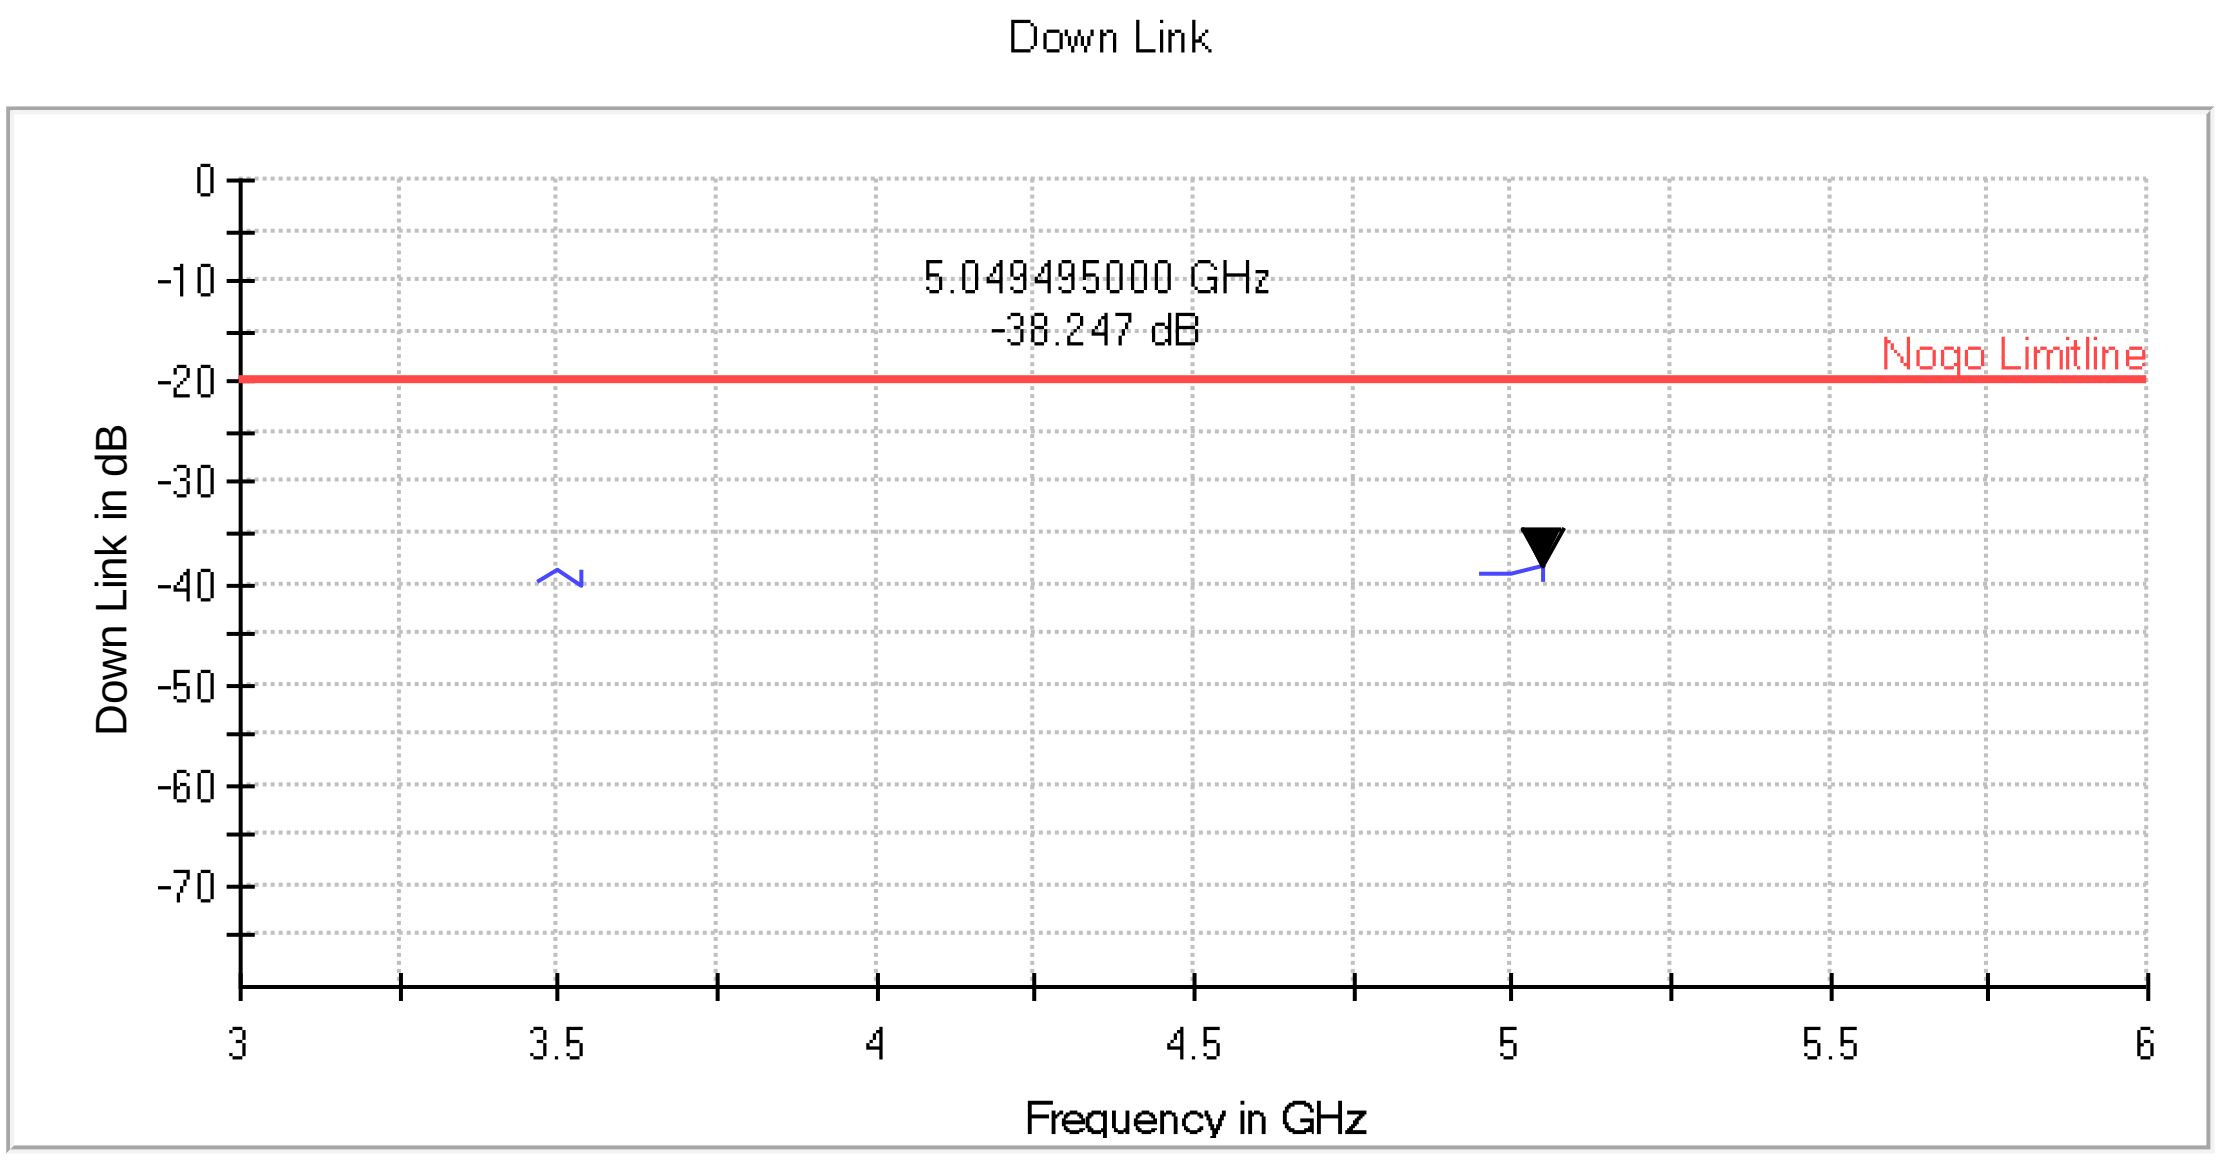

4.4.5 Setup Photographs

Mode 10
Position 0°

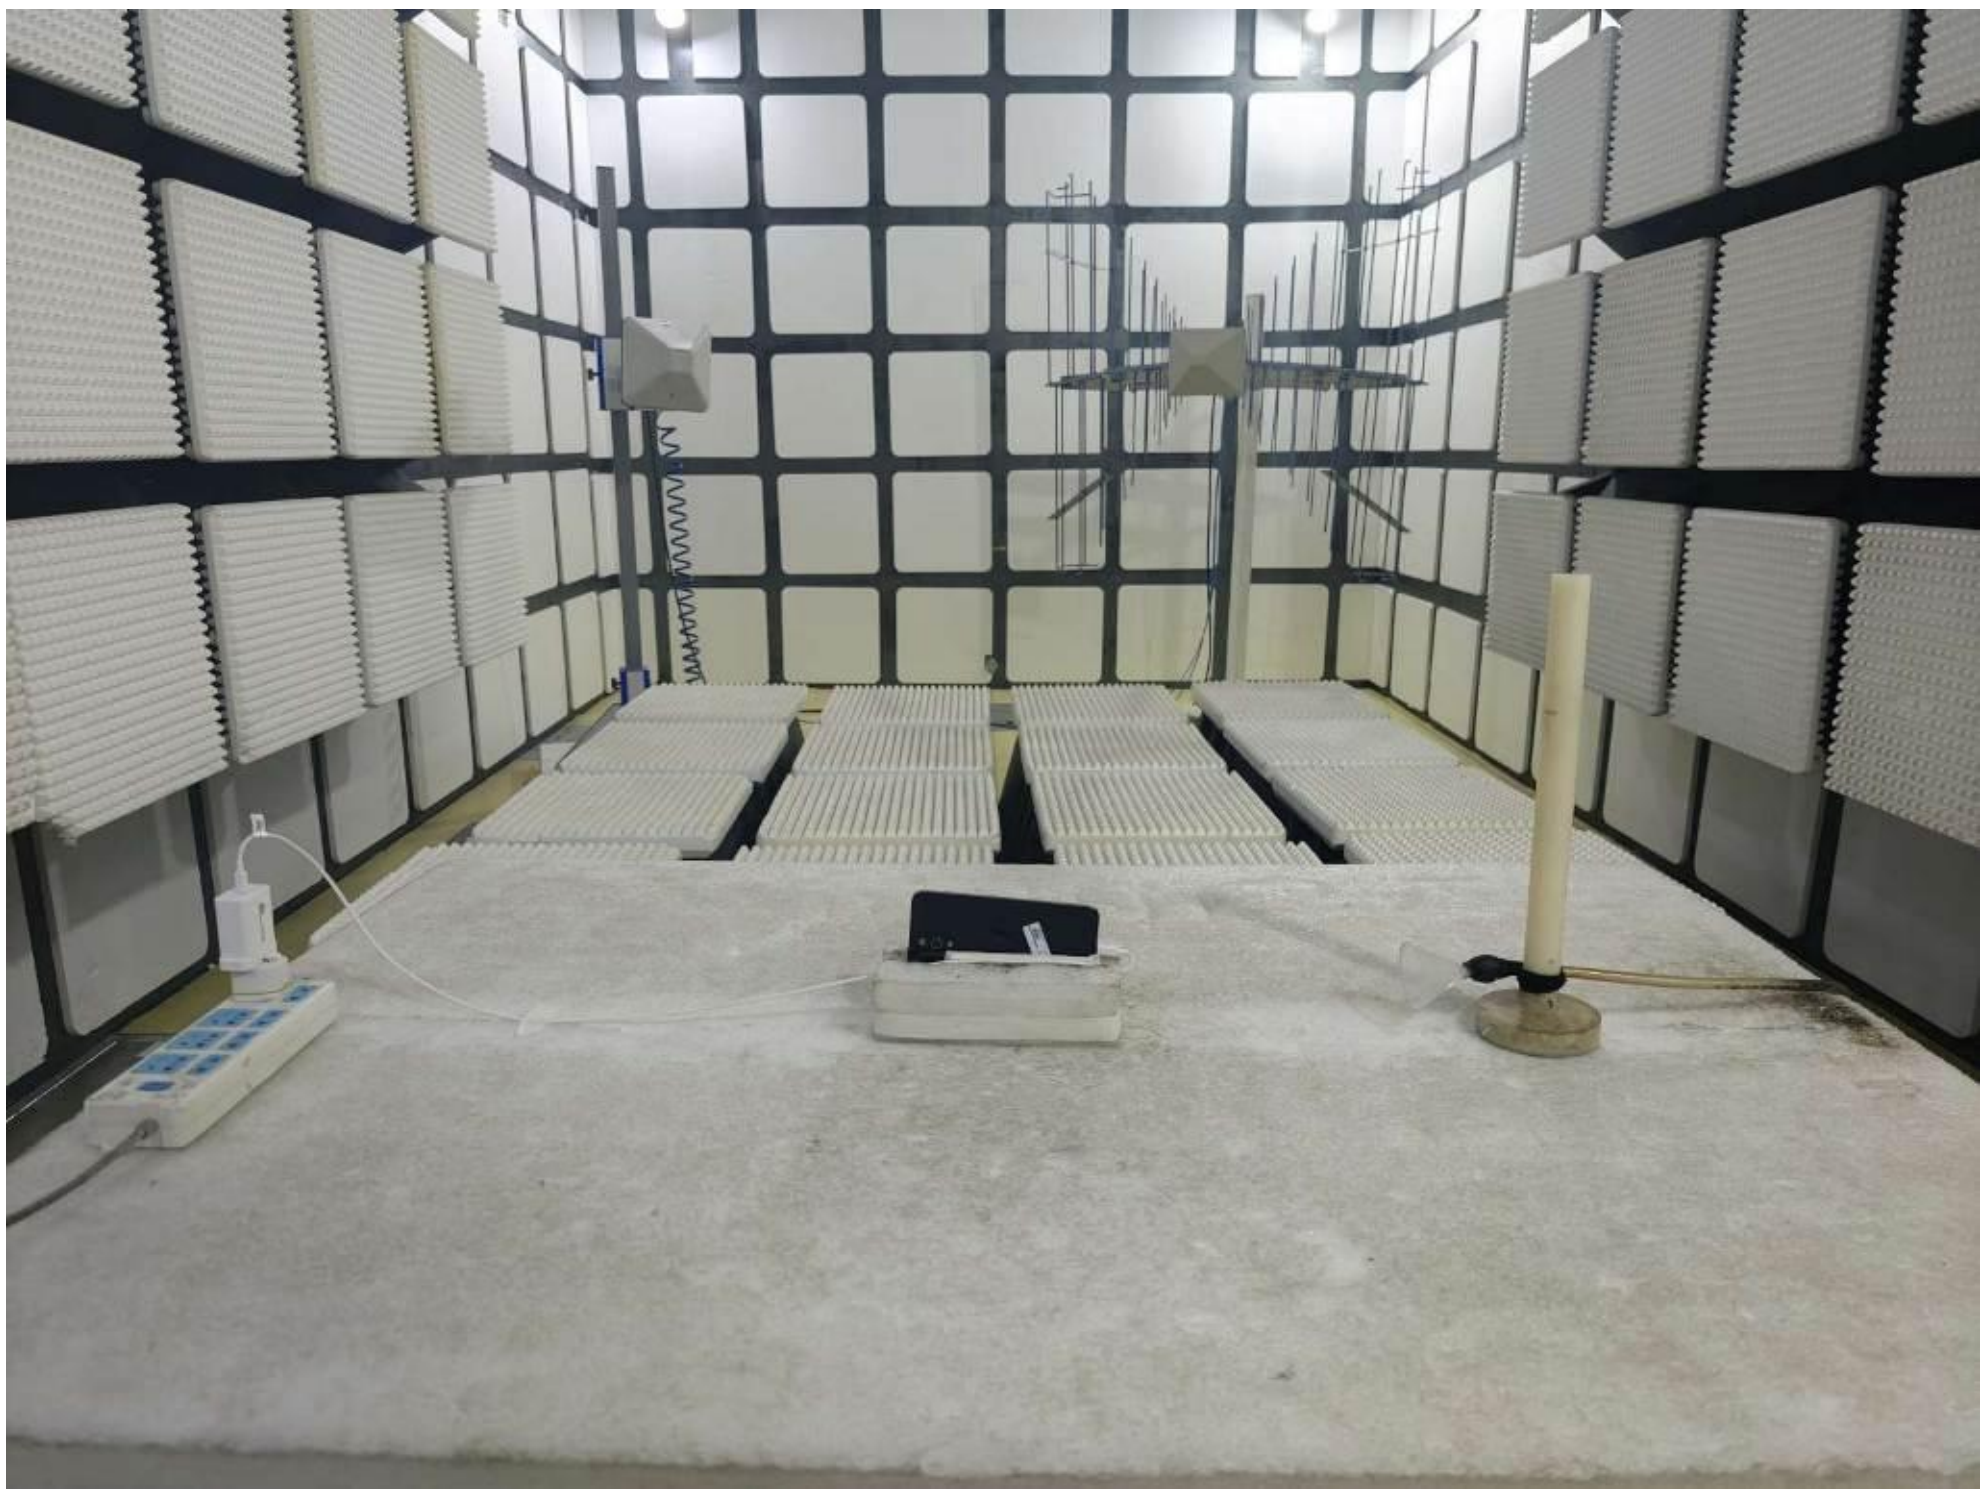

Position 180°

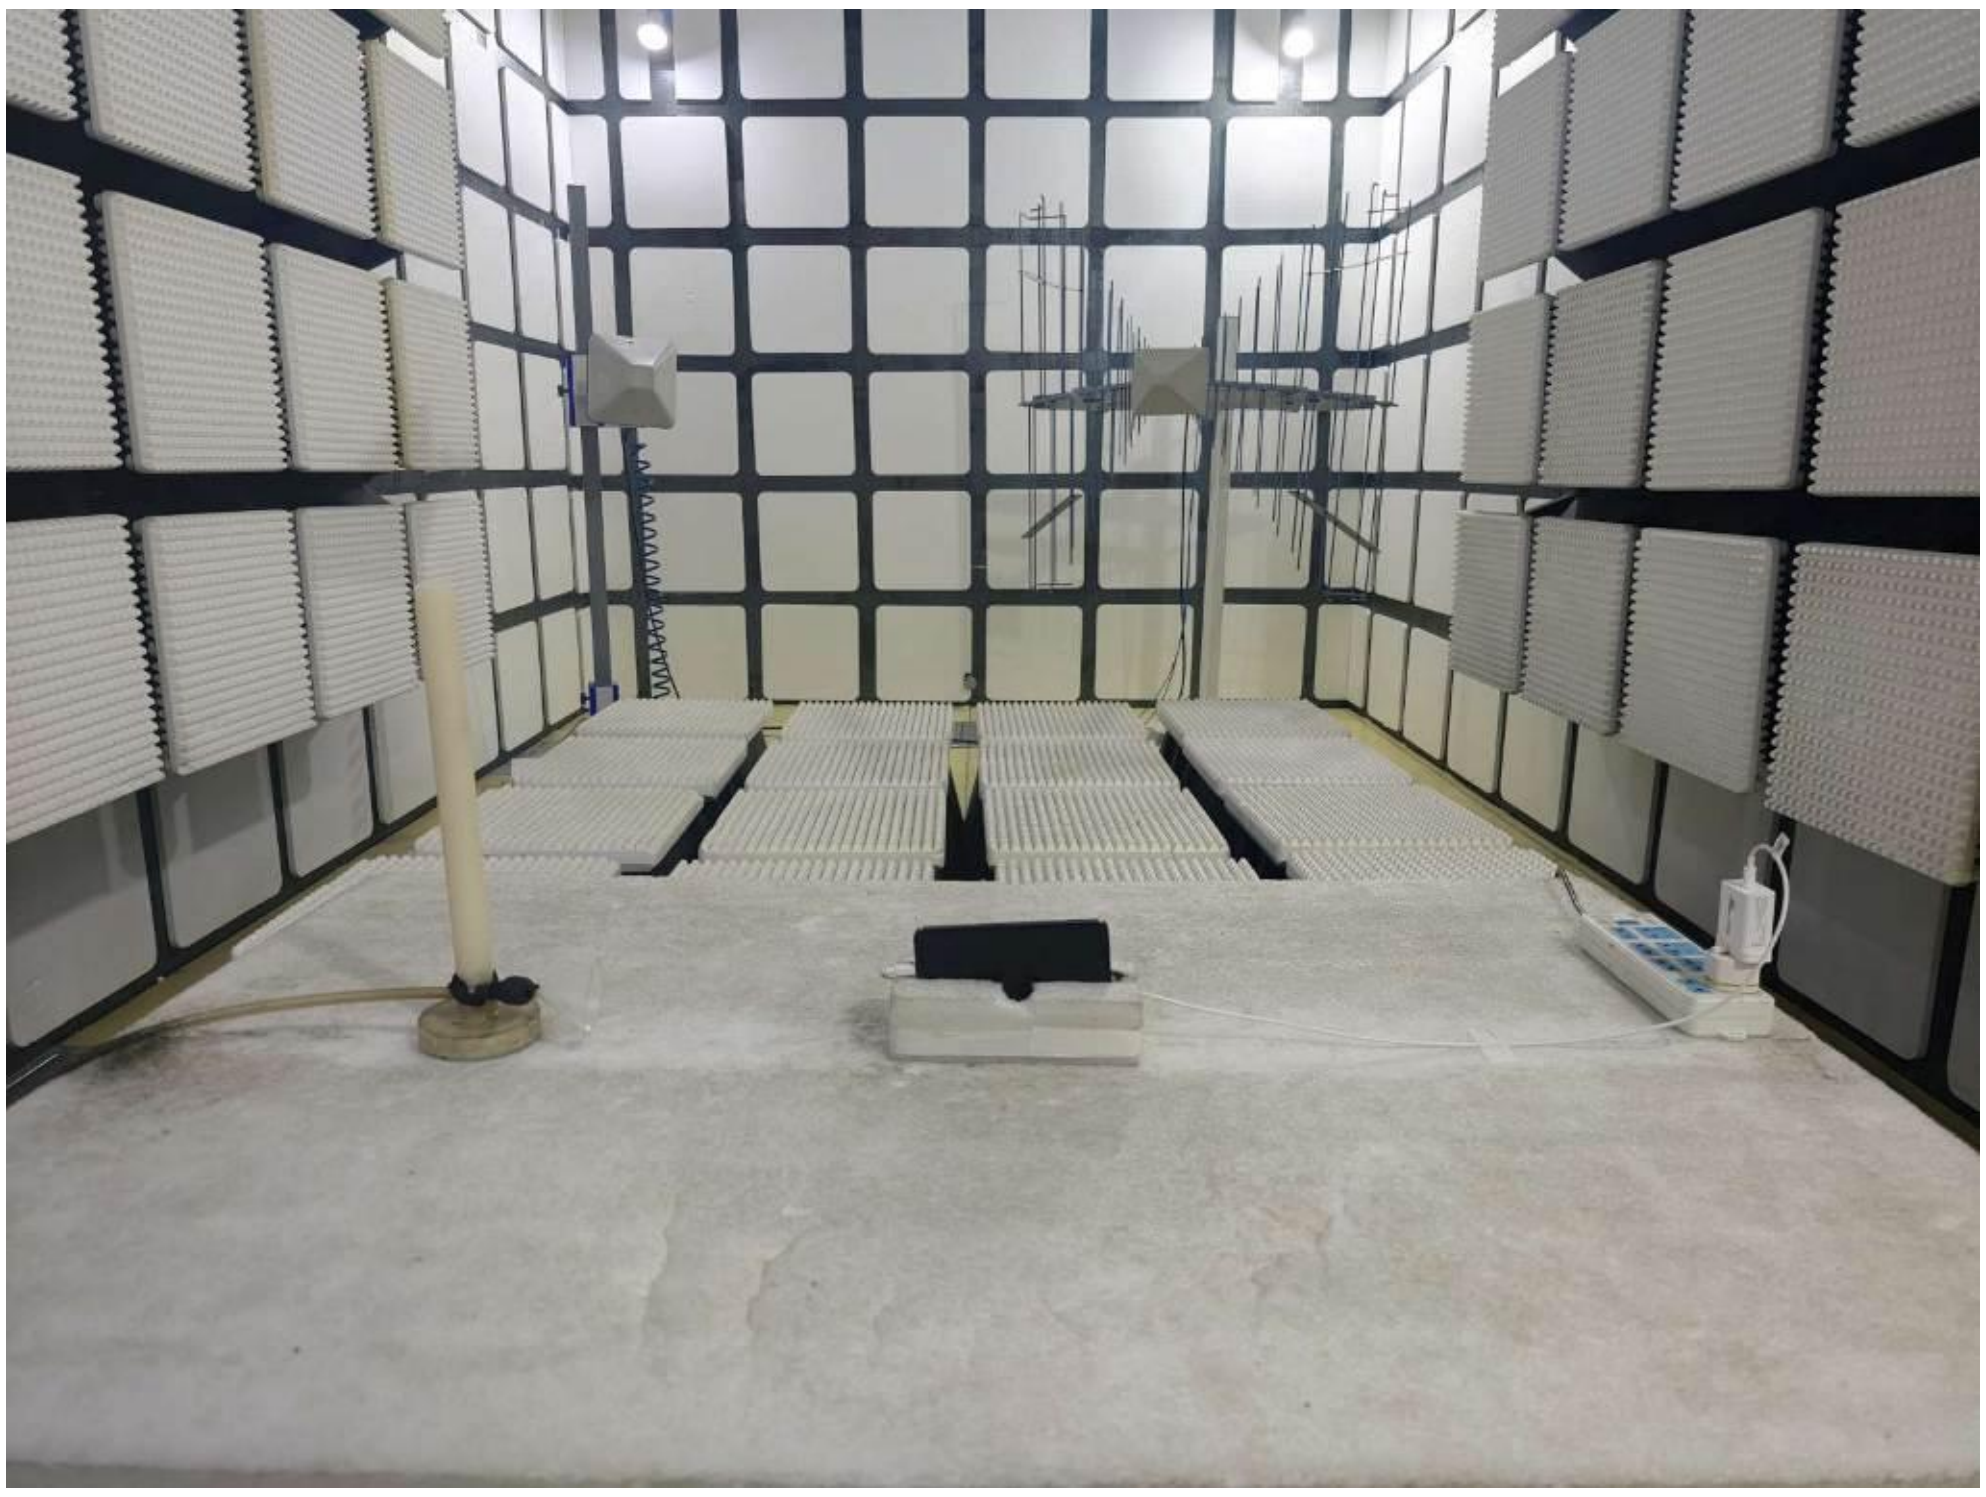

4.5 Continuous induced RF disturbances (CS) Test (Refer to EN55035 Section 4.2.2.3)

4.5.1 Test Setup

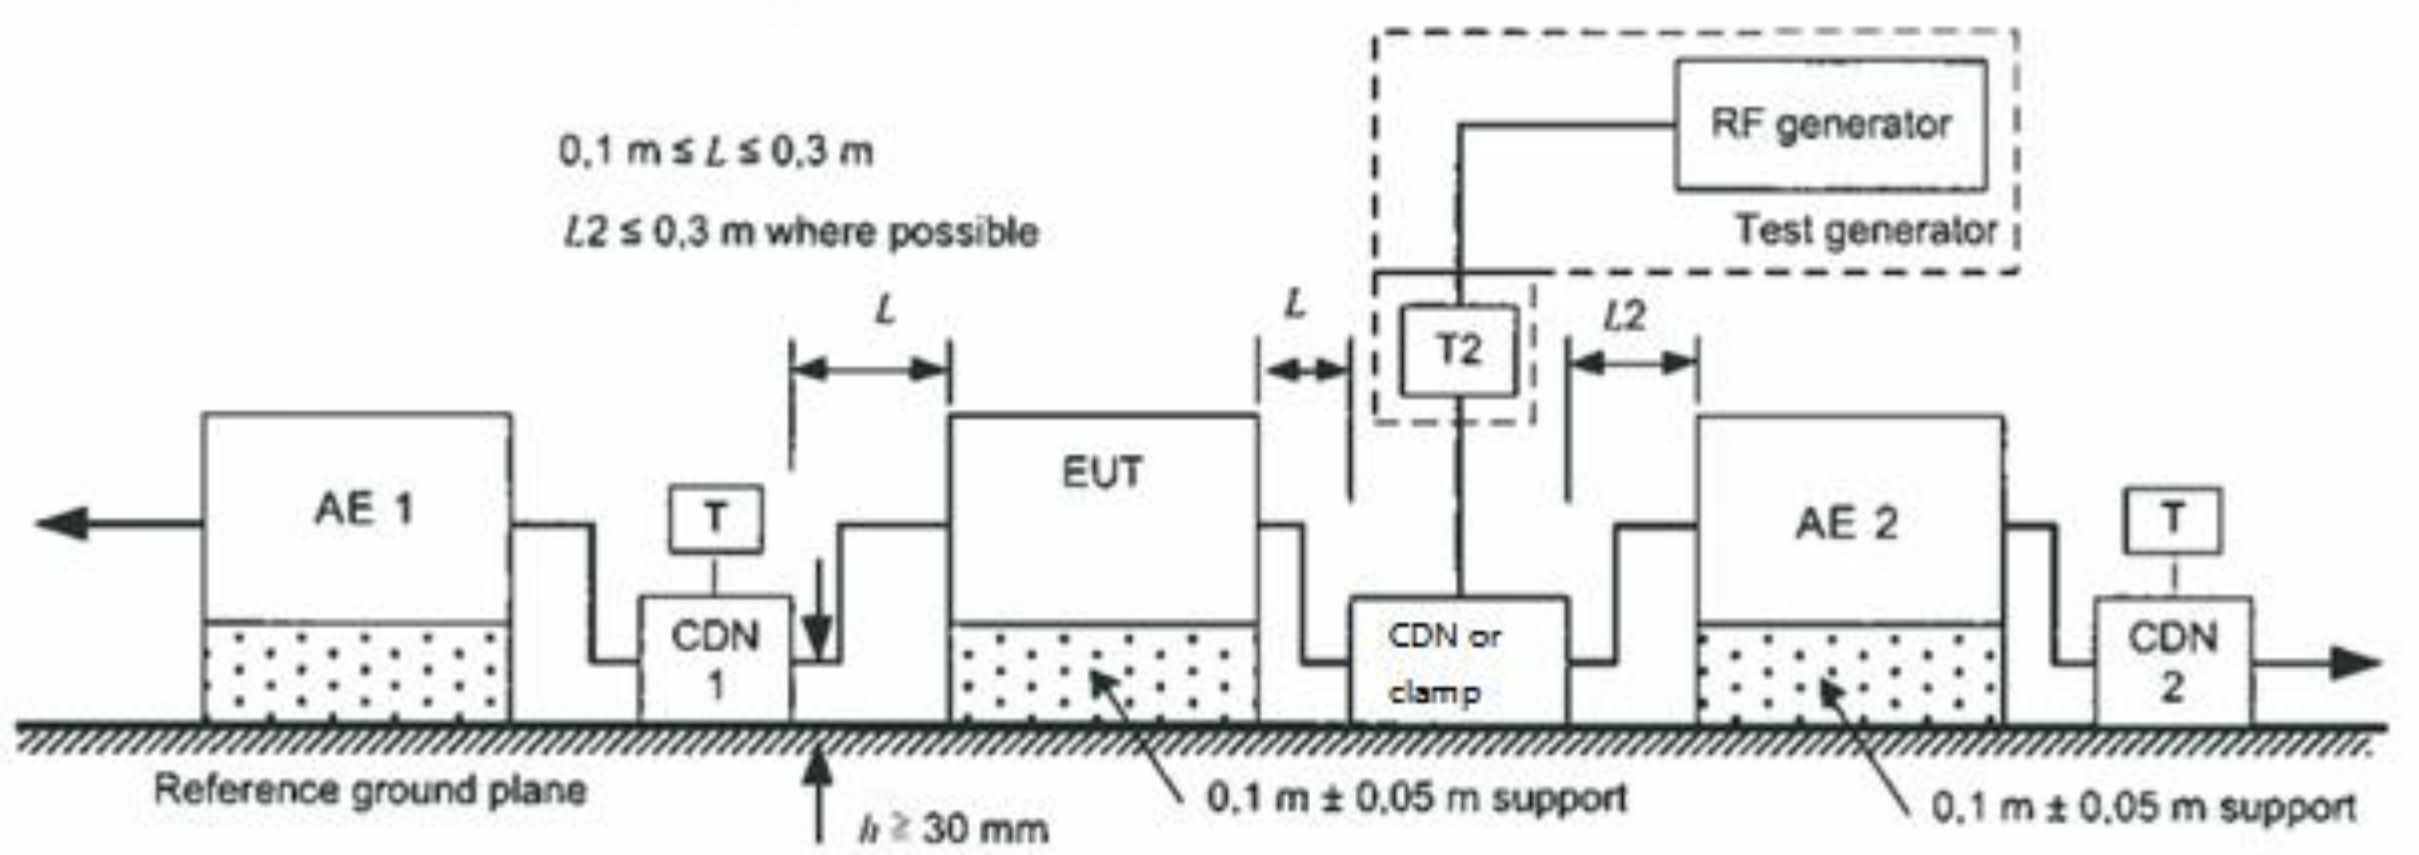

4.5.2 Test Instrument Setting

Frequency Step Size	1% increment
Modulation	80% AM (1kHz)
Dwell Time	3 seconds

4.5.3 Test Procedures

a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.

b. Cables selected for testing for which a CDN is suitable are to have the CDN in place during the test. All CDNs that are not being used to inject the test signal are to be terminated with a 50 ohm load.

c. In EN55035 standard establishes the particular modes of operation and performance criteria applicable to the audio output function during continuous RF disturbance tests

d. This method establishes an acoustic reference level using an SPL meter and microphone. During the test, the demodulated audio levels are measured, the interference ratio is then established and the results are compared to the interference ratio limits.

e. G.7.1.3The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be –20 dB or better.

4.5.4 Test Result

Test Standard	IEC 61000-4-6:2008
Product Standard	EN 55035 : 2017 + A11: 2020
EUT operated voltage during test	230Vac, 50Hz
Test Frequency Range	0.15 MHz ~ 80 MHz
Test Level	0.15 MHz to 10MHz : 3 Vrms 10 MHz to 30MHz : 3Vrms to 1Vrms 30MHz to 80MHz : 1Vrms
Loudspeaker Mode Test Distance	30cm
Test Method	CDN for Power port
Required Performance Criteria	A
Performance Criteria of EUT	A
Test Result	PASS

Remark: Loudspeaker Mode Test Distance is 30cm, ensure that there is minimal acoustic loss between EUT and microphone.

<Data>

Test Mode :	Mode 10
Function Type :	Color Bar Earphone Port + Battery + Audio Mode + USB Cable (Charging from Adapter)
Frequency Range :	0.15 MHz ~ 80 MHz

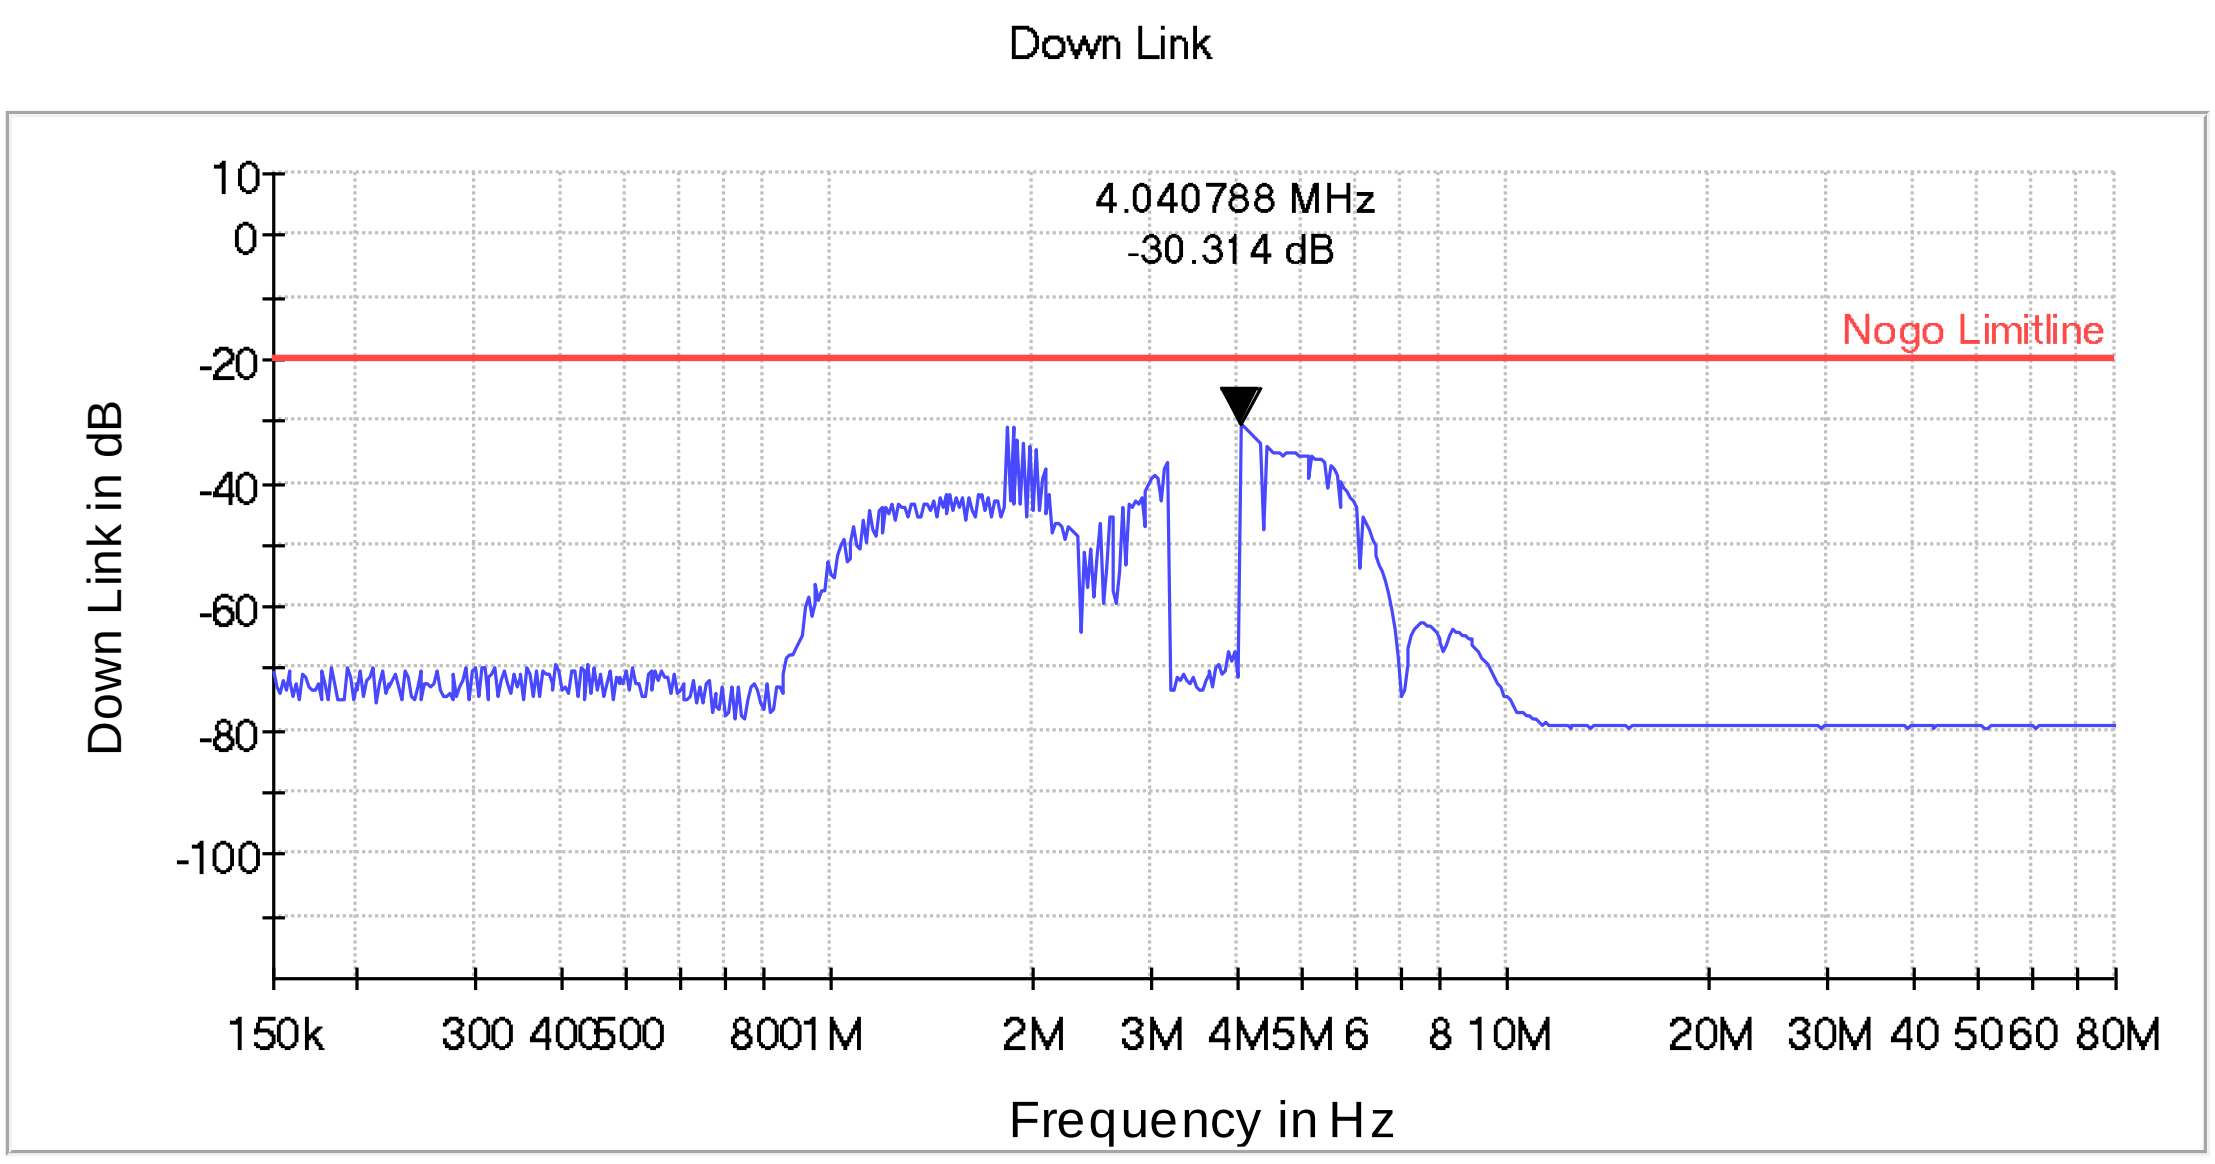

4.5.5 Setup Photographs

Mode 10

Front View

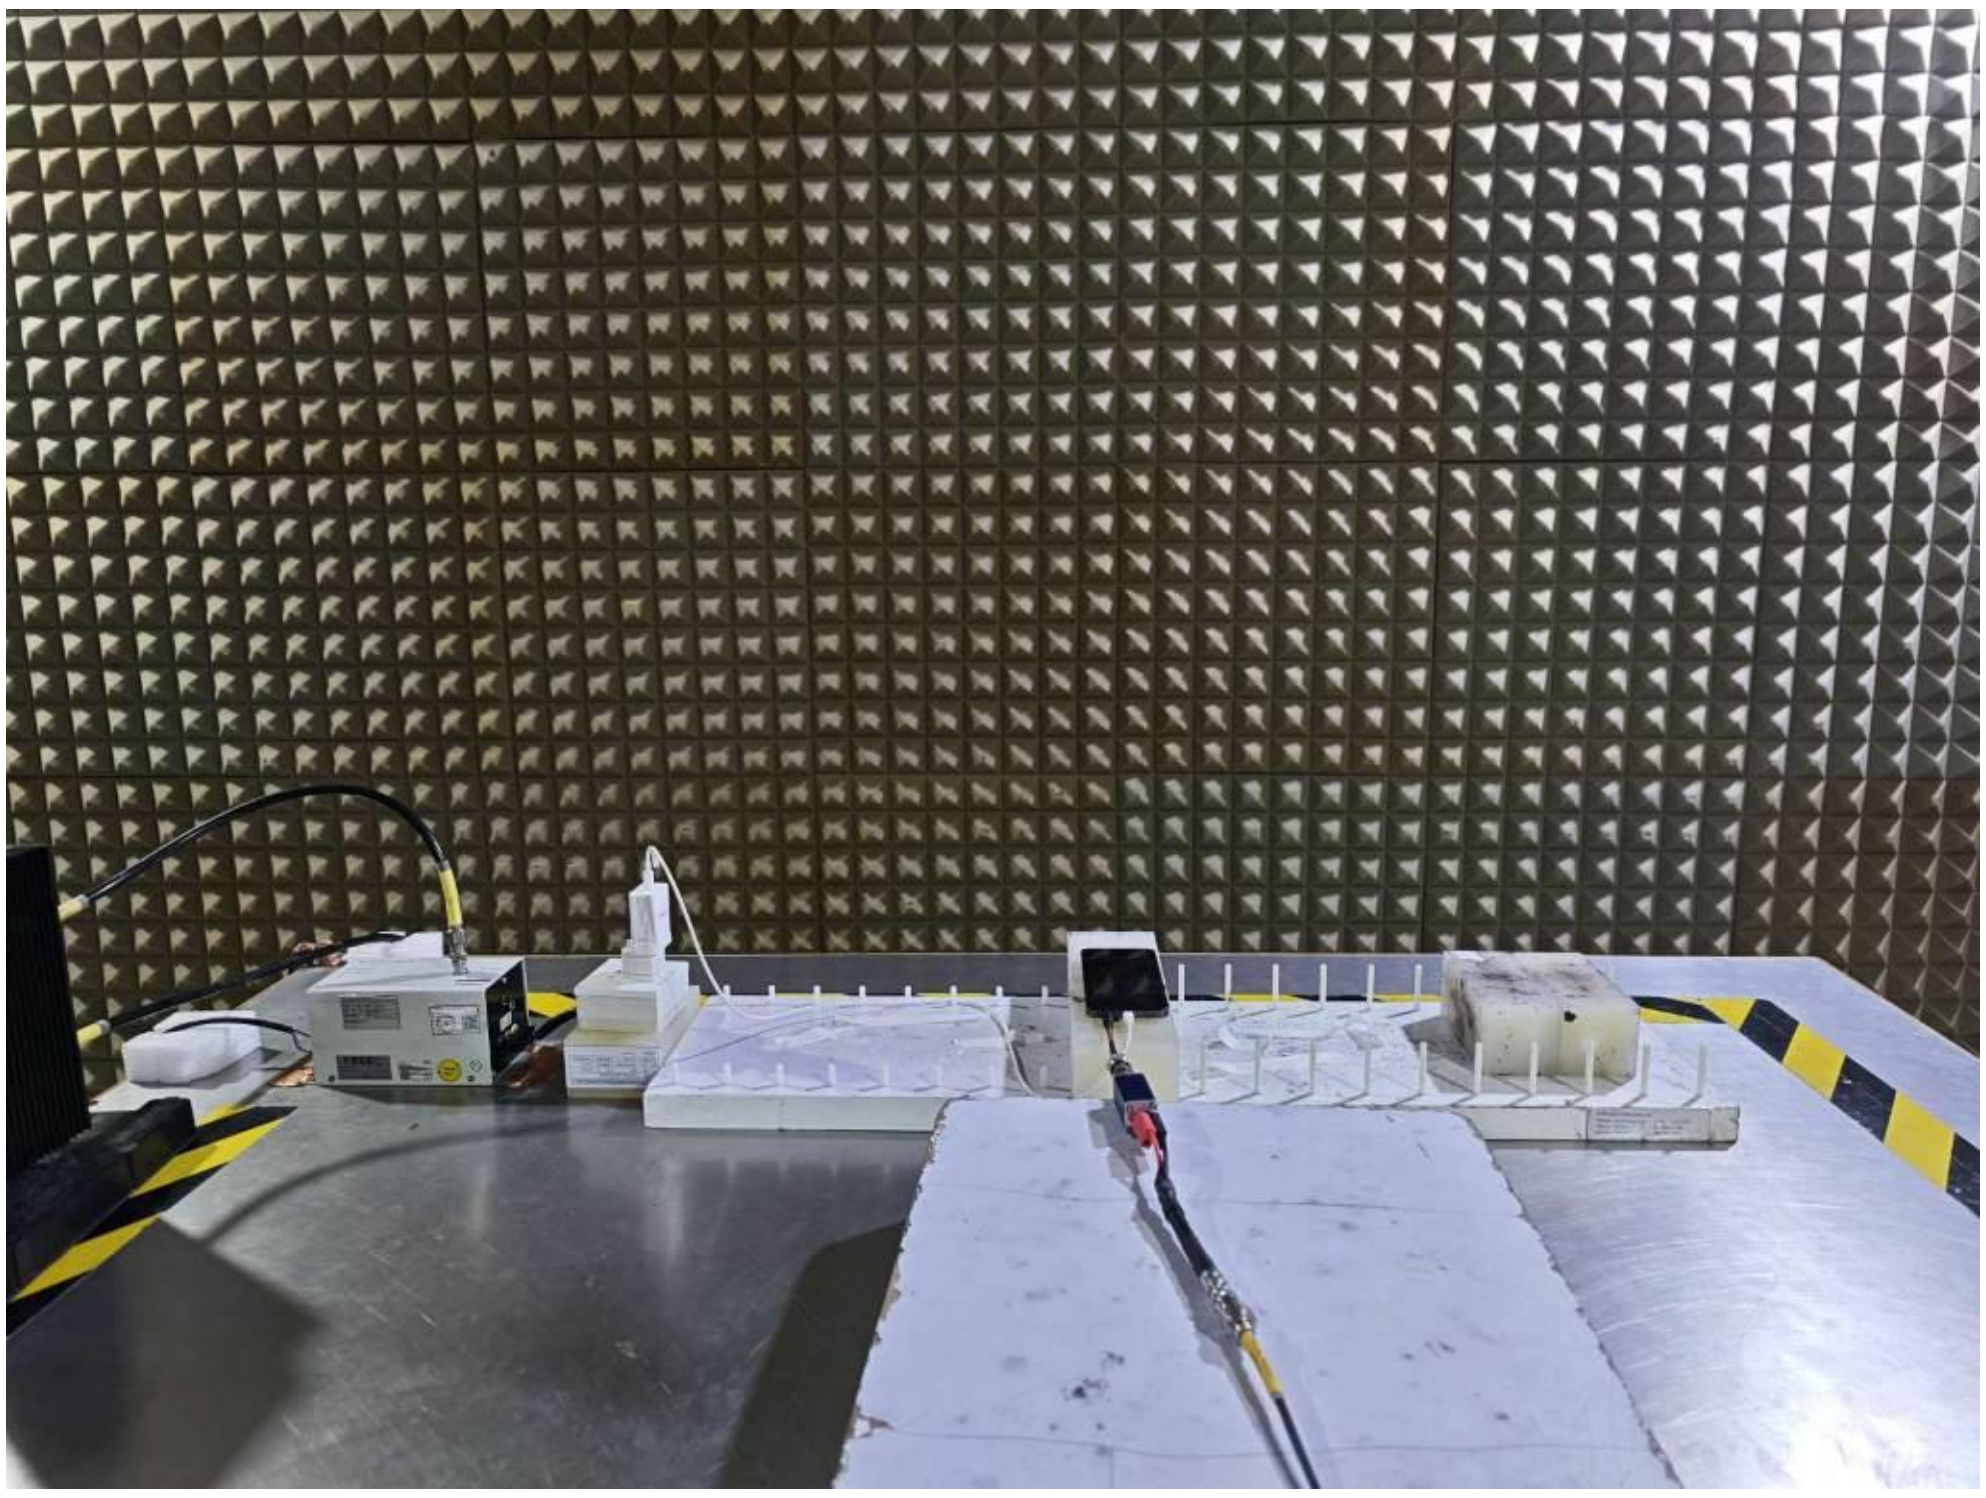

Side View

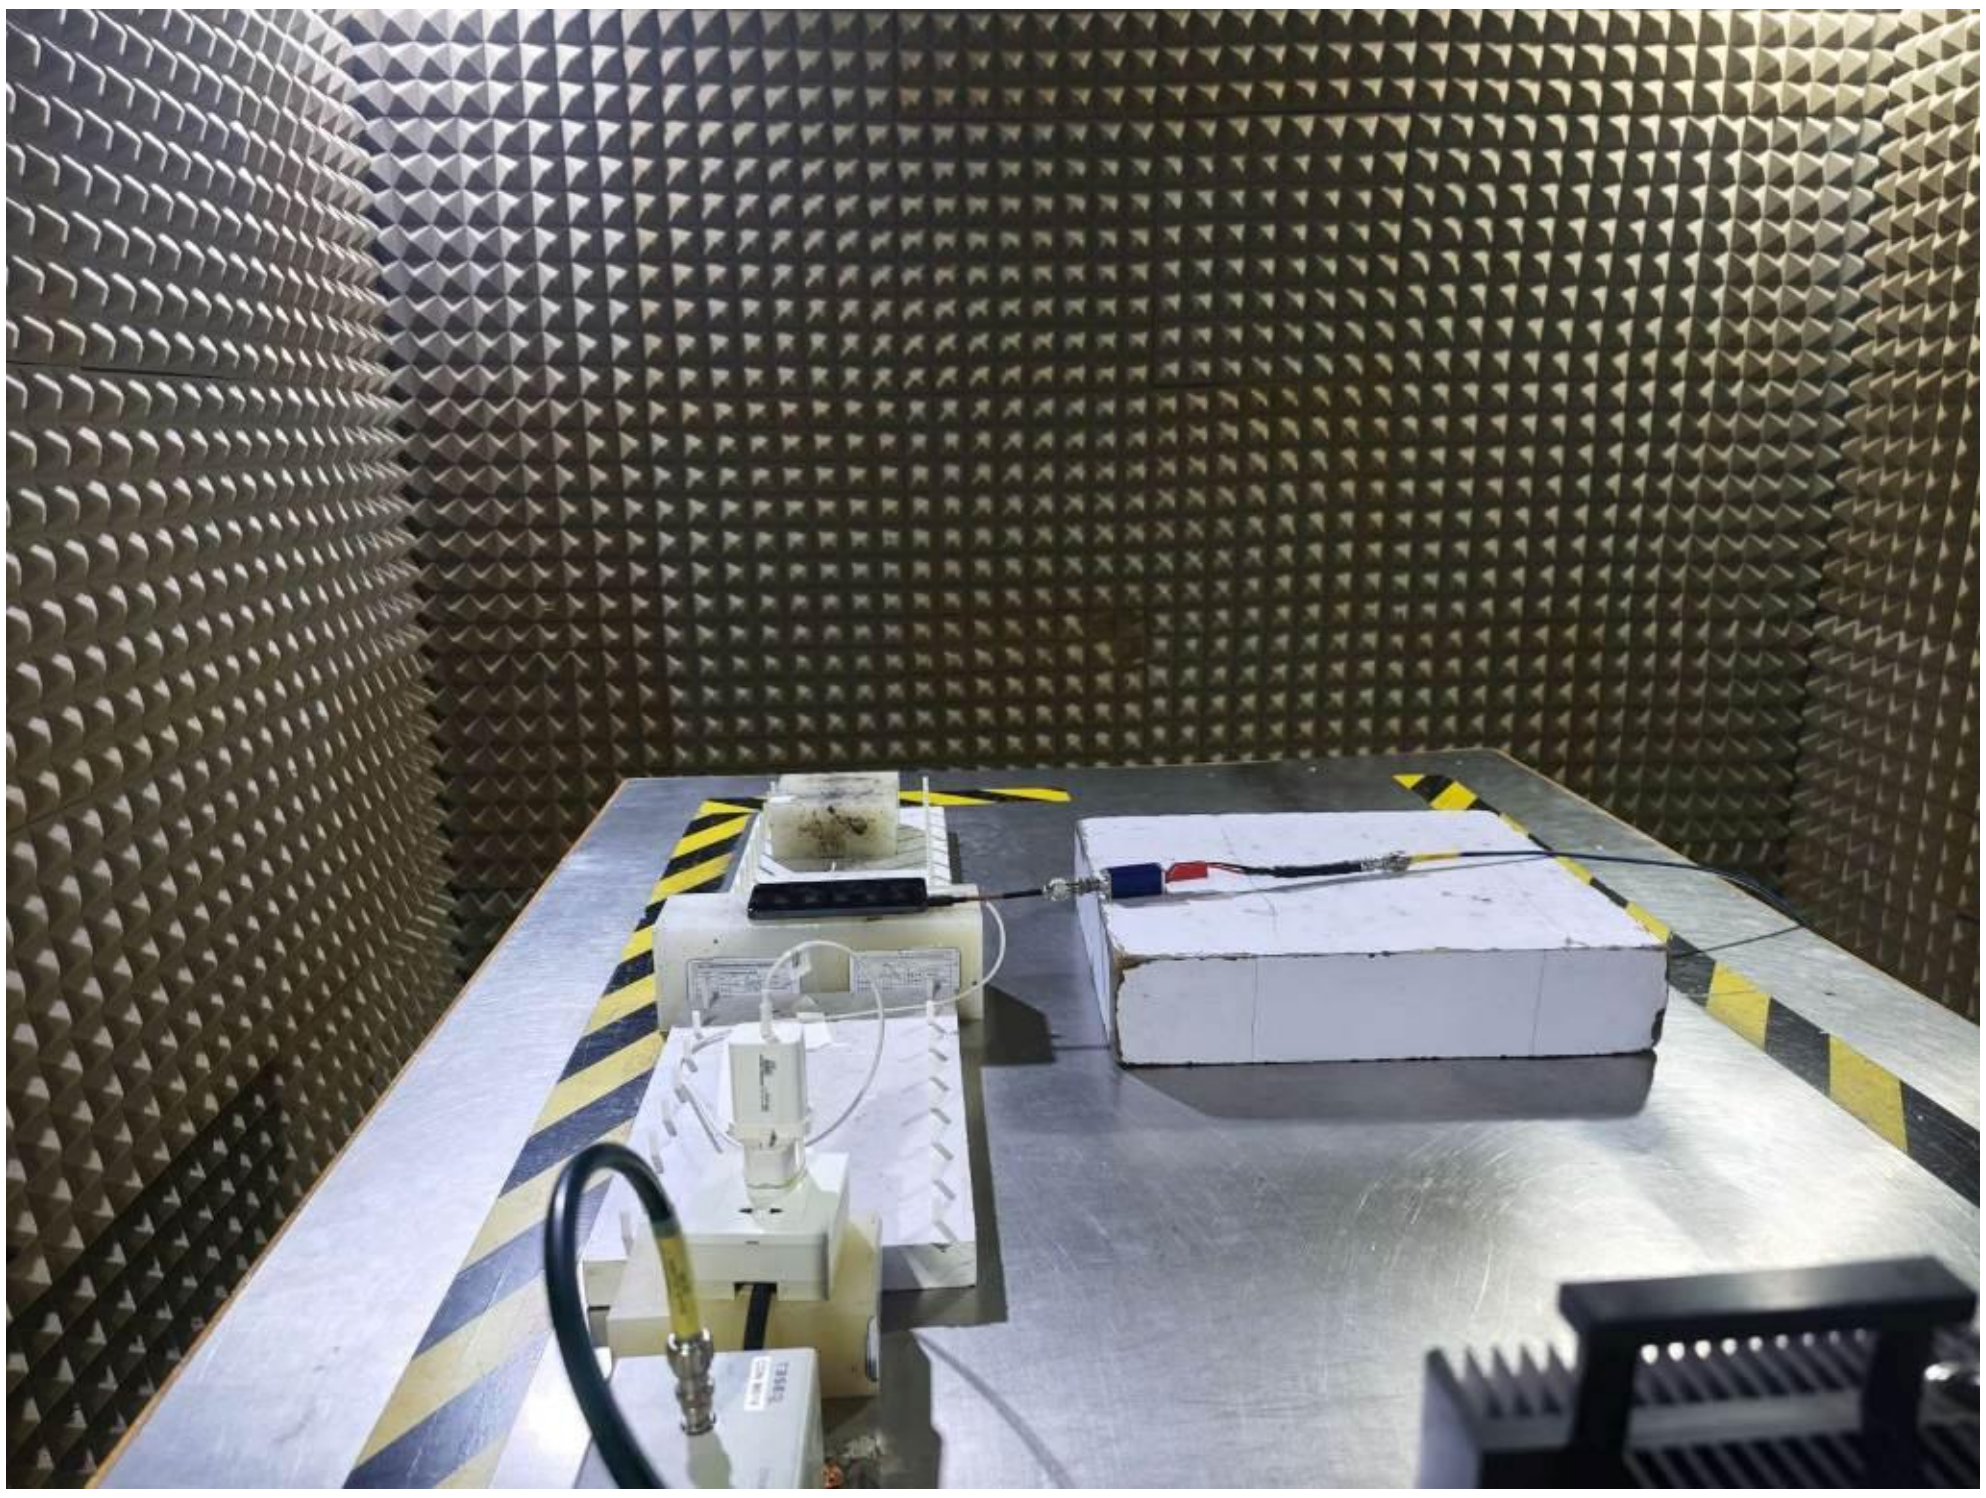

4.6 Power Frequency Magnetic Field Test (Refer to EN55035 Section 4.2.3)

4.6.1 Test Setup

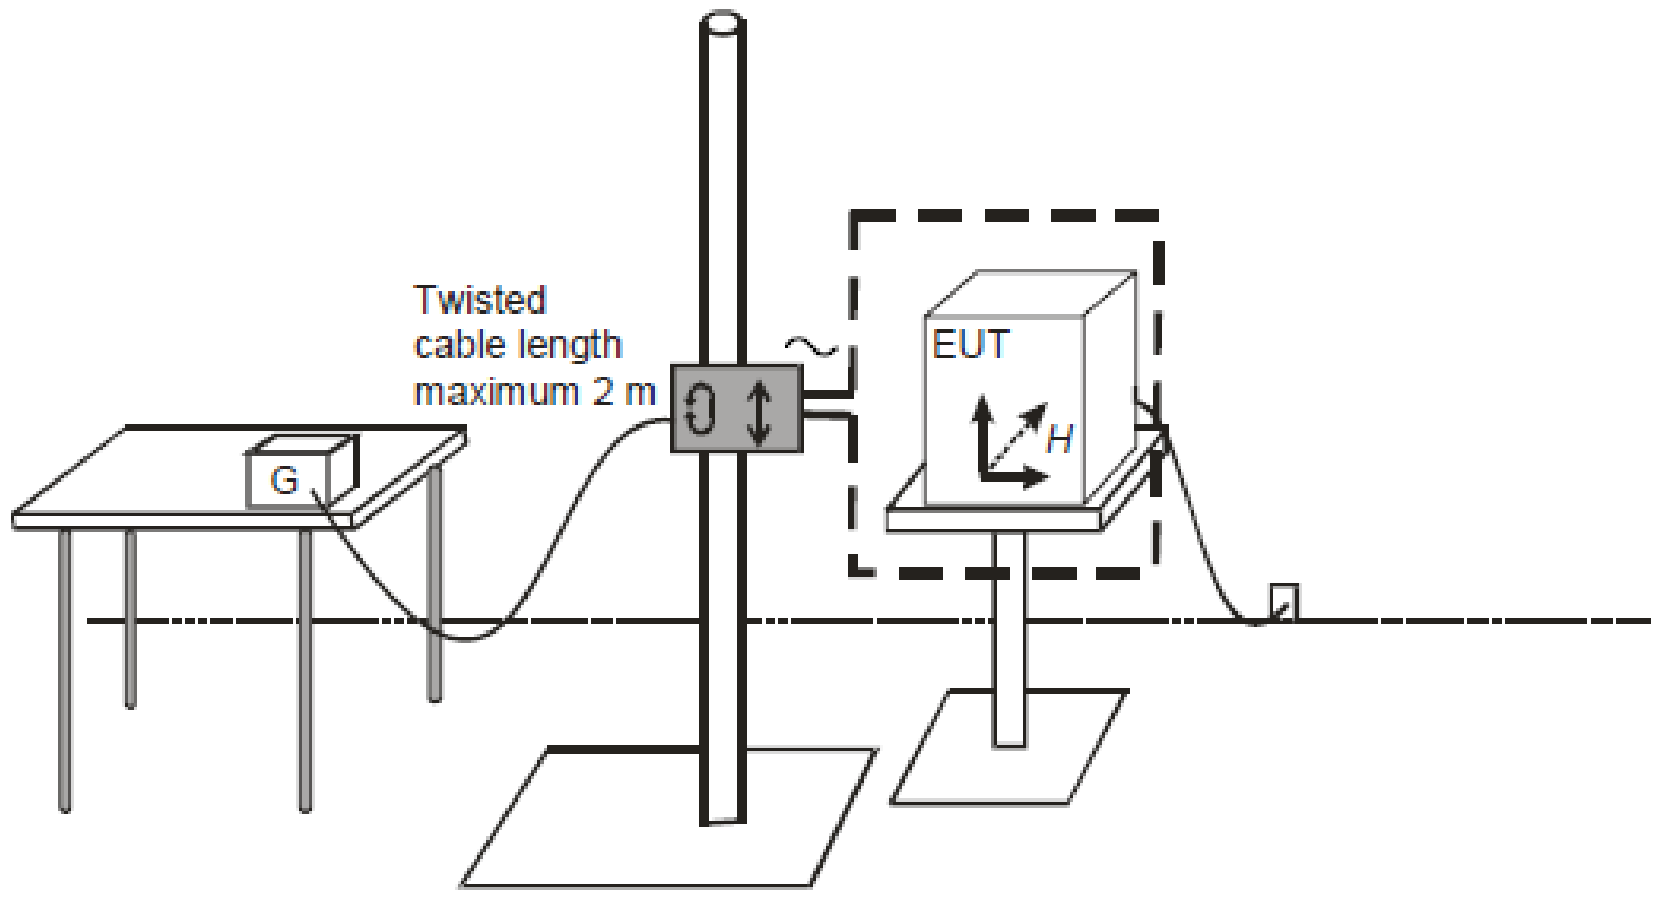

4.6.2 Test Instrument Setting

Testing Duration	1 minute
Coil Orientation	X-axis, Y-axis, Z-axis

4.6.3 Test Procedure

a. The test procedure shall include:

- the verification of the laboratory reference conditions;
- preliminary verification of the correct operation of the equipment;
- carrying out the test;
- evaluation of the test results.

b. The power frequency magnetic field value of the laboratory shall be at least 20 dB lower than the selected test level.

c. The equipment under test is placed in the center of the coil. For a single square coil, the distance from EUT to the coil is 0.2m (minimum).The equipment is then connected to power and signal leads according to pertinent installation instructions.

d. The plane of the inductive coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations.

4.6.4 Test Result

Test Standard	IEC 61000-4-8:2009
Product Standard	EN 55035 : 2017 + A11: 2020
EUT operated voltage during test	230Vac, 50Hz
Test Level	1A/m, 50Hz
Required Performance Criteria	A
Performance Criteria of EUT	A
Test Result	PASS

4.6.5 Setup Photographs

Mode 1~4

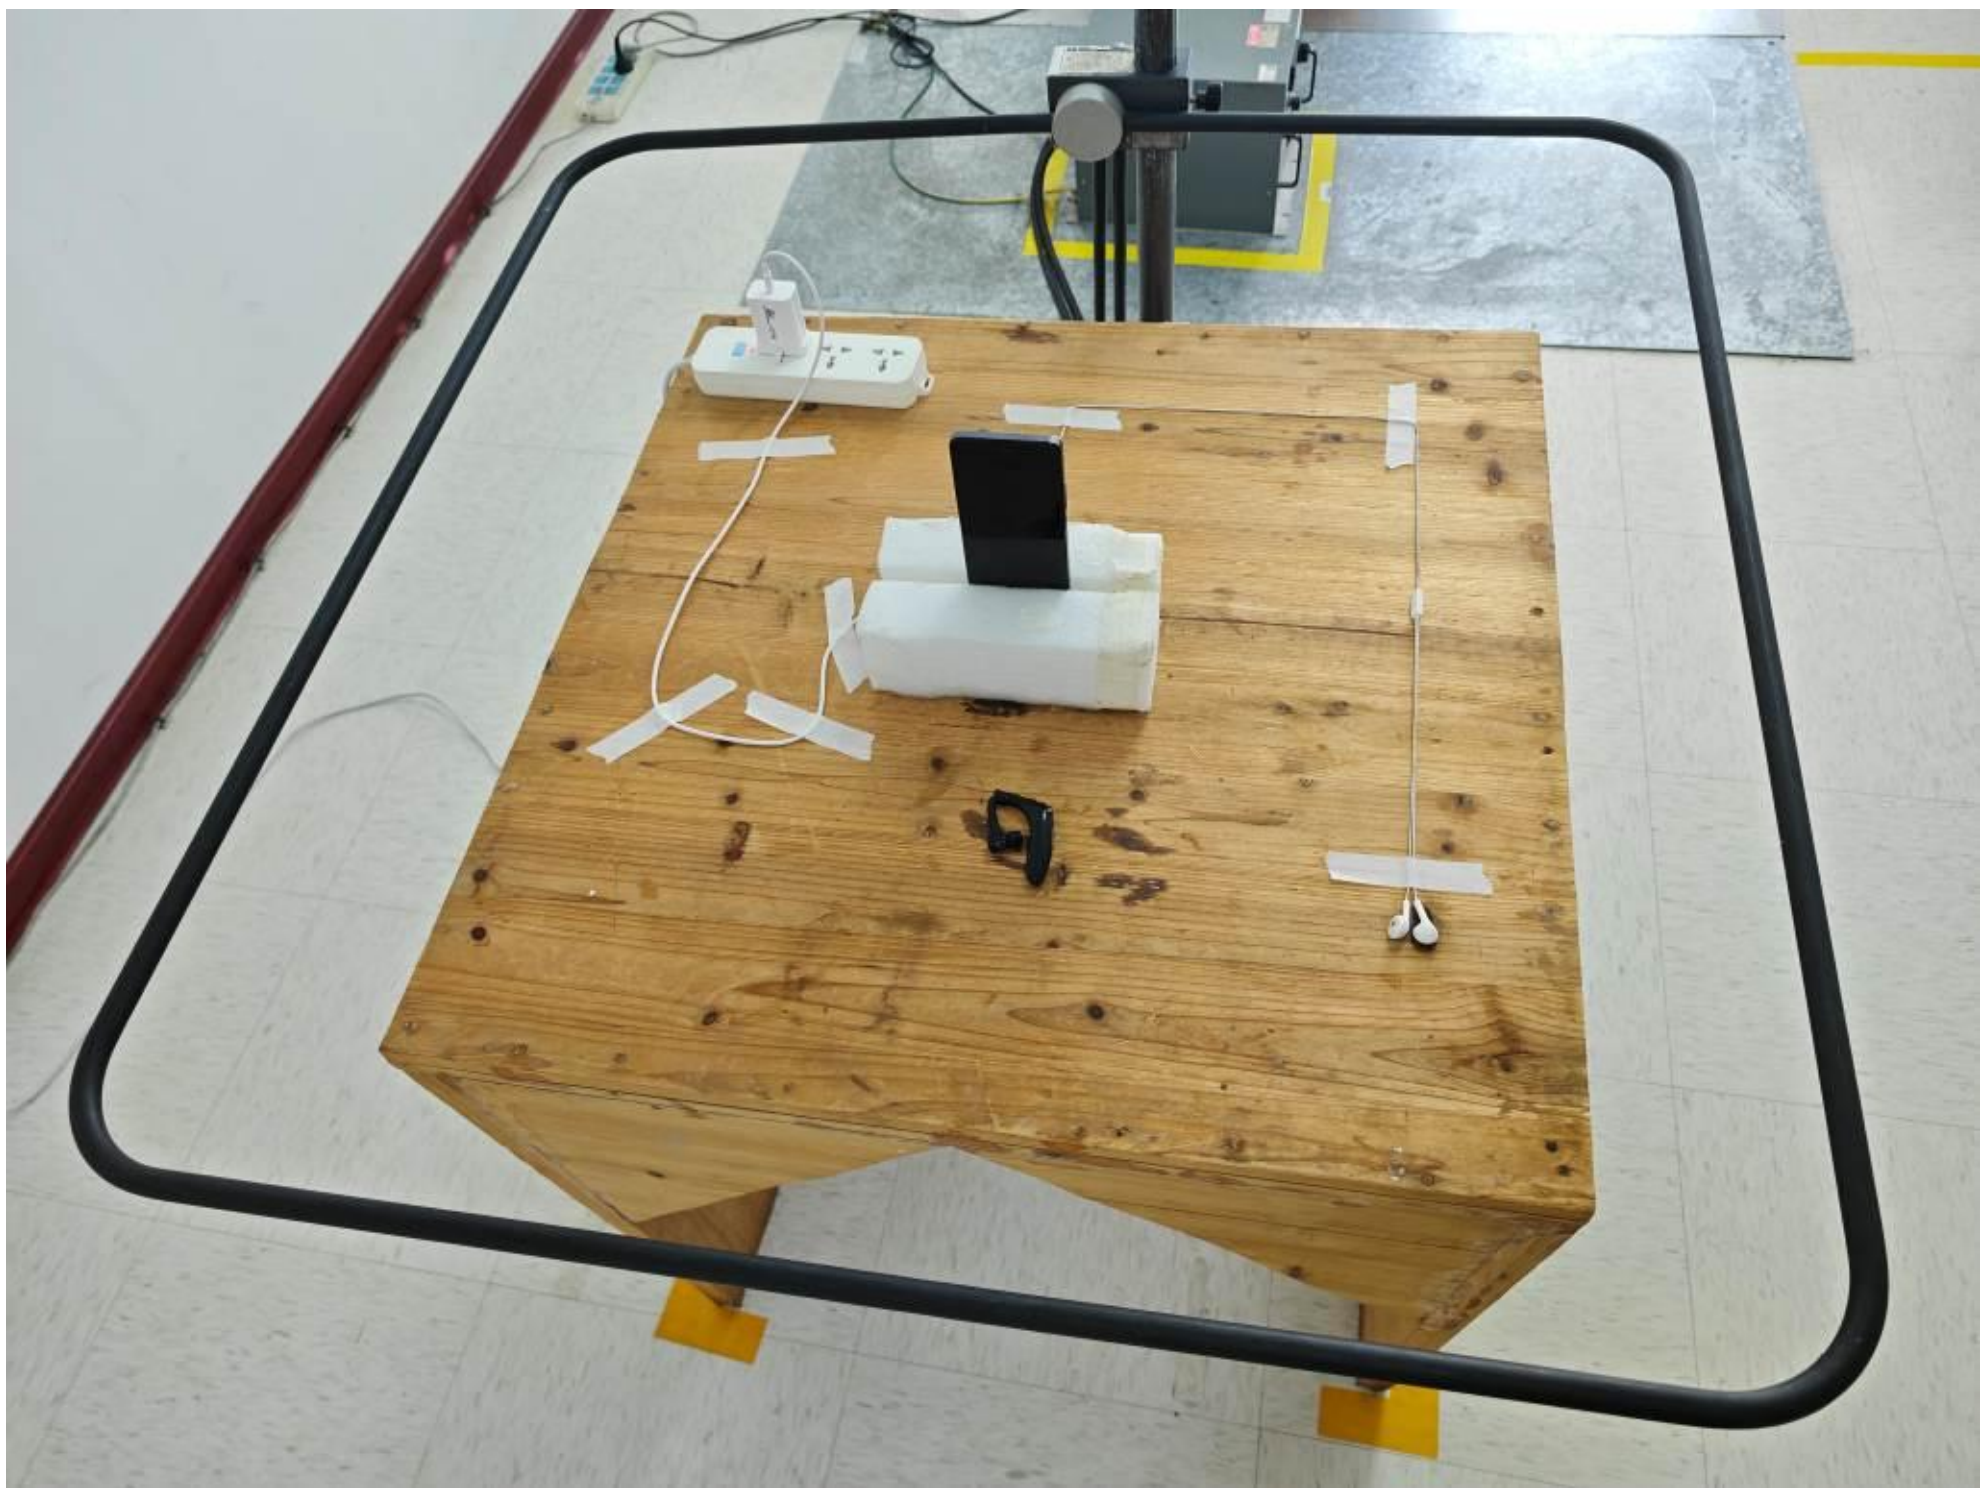

Mode 5~6

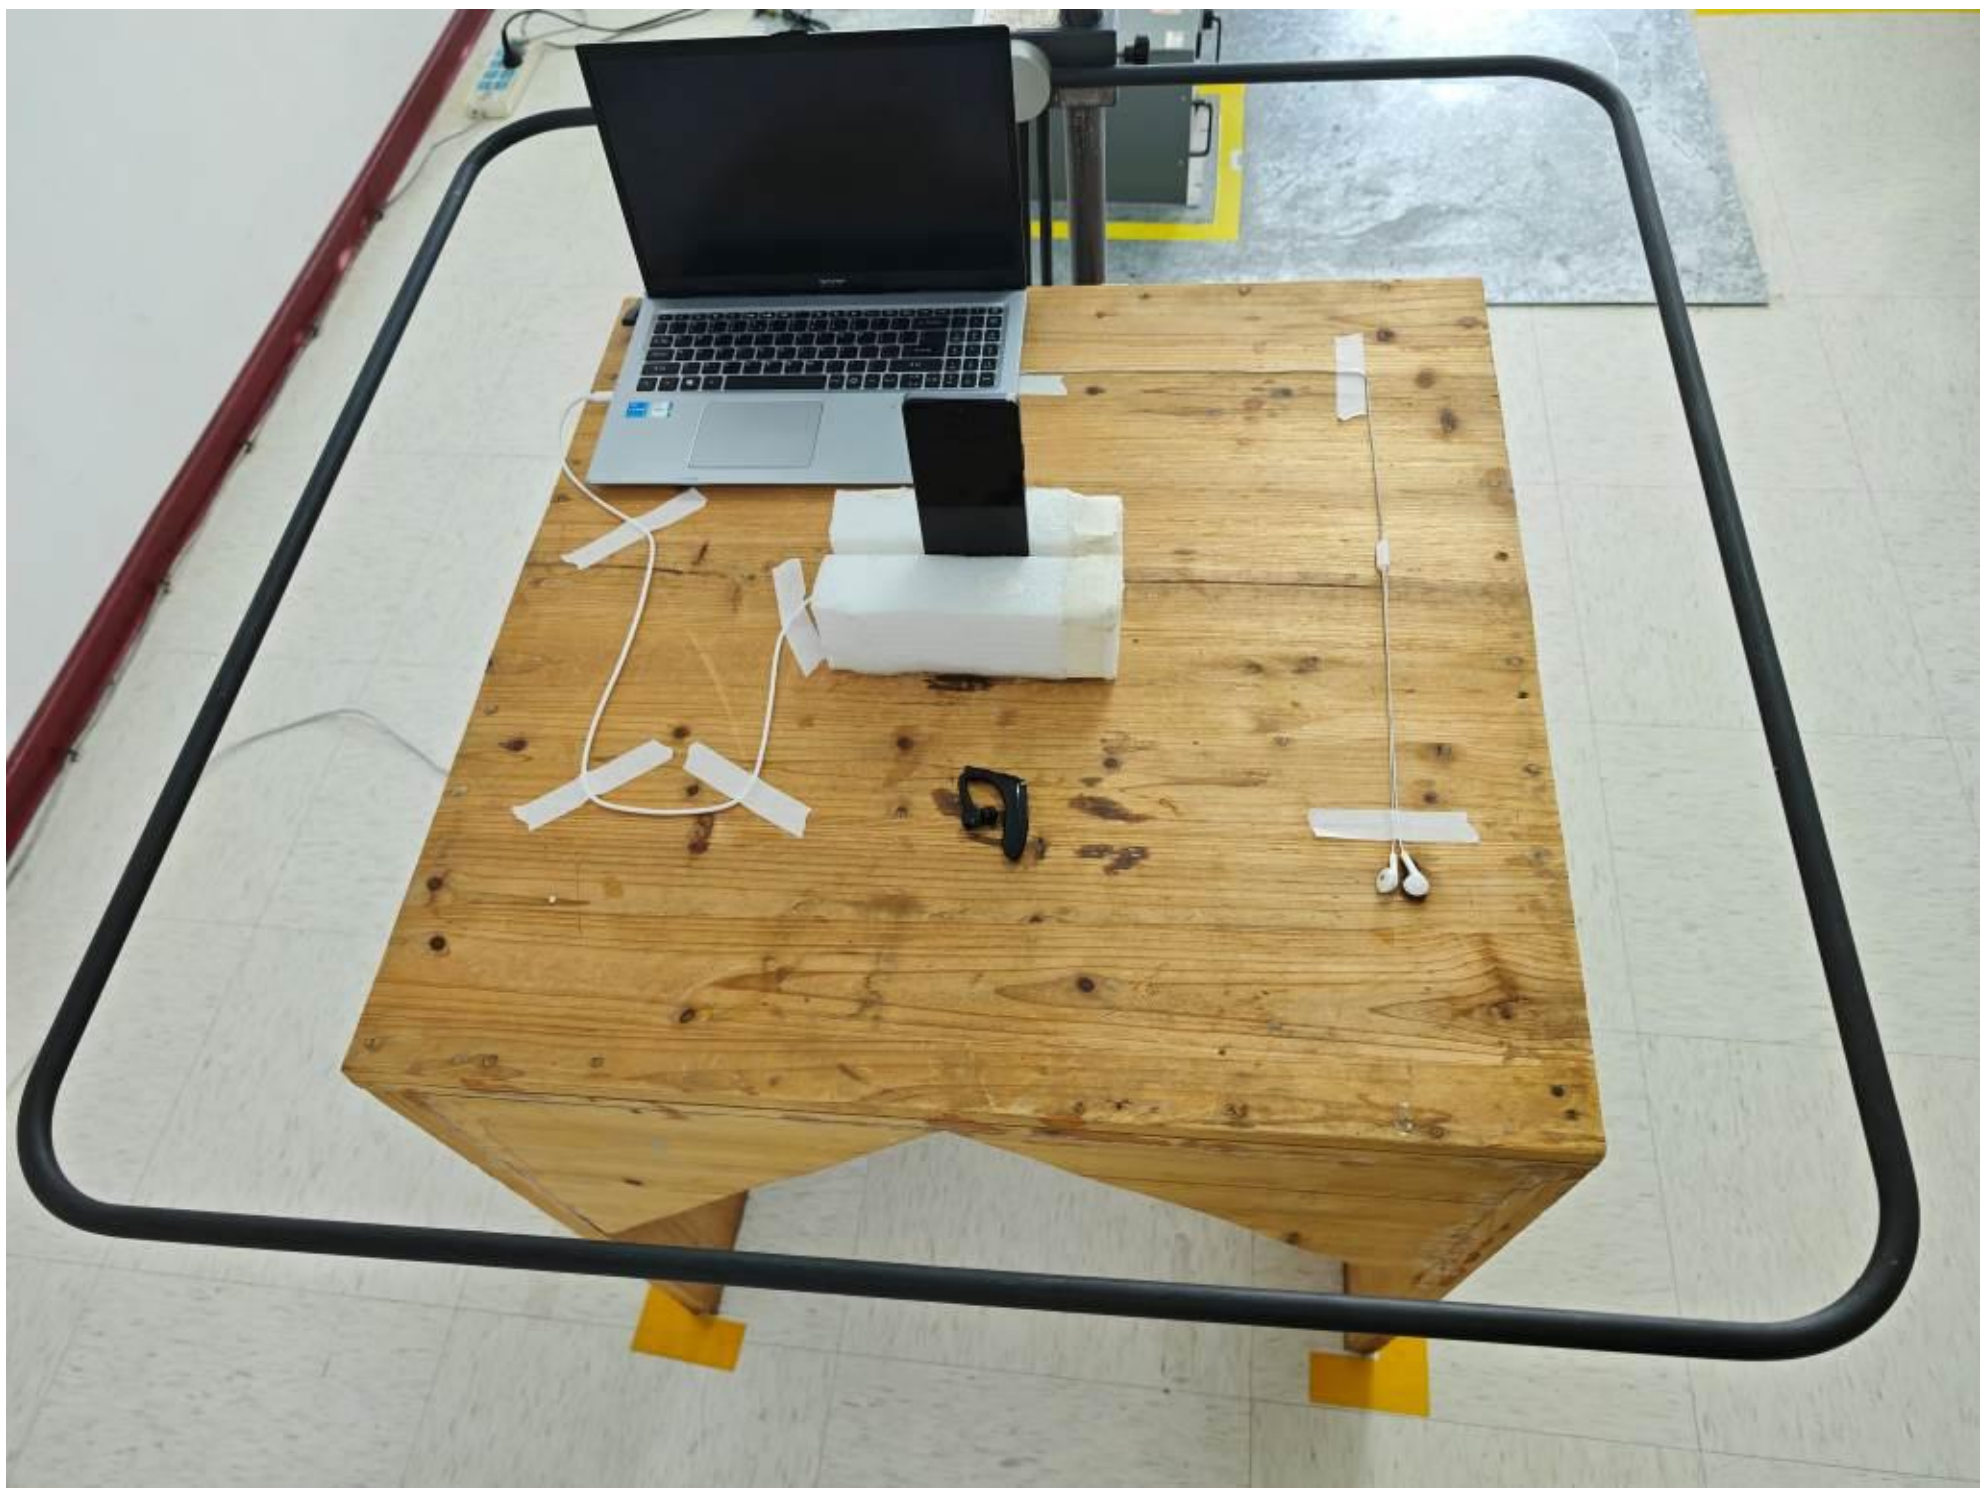

Mode 7

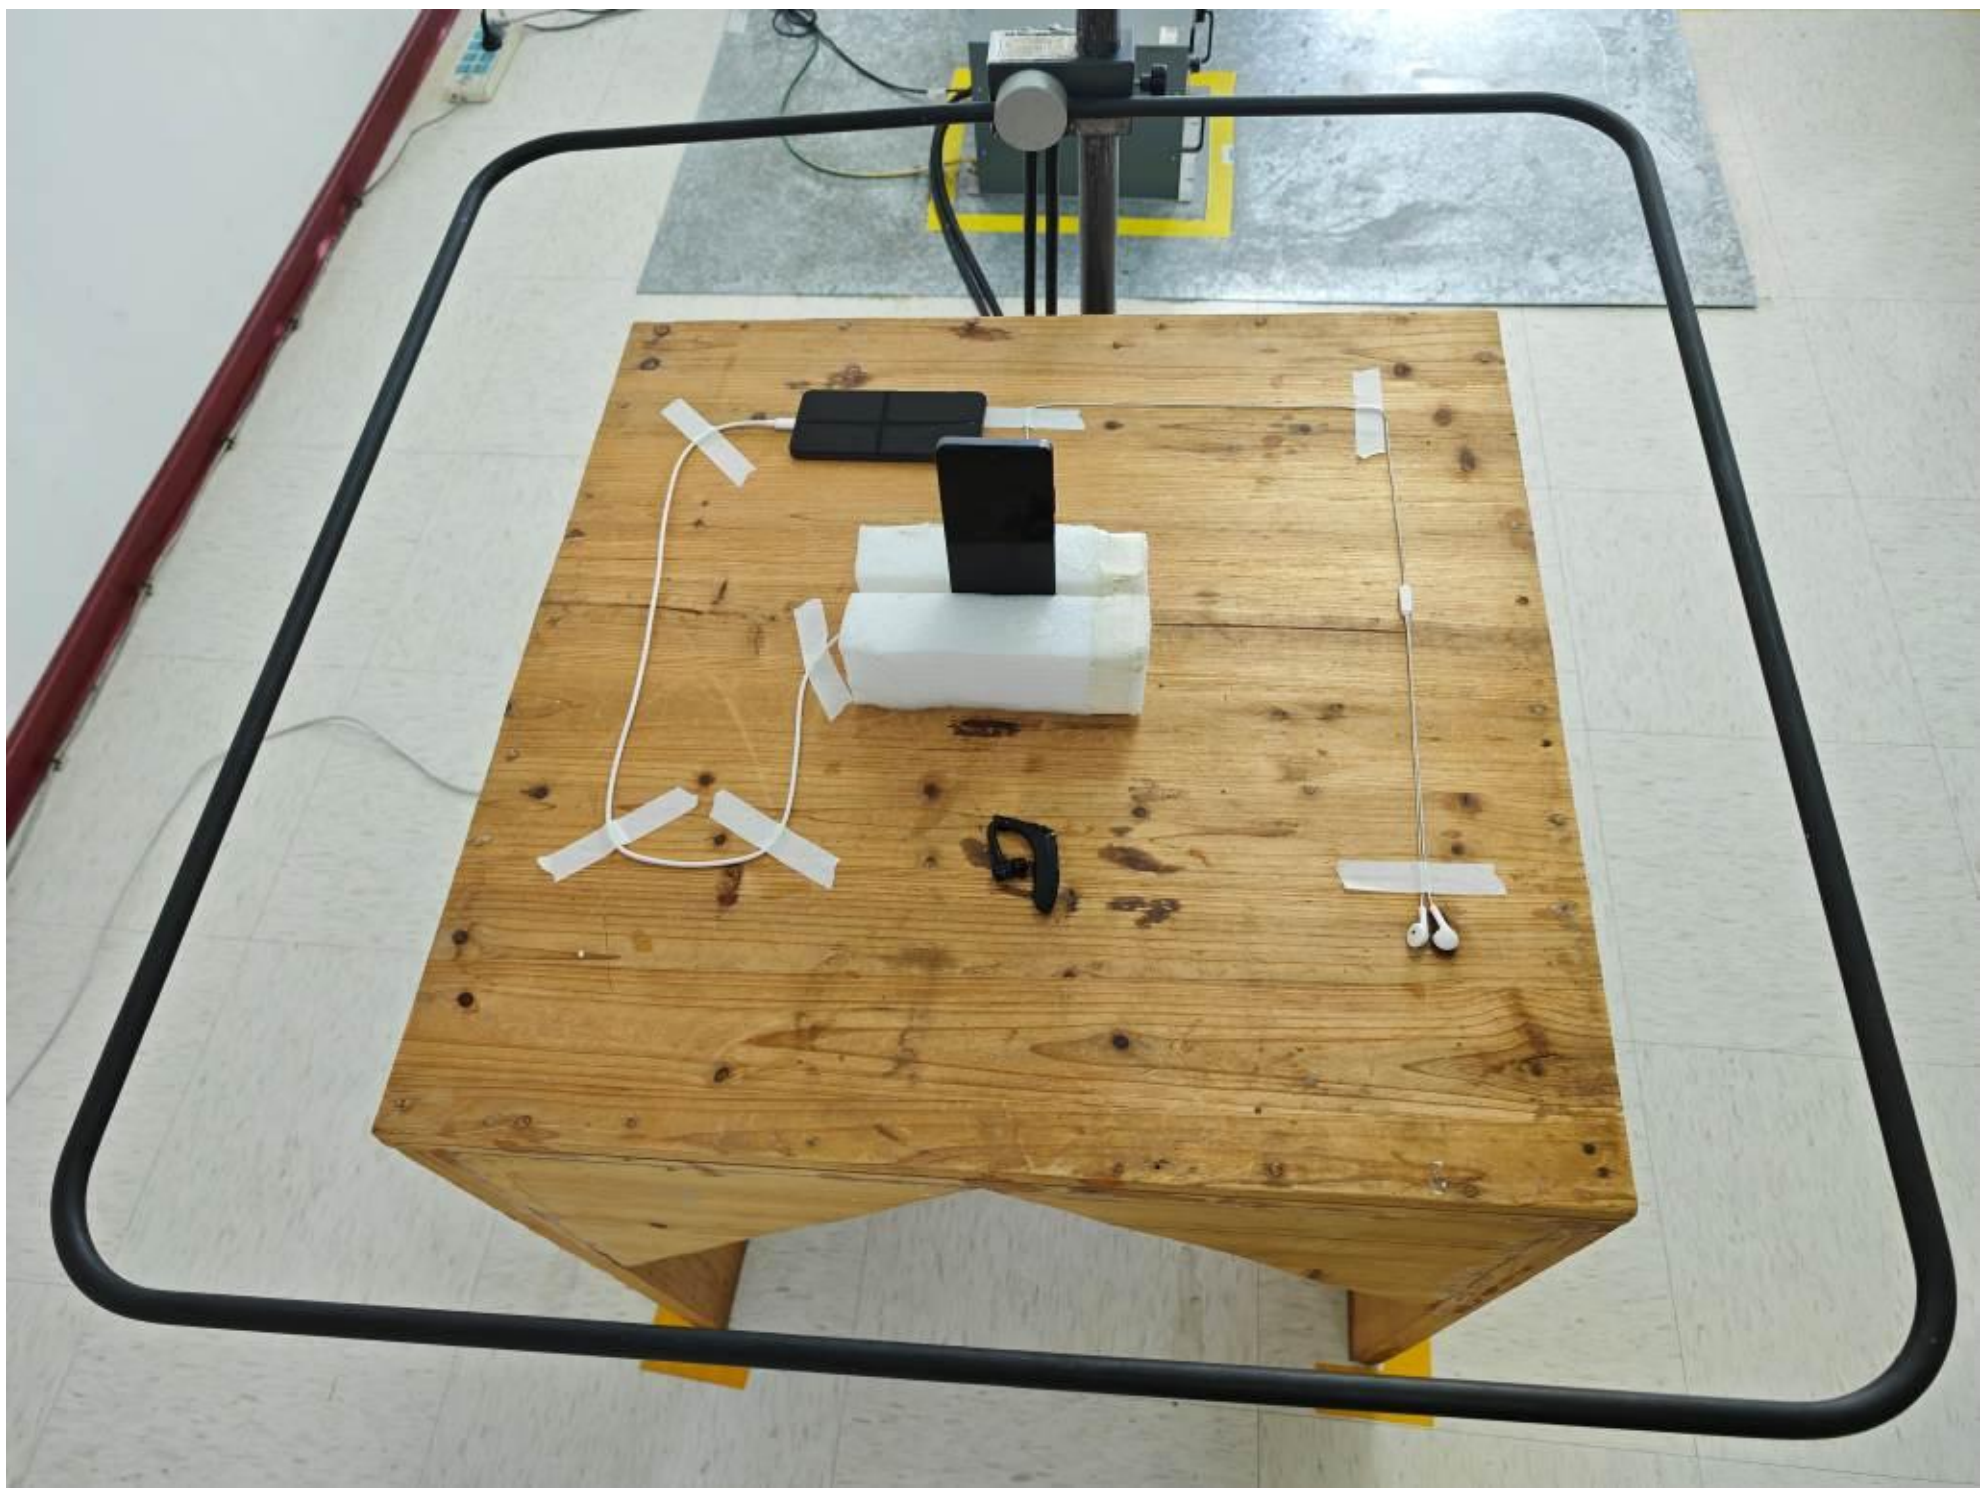

Mode 8

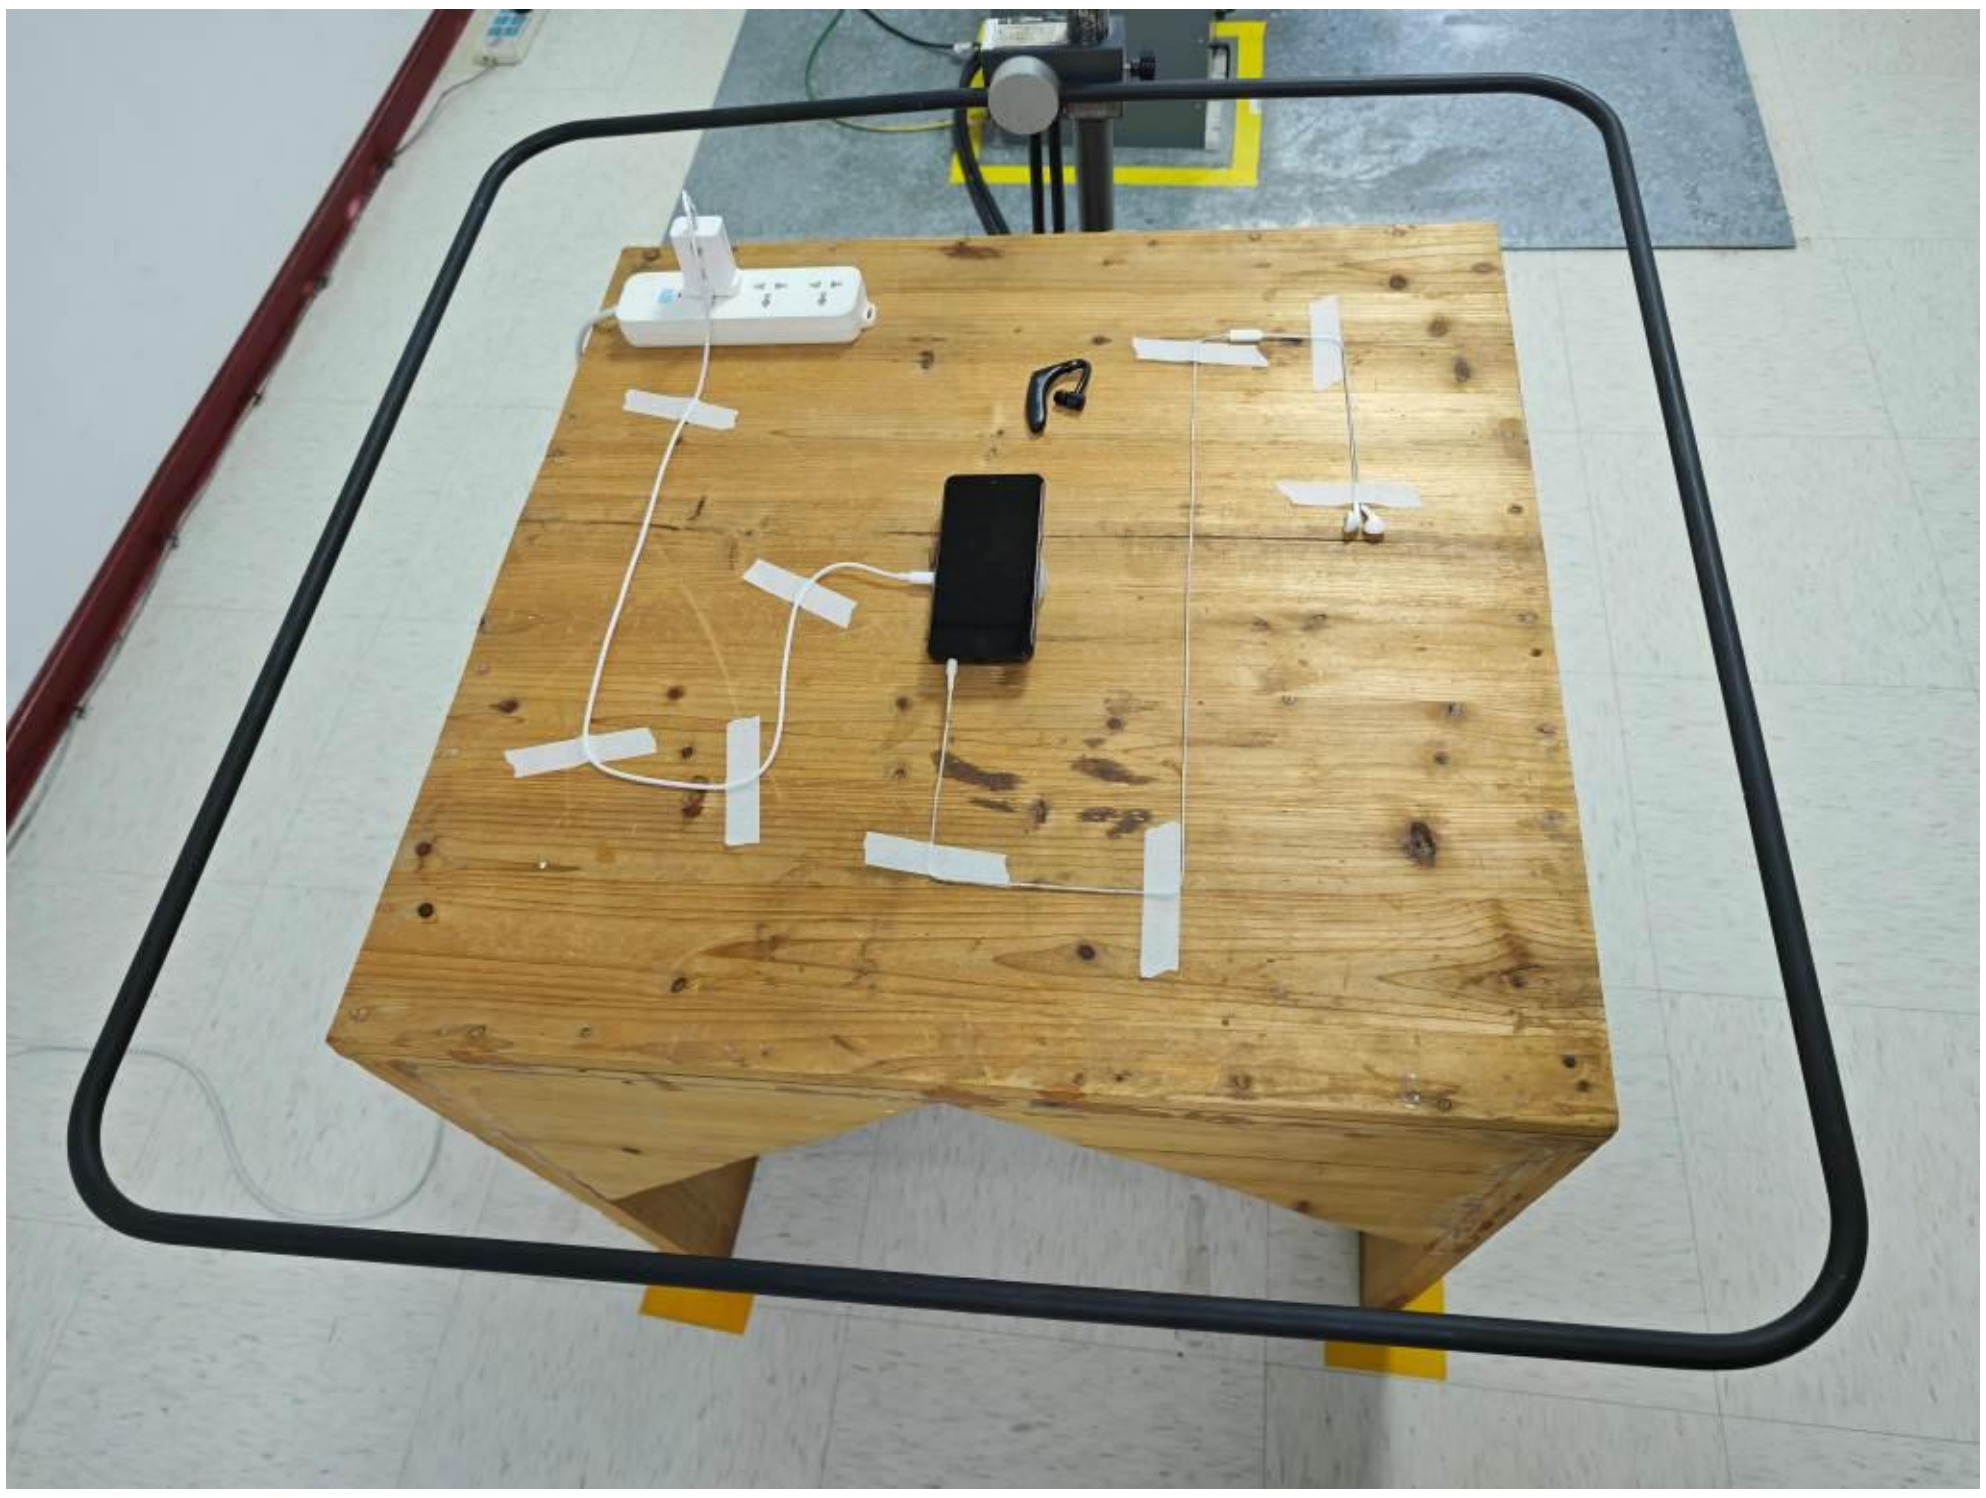

Mode 9

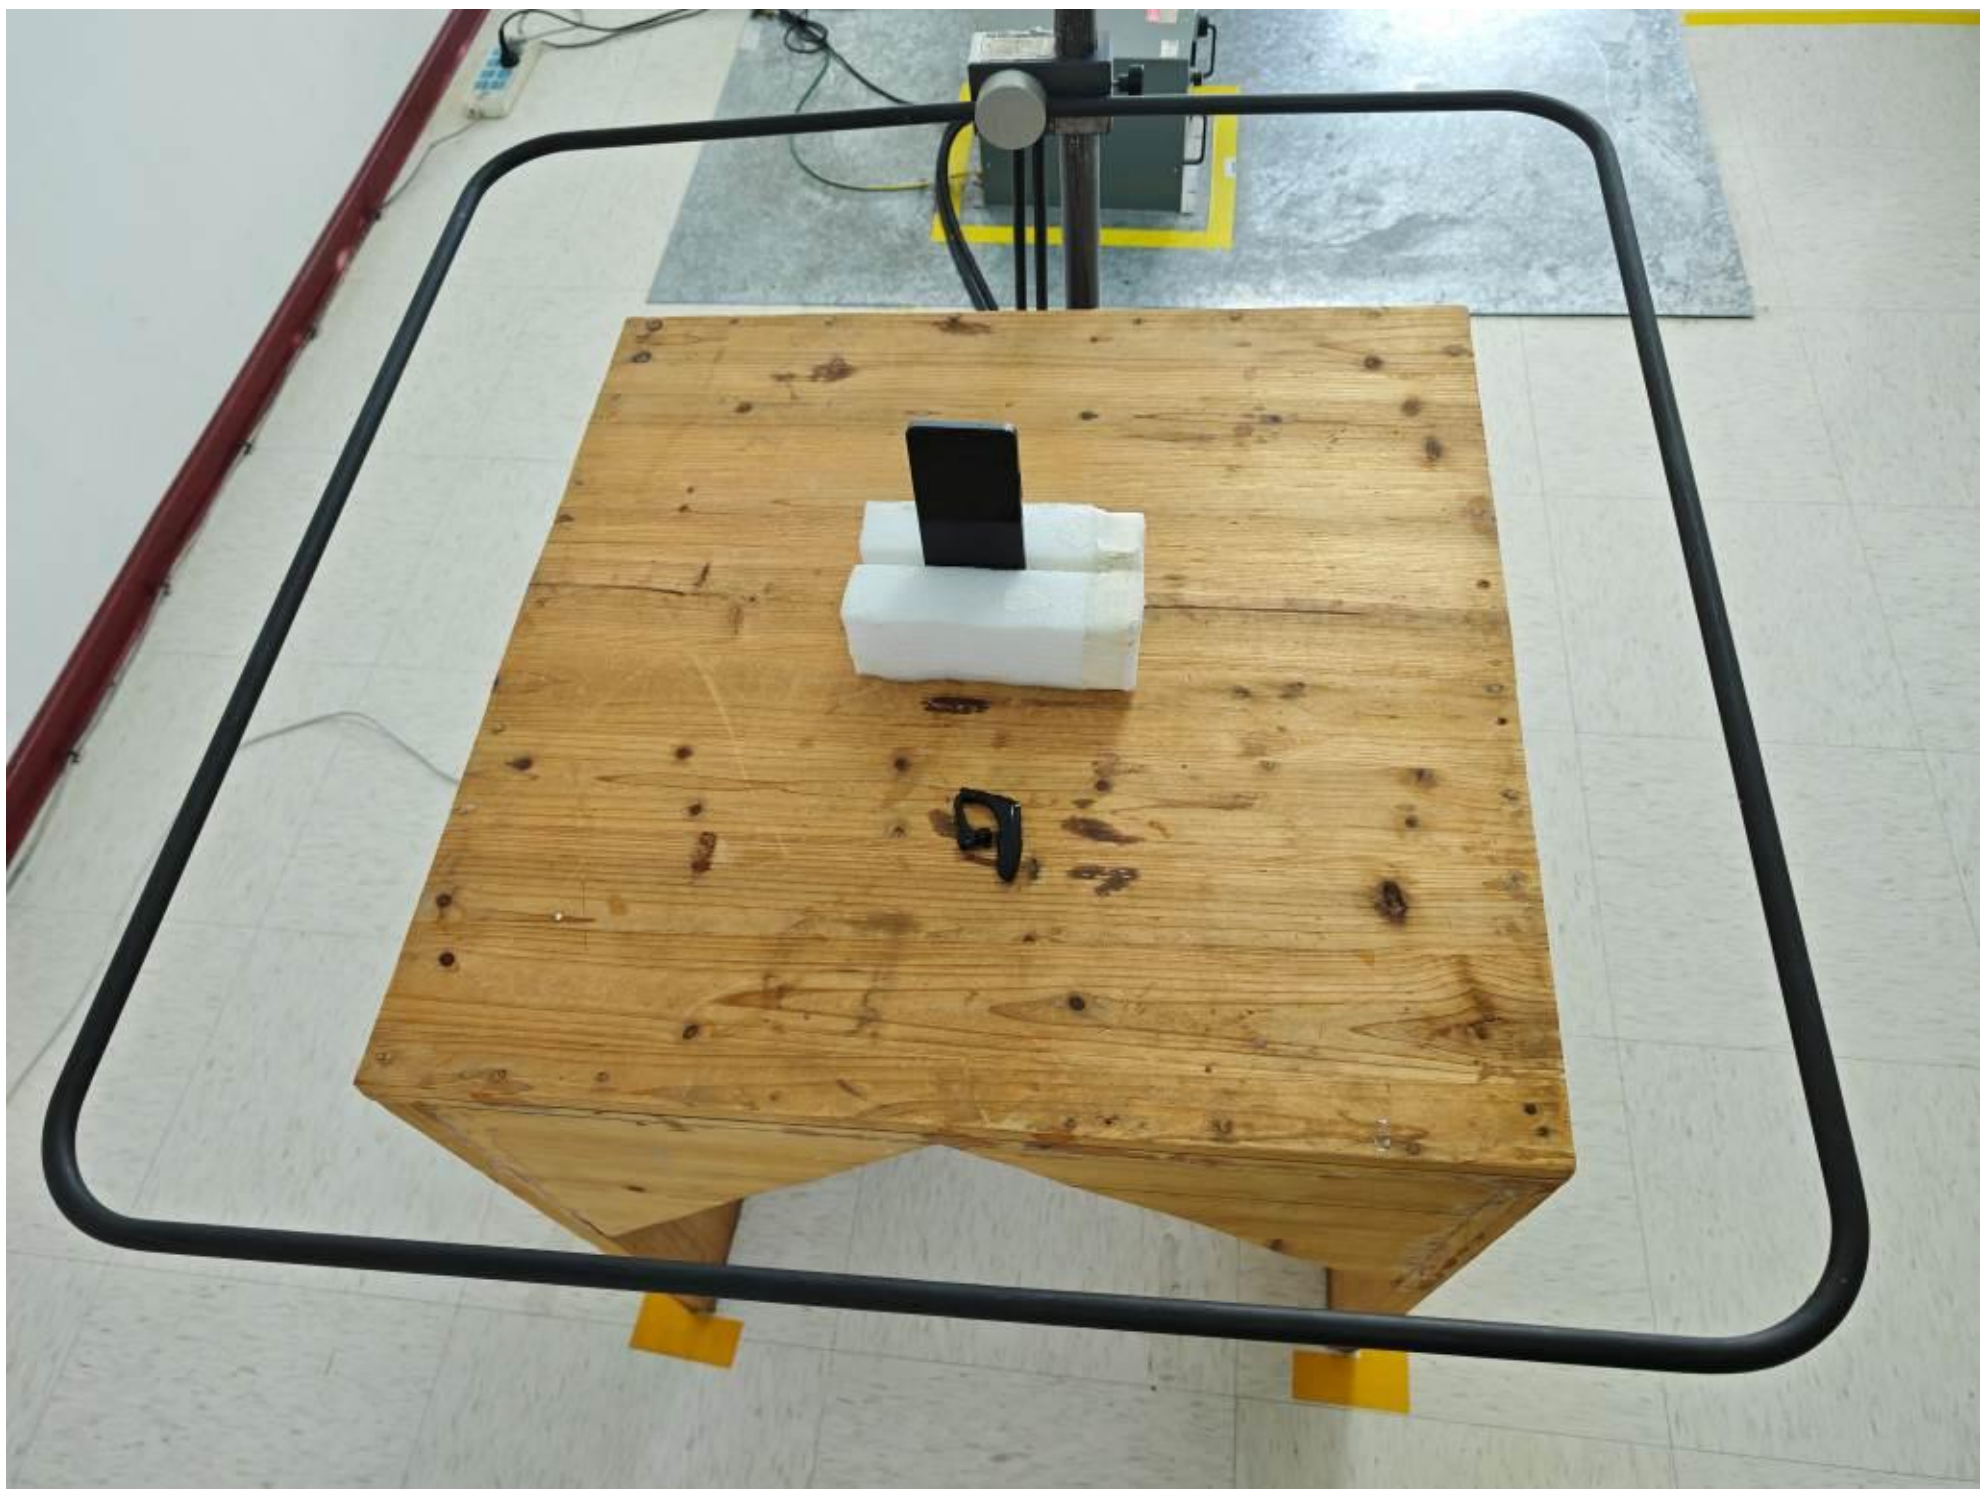

4.7 Surges Test (Refer to EN55035 Section 4.2.5)

4.7.1 Test Setup

<Testing for power port >

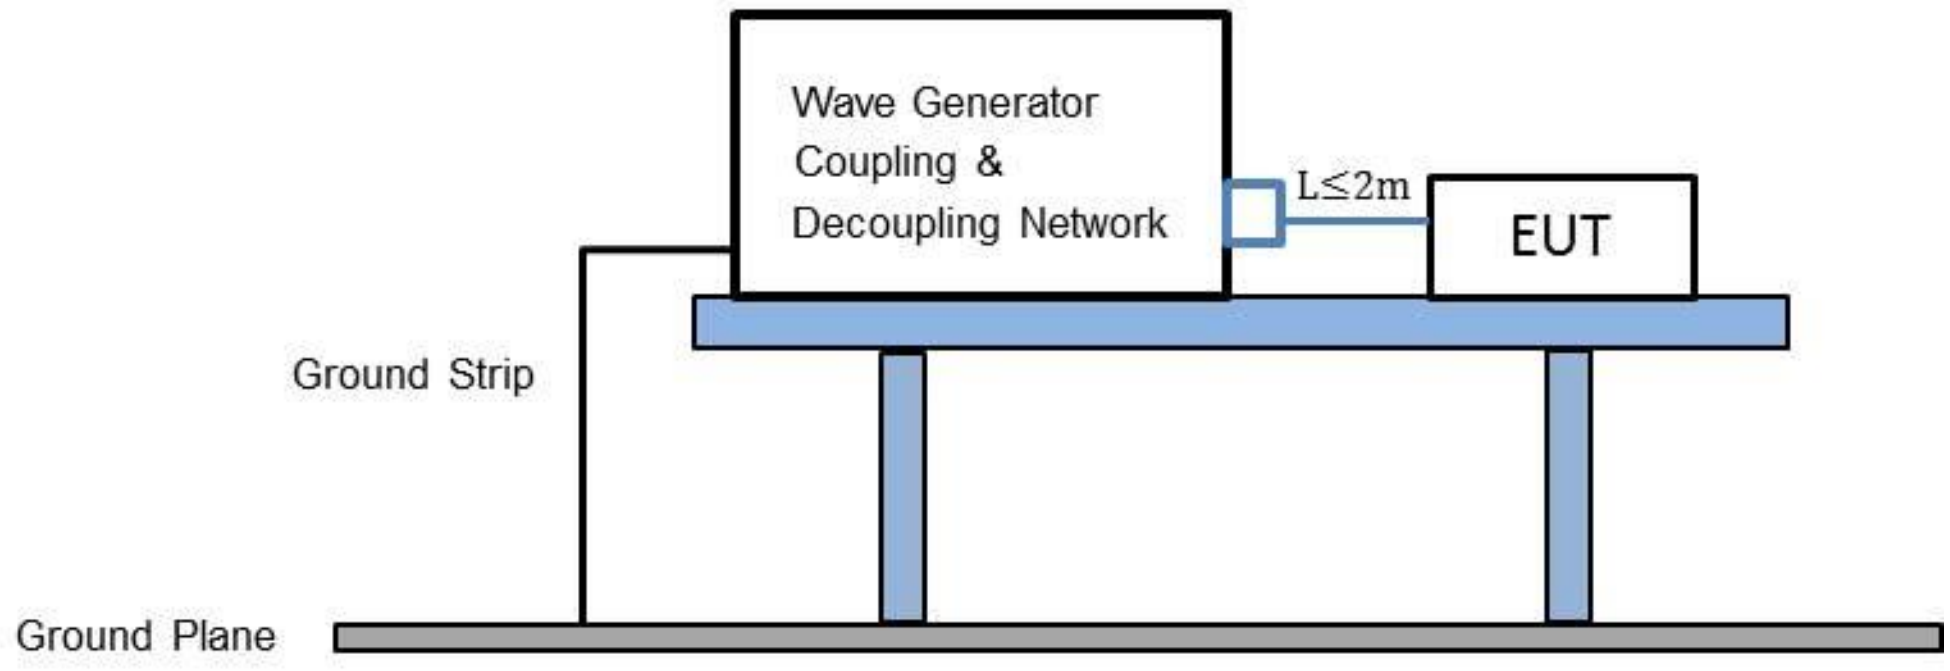

4.7.2 Test Instrument Setting

Surge wave form (Tr/Th)	1,2/50 µs, for power port (if EUT supported) 1,2/50 µs, for coaxial port (if EUT supported) 10/700 µs, for signal port (if EUT supported)
Number of impulses	For d.c. power ports and interconnection lines five positive and five negative surge impulses
	For a.c. power ports five positive and five negative impulses each at 0º, 90º, 180º and 270º
Time between successive impulses	1 minute

4.7.3 Test Procedure

a. Electromagnetic conditions
The electromagnetic environment of the laboratory shall not influence the test results.

b. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan. All lower levels including the selected test level shall be satisfied.

4.7.4 Test Result

Test Standard	IEC 61000-4-5:2005
Product Standard	EN 55035 : 2017 + A11: 2020
EUT operated voltage during test	230Vac, 50Hz
Test Level	on AC Power Port : ±0.5 kV, ±1 kV
Required Performance Criteria	B for Power Port
Performance Criteria of EUT	A for Power Port
Test Result	PASS

4.7.5 Setup Photographs

Mode 1~5

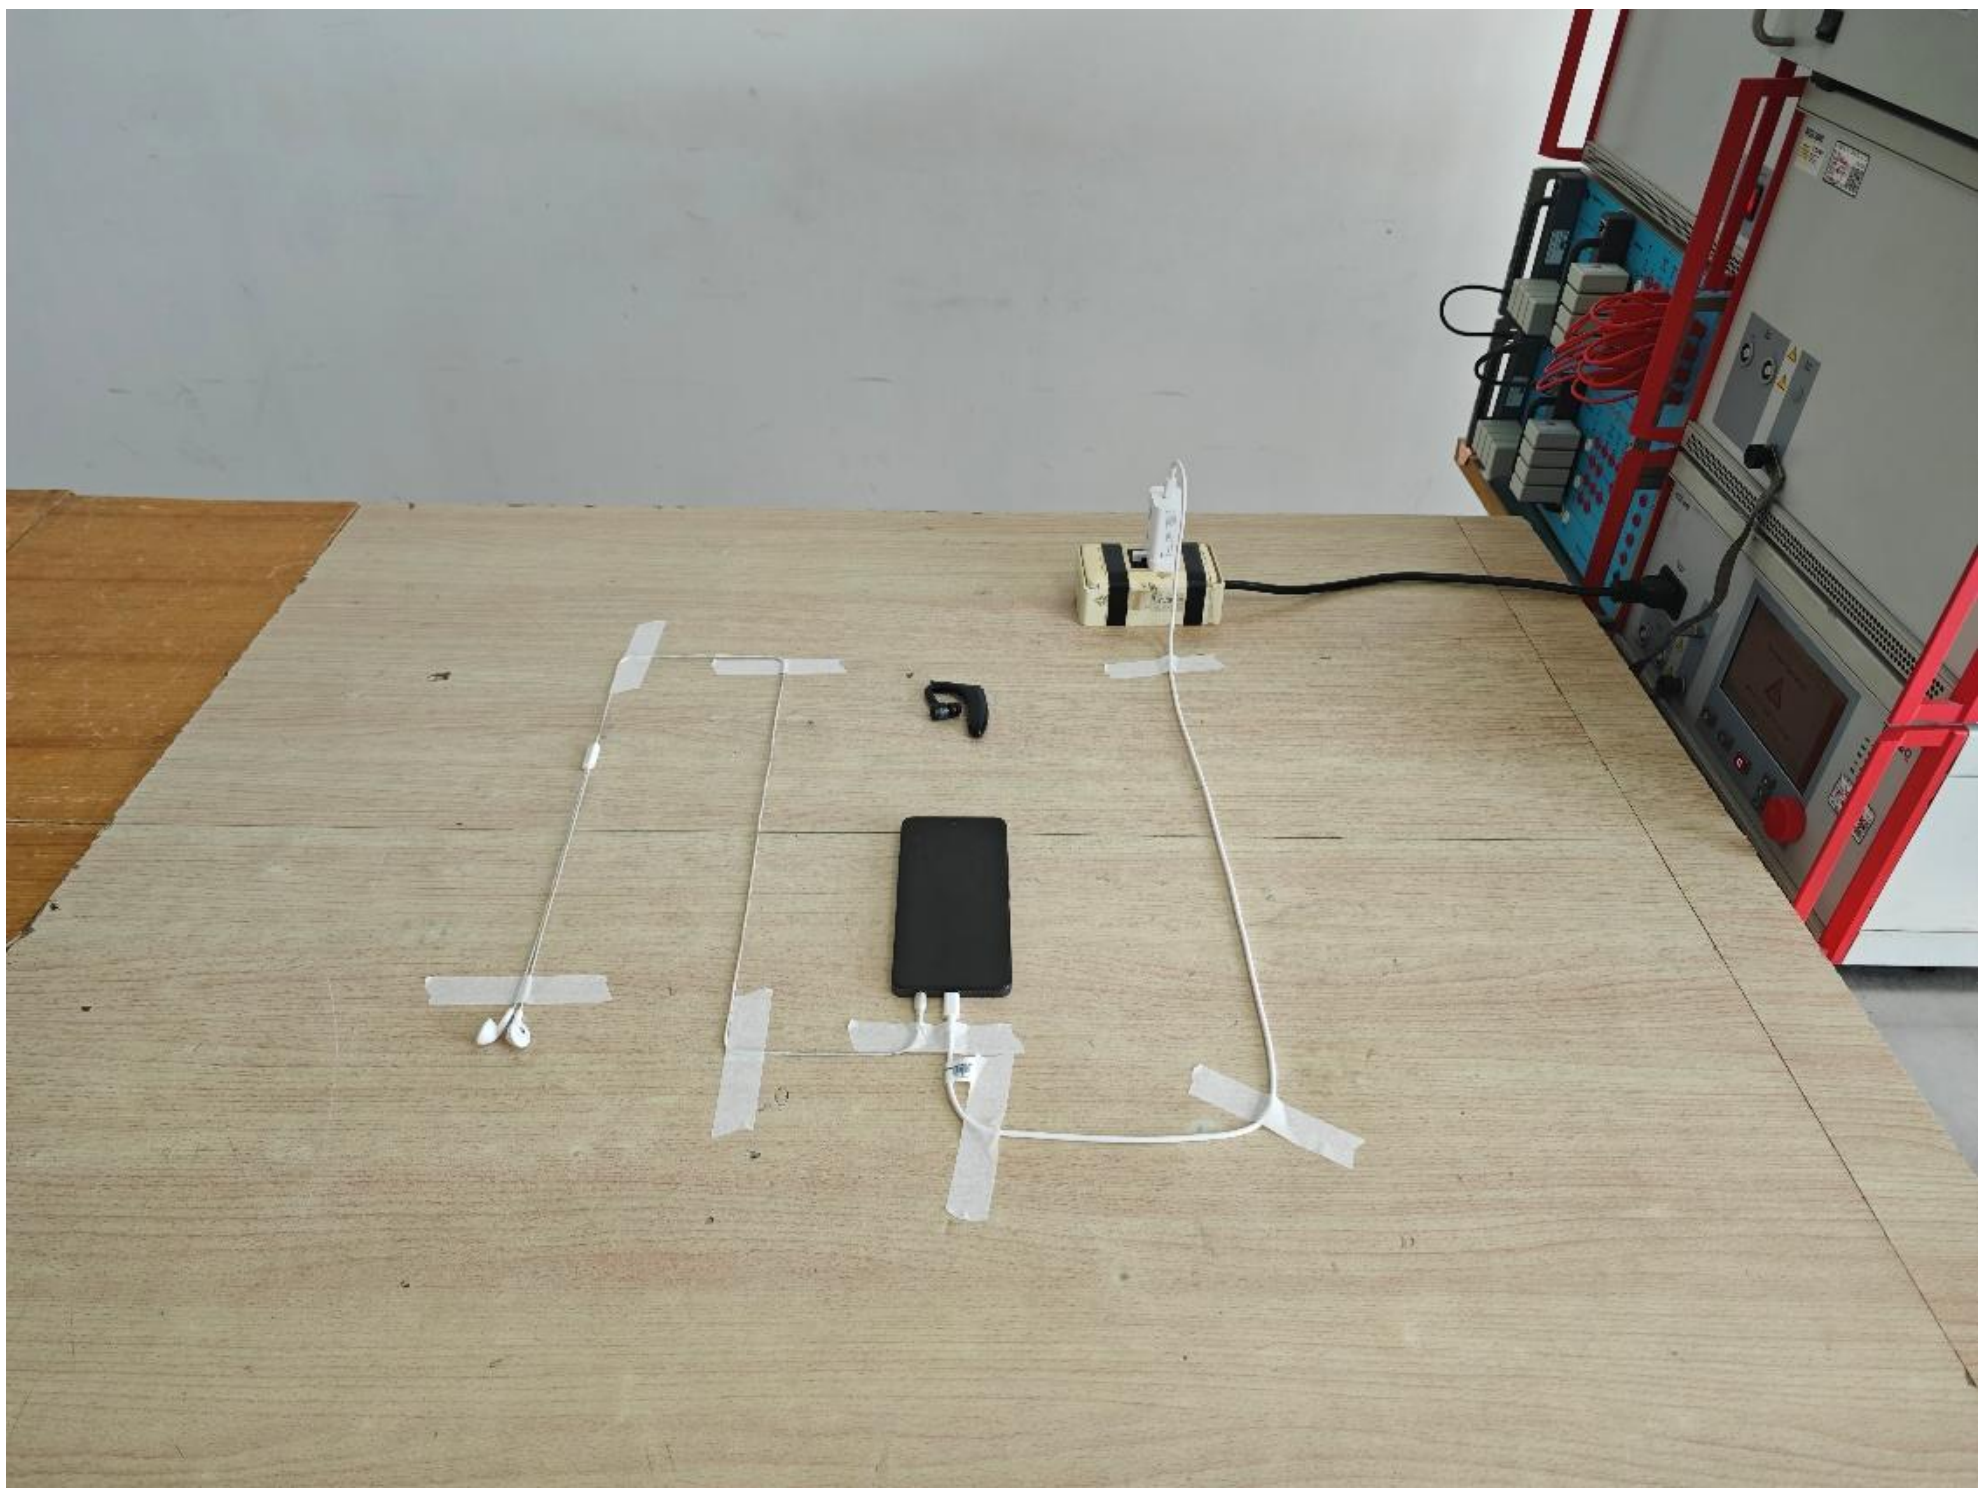

Mode 6

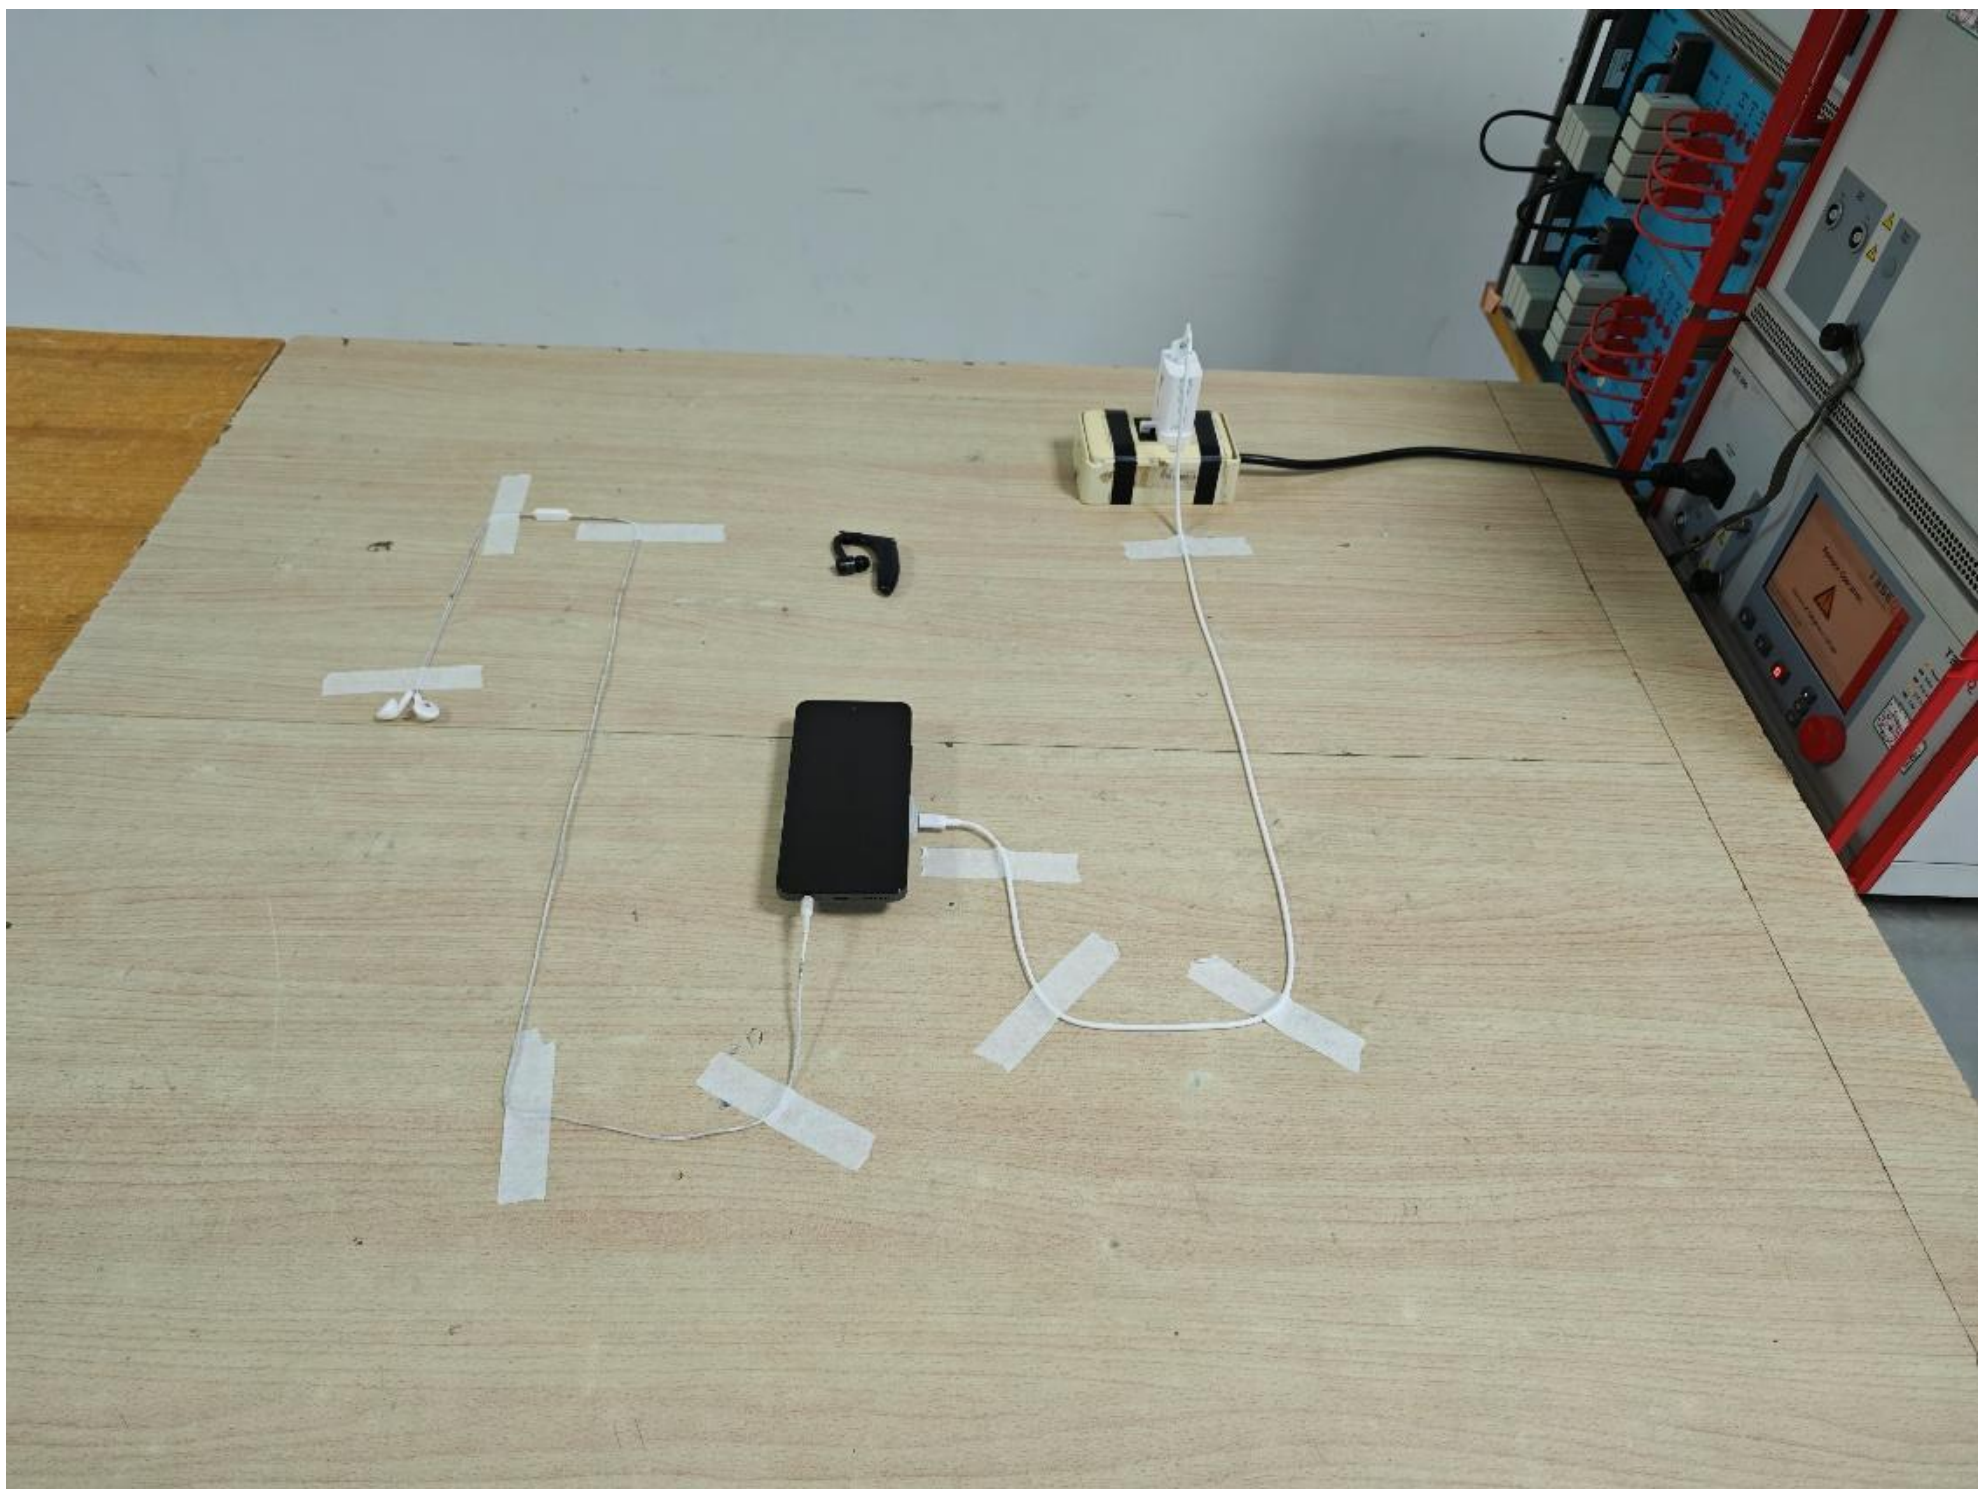

4.8 Voltage Dips and Interruptions Test (Refer to EN55035 Section 4.2.6)

4.8.1 Test Setup

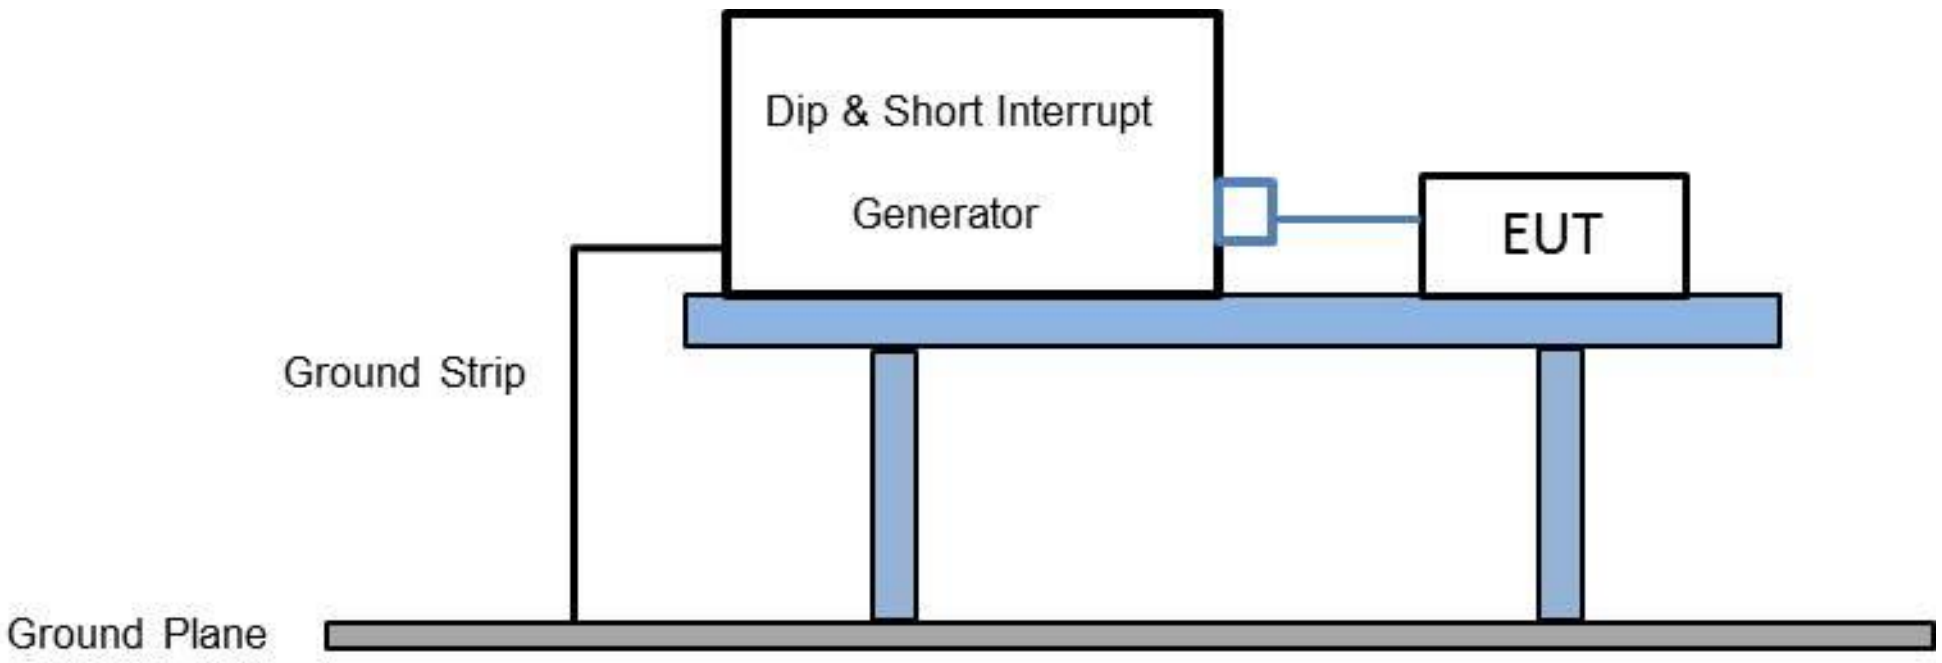

4.8.2 Test Instrument Setting

Test of interval	10 sec
Waveform Rise (and Fall) Time	1 ~ 5 μs.
Duration	Sequence of 3 dips/interrupts.

4.8.3 Test Procedures

Where the equipment has a rated voltage the following shall apply:

- If the voltage range does not exceed 20% of the lower voltage specified for the rated voltage range, a single voltage within that range may be specified as a basis for test level specification.

4.8.4 Test Result

Test Standard	IEC 61000-4-11:2004
Product Standard	EN 55035 : 2017 + A11: 2020
EUT input voltage	100 Vac, 50Hz 240 Vac, 50Hz
Requirements among Phase, Residual and Duration	As following table
Required Performance Criteria	B for Voltage Dips (Residual<5%) C for Voltage Dips (Residual 70%) C for Voltage Interruption
Performance Criteria of EUT	A for Voltage Interruption A for Voltage Dips
Test Result	PASS

Test	Phase Angle	Residual (%)	Duration (ms)
Voltage Dips	0 °, 45 °, 90 °, 135 °, 180 °, 225 °, 270 °, 315 °	<5%	10
		70%	500
Voltage Interruption	0 °	<5%	5000

4.8.5 Setup Photographs

Mode 1~5

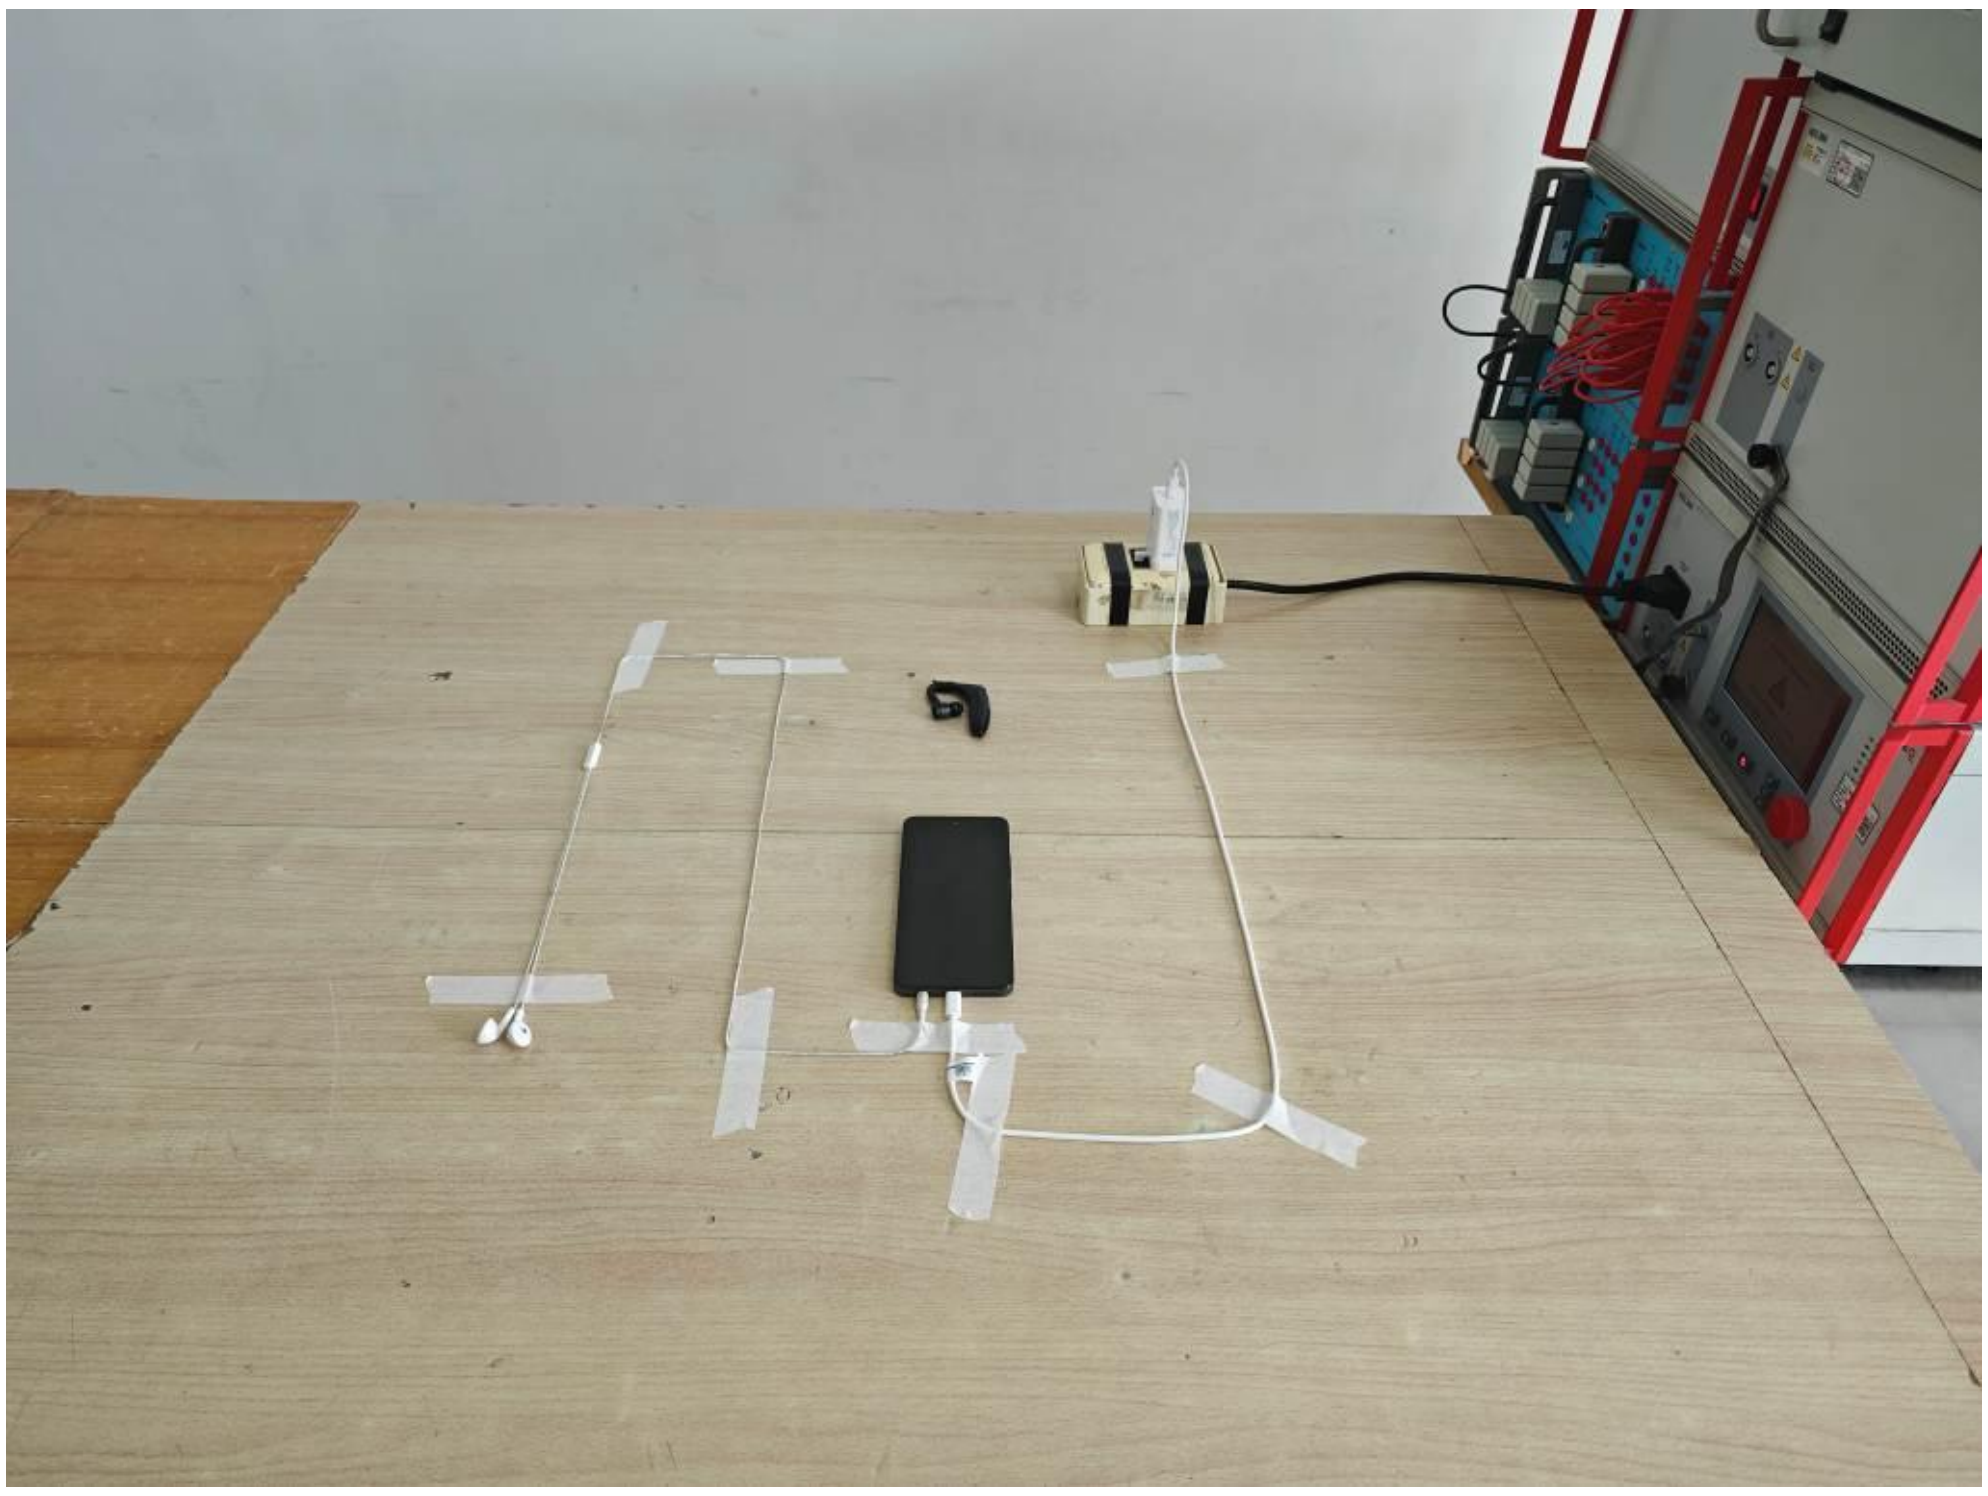

Mode 6

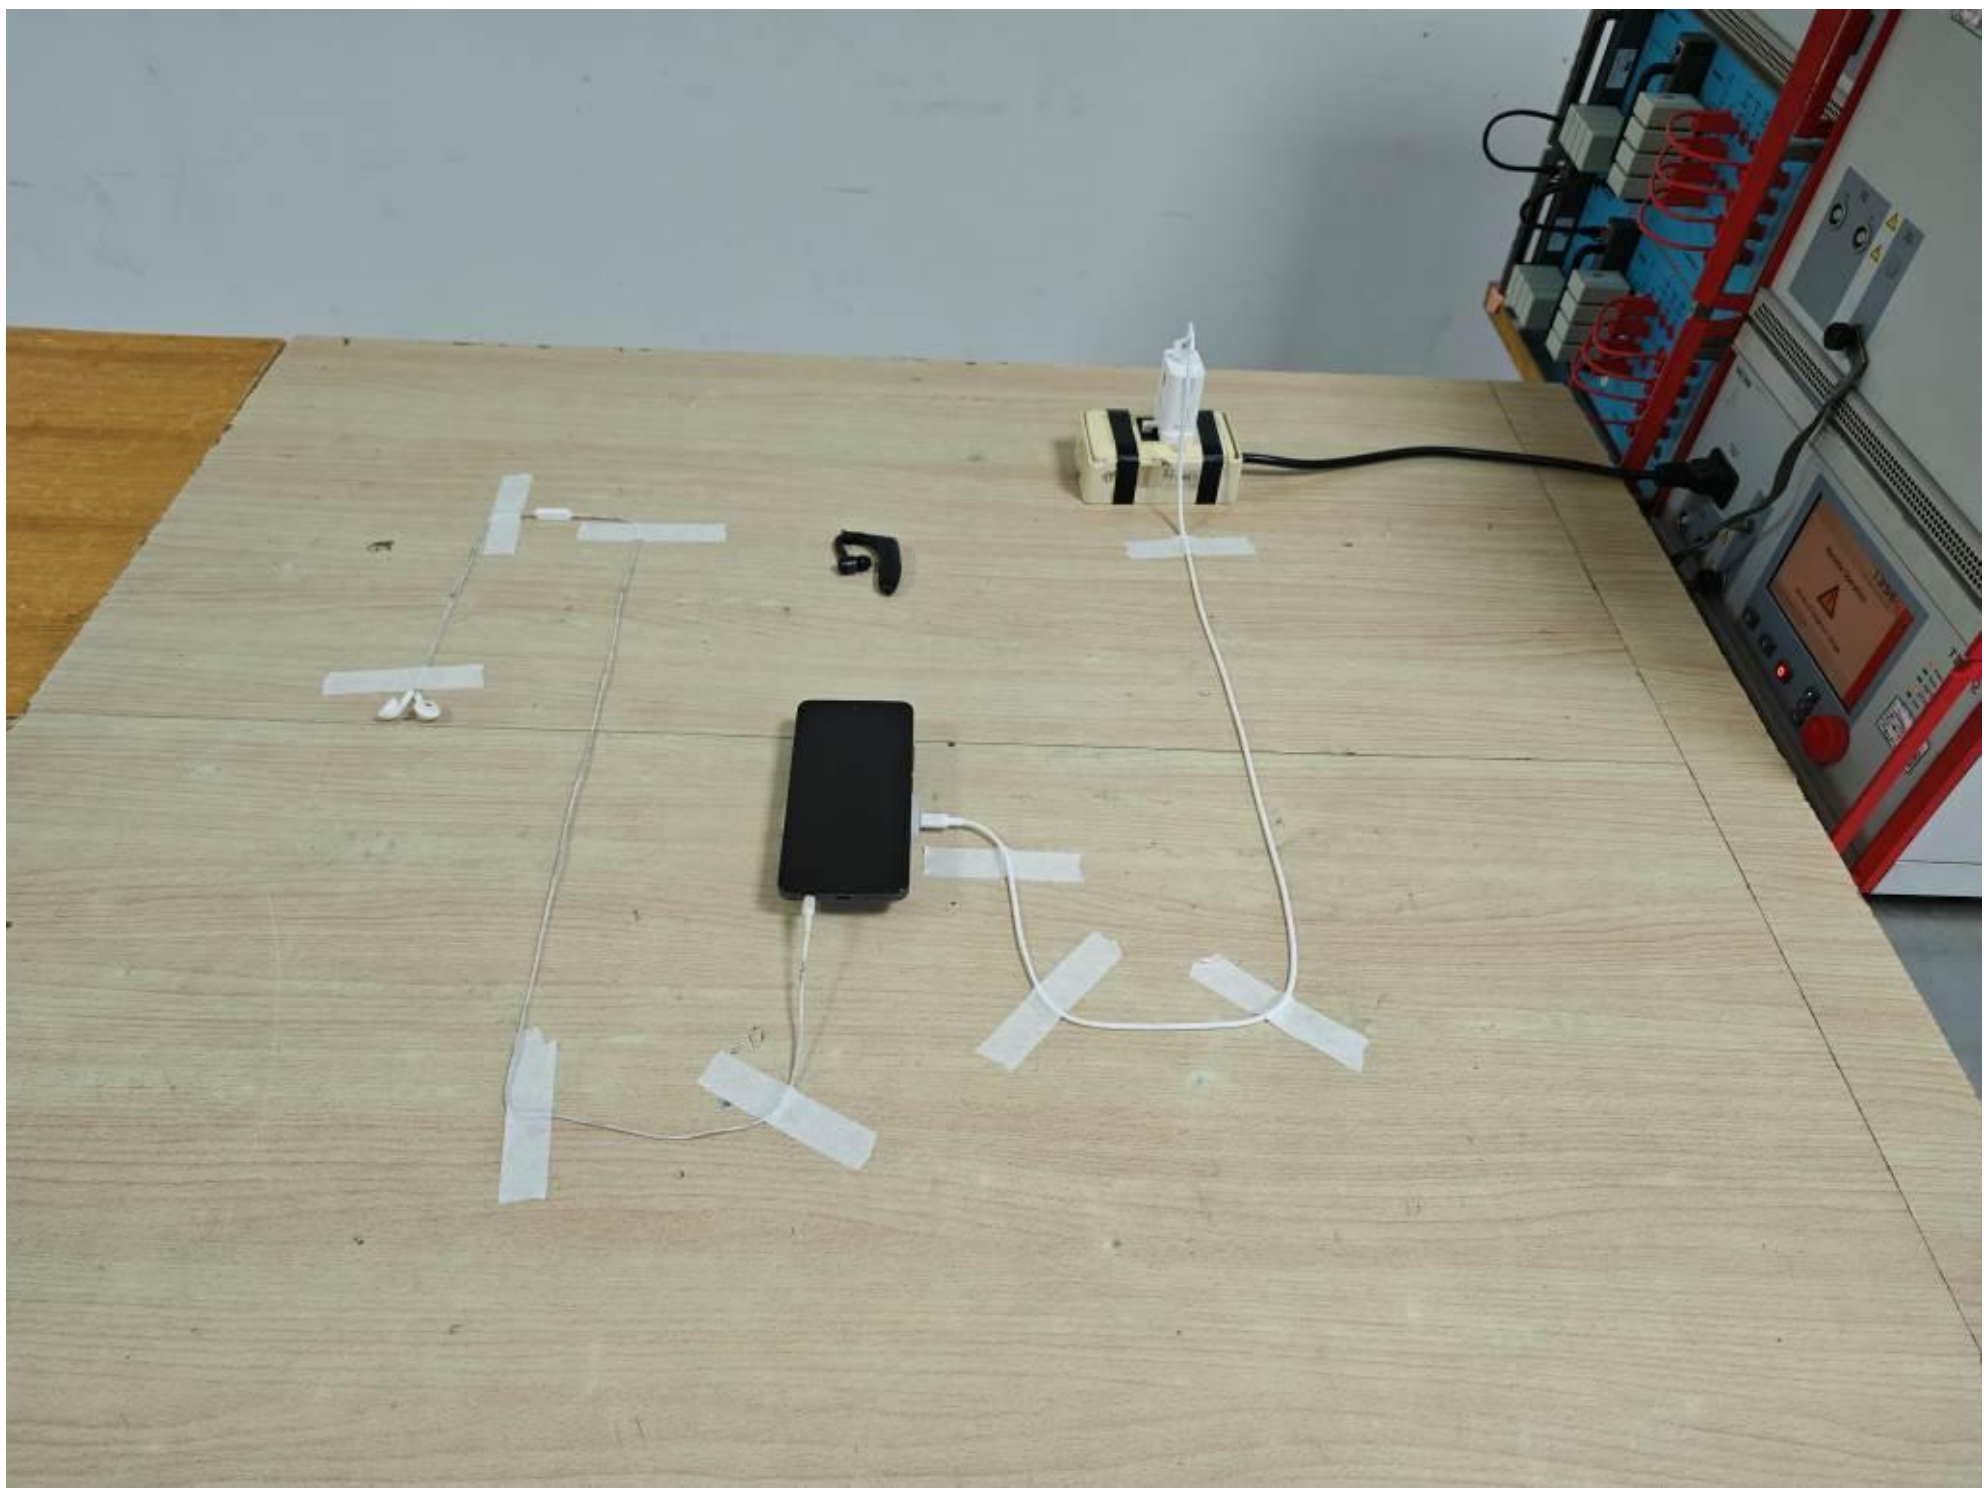

5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))	3.50dB

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz) - 03CH07-KS

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))	4.86dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) - 10CH01-KS(Horizontal)

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))	5.04dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) - 10CH01-KS(Vertical)

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))	5.04dB

Uncertainty of Radiated Susceptibility Measurement (80 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))	1.92dB

Uncertainty of Electrostatic Discharge Measurement

	Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) %
Electrostatic Discharge ~ Rise Time	9.7%
Electrostatic Discharge ~ Peak Current	4.6%
Electrostatic Discharge ~ 30ns Current	4.6%
Electrostatic Discharge ~ 60ns Current	4.6%

Uncertainty of Conducted Susceptibility Measurement (150kHz ~ 80 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))	2.60dB

<For Electrical Fast Transients / BURST test>

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))- budget for voltage rise time (tr)	5.3%

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))- EFT/B peak voltage value (VP)	8.3%

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))- EFT/B voltage pulse width (tw)	2.7%

<For Surge test>

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))- Surge open-circuit voltage front time (TfV)	13.33%

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))- Surge open-circuit voltage peak value (VP)	8.20%

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))- surge open-circuit voltage duration (Td)	1.10%

<For Dips test>

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))- Surge open-circuit voltage front time (TfV)	2.66%

6. Testing Facility

Sporton International Inc.(Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02

Test Lab.	Sporton International Inc. (Kunshan)
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158
Test Site No.	**Sporton Site No. :** **EMI Test :** 03CH07-KS; 10CH01-KS; CO01-KS **EMS Test :** RS01-KS ; CS01-KS ; ES01-KS ; EX01-KS

7. List of Measuring Equipment

<EMI>

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL6111D	63161	30MHz~1GHz	Oct. 24, 2025	Mar. 20, 2026	Oct. 23, 2026	Radiation (10CH01-KS)
Bilog Antenna	TESEQ	CBL6111D	63755	30MHz~1GHz	Oct. 24, 2025	Mar. 20, 2026	Oct. 23, 2026	Radiation (10CH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 02, 2025	Mar. 20, 2026	Jul. 01, 2026	Radiation (10CH01-KS)
EMI test receive	R&S	ESR7	102631	9KHz~7GHz	Oct. 09, 2025	Mar. 20, 2026	Oct. 08, 2026	Radiation (10CH01-KS)
Amplifier	SONOMA	310N	422544	9KHz ~1GHZ	Oct. 10, 2025	Mar. 20, 2026	Oct. 09, 2026	Radiation (10CH01-KS)
Amplifier	SONOMA	310N	422545	9KHz ~1GHZ	Oct. 10, 2025	Mar. 20, 2026	Oct. 09, 2026	Radiation (10CH01-KS)
Bore-site Antenna Mast	EM	MBD-400-1	NA	1 m~4 m	NCR	Mar. 20, 2026	NCR	Radiation (10CH01-KS)
Antenna Mast	EM	MBD-400-1	NA	1 m~4 m	NCR	Mar. 20, 2026	NCR	Radiation (10CH01-KS)
Controller	EM	3000-1	NA	NA	NCR	Mar. 20, 2026	NCR	Radiation (10CH01-KS)
Turn Table	EM	T-300-1	NA	0~360 degree	NCR	Mar. 20, 2026	NCR	Radiation (10CH01-KS)
MXE EMI Receiver	Keysight	N9038A	MY57290151	3Hz~8.4GHz	Jul. 02, 2025	Mar. 20, 2026	Jul. 01, 2026	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240132	1GHz~18GHz	Jun. 26, 2025	Mar. 20, 2026	Jun. 25, 2026	Radiation (03CH07-KS)
Amplifier	Keysight	83017A	MY57280106	0.5GHz-26.5GHz	Apr. 09, 2025	Mar. 20, 2026	Apr. 08, 2026	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Mar. 20, 2026	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Mar. 20, 2026	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Mar. 20, 2026	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Feb. 28, 2026	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Feb. 28, 2026	Jul. 02, 2026	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	202201040060	AC 0V~300V, 45Hz~1000Hz	Apr. 16, 2025	Feb. 28, 2026	Apr. 15, 2026	Conduction (CO01-KS)
Harmonic/ Flicker Test System	TeseQ	CNN1000-1	1521A01676	N/A	Jun. 18, 2025	Feb. 12, 2026	Jun. 17, 2026	Harmonics, Flicker (EX01-KS)
	TeseQ	NSG1007-5	1521A01676	5kVA	Jun. 18, 2025	Feb. 12, 2026	Jun. 17, 2026	Harmonics, Flicker (EX01-KS)

<EMS>

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal Generator	R&S	SMJ100A	101908	100Khz to 6Ghz	Dec. 24, 2025	Mar. 08, 2026	Dec. 23, 2026	RS (RS01-KS)
Audio Analyzer	R&S	UPV	101925	DC~250KHz	Apr. 18, 2025	Mar. 08, 2026	Apr. 17, 2026	RS (RS01-KS)
Power Sensors	R&S	NRP-Z91	101429	9K-6GHz 200PW~200MW	Jul. 07, 2025	Mar. 08, 2026	Jul. 06, 2026	RS (RS01-KS)
Power Sensors	R&S	NRP-Z91	100034	9K-6GHz 200PW~200MW	Apr 17, 2025	Mar. 08, 2026	Apr 16, 2026	RS (RS01-KS)
Power Sensors	R&S	NRP-Z92	100213	9K-6GHz 2nW~2W	Apr. 17, 2025	Mar. 08, 2026	Apr. 16, 2026	RS (RS01-KS)
Antenna	R&S	HL046E	100100	80MHz~3GHz	NCR	Mar. 08, 2026	NCR	RS (RS01-KS)
AC Power Source	Chroma	61602	ABP0000008 10	N/A	Oct. 10 2025	Mar. 08, 2026	Oct. 09, 2026	RS (RS01-KS)
Antenna	SCHWARZBE CK	STLP 9149	9149-010	0.7-10.5GHz	NCR	Mar. 08, 2026	NCR	RS (RS01-KS)
Power Amplifier	R&S	BBA150	103650	2.5-6GHz,100W	Apr. 17, 2025	Mar. 08, 2026	Apr. 16, 2026	RS (RS01-KS)
Power Amplifier	AR	120S1G3M1	0325544	0.8~3GHz,120W	Apr. 17, 2025	Mar. 08, 2026	Apr. 16, 2026	RS (RS01-KS)
Power Amplifier	AR	150W1000M 1	0328395	80~1000MHz, 150W	Apr. 17, 2025	Mar. 08, 2026	Apr. 16, 2026	RS (RS01-KS)
Coupling/Deco upling Network	TESEQ	CDN M016	24477	150kHz~230MHz	Jul. 04, 2025	Mar. 10, 2026	Jul. 03, 2026	CS (CS01-KS)
Signal Generator	R&S	SMB 100A	105413	9K-1.1G	Dec. 24, 2025	Mar. 10, 2026	Dec. 23, 2026	CS (CS01-KS)
Power Sensors	R&S	NRP-Z91	102869	9kHz~6GHz 200PW~200MW	Dec. 25, 2025	Mar. 10, 2026	Dec. 24, 2026	CS (CS01-KS)
Preamplifier	BONN	BSA 0125-150	076577A	150W 9kHz~250MHz	Dec. 25, 2025	Mar. 10, 2026	Dec. 24, 2026	CS (CS01-KS)
AC Power Source	Chroma	61601	61601000164 9	N/A	Oct. 10, 2025	Mar. 10, 2026	Oct. 09, 2026	CS (CS01-KS)
Audio Analyzer	R&S	UPV	101468	DC~250KHz	Aug. 26, 2025	Mar. 10, 2026	Aug. 25, 2026	CS (CS01-KS)
ESD Generator	EM TEST	DITO	P1251107027	±0.5kV~16.5kV	Aug. 29, 2025	Feb. 10, 2026	Aug. 28, 2026	ESD (ES01-KS)
EMC Test System	TeseQ	NSG 3040	1746	0kV-4.4kV	Jul. 02, 2025	Feb. 12, 2026	Jul. 01, 2026	EFT, SURGE, DIP (EX01-KS)
Single motor driven variable transformer	Teseq AG	VAR 3005-S16	850	0kV~4.4kV	Jul. 02, 2025	Feb. 12, 2026	Jul. 01, 2026	EFT, SURGE, DIP (EX01-KS)
Magnetic Field Test Generator	FCC	F-1000-4-8-G -125A	07006	1-100A/m	Apr. 16, 2025	Feb. 12, 2026	Apr. 15, 2026	MF (EX01-KS)
Magnetic Field Immunity Loop	FCC	F1000-4-8/9/ 10-L-1M	07009	1-100A/m	Apr. 16, 2025	Feb. 12, 2026	Apr. 15, 2026	MF (EX01-KS)

NCR: No Calibration Required

——THE END——