



CE Radio Test Report

APPLICANT : Magne AI Global tech limited
EQUIPMENT : MAG1
BRAND NAME : MaQ
MODEL NAME : MA1
STANDARD : ETSI EN 301 511 V12.5.1 (2017-03)
TEST DATE(S) : Feb. 16, 2026 ~ Mar. 14, 2026

The measurements shown in this test report were tested in accordance with the procedures given in ETSI Standard ETSI EN 301 511 V12.5.1 (2017-03). The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	5
1.6 Testing Facility	6
1.7 Test Software	6
1.8 Test Condition	6
1.9 Applied Standards	6
1.10 Reference Documents	7
2. TEST CONFIGURATION RADIATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration and system	8
3. TEST RESULTS	9
3.1 Result Summary	9
3.2 RF Conducted Tests Performed	10
3.3 Radiated Spurious Emissions	20
4. MAXIMUM OUTPUT POWER TABLE	27
5. SETUP PHOTOGRAPHS	28
6. MEASUREMENT UNCERTAINTY	30
7. LIST OF MEASURING EQUIPMENT	31
APPENDIX A. TEST EQUIPMENT CONFIGURATION INFORMATION	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
EG612311	Rev. 01	Initial issue of report	May 25, 2026

SUMMARY OF TEST RESULT

Report Section	Test Parameter	RESULT	Remark
3.2	RF Conducted Test Case	PASS	–
3.3	Radiated Spurious Emission	PASS	–

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1 Applicant

MAGNE AI Global tech limited

FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.2 Manufacturer

Magne AI Global tech limited

FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	MAG1
Brand Name	MaQ
Model Name	MA1
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For other wireless features of this EUT, test report will be issued separately.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Transmitter Frequency Range	GSM900: 880 MHz ~ 915 MHz GSM1800: 1710 MHz ~ 1785 MHz
Receiver Frequency Range	GSM900: 925 MHz ~ 960 MHz GSM1800: 1805 MHz ~ 1880 MHz
Antenna Type	LDS Antenna
Type of Modulation	GSM/GPRS: GMSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Facility

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02

Test Lab.	Sporton International Inc. (Kunshan)
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158
Test Site No.	FTA-KS; 05CH02-KS
Test Engineer	Andy,Aziz,Robo,Tiger,Never,Fletcher;

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	05CH02-KS	AUDIX	E3	210616

1.8 Test Condition

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient-Condition	15~35	25~75
Maximum Extreme	+55	N.A.
Minimum Extreme	-10	N.A.

Normal Supply Voltage (V d.c.):	3.87
Maximum Extreme Supply Voltage (V d.c.):	4.45
Minimum Extreme Supply Voltage (V d.c.):	3.50

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of **ETSI EN 301 511 V12.5.1 (2017-03)**

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



1.10 Reference Documents

Testing was performed according to the following reference documents and standards

Document	Version	Applicable	Title
3GPP TS 51.010-1	V13.13.0	Y	3rd Generation Partnership Project; Technical Specification Group GSM/EDGE Radio Access Network; Digital cellular telecommunications system (Phase 2+); Mobile Station (MS) conformance specification; Part 1: Conformance specification

2. Test Configuration Radiation of Equipment under Test


2.1 Test Mode

During testing, the interface cables and equipment positions were arranged according to European Standard ETSI EN 301 511 V12.5.1 (2017-03).

Frequency range of radiation was investigated from 30MHz to 4GHz.

Mode	Band	Channel	Condition
1.	GSM900	CH62	Link Mode
2.	GSM900	CH62	Idle Mode
3.	GSM1800	CH699	Link Mode
4.	GSM1800	CH699	Idle Mode
Remark: The test items were performed with Adapter, Earphone and USB Cable.			

2.2 Connection Diagram of Test System

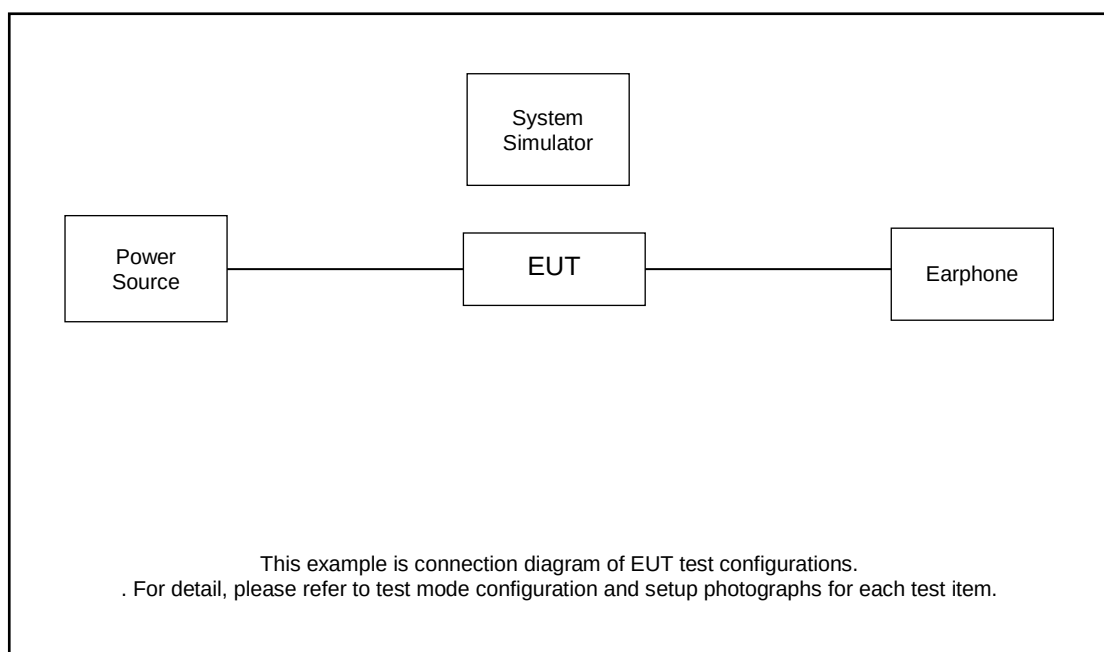

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2	Earphone	N/A	N/A	N/A	N/A	N/A

3. Test Results

3.1 Result Summary

The following table summarizes the test results obtained :

Standard	EN 301 511
Result	PASS

Terms in the column “Verdict” for the test results list of this section

Verdict	Description
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/A	Test is either not required/not applicable in the specified frequency band or is not applicable according to the specific PICS/PIXIT for the equipment under test.

The following table describes the special notes, which are relevant to each test.

Note	Meaning
1	Test case not applicable as per PICS/PIXIT.
2	Test condition not required due to no practical connection made to the power supply, and then normal condition performed with Internal Battery and AC charger.

The following summary may be used to identify the samples referenced in the test summary and any declared hardware or software modifications.

E.g. 01.01.01

Sample Reference	IMEI	Location
31.01.01	016813000001097 016813000001105	KS
32.01.01	016813000000719 016813000000727	KS
33.01.01	016813000002137 016813000002145	KS
07.01.01	016813000001816	KS



3.2 RF Conducted Tests Performed

The following tables reflect the requirements of the relevant specification and show the tests performed. Result files verifying these verdicts are available for inspection at Sporton.

3.2.1 Test Results for ETSI EN 301 511

GSM900

EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition_Designation	Verdict	Sample	Note
4.2.12/5.3.12	12.1.1	Conducted spurious emissions, MS allocated a channel	12.1.1; Frequency Band = 900, VH	Pass	32.01.01	-
4.2.12/5.3.12	12.1.1	Conducted spurious emissions, MS allocated a channel	12.1.1; Frequency Band = 900, VL	Pass	32.01.01	-
4.2.12/5.3.12	12.1.1	Conducted spurious emissions, MS allocated a channel	12.1.1; Frequency Band = 900, VN	Pass	32.01.01	-
4.2.13/5.3.13	12.1.2	Conducted spurious emissions, MS in idle mode	12.1.2; Frequency Band = 900, VH	Pass	32.01.01	-
4.2.13/5.3.13	12.1.2	Conducted spurious emissions, MS in idle mode	12.1.2; Frequency Band = 900, VL	Pass	32.01.01	-
4.2.13/5.3.13	12.1.2	Conducted spurious emissions, MS in idle mode	12.1.2; Frequency Band = 900, VN	Pass	32.01.01	-
4.2.16/5.3.16	12.2.1	Radiated spurious emissions, MS allocated a channel	12.2.1; Frequency Band = 900, VH	N/A	—	2
4.2.16/5.3.16	12.2.1	Radiated spurious emissions, MS allocated a channel	12.2.1; Frequency Band = 900, VL	N/A	—	2
4.2.16/5.3.16	12.2.1	Radiated spurious emissions, MS allocated a channel	12.2.1; Frequency Band = 900, VN	Pass	07.01.01	-
4.2.17/5.3.17	12.2.2	Radiated spurious emissions, MS in idle mode	12.2.2; Frequency Band = 900, VH	N/A	—	2
4.2.17/5.3.17	12.2.2	Radiated spurious emissions, MS in idle mode	12.2.2; Frequency Band = 900, VL	N/A	—	2
4.2.17/5.3.17	12.2.2	Radiated spurious emissions, MS in idle mode	12.2.2; Frequency Band = 900, VN	Pass	07.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 900, TH, VH	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 900, TH, VL	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 900, TL, VH	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 900, TL, VL	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 900, TN, VN	Pass	31.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 900, TN, VN, Vibr.axis X	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 900, TN, VN, Vibr.axis Y	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 900, TN, VN, Vibr.axis Z	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 900, TH, VH	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 900, TH, VL	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 900, TL, VH	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 900, TL, VL	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 900, TN, VN	Pass	31.01.01	-
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or temporary antenna connector	13.3.4.1; Frequency Band = 900, TH, VH	Pass	32.01.01	-
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or	13.3.4.1; Frequency Band = 900, TH, VL	Pass	32.01.01	-



EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition_Designation	Verdict	Sample	Note
		temporary antenna connector				
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or temporary antenna connector	13.3.4.1; Frequency Band = 900, TL, VH	Pass	32.01.01	-
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or temporary antenna connector	13.3.4.1; Frequency Band = 900, TL, VL	Pass	32.01.01	-
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or temporary antenna connector	13.3.4.1; Frequency Band = 900, TN, VN	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TH, VH, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TH, VH, switching	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TH, VL, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TH, VL, switching	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TL, VH, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TL, VH, switching	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TL, VL, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TL, VL, switching	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TN, VN, modulation detailed	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TN, VN, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TN, VN, spurious	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 900, TN, VN, switching	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 900, TH, VH	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 900, TH, VL	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 900, TL, VH	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 900, TL, VL	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 900, TN, VN	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 900, TN, VN, Vibr.axis X	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 900, TN, VN, Vibr.axis Y	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 900, TN, VN, Vibr.axis Z	Pass	32.01.01	-
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna connector	13.16.2.4.1; Frequency Band = 900, TH, VH	Pass	32.01.01	-
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna connector	13.16.2.4.1; Frequency Band = 900, TH, VL	Pass	32.01.01	-
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna connector	13.16.2.4.1; Frequency Band = 900, TL, VH	Pass	32.01.01	-
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna	13.16.2.4.1; Frequency Band = 900, TL, VL	Pass	32.01.01	-



EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition_Designation	Verdict	Sample	Note
		connector				
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna connector	13.16.2.4.1; Frequency Band = 900, TN, VN	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TH, VH, modulation	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TH, VH, switching	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TH, VL, modulation	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TH, VL, switching	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TL, VH, modulation	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TL, VH, switching	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TL, VL, modulation	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TL, VL, switching	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TN, VN, modulation detailed	Pass	31.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TN, VN, modulation	Pass	31.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TN, VN, spurious	Pass	31.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 900, TN, VN, switching	Pass	31.01.01	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 900, TH, VH	N.A (not support EGPRS)	-	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 900, TH, VL	N.A (not support EGPRS)	-	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 900, TL, VH	N.A (not support EGPRS)	-	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 900, TL, VL	N.A (not support EGPRS)	-	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 900, TN, VN	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 900, TH, VH	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 900, TH, VL	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 900, TL, VH	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 900, TL, VL	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 900, TN, VN	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 900, TH, VH	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 900, TH, VL	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 900, TL, VH	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 900, TL, VL	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 900, TN, VN	N.A (not support EGPRS)	-	-



EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition Designation	Verdict	Sample	Note
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TH, VH, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TH, VH, switching	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TH, VL, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TH, VL, switching	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TL, VH, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TL, VH, switching	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TL, VL, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TL, VL, switching	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TN, VN, modulation detailed	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TN, VN, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TN, VN, spurious	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 900, TN, VN, switching	N.A (not support EGPRS)	-	-
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 900, TH, VH	Pass	32.01.01	
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 900, TH, VL	Pass	32.01.01	
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 900, TL, VH	Pass	32.01.01	
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 900, TL, VL	Pass	32.01.01	
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 900, TN, VN	Pass	31.01.01	
4.2.43/5.3.43	14.2.3	Reference sensitivity - FACCH/F	14.2.3; Frequency Band = 900	Pass	31.01.01	
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 900, TH, VH	Pass	32.01.01	
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 900, TH, VL	Pass	32.01.01	
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 900, TL, VH	Pass	32.01.01	
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 900, TL, VL	Pass	32.01.01	
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 900, TN, VN	Pass	31.01.01	
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 900, TH, VH	Pass	32.01.01	
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 900, TH, VL	Pass	32.01.01	
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 900, TL, VH	Pass	32.01.01	
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 900, TL, VL	Pass	32.01.01	
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 900, TN, VN	Pass	32.01.01	
4.2.20/5.3.20	14.7.1	Blocking and spurious response - speech channels	14.7.1; Frequency Band = 900	Pass	32.01.01	
4.2.35/5.3.35	14.8.1	AM suppression - speech channels	14.8.1; Frequency Band = 900	Pass	32.01.01	
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 900, TH, VH	Pass	32.01.01	
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 900, TH, VL	Pass	32.01.01	
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 900, TL, VH	Pass	32.01.01	



EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition_Designation	Verdict	Sample	Note
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 900, TL, VL	Pass	32.01.01	
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 900, TN, VN	Pass	31.01.01	
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 900, TH, VH	N.A (not support EGPRS)	-	-
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 900, TH, VL	N.A (not support EGPRS)	-	-
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 900, TL, VH	N.A (not support EGPRS)	-	-
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 900, TL, VL	N.A (not support EGPRS)	-	-
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 900, TN, VN	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 900, TH, VH	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 900, TH, VL	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 900, TL, VH	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 900, TL, VL	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 900, TN, VN	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 900, TH, VH	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 900, TH, VL	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 900, TL, VH	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 900, TL, VL	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 900, TN, VN	N.A (not support EGPRS)	-	-
4.2.30/5.3.30	14.18.5	Blocking and spurious response	14.18.5; Frequency Band = 900, TN, VN	N.A (not support EGPRS)	-	-

**GSM1800**

EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition_Designation	Verdict	Sample	Note
4.2.12/5.3.12	12.1.1	Conducted spurious emissions, MS allocated a channel	12.1.1; Frequency Band = 1800, VH	Pass	32.01.01	-
4.2.12/5.3.12	12.1.1	Conducted spurious emissions, MS allocated a channel	12.1.1; Frequency Band = 1800, VL	Pass	32.01.01	-
4.2.12/5.3.12	12.1.1	Conducted spurious emissions, MS allocated a channel	12.1.1; Frequency Band = 1800, VN	Pass	32.01.01	-
4.2.13/5.3.13	12.1.2	Conducted spurious emissions, MS in idle mode	12.1.2; Frequency Band = 1800, VH	Pass	32.01.01	-
4.2.13/5.3.13	12.1.2	Conducted spurious emissions, MS in idle mode	12.1.2; Frequency Band = 1800, VL	Pass	32.01.01	-
4.2.13/5.3.13	12.1.2	Conducted spurious emissions, MS in idle mode	12.1.2; Frequency Band = 1800, VN	Pass	32.01.01	-
4.2.16/5.3.16	12.2.1	Radiated spurious emissions, MS allocated a channel	12.2.1; Frequency Band = 1800, VH	N/A	—	2
4.2.16/5.3.16	12.2.1	Radiated spurious emissions, MS allocated a channel	12.2.1; Frequency Band = 1800, VL	N/A	—	2
4.2.16/5.3.16	12.2.1	Radiated spurious emissions, MS allocated a channel	12.2.1; Frequency Band = 1800, VN	Pass	07.01.01	-
4.2.17/5.3.17	12.2.2	Radiated spurious emissions, MS in idle mode	12.2.2; Frequency Band = 1800, VH	N/A	—	2
4.2.17/5.3.17	12.2.2	Radiated spurious emissions, MS in idle mode	12.2.2; Frequency Band = 1800, VL	N/A	—	2
4.2.17/5.3.17	12.2.2	Radiated spurious emissions, MS in idle mode	12.2.2; Frequency Band = 1800, VN	Pass	07.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 1800, TH, VH	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 1800, TH, VL	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 1800, TL, VH	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 1800, TL, VL	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 1800, TN, VN	Pass	31.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 1800, TN, VN, Vibr.axis X	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 1800, TN, VN, Vibr.axis Y	Pass	32.01.01	-
4.2.1/5.3.1	13.1	Frequency error and phase error	13.1; Frequency Band = 1800, TN, VN, Vibr.axis Z	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 1800, TH, VH	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 1800, TH, VL	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 1800, TL, VH	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 1800, TL, VL	Pass	32.01.01	-
4.2.2/5.3.2	13.2	Frequency error under multipath and interference conditions	13.2; Frequency Band = 1800, TN, VN	Pass	31.01.01	-
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or temporary antenna connector	13.3.4.1; Frequency Band = 1800, TH, VH	Pass	32.01.01	-
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or temporary antenna connector	13.3.4.1; Frequency Band = 1800, TH, VL	Pass	32.01.01	-
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or temporary antenna connector	13.3.4.1; Frequency Band = 1800, TL, VH	Pass	32.01.01	-
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or temporary antenna connector	13.3.4.1; Frequency Band = 1800, TL, VL	Pass	32.01.01	-
4.2.5/5.3.5	13.3.4.1	Transmitter output power and burst timing - MS with permanent- or temporary antenna connector	13.3.4.1; Frequency Band = 1800, TN, VN	Pass	31.01.01	-



EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition_Designation	Verdict	Sample	Note
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TH, VH, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TH, VH, switching	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TH, VL, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TH, VL, switching	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TL, VH, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TL, VH, switching	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TL, VL, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TL, VL, switching	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TN, VN, modulation detailed	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TN, VN, modulation	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TN, VN, spurious	Pass	32.01.01	-
4.2.6/5.3.6	13.4	Output RF spectrum	13.4; Frequency Band = 1800, TN, VN, switching	Pass	33.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 1800, TH, VH	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 1800, TH, VL	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 1800, TL, VH	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 1800, TL, VL	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 1800, TN, VN	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 1800, TN, VN, Vibr.axis X	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 1800, TN, VN, Vibr.axis Y	Pass	32.01.01	-
4.2.4/5.3.4	13.16.1	Frequency error and phase error in GPRS multislot configuration	13.16.1; Frequency Band = 1800, TN, VN, Vibr.axis Z	Pass	32.01.01	-
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna connector	13.16.2.4.1; Frequency Band = 1800, TH, VH	Pass	32.01.01	-
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna connector	13.16.2.4.1; Frequency Band = 1800, TH, VL	Pass	32.01.01	-
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna connector	13.16.2.4.1; Frequency Band = 1800, TL, VH	Pass	32.01.01	-
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna connector	13.16.2.4.1; Frequency Band = 1800, TL, VL	Pass	32.01.01	-
4.2.10/5.3.10	13.16.2.4.1	Transmitter output power in GPRS multislot configuration - MS with permanent- or temporary antenna connector	13.16.2.4.1; Frequency Band = 1800, TN, VN	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TH, VH, modulation	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TH, VH, switching	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TH, VL, modulation	Pass	32.01.01	-



EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition Designation	Verdict	Sample	Note
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TH, VL, switching	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TL, VH, modulation	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TL, VH, switching	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TL, VL, modulation	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TL, VL, switching	Pass	32.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TN, VN, modulation detailed	Pass	31.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TN, VN, modulation	Pass	31.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TN, VN, spurious	Pass	31.01.01	-
4.2.11/5.3.11	13.16.3	Output RF spectrum in GPRS multislot configuration	13.16.3; Frequency Band = 1800, TN, VN, switching	Pass	31.01.01	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 1800, TH, VH	N.A (not support EGPRS)	-	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 1800, TH, VL	N.A (not support EGPRS)	-	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 1800, TL, VH	N.A (not support EGPRS)	-	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 1800, TL, VL	N.A (not support EGPRS)	-	-
4.2.26/5.3.26	13.17.1	Frequency error and Modulation accuracy	13.17.1; Frequency Band = 1800, TN, VN	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 1800, TH, VH	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 1800, TH, VL	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 1800, TL, VH	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 1800, TL, VL	N.A (not support EGPRS)	-	-
4.2.27/5.3.27	13.17.2	Frequency error under multipath and interference conditions	13.17.2; Frequency Band = 1800, TN, VN	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 1800, TH, VH	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 1800, TH, VL	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 1800, TL, VH	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 1800, TL, VL	N.A (not support EGPRS)	-	-
4.2.28/5.3.28	13.17.3.4.1	EGPRS Transmitter output power-MS with permanent- or temporary antenna connector	13.17.3.4.1; Frequency Band = 1800, TN, VN	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TH, VH, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TH, VH, switching	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TH, VL, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TH, VL, switching	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TL, VH, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TL, VH, switching	N.A (not support EGPRS)	-	-



EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition Designation	Verdict	Sample	Note
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TL, VL, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TL, VL, switching	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TN, VN, modulation detailed	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TN, VN, modulation	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TN, VN, spurious	N.A (not support EGPRS)	-	-
4.2.29/5.3.29	13.17.4	Output RF spectrum	13.17.4; Frequency Band = 1800, TN, VN, switching	N.A (not support EGPRS)	-	-
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 1800, TH, VH	Pass	32.01.01	-
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 1800, TH, VL	Pass	32.01.01	-
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 1800, TL, VH	Pass	32.01.01	-
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 1800, TL, VL	Pass	32.01.01	-
4.2.42/5.3.42	14.2.1	Reference sensitivity - TCH/FS	14.2.1; Frequency Band = 1800, TN, VN	Pass	31.01.01	-
4.2.43/5.3.43	14.2.3	Reference sensitivity - FACCH/F	14.2.3; Frequency Band = 1800	Pass	31.01.01	-
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 1800, TH, VH	Pass	32.01.01	-
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 1800, TH, VL	Pass	32.01.01	-
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 1800, TL, VH	Pass	32.01.01	-
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 1800, TL, VL	Pass	32.01.01	-
4.2.38/5.3.38	14.5.1.1	Adjacent channel rejection - speech channels- TCH/FS	14.5.1.1; Frequency Band = 1800, TN, VN	Pass	31.01.01	-
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 1800, TH, VH	Pass	32.01.01	-
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 1800, TH, VL	Pass	32.01.01	-
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 1800, TL, VH	Pass	32.01.01	-
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 1800, TL, VL	Pass	32.01.01	-
4.2.32/5.3.32	14.6.1	Intermodulation rejection - speech channels	14.6.1; Frequency Band = 1800, TN, VN	Pass	32.01.01	-
4.2.20/5.3.20	14.7.1	Blocking and spurious response - speech channels	14.7.1; Frequency Band = 1800	Pass	32.01.01	-
4.2.35/5.3.35	14.8.1	AM suppression - speech channels	14.8.1; Frequency Band = 1800	Pass	32.01.01	-
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 1800, TH, VH	Pass	32.01.01	-
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 1800, TH, VL	Pass	32.01.01	-
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 1800, TL, VH	Pass	32.01.01	-
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 1800, TL, VL	Pass	32.01.01	-
4.2.44/5.3.44	14.16.1	Minimum Input level for Reference Performance	14.16.1; Frequency Band = 1800, TN, VN	Pass	31.01.01	-
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 1800, TH, VH	N.A (not support EGPRS)	-	-
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 1800, TH, VL	N.A (not support EGPRS)	-	-
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 1800, TL, VH	N.A (not support EGPRS)	-	-
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 1800, TL, VL	N.A (not support EGPRS)	-	-



EN 301511 TC ID	TS 51.010-1 TC ID	Name	Condition_Designation	Verdict	Sample	Note
4.2.45/5.3.45	14.18.1	Minimum Input Level for Reference Performance	14.18.1; Frequency Band = 1800, TN, VN	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 1800, TH, VH	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 1800, TH, VL	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 1800, TL, VH	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 1800, TL, VL	N.A (not support EGPRS)	-	-
4.2.40/5.3.40	14.18.3	Adjacent channel Rejection	14.18.3; Frequency Band = 1800, TN, VN	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 1800, TH, VH	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 1800, TH, VL	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 1800, TL, VH	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 1800, TL, VL	N.A (not support EGPRS)	-	-
4.2.34/5.3.34	14.18.4	Intermodulation Rejection	14.18.4; Frequency Band = 1800, TN, VN	N.A (not support EGPRS)	-	-
4.2.30/5.3.30	14.18.5	Blocking and spurious response	14.18.5; Frequency Band = 1800, TN, VN	N.A (not support EGPRS)	-	-

3.3 Radiated Spurious Emissions

3.3.1 Limit of Radiated Emissions

Based on 3GPP TS51.010-1 chapter 12.2.1 and 12.2.2.

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedure


- a. The equipment under test (EUT) was placed on a turntable inside a fully anechoic chamber.
- b. Established EUT link (dedicated mode) with system simulator (Base Station) and allocated a middle channel with maximum output power.
- c. Compensated the air loss in Base Station, the BS level is set to -75 dBm.
- d. The pre-calibration method has been performed ahead of testing so as to correct the readings from the spectrum analyzer.
- e. The GSM link mode was scanned for harmonics in 3 test planes (Y, Z and X planes) and cradle for both horizontal and vertical polarizations, and then the worst mode was performed the full test. All spurious emissions radiated by the EUT were detected by the receive antenna and the test frequency range is from 30 MHz to 4 GHz.
- f. Repeat the testing for link mode and idle mode.
- g. The measurement bandwidth, based on a 5 pole synchronously tuned filter, is set according to ETSI TS 151 010-1 table 12.8 for Link mode and Table 12.10 for Idle Mode. The power indication is the peak power detected by the measuring system.
- h. Test Results Explanation:
 $\text{Level (dBm)} = \text{Read Level (dBm)} + \text{Factor (dB)}$
 $\text{Over Limit (dB)} = \text{Level (dBm)} - \text{Limit Line (dBm)}$

3.3.4 Test Setup

<Below 1GHz>

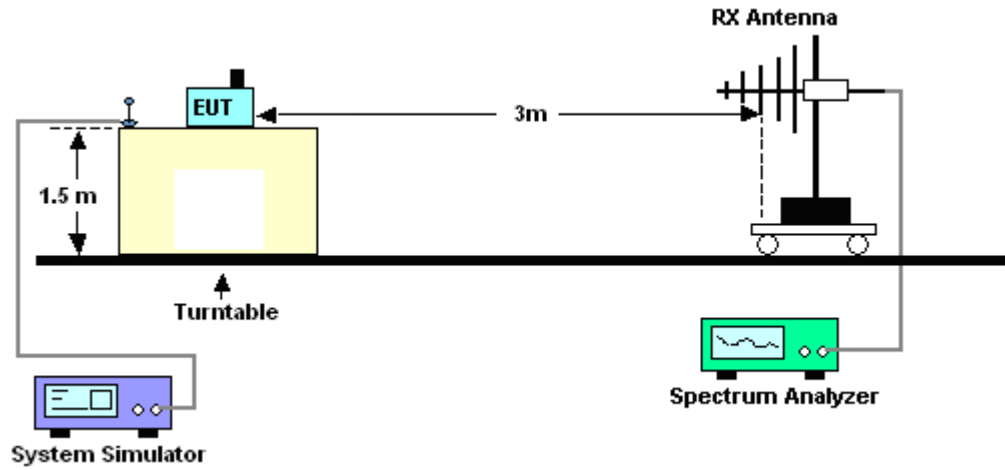

<Above 1GHz>

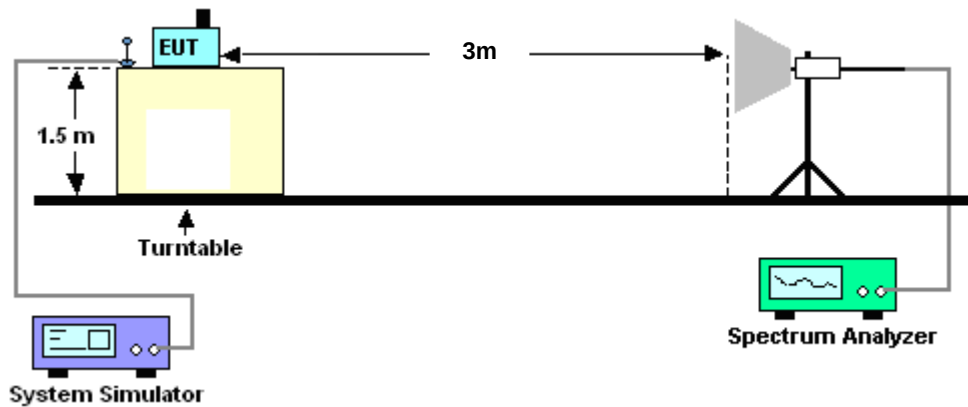



3.3.5 Test Results

Radiated Spurious Emission Test Data

Test Engineer :	Juggler Zhang	Relative Humidity :	42~43 %
		Temperature :	22~23℃



Radiated Spurious Emission Test Modes

Antenna	Mode	Test Mode		Channel	Condition	Traffic / Idle	Axis
0	Mode 1	GSM	900	62	-	Traffic	X
0	Mode 2	GSM	900	62	-	Idle	X
0	Mode 3	DCS	1800	699	-	Traffic	X
0	Mode 4	DCS	1800	699	-	Idle	X



Summary of each worse mode

Mode	Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization	Result
1	988.12	-39.51	-36.00	-3.51	Vertical	Pass
2	31.78	-60.72	-57.00	-3.72	Horizontal	Pass
3	2899.28	-41.54	-30.00	-11.54	Horizontal	Pass
4	31.78	-60.15	-57.00	-3.15	Horizontal	Pass

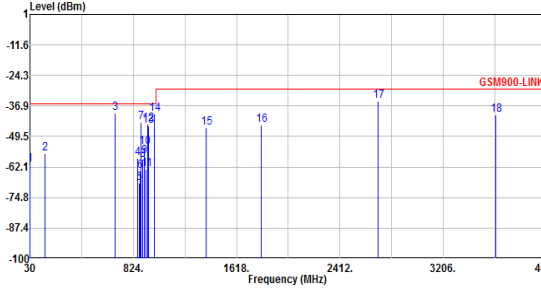
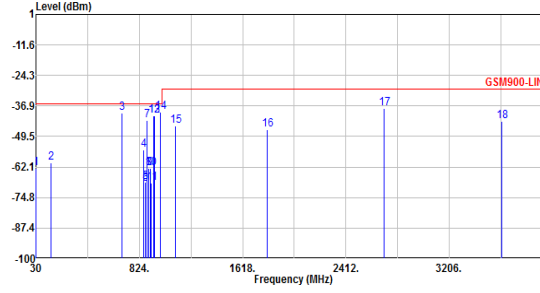


Mode	1																																																																																																																																																																																																																																																																																																																															
	GSM 900	Channel 62	-																																																																																																																																																																																																																																																																																																																													
Ant	0																																																																																																																																																																																																																																																																																																																															
Pol.	Horizontal		Vertical																																																																																																																																																																																																																																																																																																																													
Traffic																																																																																																																																																																																																																																																																																																																																
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	31.78	-61.22	-25.22	-36.00	-62.18	0.96	HORIZONTAL	2	146.30	-56.43	-20.43	-36.00	-45.49	-10.94	HORIZONTAL	3 @	687.25	-39.74	-3.74	-36.00	-39.29	-0.45	HORIZONTAL	4	857.20	-58.54	-22.54	-36.00	-60.00	1.46	HORIZONTAL	5	869.37	-68.87	-32.87	-36.00	-70.49	1.62	HORIZONTAL	6	878.54	-63.84	-27.84	-36.00	-65.58	1.74	HORIZONTAL	7	882.35	-43.61	-7.61	-36.00	-45.40	1.79	HORIZONTAL	8	896.70	-59.27	-23.27	-36.00	-61.25	1.98	HORIZONTAL	9	906.92	-57.78	-21.78	-36.00	-60.00	2.22	HORIZONTAL	10	908.50	-53.98	-17.98	-36.00	-56.24	2.26	HORIZONTAL	11	923.81	-63.17	-27.17	-36.00	-65.87	2.70	HORIZONTAL	12	933.31	-44.31	-8.31	-36.00	-47.29	2.98	HORIZONTAL	13	937.90	-45.28	-9.28	-36.00	-48.39	3.11	HORIZONTAL	14	988.12	-40.17	-4.17	-36.00	-44.82	4.65	HORIZONTAL	15	1382.20	-45.98	-15.98	-30.00	-58.14	12.16	HORIZONTAL	16	1804.00	-44.65	-14.65	-30.00	-58.09	13.44	HORIZONTAL	17	2707.20	-34.91	-4.91	-30.00	-53.21	18.30	HORIZONTAL	18	3609.60	-40.44	-10.44	-30.00	-62.97	22.53	HORIZONTAL	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr><tr><td>1</td><td>31.78</td><td>-62.61</td><td>-26.61</td><td>-36.00</td><td>-61.54</td><td>-1.07</td><td>VERTICAL</td></tr><tr><td>2</td><td>145.85</td><td>-60.39</td><td>-24.39</td><td>-36.00</td><td>-52.64</td><td>-7.75</td><td>VERTICAL</td></tr><tr><td>3</td><td>687.95</td><td>-39.69</td><td>-3.69</td><td>-36.00</td><td>-39.47</td><td>-0.22</td><td>VERTICAL</td></tr><tr><td>4</td><td>857.47</td><td>-55.14</td><td>-19.14</td><td>-36.00</td><td>-56.99</td><td>1.85</td><td>VERTICAL</td></tr><tr><td>5</td><td>869.40</td><td>-68.30</td><td>-32.30</td><td>-36.00</td><td>-70.26</td><td>1.96</td><td>VERTICAL</td></tr><tr><td>6</td><td>871.51</td><td>-69.04</td><td>-33.04</td><td>-36.00</td><td>-71.02</td><td>1.98</td><td>VERTICAL</td></tr><tr><td>7</td><td>882.35</td><td>-42.76</td><td>-6.76</td><td>-36.00</td><td>-44.84</td><td>2.08</td><td>VERTICAL</td></tr><tr><td>8</td><td>898.07</td><td>-62.55</td><td>-26.55</td><td>-36.00</td><td>-64.78</td><td>2.23</td><td>VERTICAL</td></tr><tr><td>9</td><td>906.90</td><td>-62.49</td><td>-26.49</td><td>-36.00</td><td>-64.88</td><td>2.39</td><td>VERTICAL</td></tr><tr><td>10</td><td>908.55</td><td>-62.62</td><td>-26.62</td><td>-36.00</td><td>-65.05</td><td>2.43</td><td>VERTICAL</td></tr><tr><td>11</td><td>916.07</td><td>-68.91</td><td>-32.91</td><td>-36.00</td><td>-71.52</td><td>2.61</td><td>VERTICAL</td></tr><tr><td>12</td><td>933.29</td><td>-41.07</td><td>-5.07</td><td>-36.00</td><td>-44.07</td><td>3.00</td><td>VERTICAL</td></tr><tr><td>13</td><td>937.69</td><td>-40.81</td><td>-4.81</td><td>-36.00</td><td>-43.91</td><td>3.10</td><td>VERTICAL</td></tr><tr><td>14 @</td><td>988.12</td><td>-39.51</td><td>-3.51</td><td>-36.00</td><td>-43.89</td><td>4.38</td><td>VERTICAL</td></tr><tr><td>15</td><td>1099.60</td><td>-45.03</td><td>-15.03</td><td>-30.00</td><td>-51.07</td><td>6.04</td><td>VERTICAL</td></tr><tr><td>16</td><td>1804.00</td><td>-46.54</td><td>-16.54</td><td>-30.00</td><td>-57.00</td><td>10.46</td><td>VERTICAL</td></tr><tr><td>17</td><td>2707.20</td><td>-37.86</td><td>-7.86</td><td>-30.00</td><td>-52.98</td><td>15.12</td><td>VERTICAL</td></tr><tr><td>18</td><td>3609.60</td><td>-43.38</td><td>-13.38</td><td>-30.00</td><td>-62.70</td><td>19.32</td><td>VERTICAL</td></tr></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	31.78	-62.61	-26.61	-36.00	-61.54	-1.07	VERTICAL	2	145.85	-60.39	-24.39	-36.00	-52.64	-7.75	VERTICAL	3	687.95	-39.69	-3.69	-36.00	-39.47	-0.22	VERTICAL	4	857.47	-55.14	-19.14	-36.00	-56.99	1.85	VERTICAL	5	869.40	-68.30	-32.30	-36.00	-70.26	1.96	VERTICAL	6	871.51	-69.04	-33.04	-36.00	-71.02	1.98	VERTICAL	7	882.35	-42.76	-6.76	-36.00	-44.84	2.08	VERTICAL	8	898.07	-62.55	-26.55	-36.00	-64.78	2.23	VERTICAL	9	906.90	-62.49	-26.49	-36.00	-64.88	2.39	VERTICAL	10	908.55	-62.62	-26.62	-36.00	-65.05	2.43	VERTICAL	11	916.07	-68.91	-32.91	-36.00	-71.52	2.61	VERTICAL	12	933.29	-41.07	-5.07	-36.00	-44.07	3.00	VERTICAL	13	937.69	-40.81	-4.81	-36.00	-43.91	3.10	VERTICAL	14 @	988.12	-39.51	-3.51	-36.00	-43.89	4.38	VERTICAL	15	1099.60	-45.03	-15.03	-30.00	-51.07	6.04	VERTICAL	16	1804.00	-46.54	-16.54	-30.00	-57.00	10.46	VERTICAL	17	2707.20	-37.86	-7.86	-30.00	-52.98	15.12	VERTICAL	18	3609.60	-43.38	-13.38	-30.00	-62.70	19.32
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																																																																																																																																																																																																																																																									
	MHz	dBm	dB	dBm	dBm	dB																																																																																																																																																																																																																																																																																																																										
1	31.78	-61.22	-25.22	-36.00	-62.18	0.96	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
2	146.30	-56.43	-20.43	-36.00	-45.49	-10.94	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
3 @	687.25	-39.74	-3.74	-36.00	-39.29	-0.45	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
4	857.20	-58.54	-22.54	-36.00	-60.00	1.46	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
5	869.37	-68.87	-32.87	-36.00	-70.49	1.62	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
6	878.54	-63.84	-27.84	-36.00	-65.58	1.74	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
7	882.35	-43.61	-7.61	-36.00	-45.40	1.79	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
8	896.70	-59.27	-23.27	-36.00	-61.25	1.98	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
9	906.92	-57.78	-21.78	-36.00	-60.00	2.22	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
10	908.50	-53.98	-17.98	-36.00	-56.24	2.26	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
11	923.81	-63.17	-27.17	-36.00	-65.87	2.70	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
12	933.31	-44.31	-8.31	-36.00	-47.29	2.98	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
13	937.90	-45.28	-9.28	-36.00	-48.39	3.11	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
14	988.12	-40.17	-4.17	-36.00	-44.82	4.65	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
15	1382.20	-45.98	-15.98	-30.00	-58.14	12.16	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
16	1804.00	-44.65	-14.65	-30.00	-58.09	13.44	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
17	2707.20	-34.91	-4.91	-30.00	-53.21	18.30	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
18	3609.60	-40.44	-10.44	-30.00	-62.97	22.53	HORIZONTAL																																																																																																																																																																																																																																																																																																																									
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																																																																																																																																																																																																																																																									
	MHz	dBm	dB	dBm	dBm	dB																																																																																																																																																																																																																																																																																																																										
1	31.78	-62.61	-26.61	-36.00	-61.54	-1.07	VERTICAL																																																																																																																																																																																																																																																																																																																									
2	145.85	-60.39	-24.39	-36.00	-52.64	-7.75	VERTICAL																																																																																																																																																																																																																																																																																																																									
3	687.95	-39.69	-3.69	-36.00	-39.47	-0.22	VERTICAL																																																																																																																																																																																																																																																																																																																									
4	857.47	-55.14	-19.14	-36.00	-56.99	1.85	VERTICAL																																																																																																																																																																																																																																																																																																																									
5	869.40	-68.30	-32.30	-36.00	-70.26	1.96	VERTICAL																																																																																																																																																																																																																																																																																																																									
6	871.51	-69.04	-33.04	-36.00	-71.02	1.98	VERTICAL																																																																																																																																																																																																																																																																																																																									
7	882.35	-42.76	-6.76	-36.00	-44.84	2.08	VERTICAL																																																																																																																																																																																																																																																																																																																									
8	898.07	-62.55	-26.55	-36.00	-64.78	2.23	VERTICAL																																																																																																																																																																																																																																																																																																																									
9	906.90	-62.49	-26.49	-36.00	-64.88	2.39	VERTICAL																																																																																																																																																																																																																																																																																																																									
10	908.55	-62.62	-26.62	-36.00	-65.05	2.43	VERTICAL																																																																																																																																																																																																																																																																																																																									
11	916.07	-68.91	-32.91	-36.00	-71.52	2.61	VERTICAL																																																																																																																																																																																																																																																																																																																									
12	933.29	-41.07	-5.07	-36.00	-44.07	3.00	VERTICAL																																																																																																																																																																																																																																																																																																																									
13	937.69	-40.81	-4.81	-36.00	-43.91	3.10	VERTICAL																																																																																																																																																																																																																																																																																																																									
14 @	988.12	-39.51	-3.51	-36.00	-43.89	4.38	VERTICAL																																																																																																																																																																																																																																																																																																																									
15	1099.60	-45.03	-15.03	-30.00	-51.07	6.04	VERTICAL																																																																																																																																																																																																																																																																																																																									
16	1804.00	-46.54	-16.54	-30.00	-57.00	10.46	VERTICAL																																																																																																																																																																																																																																																																																																																									
17	2707.20	-37.86	-7.86	-30.00	-52.98	15.12	VERTICAL																																																																																																																																																																																																																																																																																																																									
18	3609.60	-43.38	-13.38	-30.00	-62.70	19.32	VERTICAL																																																																																																																																																																																																																																																																																																																									

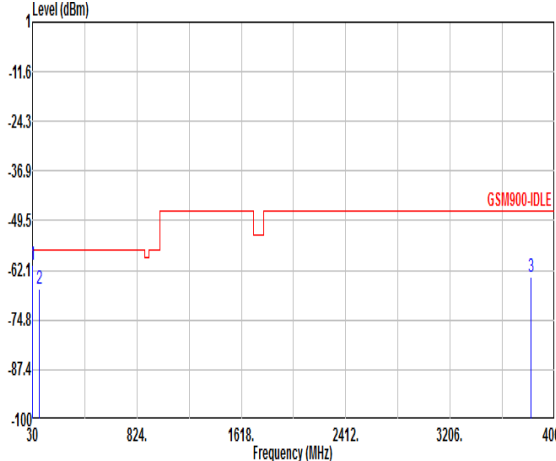
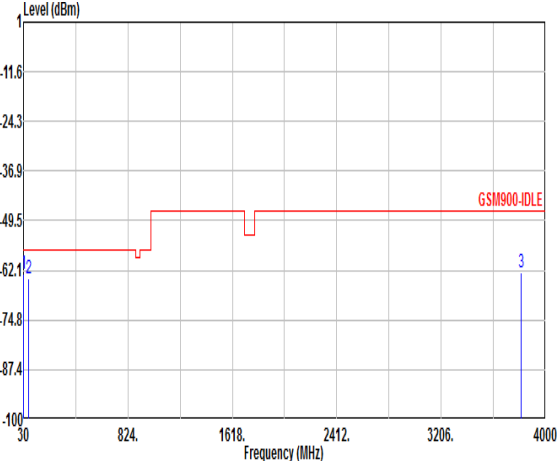


Mode	2																																																																																						
	GSM 900				Channel 62		-																																																																																
Ant	0																																																																																						
Pol.	Horizontal				Vertical																																																																																		
Idle																																																																																							
	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr><tr><td>1 @</td><td>31.78</td><td>-60.72</td><td>-3.72</td><td>-57.00</td><td>-61.68</td><td>0.96</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>80.40</td><td>-66.97</td><td>-9.97</td><td>-57.00</td><td>-59.11</td><td>-7.86</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>3823.00</td><td>-63.74</td><td>-16.74</td><td>-47.00</td><td>-48.78</td><td>-14.96</td><td>HORIZONTAL</td></tr></table>				Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1 @	31.78	-60.72	-3.72	-57.00	-61.68	0.96	HORIZONTAL	2	80.40	-66.97	-9.97	-57.00	-59.11	-7.86	HORIZONTAL	3	3823.00	-63.74	-16.74	-47.00	-48.78	-14.96	HORIZONTAL	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr><tr><td>1 @</td><td>31.78</td><td>-63.20</td><td>-6.20</td><td>-57.00</td><td>-62.13</td><td>-1.07</td><td>VERTICAL</td></tr><tr><td>2</td><td>70.90</td><td>-64.24</td><td>-7.24</td><td>-57.00</td><td>-56.83</td><td>-7.41</td><td>VERTICAL</td></tr><tr><td>3</td><td>3817.00</td><td>-62.65</td><td>-15.65</td><td>-47.00</td><td>-47.67</td><td>-14.98</td><td>VERTICAL</td></tr></table>			Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1 @	31.78	-63.20	-6.20	-57.00	-62.13	-1.07	VERTICAL	2	70.90	-64.24	-7.24	-57.00	-56.83	-7.41	VERTICAL	3	3817.00	-62.65	-15.65	-47.00	-47.67	-14.98	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																															
	MHz	dBm	dB	dBm	dBm	dB																																																																																	
1 @	31.78	-60.72	-3.72	-57.00	-61.68	0.96	HORIZONTAL																																																																																
2	80.40	-66.97	-9.97	-57.00	-59.11	-7.86	HORIZONTAL																																																																																
3	3823.00	-63.74	-16.74	-47.00	-48.78	-14.96	HORIZONTAL																																																																																
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																
	MHz	dBm	dB	dBm	dBm	dB																																																																																	
1 @	31.78	-63.20	-6.20	-57.00	-62.13	-1.07	VERTICAL																																																																																
2	70.90	-64.24	-7.24	-57.00	-56.83	-7.41	VERTICAL																																																																																
3	3817.00	-62.65	-15.65	-47.00	-47.67	-14.98	VERTICAL																																																																																

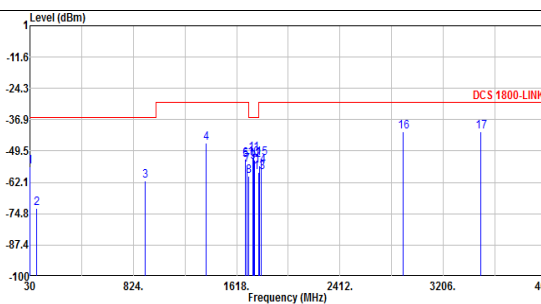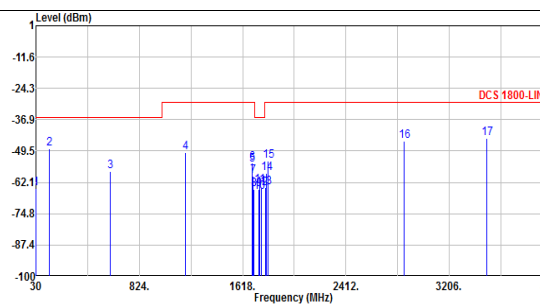

Mode	3																																																																																																																																																																																																																																																																																																																		
	DCS 1800	Channel 699	-																																																																																																																																																																																																																																																																																																																
Ant	0																																																																																																																																																																																																																																																																																																																		
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																																																	
Traffic	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr><tr><td>1</td><td>31.76</td><td>-55.72</td><td>-19.72</td><td>-36.00</td><td>-56.14</td><td>0.42</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>81.05</td><td>-72.50</td><td>-36.50</td><td>-36.00</td><td>-64.30</td><td>-8.20</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>918.00</td><td>-61.56</td><td>-25.56</td><td>-36.00</td><td>-62.13</td><td>0.57</td><td>HORIZONTAL</td></tr><tr><td>4</td><td>1381.48</td><td>-46.32</td><td>-16.32</td><td>-30.00</td><td>-58.48</td><td>12.16</td><td>HORIZONTAL</td></tr><tr><td>5</td><td>1683.76</td><td>-53.16</td><td>-23.16</td><td>-30.00</td><td>-65.42</td><td>12.26</td><td>HORIZONTAL</td></tr><tr><td>6</td><td>1685.87</td><td>-52.74</td><td>-22.74</td><td>-30.00</td><td>-65.03</td><td>12.29</td><td>HORIZONTAL</td></tr><tr><td>7</td><td>1699.19</td><td>-54.96</td><td>-24.96</td><td>-30.00</td><td>-67.42</td><td>12.46</td><td>HORIZONTAL</td></tr><tr><td>8</td><td>1709.99</td><td>-59.55</td><td>-29.55</td><td>-30.00</td><td>-72.11</td><td>12.56</td><td>HORIZONTAL</td></tr><tr><td>9</td><td>1741.41</td><td>-53.70</td><td>-17.70</td><td>-36.00</td><td>-66.57</td><td>12.87</td><td>HORIZONTAL</td></tr><tr><td>10</td><td>1745.51</td><td>-52.54</td><td>-16.54</td><td>-36.00</td><td>-65.45</td><td>12.91</td><td>HORIZONTAL</td></tr><tr><td>11</td><td>1749.61</td><td>-50.36</td><td>-14.36</td><td>-36.00</td><td>-63.32</td><td>12.96</td><td>HORIZONTAL</td></tr><tr><td>12</td><td>1753.73</td><td>-53.02</td><td>-17.02</td><td>-36.00</td><td>-66.02</td><td>13.00</td><td>HORIZONTAL</td></tr><tr><td>13</td><td>1785.32</td><td>-58.19</td><td>-28.19</td><td>-30.00</td><td>-71.49</td><td>13.30</td><td>HORIZONTAL</td></tr><tr><td>14</td><td>1796.37</td><td>-55.45</td><td>-25.45</td><td>-30.00</td><td>-68.92</td><td>13.47</td><td>HORIZONTAL</td></tr><tr><td>15</td><td>1809.69</td><td>-52.24</td><td>-22.24</td><td>-30.00</td><td>-65.66</td><td>13.42</td><td>HORIZONTAL</td></tr><tr><td>16 @</td><td>2899.28</td><td>-41.54</td><td>-11.54</td><td>-30.00</td><td>-60.69</td><td>19.15</td><td>HORIZONTAL</td></tr><tr><td>17</td><td>3495.00</td><td>-41.71</td><td>-11.71</td><td>-30.00</td><td>-63.93</td><td>22.22</td><td>HORIZONTAL</td></tr></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	31.76	-55.72	-19.72	-36.00	-56.14	0.42	HORIZONTAL	2	81.05	-72.50	-36.50	-36.00	-64.30	-8.20	HORIZONTAL	3	918.00	-61.56	-25.56	-36.00	-62.13	0.57	HORIZONTAL	4	1381.48	-46.32	-16.32	-30.00	-58.48	12.16	HORIZONTAL	5	1683.76	-53.16	-23.16	-30.00	-65.42	12.26	HORIZONTAL	6	1685.87	-52.74	-22.74	-30.00	-65.03	12.29	HORIZONTAL	7	1699.19	-54.96	-24.96	-30.00	-67.42	12.46	HORIZONTAL	8	1709.99	-59.55	-29.55	-30.00	-72.11	12.56	HORIZONTAL	9	1741.41	-53.70	-17.70	-36.00	-66.57	12.87	HORIZONTAL	10	1745.51	-52.54	-16.54	-36.00	-65.45	12.91	HORIZONTAL	11	1749.61	-50.36	-14.36	-36.00	-63.32	12.96	HORIZONTAL	12	1753.73	-53.02	-17.02	-36.00	-66.02	13.00	HORIZONTAL	13	1785.32	-58.19	-28.19	-30.00	-71.49	13.30	HORIZONTAL	14	1796.37	-55.45	-25.45	-30.00	-68.92	13.47	HORIZONTAL	15	1809.69	-52.24	-22.24	-30.00	-65.66	13.42	HORIZONTAL	16 @	2899.28	-41.54	-11.54	-30.00	-60.69	19.15	HORIZONTAL	17	3495.00	-41.71	-11.71	-30.00	-63.93	22.22	HORIZONTAL	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr><tr><td>1</td><td>31.78</td><td>-64.58</td><td>-28.58</td><td>-36.00</td><td>-63.51</td><td>-1.07</td><td>VERTICAL</td></tr><tr><td>2 @</td><td>132.80</td><td>-48.40</td><td>-12.40</td><td>-36.00</td><td>-41.78</td><td>-6.62</td><td>VERTICAL</td></tr><tr><td>3</td><td>599.00</td><td>-57.77</td><td>-21.77</td><td>-36.00</td><td>-56.97</td><td>-0.80</td><td>VERTICAL</td></tr><tr><td>4</td><td>1177.48</td><td>-50.02</td><td>-20.02</td><td>-30.00</td><td>-57.24</td><td>7.22</td><td>VERTICAL</td></tr><tr><td>5</td><td>1688.71</td><td>-55.03</td><td>-25.03</td><td>-30.00</td><td>-63.96</td><td>8.93</td><td>VERTICAL</td></tr><tr><td>6</td><td>1689.97</td><td>-54.39</td><td>-24.39</td><td>-30.00</td><td>-63.34</td><td>8.95</td><td>VERTICAL</td></tr><tr><td>7</td><td>1698.23</td><td>-59.55</td><td>-29.55</td><td>-30.00</td><td>-68.60</td><td>9.05</td><td>VERTICAL</td></tr><tr><td>8</td><td>1701.02</td><td>-64.96</td><td>-34.96</td><td>-30.00</td><td>-74.04</td><td>9.08</td><td>VERTICAL</td></tr><tr><td>9</td><td>1740.81</td><td>-64.91</td><td>-28.91</td><td>-36.00</td><td>-74.55</td><td>9.64</td><td>VERTICAL</td></tr><tr><td>10</td><td>1745.51</td><td>-65.96</td><td>-29.96</td><td>-36.00</td><td>-75.67</td><td>9.71</td><td>VERTICAL</td></tr><tr><td>11</td><td>1749.65</td><td>-63.23</td><td>-27.23</td><td>-36.00</td><td>-73.00</td><td>9.77</td><td>VERTICAL</td></tr><tr><td>12</td><td>1761.98</td><td>-64.46</td><td>-28.46</td><td>-36.00</td><td>-74.40</td><td>9.94</td><td>VERTICAL</td></tr><tr><td>13</td><td>1791.17</td><td>-64.12</td><td>-34.12</td><td>-30.00</td><td>-74.46</td><td>10.34</td><td>VERTICAL</td></tr><tr><td>14</td><td>1801.88</td><td>-58.46</td><td>-28.46</td><td>-30.00</td><td>-68.99</td><td>10.53</td><td>VERTICAL</td></tr><tr><td>15</td><td>1813.65</td><td>-53.51</td><td>-23.51</td><td>-30.00</td><td>-63.98</td><td>10.47</td><td>VERTICAL</td></tr><tr><td>16</td><td>2861.36</td><td>-45.33</td><td>-15.33</td><td>-30.00</td><td>-61.20</td><td>15.87</td><td>VERTICAL</td></tr><tr><td>17</td><td>3495.00</td><td>-44.24</td><td>-14.24</td><td>-30.00</td><td>-62.91</td><td>18.67</td><td>VERTICAL</td></tr></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	31.78	-64.58	-28.58	-36.00	-63.51	-1.07	VERTICAL	2 @	132.80	-48.40	-12.40	-36.00	-41.78	-6.62	VERTICAL	3	599.00	-57.77	-21.77	-36.00	-56.97	-0.80	VERTICAL	4	1177.48	-50.02	-20.02	-30.00	-57.24	7.22	VERTICAL	5	1688.71	-55.03	-25.03	-30.00	-63.96	8.93	VERTICAL	6	1689.97	-54.39	-24.39	-30.00	-63.34	8.95	VERTICAL	7	1698.23	-59.55	-29.55	-30.00	-68.60	9.05	VERTICAL	8	1701.02	-64.96	-34.96	-30.00	-74.04	9.08	VERTICAL	9	1740.81	-64.91	-28.91	-36.00	-74.55	9.64	VERTICAL	10	1745.51	-65.96	-29.96	-36.00	-75.67	9.71	VERTICAL	11	1749.65	-63.23	-27.23	-36.00	-73.00	9.77	VERTICAL	12	1761.98	-64.46	-28.46	-36.00	-74.40	9.94	VERTICAL	13	1791.17	-64.12	-34.12	-30.00	-74.46	10.34	VERTICAL	14	1801.88	-58.46	-28.46	-30.00	-68.99	10.53	VERTICAL	15	1813.65	-53.51	-23.51	-30.00	-63.98	10.47	VERTICAL	16	2861.36	-45.33	-15.33	-30.00	-61.20	15.87	VERTICAL	17	3495.00	-44.24	-14.24	-30.00	-62.91	18.67	VERTICAL	
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																																																																																																																																																																																																																																												
	MHz	dBm	dB	dBm	dBm	dB																																																																																																																																																																																																																																																																																																													
1	31.76	-55.72	-19.72	-36.00	-56.14	0.42	HORIZONTAL																																																																																																																																																																																																																																																																																																												
2	81.05	-72.50	-36.50	-36.00	-64.30	-8.20	HORIZONTAL																																																																																																																																																																																																																																																																																																												
3	918.00	-61.56	-25.56	-36.00	-62.13	0.57	HORIZONTAL																																																																																																																																																																																																																																																																																																												
4	1381.48	-46.32	-16.32	-30.00	-58.48	12.16	HORIZONTAL																																																																																																																																																																																																																																																																																																												
5	1683.76	-53.16	-23.16	-30.00	-65.42	12.26	HORIZONTAL																																																																																																																																																																																																																																																																																																												
6	1685.87	-52.74	-22.74	-30.00	-65.03	12.29	HORIZONTAL																																																																																																																																																																																																																																																																																																												
7	1699.19	-54.96	-24.96	-30.00	-67.42	12.46	HORIZONTAL																																																																																																																																																																																																																																																																																																												
8	1709.99	-59.55	-29.55	-30.00	-72.11	12.56	HORIZONTAL																																																																																																																																																																																																																																																																																																												
9	1741.41	-53.70	-17.70	-36.00	-66.57	12.87	HORIZONTAL																																																																																																																																																																																																																																																																																																												
10	1745.51	-52.54	-16.54	-36.00	-65.45	12.91	HORIZONTAL																																																																																																																																																																																																																																																																																																												
11	1749.61	-50.36	-14.36	-36.00	-63.32	12.96	HORIZONTAL																																																																																																																																																																																																																																																																																																												
12	1753.73	-53.02	-17.02	-36.00	-66.02	13.00	HORIZONTAL																																																																																																																																																																																																																																																																																																												
13	1785.32	-58.19	-28.19	-30.00	-71.49	13.30	HORIZONTAL																																																																																																																																																																																																																																																																																																												
14	1796.37	-55.45	-25.45	-30.00	-68.92	13.47	HORIZONTAL																																																																																																																																																																																																																																																																																																												
15	1809.69	-52.24	-22.24	-30.00	-65.66	13.42	HORIZONTAL																																																																																																																																																																																																																																																																																																												
16 @	2899.28	-41.54	-11.54	-30.00	-60.69	19.15	HORIZONTAL																																																																																																																																																																																																																																																																																																												
17	3495.00	-41.71	-11.71	-30.00	-63.93	22.22	HORIZONTAL																																																																																																																																																																																																																																																																																																												
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																																																																																																																																																																																																																																												
	MHz	dBm	dB	dBm	dBm	dB																																																																																																																																																																																																																																																																																																													
1	31.78	-64.58	-28.58	-36.00	-63.51	-1.07	VERTICAL																																																																																																																																																																																																																																																																																																												
2 @	132.80	-48.40	-12.40	-36.00	-41.78	-6.62	VERTICAL																																																																																																																																																																																																																																																																																																												
3	599.00	-57.77	-21.77	-36.00	-56.97	-0.80	VERTICAL																																																																																																																																																																																																																																																																																																												
4	1177.48	-50.02	-20.02	-30.00	-57.24	7.22	VERTICAL																																																																																																																																																																																																																																																																																																												
5	1688.71	-55.03	-25.03	-30.00	-63.96	8.93	VERTICAL																																																																																																																																																																																																																																																																																																												
6	1689.97	-54.39	-24.39	-30.00	-63.34	8.95	VERTICAL																																																																																																																																																																																																																																																																																																												
7	1698.23	-59.55	-29.55	-30.00	-68.60	9.05	VERTICAL																																																																																																																																																																																																																																																																																																												
8	1701.02	-64.96	-34.96	-30.00	-74.04	9.08	VERTICAL																																																																																																																																																																																																																																																																																																												
9	1740.81	-64.91	-28.91	-36.00	-74.55	9.64	VERTICAL																																																																																																																																																																																																																																																																																																												
10	1745.51	-65.96	-29.96	-36.00	-75.67	9.71	VERTICAL																																																																																																																																																																																																																																																																																																												
11	1749.65	-63.23	-27.23	-36.00	-73.00	9.77	VERTICAL																																																																																																																																																																																																																																																																																																												
12	1761.98	-64.46	-28.46	-36.00	-74.40	9.94	VERTICAL																																																																																																																																																																																																																																																																																																												
13	1791.17	-64.12	-34.12	-30.00	-74.46	10.34	VERTICAL																																																																																																																																																																																																																																																																																																												
14	1801.88	-58.46	-28.46	-30.00	-68.99	10.53	VERTICAL																																																																																																																																																																																																																																																																																																												
15	1813.65	-53.51	-23.51	-30.00	-63.98	10.47	VERTICAL																																																																																																																																																																																																																																																																																																												
16	2861.36	-45.33	-15.33	-30.00	-61.20	15.87	VERTICAL																																																																																																																																																																																																																																																																																																												
17	3495.00	-44.24	-14.24	-30.00	-62.91	18.67	VERTICAL																																																																																																																																																																																																																																																																																																												

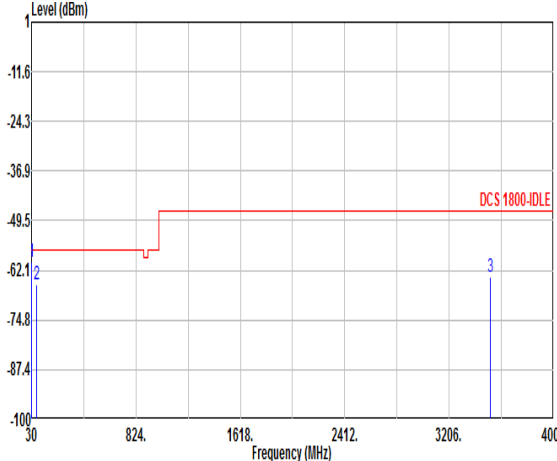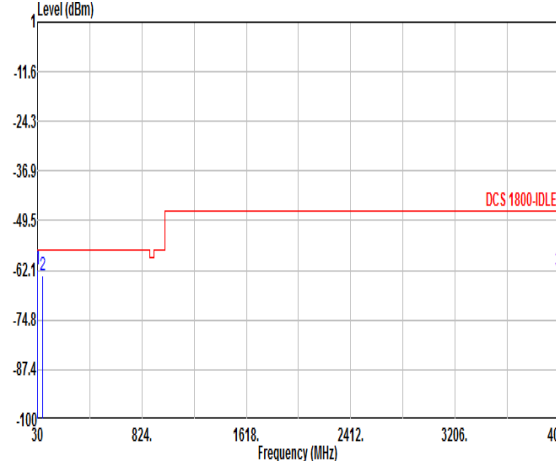

Mode	4																																																																																				
	DCS 1800			Channel 699	-																																																																																
Ant	0																																																																																				
Pol.	Horizontal			Vertical																																																																																	
Idle																																																																																					
	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr><tr><td>1 @</td><td>31.78</td><td>-60.15</td><td>-3.15</td><td>-57.00</td><td>-61.11</td><td>0.96</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>69.95</td><td>-65.67</td><td>-8.67</td><td>-57.00</td><td>-55.60</td><td>-10.07</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>3517.00</td><td>-63.93</td><td>-16.93</td><td>-47.00</td><td>-47.87</td><td>-16.06</td><td>HORIZONTAL</td></tr></table>			Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1 @	31.78	-60.15	-3.15	-57.00	-61.11	0.96	HORIZONTAL	2	69.95	-65.67	-8.67	-57.00	-55.60	-10.07	HORIZONTAL	3	3517.00	-63.93	-16.93	-47.00	-47.87	-16.06	HORIZONTAL	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr><tr><td>1 @</td><td>31.78</td><td>-62.00</td><td>-5.00</td><td>-57.00</td><td>-60.93</td><td>-1.07</td><td>VERTICAL</td></tr><tr><td>2</td><td>70.90</td><td>-63.51</td><td>-6.51</td><td>-57.00</td><td>-56.10</td><td>-7.41</td><td>VERTICAL</td></tr><tr><td>3</td><td>3985.00</td><td>-62.30</td><td>-15.30</td><td>-47.00</td><td>-47.15</td><td>-15.15</td><td>VERTICAL</td></tr></table>			Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1 @	31.78	-62.00	-5.00	-57.00	-60.93	-1.07	VERTICAL	2	70.90	-63.51	-6.51	-57.00	-56.10	-7.41	VERTICAL	3	3985.00	-62.30	-15.30	-47.00	-47.15	-15.15
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																														
	MHz	dBm	dB	dBm	dBm	dB																																																																															
1 @	31.78	-60.15	-3.15	-57.00	-61.11	0.96	HORIZONTAL																																																																														
2	69.95	-65.67	-8.67	-57.00	-55.60	-10.07	HORIZONTAL																																																																														
3	3517.00	-63.93	-16.93	-47.00	-47.87	-16.06	HORIZONTAL																																																																														
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																														
	MHz	dBm	dB	dBm	dBm	dB																																																																															
1 @	31.78	-62.00	-5.00	-57.00	-60.93	-1.07	VERTICAL																																																																														
2	70.90	-63.51	-6.51	-57.00	-56.10	-7.41	VERTICAL																																																																														
3	3985.00	-62.30	-15.30	-47.00	-47.15	-15.15	VERTICAL																																																																														

4. Maximum Output Power Table

<GSM>


Burst Average Power (dBm)	
Mode	GSM 900
GSM	32.47
GPRS	32.45

Burst Average Power (dBm)	
Mode	GSM 1800
GSM	29.79
GPRS	29.74


5. Setup Photographs

Radiated Spurious Emission

X Plane

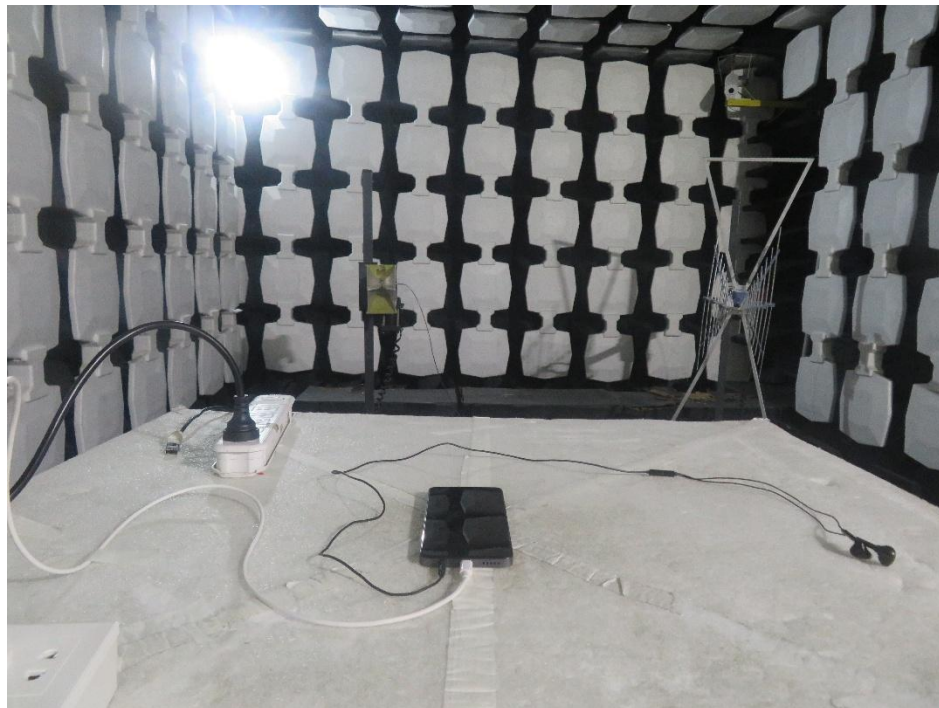

DUT Photographs

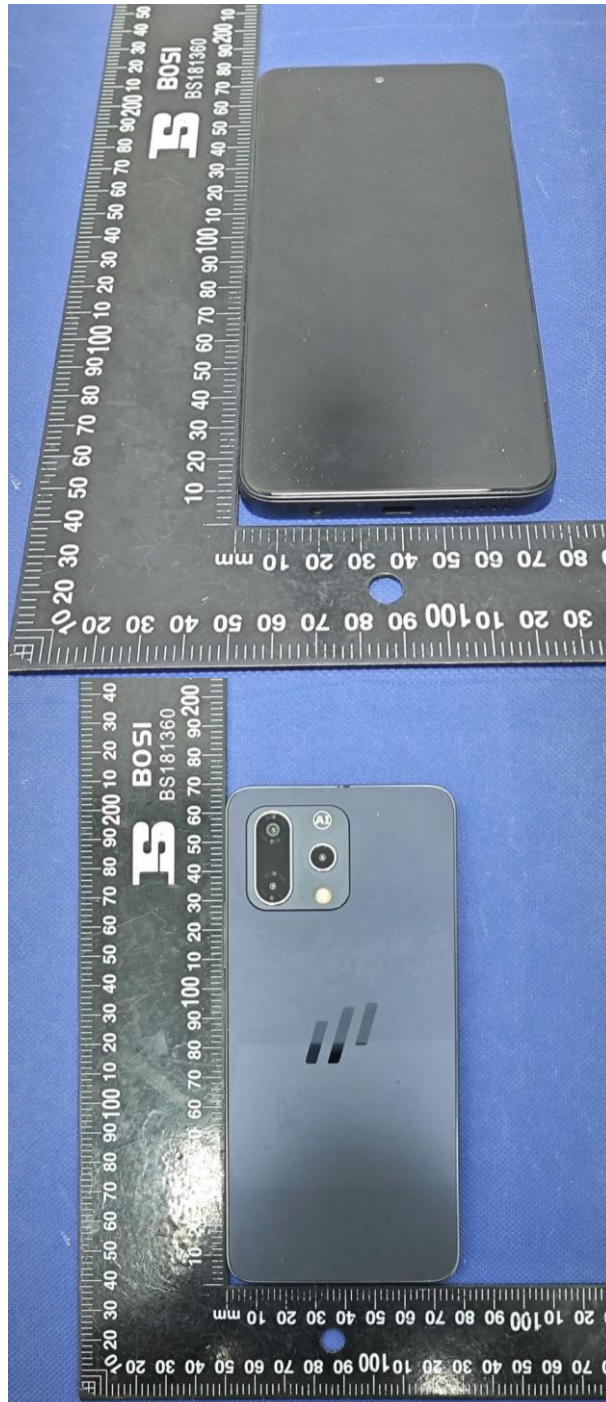



6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Radiated spurious emissions	30MHz ~ 1GHz	±2.54dB
	1GHz ~ 12.75GHz	±2.54dB



7. List of Measuring Equipment

7.1 Radiated Spurious Emissions

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal and spectrum analyzer	Rohde & Schwarz	FSV3044	101177	10Hz-44GHz	Jul. 03, 2025	Mar. 14, 2026	Jul. 02, 2026	Radiation (05CH02-KS)
Log-periodic antenna	R&S	HL562	100446	30MHz-3GHz	Jan. 09, 2026	Mar. 14, 2026	Jan. 08, 2027	Radiation (05CH02-KS)
Horn Antenna	R&S	HF906	100485	1GHz~18GHz	Feb. 07, 2026	Mar. 14, 2026	Feb. 06, 2027	Radiation (05CH02-KS)
SHF-EHF Horn	Com-Power	AH-840	101116	18GHz~40GHz	Oct. 18, 2025	Mar. 14, 2026	Oct. 17, 2026	Radiation (05CH02-KS)
Amplifier	Keysight	83017A	MY53270360	500MHz~26.5G Hz	Apr. 09, 2025	Mar. 14, 2026	Apr. 08, 2026	Radiation (05CH02-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Dec. 24, 2025	Mar. 14, 2026	Dec. 23, 2026	Radiation (05CH02-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Dec. 26, 2025	Mar. 14, 2026	Dec. 25, 2026	Radiation (05CH02-KS)
Amplifier	EM	EM01G18GA	060839	1GHz-18GHz	Sep. 19, 2025	Mar. 14, 2026	Sep. 18, 2026	Radiation (05CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)

7.2 Radio Conformance Test (RCT) System

Please Refer Annex A

---THE END---

1 Test Equipment

Conformance testing was performed using test equipment calibrated in accordance with TAF accreditation requirements. Calibration, configuration records and equipment details used for conformance testing are available for inspection at Sporton International Inc., if required.

1.1 TP005 R&S TS8950G Test System (KunShan)

Test Platform Info		R&S TS8950G Test System		
Serial Number		100095		
Hardware Info		Devices List		
Manufacturer	Model Info	Description	Serial Number	Calibration Due Date
R&S	NGSM32	Power Supply	5005	03-Jul-26
R&S	SMU200A	Vector Signal Generator	103066	02-Jan-28
R&S	SMP02	Microwave Generator	100367	27-Feb-29
R&S	ASCU850	GSM 850 MS Advanced Signal Comditioning Unit	100070	NCR
R&S	ASCU190	GSM 1900 MS Advanced Signal Comditioning Unit	100079	NCR
R&S	ASCU180	GSM 1800 MS Advanced Signal Comditioning Unit	100077	NCR
R&S	ASCU900	GSM 900 MS Advanced Signal Comditioning Unit	100078	NCR
R&S	SMU200A	Vector Signal Generator	102328	02-Jan-28
R&S	FSU	Spectrum Analyzer	200436	24-Dec-26
R&S	SSCU-GW	Switching and Signal Conditioning Unit	100025	NCR
R&S	CRTU-RU	Universal Protocol Tester	100093	10-Oct-26
R&S	NRVD	Power Meter	101740	08-Oct-26
R&S	ABFS	Fading Simulator	100250	6-Jul-26
R&S	PSL3	Industrial Controller	100062	NCR
Symmetricon	8040/CS-RUB6	Rubidium FrequencyStandard	100054	20-Oct-26
R&S	NRV-Z1	Power Sensor	100418	03-Jul-26
R&S	NRV-Z1	Power Sensor	100171	9-Apr-27
Software Version	Operational System			
	Windows 7 Professional			
	Platform Software		Version	
	Test System Control Center		V10.62.03.00	
	Software Modules		Version	
	Common		V10.62(3) 07.03.16	
	Applications		V5.31(1) 07.03.16	

1.2 TP36 – KEYSIGHT N1960A (GS-8800)(2G/3G) (KunShan)

Manufacturer:	KEYSIGHT Technology	
Serial number	MY44430268	
Keysight 8960 Firmware	2G: E6701K – 13090350 3G: E6703J –15120350	
RCT Software:	RCT 3.6.1.0.0	
Instrument	Serial No.	Calibration Due
Keysight N9020A	MY53420893	03-Jul-26
Keysight E8257D	MY48050405	8-Apr-27
Keysight 66319D	MY43003112	10-Oct-26
Keysight E4438C	MY47271570	03-Jul-26
Keysight E4418B	MY45107368	03-Jul-26
Spirent SR5500M	WCE341A5	9-Apr-27
Keysight N8990A P06	MY45500167	NCR
Keysight GSM Modem	MY45490155	NCR
Keysight N9370A	MY46130145	NCR
Keysight 8960 E5515C	MY50267045	03-Jul-26
Keysight RF Interface	MY45490158	NCR
Keysight E9304A	MY41498364	03-Jul-26
Keysight Control PC	TBNB110347	NCR

1.3 CS3000 (KUNSHAN)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Due Date	Remark
UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	MY60101082	4G/5G	2027/04/07	CS3000
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59101301	9kHz - 6GHz	2027/04/07	CS3000
MXG Analog Signal Generator	KEYSIGHT	N5173B	MY59101066	9kHz - 40GHz	2027/04/07	CS3000
EXA Signal Analyzer	KEYSIGHT	N9010B	MY60240804	10Hz - 44GHz	2027/04/07	CS3000