



CE Radio Test Report

APPLICANT : Magne AI Global tech limited
EQUIPMENT : MAG1
BRAND NAME : MaQ
MODEL NAME : MA1
STANDARD : ETSI EN 300 440 V2.2.1 (2018-07)
TEST DATE(S) : Feb. 17, 2026 ~ Mar. 14, 2026

The measurements shown in this test report were made in accordance with the procedures given in ETSI EN 300 440 V2.2.1 (2018-07).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Facility.....	6
1.7 Test Software.....	7
1.8 Applied Standards	7
1.9 Test Condition.....	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system	8
2.4 EUT Operation Test Setup	8
3. TRANSMITTER PARAMETERS	9
3.1 Equivalent Isotropically Radiated Power	9
3.2 Permitted Range of Operating Frequencies	12
3.3 Transmitter Spurious Emissions	14
4. RECEIVER PARAMETERS.....	16
4.1 Receiver category	16
4.2 General performance criteria.....	16
4.3 Receiver Blocking Test.....	17
4.4 Receiver Spurious Emissions.....	21
5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION.....	23
6. LIST OF MEASURING EQUIPMENT	24
7. MEASUREMENT UNCERTAINTY	25
APPENDIX A. TEST RESULT OF RADIATED SPURIOUS EMISSION	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
EQ612311	Rev. 01	Initial issue of report	May 25, 2026

SUMMARY OF TEST RESULT

CLAUSE (EN 300 440)	TEST PARAMETER	PASS/FAIL	REMARK
Transmitter Parameters			
4.2.2	Equivalent Isotropically Radiated Power	PASS	-
4.2.3	Permitted Range of Operating Frequencies	PASS	-
4.2.4	Unwanted Emissions	PASS	Under limit 6.81 dB at 17973.72 MHz
4.2.5.4	Duty Cycle	Not Applicable	Not applied for LBT or DAA equipment
4.2.6	Additional requirement for FHSS equipment	Not Applicable	WLAN is not FHSS equipment
4.4	Spectrum access techniques	Not Applicable	CEPT/ERC/REC 70-03 Annex 6
4.6.4	GBSAR antenna pattern	Not Applicable	WLAN is not GBSAR equipment
Receiver Parameters			
4.3.3	Adjacent Channel Selectivity	PASS	Applies to equipment Category 1 receivers
4.3.4	Blocking or Desensitization	PASS	-
4.3.5	Spurious Emissions	PASS	Under limit 6.12 dB at 31.94 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1 Applicant

Magne AI Global tech limited

FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.2 Manufacturer

Magne AI Global tech limited

FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	MAG1
Brand Name	MaQ
Model Name	MA1
IMEI / SN Code	Conducted: MGUGLM54300121 Radiation: 016813000001816 Receiver Blocking/Adjacent channel selectivity: 016813000001410/016813000001428
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For other wireless features of this EUT, test report will be issued separately.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx / Rx Frequency Range	5725 MHz ~ 5850 MHz
Channel Spacing	20MHz System: 20 MHz 40MHz System: 40 MHz 80MHz System: 80 MHz
Maximum EIRP Average Power	802.11a : 13.27 dBm 802.11n HT20 : 13.47 dBm 802.11n HT40 : 13.48 dBm 802.11ac VHT20 : 13.45 dBm 802.11ac VHT40 : 13.48 dBm 802.11ac VHT80 : 13.18 dBm
Antenna Type / Gain	LDS Antenna type / 4 dBi
Receiver Category	Category 2
Type of Modulation	802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Power Supply	Battery / AC Adapter

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 modes, the whole testing have assessed only 802.11n HT20 / HT40 by referring to the higher output power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Facility

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Lab.	Sporton International Inc. (Kunshan)
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158
Test Site No.	Sporton Site No. : TH01-KS; DFS01-KS; 05CH02-KS

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system	3.3.10
2.	05CH02-KS	AUDIX	E3	210616
3.	DFS01-KS	SPORTON	DFS & Adaptivity	1.0

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must complies with the requirements of **ETSI EN 300 440 V2.2.1 (2018-07)**

Note: All test items were verified and recorded according to the standards and without any deviation during the test.

1.9 Test Condition

Normal Voltage	DC 3.87V
Extreme Voltage	DC 3.5V and DC 4.45V
Normal Temperature	25°C
Extreme Temperature	-10°C and 40°C

Note:

1. The manufacturer declared that the EUT could work properly between voltage 3.5V~4.45V.
2. The test temperature was between -10°C ~ 40°C by manufacturer requested.


2. Test Configuration of Equipment under Test

2.1 Test Mode

During testing, the interface cables and equipment positions were varied according to European Standard ETSI EN 300 440 V2.2.1 (2018-07).

- Frequency range of radiation was investigated from 25 MHz to 40 GHz.
- Pre-scanned tests were conducted to determine the final configuration from all possible combinations.
- For radiated measurement, pre-scanned in three orthogonal panels (X, Y, Z). The worst cases (X Plane) were recorded in Appendix A of this report.

2.2 Connection Diagram of Test System

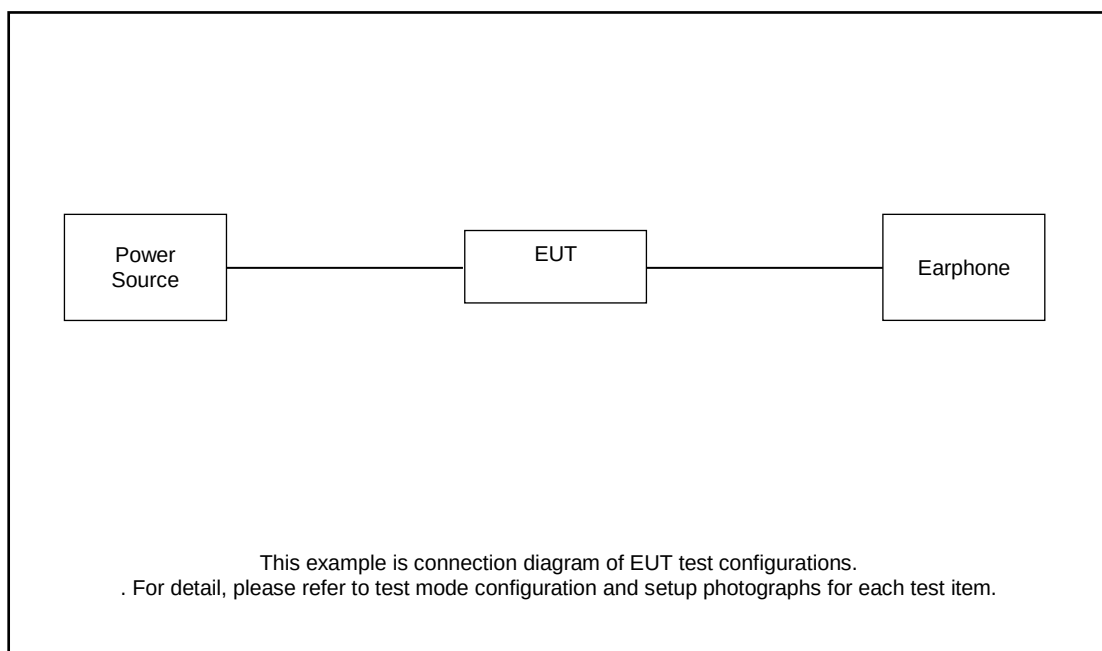

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Apple	NA	N/A	N/A	N/A

2.4 EUT Operation Test Setup

For WLAN test items, an engineering test program was provided and enabled to make EUT continuous transmitting and receiving signals.

3. Transmitter Parameters

3.1 Equivalent Isotropically Radiated Power

3.1.1 Limit of Equivalent Isotropically Radiated Power

The transmitter maximum e.i.r.p. under normal and extreme test conditions shall not exceed 25mW.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. Placing the EUT in thermal chamber.
2. The transmitter output port was connected to the power meter.
3. Connecting the charger to power supply.
4. Setting thermal chamber temperature and power supply voltage at suitable value.
5. The conducted power is equal to the reading on power meter plus cable loss.
6. The EIRP is equal to the conducted power plus the antenna gain.
7. Repeating step 4 to 6 at different condition and different channel.

3.1.4 Test Setup

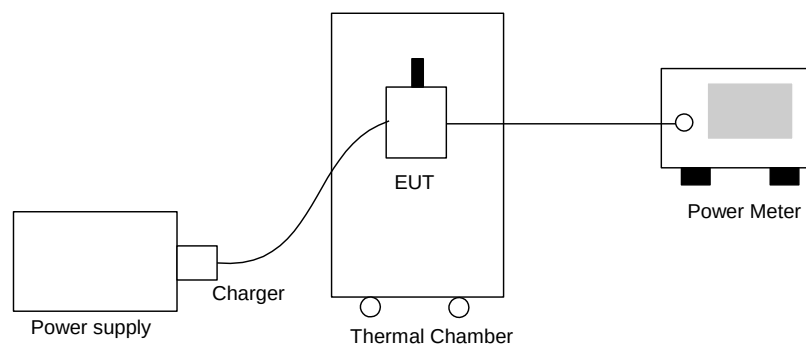

**3.1.5 Test Result**

EUT Mode :	Band IV (5725 ~ 5850 MHz)	Temperature :	21~25°C
Test Engineer :	Smile Wang	Relative Humidity :	51~55%

TEST RESULTS DATA											
EIRP Power											
5725-5850-WIFI-Band 4											
Mode						Power Setting	Conducted Power (dBm)				
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low		Extreme Temperature High	
							25 °C	-10 °C		40 °C	
							Vnom	Vmin	Vmax	Vmin	Vmax
							3.87	3.5	4.45	3.5	4.45
							Ant 6	Ant 6	Ant 6	Ant 6	Ant 6
11a	SISO	1	149	5745	6Mbps	5.00	7.88	8.58	8.92	7.54	7.57
11a	SISO	1	157	5785	6Mbps	6.00	8.21	8.92	9.27	7.86	7.89
11a	SISO	1	165	5825	6Mbps	6.00	8.12	8.75	9.09	7.78	7.81
HT20	SISO	1	149	5745	MCS0	5.00	7.93	8.64	8.99	7.58	7.59
HT20	SISO	1	157	5785	MCS0	6.00	8.51	9.12	9.47	8.16	8.19
HT20	SISO	1	165	5825	MCS0	6.00	8.34	8.98	9.28	8.04	8.07
HT40	SISO	1	151	5755	MCS0	7.00	8.65	9.15	9.48	8.32	8.34
HT40	SISO	1	159	5795	MCS0	7.00	8.64	9.16	9.46	8.34	8.35
VHT20	SISO	1	149	5745	MCS0	5.00	7.89	8.60	8.93	7.56	7.57
VHT20	SISO	1	157	5785	MCS0	6.00	8.49	9.17	9.45	8.21	8.23
VHT20	SISO	1	165	5825	MCS0	6.00	8.33	8.95	9.26	8.02	8.04
VHT40	SISO	1	151	5755	MCS0	7.00	8.62	9.14	9.47	8.29	8.32
VHT40	SISO	1	159	5795	MCS0	7.00	8.63	9.13	9.48	8.28	8.31
VHT80	SISO	1	155	5775	MCS0	7.00	8.16	8.86	9.18	7.84	7.86



Mode						PowerSetting	EIRP Power (dBm)					Gain(dBi)	EIRP Power Limit(dBm)	Pass/Fail
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low		Extreme Temperature High				
							25 °C	-10 °C		40 °C				
							Vnom	Vmin	Vmax	Vmin	Vmax			
							3.87	3.5	4.45	3.5	4.45			
Ant 6							Ant 6	Ant 6	Ant 6	Ant 6	Ant 6			
11a	SISO	1	149	5745	6Mbps	5.00	11.88	12.58	12.92	11.54	11.57	4.00	13.9794	Pass
11a	SISO	1	157	5785	6Mbps	6.00	12.21	12.92	13.27	11.86	11.89	4.00	13.9794	Pass
11a	SISO	1	165	5825	6Mbps	6.00	12.12	12.75	13.09	11.78	11.81	4.00	13.9794	Pass
HT20	SISO	1	149	5745	MCS0	5.00	11.93	12.64	12.99	11.58	11.59	4.00	13.9794	Pass
HT20	SISO	1	157	5785	MCS0	6.00	12.51	13.12	13.47	12.16	12.19	4.00	13.9794	Pass
HT20	SISO	1	165	5825	MCS0	6.00	12.34	12.98	13.28	12.04	12.07	4.00	13.9794	Pass
HT40	SISO	1	151	5755	MCS0	7.00	12.65	13.15	13.48	12.32	12.34	4.00	13.9794	Pass
HT40	SISO	1	159	5795	MCS0	7.00	12.64	13.16	13.46	12.34	12.35	4.00	13.9794	Pass
VHT20	SISO	1	149	5745	MCS0	5.00	11.89	12.60	12.93	11.56	11.57	4.00	13.9794	Pass
VHT20	SISO	1	157	5785	MCS0	6.00	12.49	13.17	13.45	12.21	12.23	4.00	13.9794	Pass
VHT20	SISO	1	165	5825	MCS0	6.00	12.33	12.95	13.26	12.02	12.04	4.00	13.9794	Pass
VHT40	SISO	1	151	5755	MCS0	7.00	12.62	13.14	13.47	12.29	12.32	4.00	13.9794	Pass
VHT40	SISO	1	159	5795	MCS0	7.00	12.63	13.13	13.48	12.28	12.31	4.00	13.9794	Pass
VHT80	SISO	1	155	5775	MCS0	7.00	12.16	12.86	13.18	11.84	11.86	4.00	13.9794	Pass

Note:

Measured average power has offset cable loss and duty factor.

SUM of EIRP Power = SUM of Conducted Power + Antenna Gain

3.2 Permitted Range of Operating Frequencies

3.2.1 Limit of Permitted Range of Operating Frequencies

The width of the power spectrum envelope is $f_H - f_L$ for a given operating frequency. In equipment that allows adjustment or selection of different operating frequencies, the power envelope takes up different positions in the allowed band. The frequency range is determined by the lowest value of f_L and the highest value of f_H resulting from the adjustment of the equipment to the lowest and highest operating frequencies.

The occupied bandwidth (i.e. the bandwidth in which 99 % of the wanted emission is contained) and the necessary bandwidth of the transmitter shall fall within the assigned frequency band.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedure

1. Placing the EUT in thermal chamber.
2. The transmitter output port was connected to the spectrum analyzer.
3. Connecting the charger to power supply.
4. The settings on spectrum analyzer are 30 kHz RBW and 100 kHz VBW.
5. Setting thermal chamber temperature and power supply voltage at suitable value.
6. Recording f_L or f_H for 99% OBW at -30dBm e.i.r.p.
7. Repeating step 5 and 6 at different conditions and different channels.

3.2.4 Test Setup

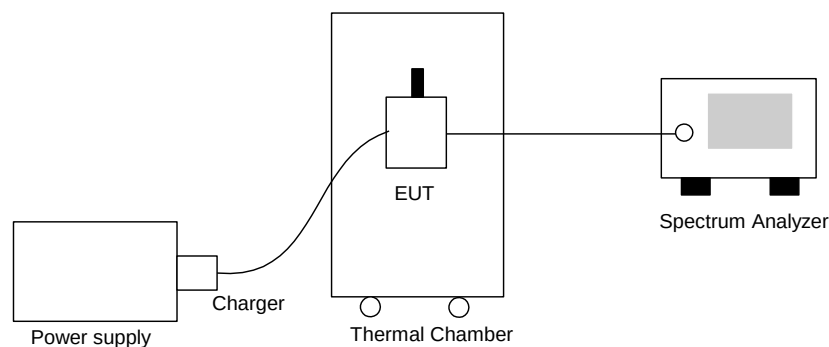

3.2.5 Test Result

TestCondition	TestMode	Antenna	Freq(MHz)	FL [MHz]	FH[MHz]	Limit[MHz]	Verdict
NTNV	11A	Ant6	5745	5735.72	5754.28	5725 to 5850	PASS
			5825	5815.80	5834.24	5725 to 5850	PASS
	11N20SISO	Ant6	5745	5735.24	5754.72	5725 to 5850	PASS
			5825	5815.48	5834.68	5725 to 5850	PASS
	11N40SISO	Ant6	5755	5736.44	5773.56	5725 to 5850	PASS
			5795	5776.44	5813.56	5725 to 5850	PASS
	11AC80SISO	Ant6	5775	5736.60	5813.24	5725 to 5850	PASS
LTLV	11A	Ant6	5745	5735.72	5754.28	5725 to 5850	PASS
			5825	5815.76	5834.24	5725 to 5850	PASS
	11N20SISO	Ant6	5745	5735.28	5754.68	5725 to 5850	PASS
			5825	5815.52	5834.52	5725 to 5850	PASS
	11N40SISO	Ant6	5755	5736.44	5773.56	5725 to 5850	PASS
			5795	5776.44	5813.56	5725 to 5850	PASS
	11AC80SISO	Ant6	5775	5736.60	5813.24	5725 to 5850	PASS
LTHV	11A	Ant6	5745	5735.72	5754.28	5725 to 5850	PASS
			5825	5815.80	5834.24	5725 to 5850	PASS
	11N20SISO	Ant6	5745	5735.28	5754.72	5725 to 5850	PASS
			5825	5815.48	5834.68	5725 to 5850	PASS
	11N40SISO	Ant6	5755	5736.44	5773.56	5725 to 5850	PASS
			5795	5776.44	5813.56	5725 to 5850	PASS
	11AC80SISO	Ant6	5775	5736.60	5813.24	5725 to 5850	PASS
HTLV	11A	Ant6	5745	5735.72	5754.28	5725 to 5850	PASS
			5825	5815.76	5834.24	5725 to 5850	PASS
	11N20SISO	Ant6	5745	5735.32	5754.72	5725 to 5850	PASS
			5825	5815.48	5834.72	5725 to 5850	PASS
	11N40SISO	Ant6	5755	5736.44	5773.56	5725 to 5850	PASS
			5795	5776.44	5813.56	5725 to 5850	PASS
	11AC80SISO	Ant6	5775	5736.76	5813.40	5725 to 5850	PASS
HTHV	11A	Ant6	5745	5735.72	5754.28	5725 to 5850	PASS
			5825	5815.76	5834.24	5725 to 5850	PASS
	11N20SISO	Ant6	5745	5735.24	5754.72	5725 to 5850	PASS
			5825	5815.32	5834.68	5725 to 5850	PASS
	11N40SISO	Ant6	5755	5736.44	5773.56	5725 to 5850	PASS
			5795	5776.44	5813.56	5725 to 5850	PASS
	11AC80SISO	Ant6	5775	5736.60	5813.24	5725 to 5850	PASS

Note: The 99 % occupied bandwidth fall within the assigned frequency band.

3.3 Transmitter Spurious Emissions

3.3.1 Limit of Transmitter Spurious Emissions

SUBCLAUSE 4.2.4.4 of EN 300 440	
FREQUENCY RANGE	LIMITS WHEN OPERATING
25 MHz to 1 GHz	250 nW / -36 dBm
Above 1 GHz	1 μ W / -30 dBm
47MHz to 74MHz 87.5MHz to 108MHz 174MHz to 230MHz 470MHz to 862MHz	4 nW / -54 dBm

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The EUT was placed on a turntable with 1.5m height.
2. The test distance between the receiving antenna and the EUT is 3 meter below 1GHz frequency range, and 3 meter which is in far field test condition for measured frequency above 1GHz, while the receiving (test) antenna is kept at 1.5 meter height.
3. Set EUT in continuous transmitting with maximum output power.
4. The table was rotated from 0 to 360 degree to search the highest radiated emission.
5. Repeating step 3 and 4 for each polarization and channel to find the worst emission level.
6. The results obtained are compared to the limits in order to prove compliance with the requirement.
7. Test Results Explanation:
Level (dBm) = Read Level (dBm) + Factor (dB)
Over Limit (dB) = Level (dBm) – Limit Line (dBm)

3.3.4 Test Setup

<Below 1GHz>

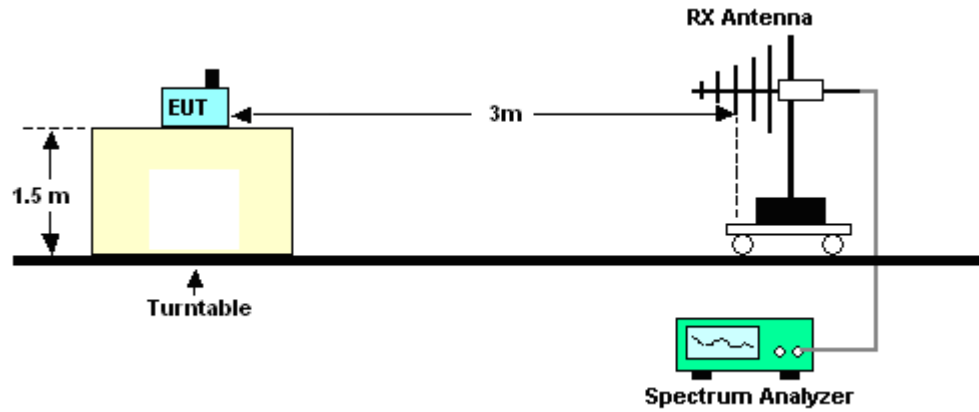

<Above 1GHz>

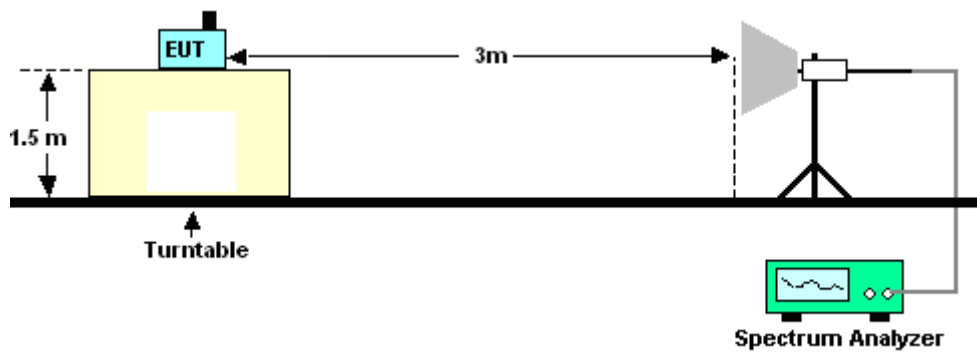

3.3.5 Test Result

Refer to Appendix A.

4. Receiver Parameters

4.1 Receiver category

Receiver category	Relevant receiver clauses	Risk assessment of receiver performance
1	4.3.3, 4.3.4 and 4.3.5	Highly reliable SRD communication media; e.g. serving human life inherent systems (may result in a physical risk to a person).
2	4.3.4 and 4.3.5	Medium reliable SRD communication media e.g. causing inconvenience to persons, which cannot simply be overcome by other means.
3	4.3.4 and 4.3.5	Standard reliable SRD communication media and radio determination devices. e.g. Inconvenience to persons, which can simply be overcome by other means (e.g. manual).

4.2 General performance criteria

For the purpose of the receiver performance tests, the receiver shall produce an appropriate output under normal conditions as indicated below:

- a SND/ND ratio of 20 dB, measured at the receiver output through a telephone psophometric weighting network as described in Recommendation ITU-T O.41 [4]; or
- after demodulation, a data signal with a bit error ratio of 10^{-2} without correction; or
- after demodulation, a message acceptance ratio of 80 %;
- an appropriate false alarm rate or sensing criteria as declared by the manufacturer.

4.3 Receiver Blocking Test

4.3.1 Limit of Receiver Blocking Test

Definition of without exceeding a given degradation: PER shall be less than 10% declared by the manufacturer

Receiver category	Limit
1	-30 dBm + k
2	-45 dBm + k
3	-60 dBm + k

The correction factor, k, is as follows:

$$K = -20\log f - 10\log BW$$

Where:

- f is the frequency in GHz;
 - BW is the occupied bandwidth in MHz.
- The factor k is limited within the following:
- $-40 < k < 0\text{dB}$.


4.3.2 Measuring Instruments

The measuring equipment is listed in the section 7 of this test report.

4.3.3 Test Procedures

1. Refer to Section 4.3.4.3 of ETSI EN 300 440 V2.2.1 (2018-07).
2. Two signal generators A and B shall be connected to the receiver via a combining network to the receiver, directly to the receiver temporary antenna connector.
3. Initially unwanted signal generator B shall be switched off and using wanted signal generator A, the wanted signal level (P_{min}) which still gives sufficient response shall be established.
The output level of generator A shall then be increased by 3 dB ($P_{min} + 3\text{dB}$).
4. The measurement shall be repeated with the test frequency for signal generator B at approximately 10 times, 20 times and 50 times of the occupied bandwidth below the lower band edge and above the upper band edge of the occupied bandwidth.

4.3.4 Test Setup

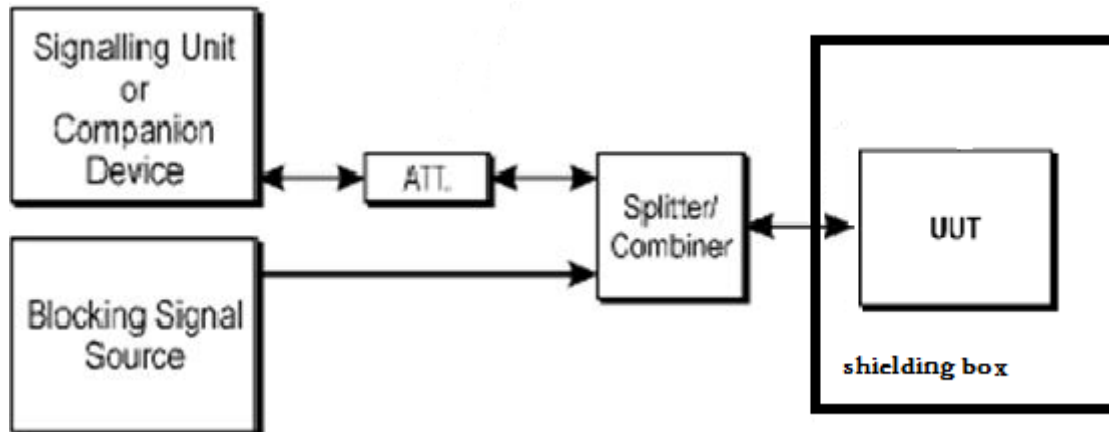


4.3.5 Test Results of Receiver Blocking

Note:

1. PER shall be less than 10% declared by the manufacturer.
2. The power of blocking signal shall not be less than -45 dBm + k.

WiFi 802.11a 6Mbps Channel 149, OBW = 16.384MHz Channel lower band edge frequency Fl= 5736.8082MHz, Channel upper band edge frequency Fh= 5753.1918 MHz,				
Wanted signal From companion	Blocking signal Frequency(MHz)	Limit of Blocking signal Power(dBm)	Measured PER(%)	Test Result (Pass/Fail)
Pmin + 3dB	4917.63	-72.45	0.3	Pass
Pmin + 3dB	5409.14	-72.45	0.8	Pass
Pmin + 3dB	5572.97	-72.45	0.15	Pass
Pmin + 3dB	5917.03	-72.45	0	Pass
Pmin + 3dB	6080.86	-72.45	0.8	Pass
Pmin + 3dB	6572.37	-72.45	0	Pass
Pmin= -93dBm				
Note: K= -20logf-10log BW, -40 dB < k < 0 dB.				

WiFi 802.11a 6Mbps Channel 165, OBW = 16.384 MHz Channel lower band edge frequency Fl= 5816.8082 MHz, Channel upper band edge frequency Fh= 5833.1918MHz,				
Wanted signal From companion	Blocking signal Frequency(MHz)	Limit of Blocking signal Power(dBm)	Measured PER(%)	Test Result (Pass/Fail)
Pmin + 3dB	4997.63	-72.45	1.45	Pass
Pmin + 3dB	5489.14	-72.45	2.1	Pass
Pmin + 3dB	5652.97	-72.45	1.7	Pass
Pmin + 3dB	5997.03	-72.45	1.7	Pass
Pmin + 3dB	6160.86	-72.45	1.85	Pass
Pmin + 3dB	6652.37	-72.45	2.4	Pass
Pmin= -93dBm				
Note: K= -20logf-10log BW, -40 dB < k < 0 dB.				

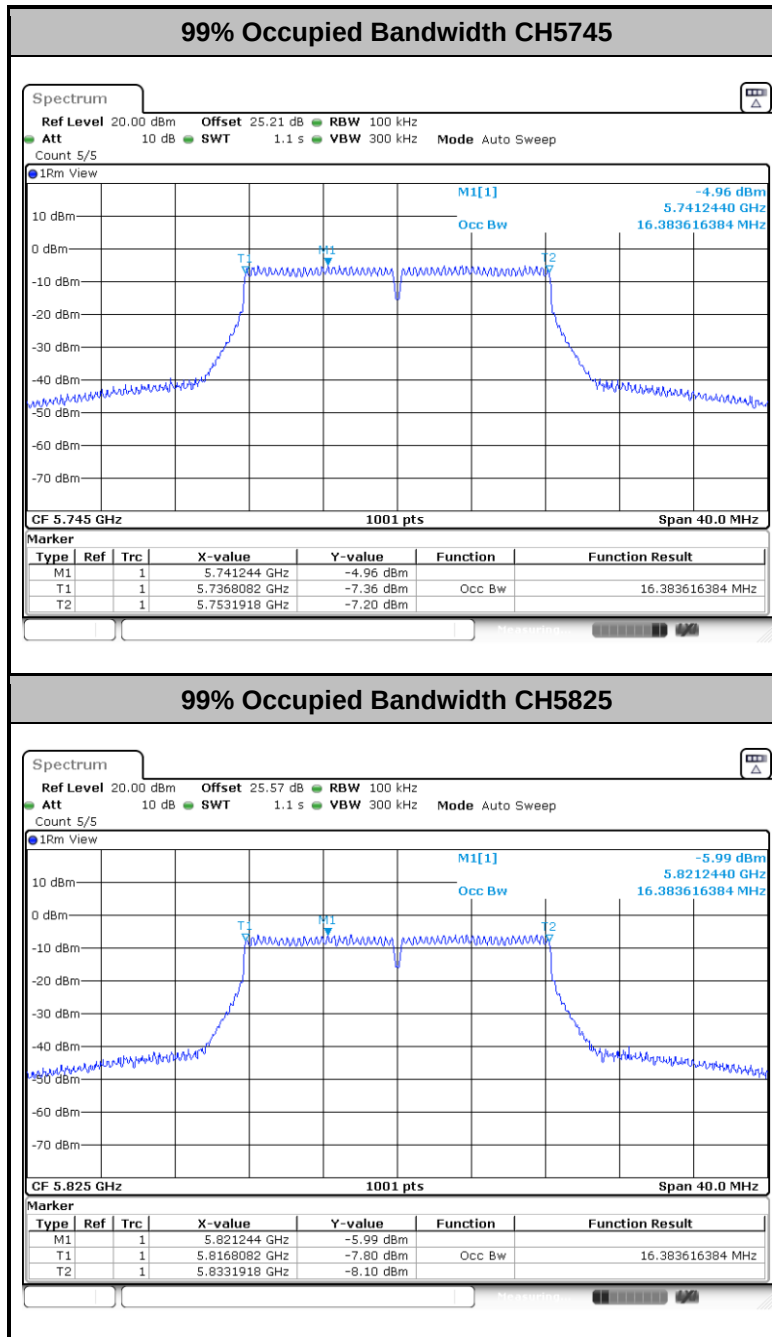

4.4 Receiver Spurious Emissions

4.4.1 Limit of Receiver Spurious Emissions

SUBCLAUSE 4.3.5 of EN 300 440	
FREQUENCY RANGE	LIMITS
25 MHz to 1 GHz	2 nW / -57 dBm
Above 1 GHz	20 nW / -47 dBm

4.4.2 Measuring Instruments


See list of measuring instruments of this test report.

4.4.3 Test Procedures


1. The EUT was placed on a turntable with 1.5m height.
2. The test distance between the receiving antenna and the EUT is 3 meter below 1GHz frequency range, and 3 meter which is in far field test condition for measured frequency above 1GHz, while the receiving (test) antenna is kept at 1.5 meter height.
3. Set EUT in continuous receiving with maximum output power.
4. The table was rotated from 0 to 360 degree to search the highest radiated emission.
5. Repeating step 3 and 4 for each polarization and channel to find the worst emission level.
6. The results obtained are compared to the limits in order to prove compliance with the requirement.
7. Test Results Explanation:
Level (dBm) = Read Level (dBm) + Factor (dB)
Over Limit (dB) = Level (dBm) – Limit Line (dBm)

4.4.4 Test Setup

<Below 1GHz>

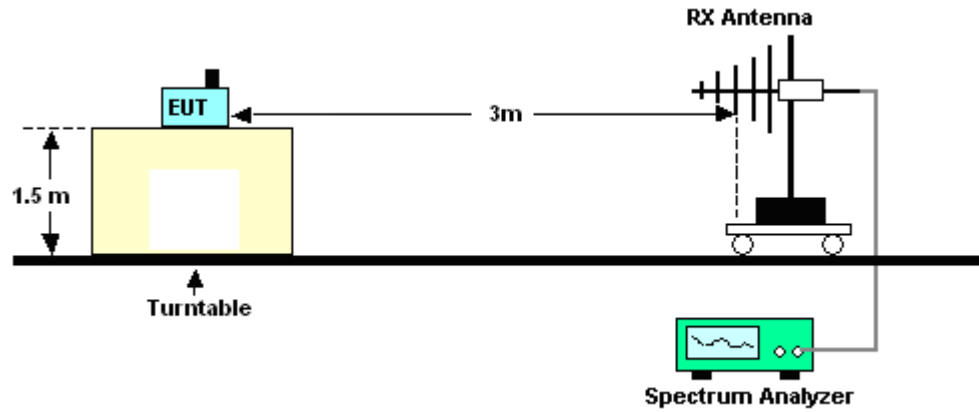

<Above 1GHz>

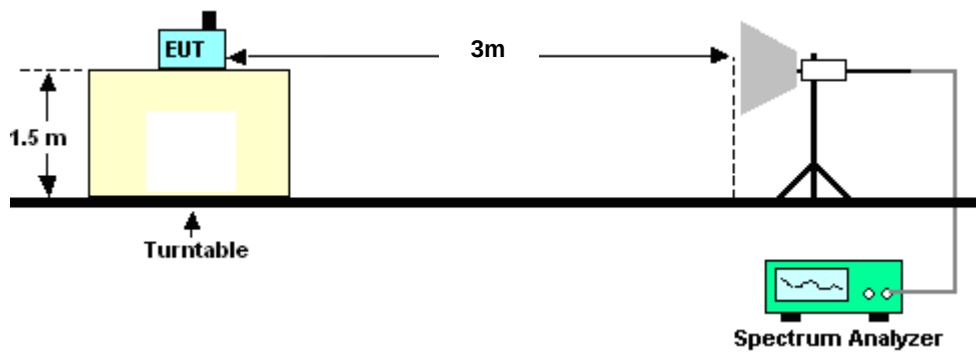


4.4.5 Test Result

Refer to Appendix A.

5. Photographs of Radiated Emission Test Configuration

X Plane

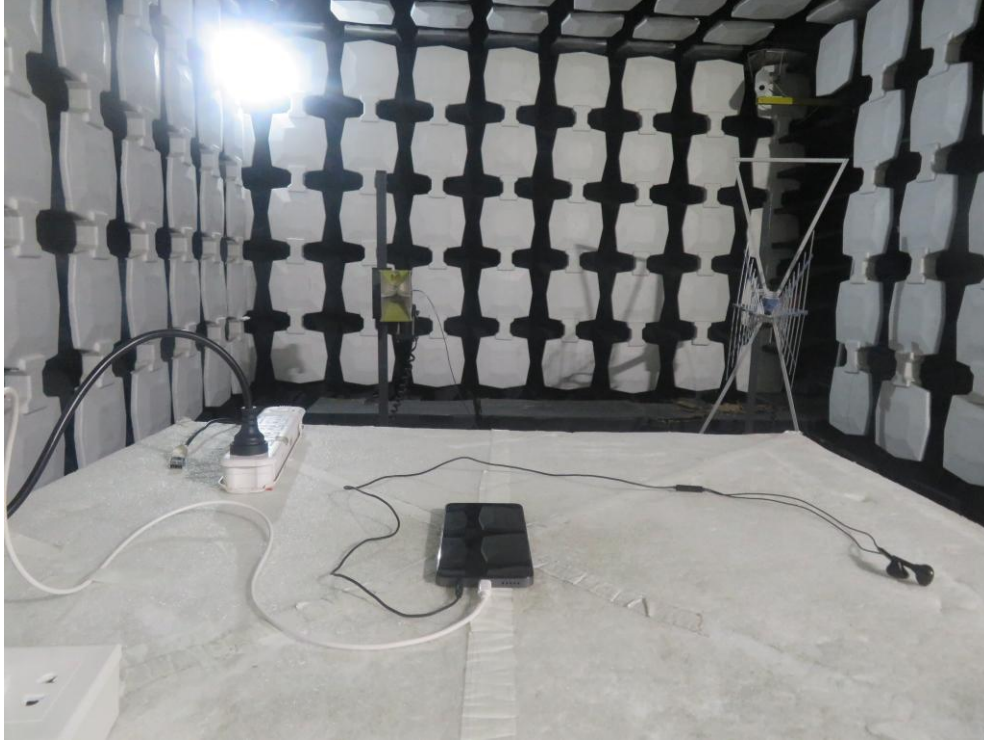



6. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal and spectrum analyzer	Rohde & Schwarz	FSV3044	101177	10Hz~44GHz	Jul, 03, 2025	Mar. 14, 2026	Jul, 02, 2026	Radiation (05CH02-KS)
Log-periodic antenna	R&S	HL562	100446	30MHz~3GHz	Jan. 09, 2026	Mar. 14, 2026	Jan. 08, 2027	Radiation (05CH02-KS)
Horn Antenna	R&S	HF906	100681	1GHz~18GHz	Apr 20, 2025	Mar. 14, 2026	Apr 19, 2026	Radiation (05CH02-KS)
SHF-EHF Horn	Com-Power	AH-840	101116	18GHz~40GHz	Oct. 18, 2025	Mar. 14, 2026	Oct. 17, 2026	Radiation (05CH02-KS)
Amplifier	Keysight	83017A	MY53270360	500MHz~26.5GHz	Apr 18, 2025	Mar. 14, 2026	Apr 17, 2026	Radiation (05CH02-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHz	Dec. 24, 2025	Mar. 14, 2026	Dec. 23, 2026	Radiation (05CH02-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Dec. 26, 2025	Mar. 14, 2026	Dec. 25, 2026	Radiation (05CH02-KS)
Amplifier	EM	EM01G18GA	060839	1GHz~18GHz	Sep, 19, 2025	Mar. 14, 2026	Sep, 18, 2026	Radiation (05CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Feb. 17, 2026	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Dec. 25, 2025	Feb. 17, 2026	Dec. 24, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Dec. 25, 2025	Feb. 17, 2026	Dec. 24, 2026	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 02, 2025	Feb. 17, 2026	Jul. 01, 2026	Conducted (TH01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Aug. 26, 2025	Feb. 17, 2026	Aug. 25, 2026	Conducted (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Dec. 24, 2025	Feb. 17, 2026	Dec. 23, 2026	Conducted (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr 16, 2025	Feb. 17, 2026	Apr 15, 2026	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Feb. 17, 2026	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required



7. Measurement Uncertainty

Test Item	Uncertainty
RF output power	±0.90 dB
Adjacent channel selectivity	±0.56 dB
RF Frequency	±0.38ppm
Receiver Blocking	±0.56 dB
Radiated spurious emissions (25M - 1GHz)	±2.54 dB
Radiated spurious emissions (1G - 18GHz)	±2.54 dB
Radiated spurious emissions (18G – 26.5GHz)	±2.54 dB
Radiated spurious emissions (26.5G – 40GHz)	±2.54 dB

————THE END————



Appendix A Radiated Spurious Emission Test Data

Test Engineer :	Juggler Zhang	Relative Humidity :	42 ~ 43%
		Temperature :	22~ 23℃

Radiated Spurious Emission Test Modes

Antenna	Mode	TX/RX	Test Function	Condition	Modulation	Channel	Frequency	Axis
6	Mode 1	Tx	802.11a	6Mbps	OFDM	CH149	5745	X
6	Mode 2	Tx	802.11n HT20	MCS0	OFDM	CH149	5745	X
6	Mode 3	Tx	802.11n HT40	MCS0	OFDM	CH151	5755	X
6	Mode 4	Tx	802.11ac VHT80	MCS0	OFDM	CH155	5775	X
6	Mode 5	Rx	802.11n HT20	MCS0	OFDM	CH149	5745	X



Note: RX mode is verified worse case of TX modes.

Summary of each worse mode



Mode	Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization	Result
1	17891.22	-39.05	-30.00	-9.05	Horizontal	Pass
2	17973.72	-36.81	-30.00	-6.81	Horizontal	Pass
3	17992.67	-37.00	-30.00	-7.00	Horizontal	Pass
4	13987.83	-39.67	-30.00	-9.67	Horizontal	Pass
5	31.94	-63.12	-57.00	-6.12	Horizontal	Pass





Mode	1																																																																																					
	802.11a OFDM_CH149																																																																																					
Ant	6																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Tx	Horizontal Tx Spectrum Plot showing Level (dBm) vs Frequency (MHz). The plot includes a red limit line at -36.9 dBm and a blue read line at -49.5 dBm. The frequency range is from 25 to 40000 MHz. The level is constant at -36.9 dBm across the entire frequency range. <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th></th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>31.94</td><td>-63.49</td><td>-27.49</td><td>-36.00</td><td>-66.58</td><td>3.09 HORIZONTAL</td></tr><tr><td>2</td><td>5668.00</td><td>-42.84</td><td>-12.84</td><td>-30.00</td><td>-70.56</td><td>27.72 HORIZONTAL</td></tr><tr><td>3</td><td>6995.50</td><td>-40.58</td><td>-10.58</td><td>-30.00</td><td>-69.81</td><td>29.23 HORIZONTAL</td></tr><tr><td>4 @</td><td>17891.22</td><td>-39.05</td><td>-9.05</td><td>-30.00</td><td>-77.52</td><td>38.47 HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read			MHz	dBm	dB	dBm	dBm	dB	1	31.94	-63.49	-27.49	-36.00	-66.58	3.09 HORIZONTAL	2	5668.00	-42.84	-12.84	-30.00	-70.56	27.72 HORIZONTAL	3	6995.50	-40.58	-10.58	-30.00	-69.81	29.23 HORIZONTAL	4 @	17891.22	-39.05	-9.05	-30.00	-77.52	38.47 HORIZONTAL	Vertical Tx Spectrum Plot showing Level (dBm) vs Frequency (MHz). The plot includes a red limit line at -36.9 dBm and a blue read line at -49.5 dBm. The frequency range is from 25 to 40000 MHz. The level is constant at -36.9 dBm across the entire frequency range. <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th></th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>31.94</td><td>-66.54</td><td>-30.54</td><td>-36.00</td><td>-67.60</td><td>1.06 VERTICAL</td></tr><tr><td>2</td><td>5644.00</td><td>-44.14</td><td>-14.14</td><td>-30.00</td><td>-68.86</td><td>24.72 VERTICAL</td></tr><tr><td>3 @</td><td>6646.00</td><td>-42.08</td><td>-12.08</td><td>-30.00</td><td>-68.88</td><td>26.80 VERTICAL</td></tr><tr><td>4</td><td>14916.77</td><td>-43.14</td><td>-13.14</td><td>-30.00</td><td>-76.73</td><td>33.59 VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read			MHz	dBm	dB	dBm	dBm	dB	1	31.94	-66.54	-30.54	-36.00	-67.60	1.06 VERTICAL	2	5644.00	-44.14	-14.14	-30.00	-68.86	24.72 VERTICAL	3 @	6646.00	-42.08	-12.08	-30.00	-68.88	26.80 VERTICAL	4	14916.77	-43.14	-13.14	-30.00	-76.73	33.59 VERTICAL
	Result	Freq	Level	Margin	Limit	Read																																																																																
	MHz	dBm	dB	dBm	dBm	dB																																																																																
1	31.94	-63.49	-27.49	-36.00	-66.58	3.09 HORIZONTAL																																																																																
2	5668.00	-42.84	-12.84	-30.00	-70.56	27.72 HORIZONTAL																																																																																
3	6995.50	-40.58	-10.58	-30.00	-69.81	29.23 HORIZONTAL																																																																																
4 @	17891.22	-39.05	-9.05	-30.00	-77.52	38.47 HORIZONTAL																																																																																
Result	Freq	Level	Margin	Limit	Read																																																																																	
	MHz	dBm	dB	dBm	dBm	dB																																																																																
1	31.94	-66.54	-30.54	-36.00	-67.60	1.06 VERTICAL																																																																																
2	5644.00	-44.14	-14.14	-30.00	-68.86	24.72 VERTICAL																																																																																
3 @	6646.00	-42.08	-12.08	-30.00	-68.88	26.80 VERTICAL																																																																																
4	14916.77	-43.14	-13.14	-30.00	-76.73	33.59 VERTICAL																																																																																

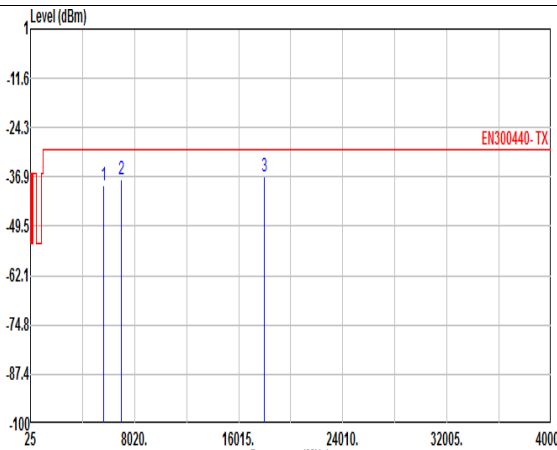
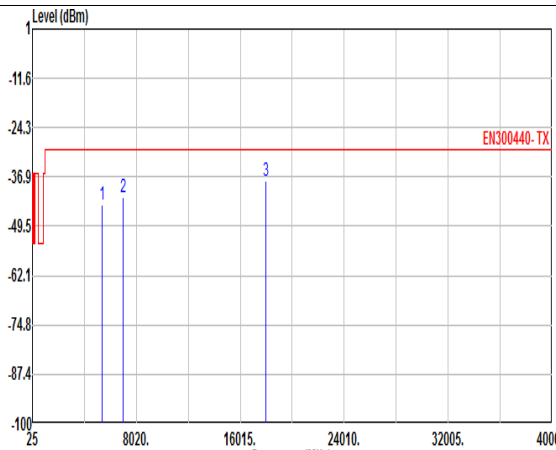
Mode	2																																																																																	
	802.11n HT20 OFDM_CH149																																																																																	
Ant	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Tx	 Level (dBm) Frequency (MHz) EN300440-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5666.50</td><td>-39.08</td><td>-9.08</td><td>-30.00</td><td>-66.46</td><td>27.38</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>6995.50</td><td>-37.55</td><td>-7.55</td><td>-30.00</td><td>-65.59</td><td>28.04</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>17973.72</td><td>-36.81</td><td>-6.81</td><td>-30.00</td><td>-80.54</td><td>43.73</td><td>HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	5666.50	-39.08	-9.08	-30.00	-66.46	27.38	HORIZONTAL	2	6995.50	-37.55	-7.55	-30.00	-65.59	28.04	HORIZONTAL	3 @	17973.72	-36.81	-6.81	-30.00	-80.54	43.73	HORIZONTAL	 Level (dBm) Frequency (MHz) EN300440-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5407.00</td><td>-43.95</td><td>-13.95</td><td>-30.00</td><td>-68.49</td><td>24.54</td><td>VERTICAL</td></tr><tr><td>2</td><td>6986.50</td><td>-42.07</td><td>-12.07</td><td>-30.00</td><td>-67.71</td><td>25.64</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>17998.78</td><td>-37.71</td><td>-7.71</td><td>-30.00</td><td>-77.81</td><td>40.10</td><td>VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	5407.00	-43.95	-13.95	-30.00	-68.49	24.54	VERTICAL	2	6986.50	-42.07	-12.07	-30.00	-67.71	25.64	VERTICAL	3 @	17998.78	-37.71	-7.71	-30.00	-77.81	40.10	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																										
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	5666.50	-39.08	-9.08	-30.00	-66.46	27.38	HORIZONTAL																																																																											
2	6995.50	-37.55	-7.55	-30.00	-65.59	28.04	HORIZONTAL																																																																											
3 @	17973.72	-36.81	-6.81	-30.00	-80.54	43.73	HORIZONTAL																																																																											
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																											
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	5407.00	-43.95	-13.95	-30.00	-68.49	24.54	VERTICAL																																																																											
2	6986.50	-42.07	-12.07	-30.00	-67.71	25.64	VERTICAL																																																																											
3 @	17998.78	-37.71	-7.71	-30.00	-77.81	40.10	VERTICAL																																																																											

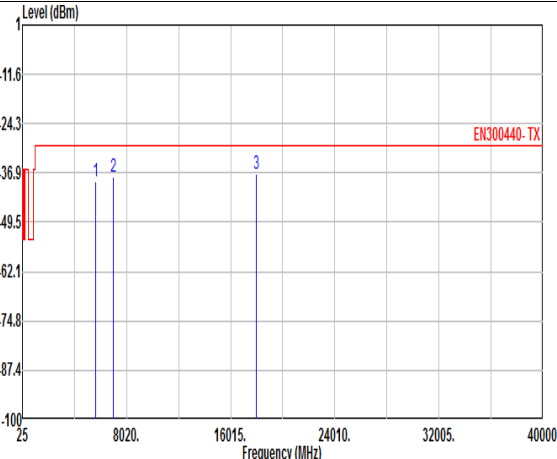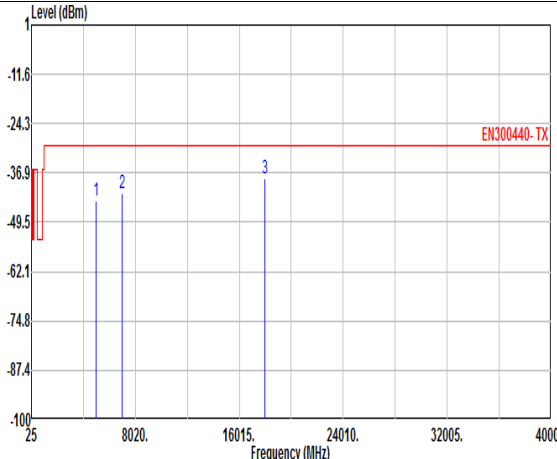

Mode	3																																																																												
	802.11n HT40 OFDM_CH151																																																																												
Ant	6																																																																												
Pol.	Horizontal				Vertical																																																																								
Tx																																																																													
	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th></th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5624.50</td><td>-38.93</td><td>-8.93</td><td>-30.00</td><td>-66.25</td><td>27.32 HORIZONTAL</td></tr><tr><td>2</td><td>6998.50</td><td>-37.73</td><td>-7.73</td><td>-30.00</td><td>-65.77</td><td>28.04 HORIZONTAL</td></tr><tr><td>3 @</td><td>17992.67</td><td>-37.00</td><td>-7.00</td><td>-30.00</td><td>-80.82</td><td>43.82 HORIZONTAL</td></tr></tbody></table>				Result	Freq	Level	Margin	Limit	Read			MHz	dBm	dB	dBm	dBm	dB	1	5624.50	-38.93	-8.93	-30.00	-66.25	27.32 HORIZONTAL	2	6998.50	-37.73	-7.73	-30.00	-65.77	28.04 HORIZONTAL	3 @	17992.67	-37.00	-7.00	-30.00	-80.82	43.82 HORIZONTAL	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th></th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>5000.50</td><td>-44.13</td><td>-14.13</td><td>-30.00</td><td>-68.48</td><td>24.35 VERTICAL</td></tr><tr><td>2</td><td>7000.00</td><td>-42.00</td><td>-12.00</td><td>-30.00</td><td>-67.65</td><td>25.65 VERTICAL</td></tr><tr><td>3 @</td><td>17985.33</td><td>-38.08</td><td>-8.08</td><td>-30.00</td><td>-78.11</td><td>40.03 VERTICAL</td></tr></tbody></table>			Result	Freq	Level	Margin	Limit	Read			MHz	dBm	dB	dBm	dBm	dB	1	5000.50	-44.13	-14.13	-30.00	-68.48	24.35 VERTICAL	2	7000.00	-42.00	-12.00	-30.00	-67.65	25.65 VERTICAL	3 @	17985.33	-38.08	-8.08	-30.00	-78.11	40.03 VERTICAL
	Result	Freq	Level	Margin	Limit	Read																																																																							
	MHz	dBm	dB	dBm	dBm	dB																																																																							
1	5624.50	-38.93	-8.93	-30.00	-66.25	27.32 HORIZONTAL																																																																							
2	6998.50	-37.73	-7.73	-30.00	-65.77	28.04 HORIZONTAL																																																																							
3 @	17992.67	-37.00	-7.00	-30.00	-80.82	43.82 HORIZONTAL																																																																							
Result	Freq	Level	Margin	Limit	Read																																																																								
	MHz	dBm	dB	dBm	dBm	dB																																																																							
1	5000.50	-44.13	-14.13	-30.00	-68.48	24.35 VERTICAL																																																																							
2	7000.00	-42.00	-12.00	-30.00	-67.65	25.65 VERTICAL																																																																							
3 @	17985.33	-38.08	-8.08	-30.00	-78.11	40.03 VERTICAL																																																																							

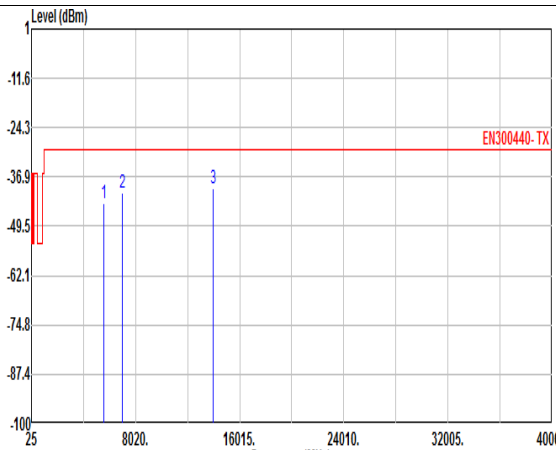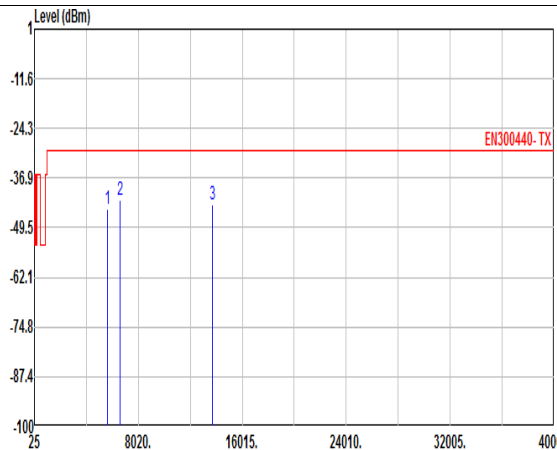Mode	4																																																																																						
	802.11ac VHT80 OFDM_CH155																																																																																						
Ant	6																																																																																						
Pol.	Horizontal				Vertical																																																																																		
Tx																																																																																							
	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5591.50</td><td>-43.44</td><td>-13.44</td><td>-30.00</td><td>-71.00</td><td>27.56</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>6977.50</td><td>-40.97</td><td>-10.97</td><td>-30.00</td><td>-70.05</td><td>29.08</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>13987.83</td><td>-39.67</td><td>-9.67</td><td>-30.00</td><td>-78.22</td><td>38.55</td><td>HORIZONTAL</td></tr></tbody></table>				Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	5591.50	-43.44	-13.44	-30.00	-71.00	27.56	HORIZONTAL	2	6977.50	-40.97	-10.97	-30.00	-70.05	29.08	HORIZONTAL	3 @	13987.83	-39.67	-9.67	-30.00	-78.22	38.55	HORIZONTAL	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5660.50</td><td>-44.55</td><td>-14.55</td><td>-30.00</td><td>-69.28</td><td>24.73</td><td>VERTICAL</td></tr><tr><td>2 @</td><td>6593.50</td><td>-42.41</td><td>-12.41</td><td>-30.00</td><td>-69.28</td><td>26.87</td><td>VERTICAL</td></tr><tr><td>3</td><td>13703.04</td><td>-43.70</td><td>-13.70</td><td>-30.00</td><td>-77.45</td><td>33.75</td><td>VERTICAL</td></tr></tbody></table>			Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	5660.50	-44.55	-14.55	-30.00	-69.28	24.73	VERTICAL	2 @	6593.50	-42.41	-12.41	-30.00	-69.28	26.87	VERTICAL	3	13703.04	-43.70	-13.70	-30.00	-77.45	33.75	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																															
		MHz	dBm	dB	dBm	dBm	dB																																																																																
1	5591.50	-43.44	-13.44	-30.00	-71.00	27.56	HORIZONTAL																																																																																
2	6977.50	-40.97	-10.97	-30.00	-70.05	29.08	HORIZONTAL																																																																																
3 @	13987.83	-39.67	-9.67	-30.00	-78.22	38.55	HORIZONTAL																																																																																
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																
	MHz	dBm	dB	dBm	dBm	dB																																																																																	
1	5660.50	-44.55	-14.55	-30.00	-69.28	24.73	VERTICAL																																																																																
2 @	6593.50	-42.41	-12.41	-30.00	-69.28	26.87	VERTICAL																																																																																
3	13703.04	-43.70	-13.70	-30.00	-77.45	33.75	VERTICAL																																																																																

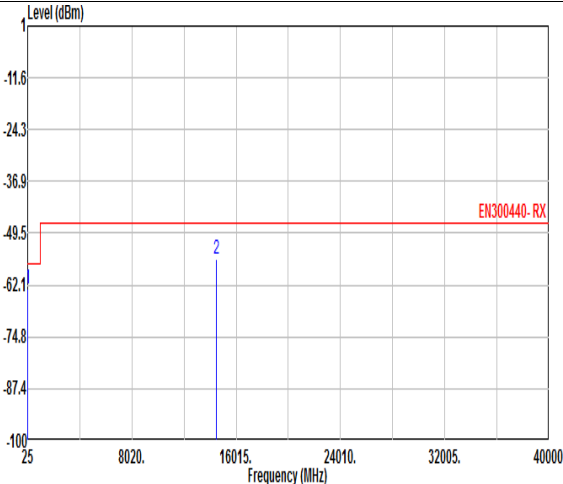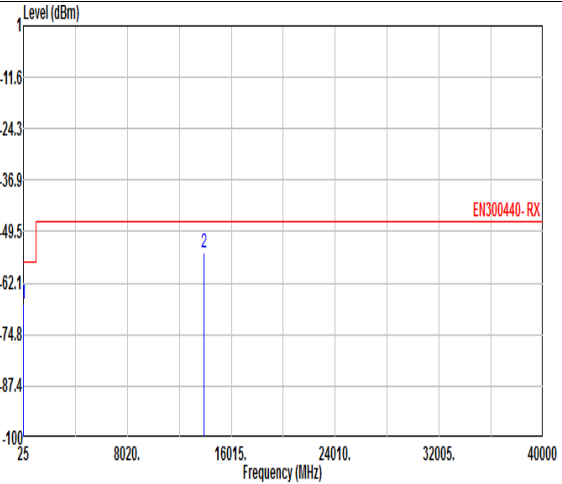

Mode	5																																																																						
	802.11n HT20 OFDM_CH149																																																																						
Ant	6																																																																						
Pol.	Horizontal				Vertical																																																																		
Rx																																																																							
	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 @</td><td>31.94</td><td>-63.12</td><td>-6.12</td><td>-57.00</td><td>-66.21</td><td>3.09</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>14466.64</td><td>-55.78</td><td>-8.78</td><td>-47.00</td><td>-51.87</td><td>-3.91</td><td>HORIZONTAL</td></tr></tbody></table>				Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1 @	31.94	-63.12	-6.12	-57.00	-66.21	3.09	HORIZONTAL	2	14466.64	-55.78	-8.78	-47.00	-51.87	-3.91	HORIZONTAL	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>31.94</td><td>-67.32</td><td>-10.32</td><td>-57.00</td><td>-68.38</td><td>1.06</td><td>VERTICAL</td></tr><tr><td>2 @</td><td>13891.44</td><td>-54.59</td><td>-7.59</td><td>-47.00</td><td>-49.51</td><td>-5.08</td><td>VERTICAL</td></tr></tbody></table>			Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	31.94	-67.32	-10.32	-57.00	-68.38	1.06	VERTICAL	2 @	13891.44	-54.59	-7.59	-47.00	-49.51	-5.08	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																															
	MHz	dBm	dB	dBm	dBm	dB																																																																	
1 @	31.94	-63.12	-6.12	-57.00	-66.21	3.09	HORIZONTAL																																																																
2	14466.64	-55.78	-8.78	-47.00	-51.87	-3.91	HORIZONTAL																																																																
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																
	MHz	dBm	dB	dBm	dBm	dB																																																																	
1	31.94	-67.32	-10.32	-57.00	-68.38	1.06	VERTICAL																																																																
2 @	13891.44	-54.59	-7.59	-47.00	-49.51	-5.08	VERTICAL																																																																