



Advance Mobile Location Test Report

Equipment : MAG1
Brand Name : MaQ
Model Name : MA1
Applicant : Magne AI Global tech limited
FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET
KWUN TONG HK
Manufacturer : Magne AI Global tech limited
FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET
KWUN TONG HK
Test Date(s) : Feb. 27, 2026 ~ Mar. 05, 2026

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in The GUIDELINES FOR COMPLIANCE WITH DELEGATED REGULATION (EU) 2019/320, European Commission, April 2021 under the RED Article 3.3(g) and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Approved by: Fly Liang

Sporton International Inc. (ShenZhen)
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



Table of Contents

Revision History	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Testing Facility	6
1.3 Measurement uncertainty.....	6
1.4 Applied Standards.....	7
1.5 Summary.....	7
1.6 EUT Information	8
Appendix A. Test Results	
A1 GNSS TEST SPECIFICATIONS	
A2 MAKING AVAILABLE FOR TRANSMISSION OF THE DATA REFERRED TO IN ARTICLE 1(2) OF DELEGATED REGULATION (EU) 2019/320	
A3 WIRELESS LOCAL AREA NETWORK FOR POSITIONING	
Appendix B. Photograph of EUT	



Revision History

Report No.	Version	Description	Issued Date
RA612311	Rev. 01	Initial issue of report	May 25, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
A1	5.0	GNSS TEST SPECIFICATIONS	PASS	-
A2	6.0	MAKING AVAILABLE FOR TRANSMISSION OF THE DATA REFERRED TO IN ARTICLE 1(2) OF DELEGATED REGULATION (EU) 2019/320	PASS	-
A3	7.0	WIRELESS LOCAL AREA NETWORK FOR POSITIONING	PASS	-

Comments and explanations:

The product specifications of the EUT presented in this report are declared by the manufacturer who shall take full responsibility for the authenticity.

Disclaimer: All test results in this report are excluded from measurement uncertainty. Although the product complies with the Guidelines of Delegated Regulation (EU) 2019/320, there may be risks while using emergency calls due to different parameters set by individual mobile network operators and various operation environments.

1 General Description

1.1 Product Feature of Equipment Under Test

Product Information	
Equipment	MAG1
Brand Name	MaQ
Model Name	MA1
EUT supports Radios application	GSM/WCDMA/LTE/5G NR GNSS (GPS/BDS/Galileo) WLAN 2.4GHz 802.11b/g/n (HT20/HT40) WLAN 5GHz 802.11a/n (HT20/HT40) WLAN 5GHz 802.11ac (VHT20/VHT40/VHT80) Bluetooth BR/EDR/LE NFC, WPT
GNSS (Galileo type)	E1
Operating System Version	Android 15
IMEI	Sample 1 (for GNSS/AML test items): IMEI 1 : 016813000002434 IMEI 2 : 016813000002442 Sample 2 (for WIFI test items): IMEI 1 : 016813000002376 IMEI 2 : 016813000002384

Remark:

1. The EUT's information above was declared by manufacturer.
2. Sample 1 and Sample 2 are electrical identical.

1.2 Testing Facility

Test Lab.	Sporton International Inc. (Shenzhen)
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Remark	The WIRELESS LOCAL AREA NETWORK FOR POSITIONING test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

1.3 Measurement uncertainty

Item	Reference Std.	Test Case	Results
1	Sec 5 GNSS	5.2.2. NMEA OUTPUT TEST	Note 1
		5.2.3. TIME TO FIRST FIX TEST (seconds)	4.80
		5.2.4. HORIZONTAL (Error) ACCURACY TEST & 5.2.4.1. POSITION ACCURACY EVALUATION – Open SKY (m)	1.68
		5.2.4. HORIZONTAL (Error) ACCURACY TEST & 5.2.4.1. POSITION ACCURACY EVALUATION – Urban Canyon(m)	2.06
		5.3. GALILEO OPEN SERVICE NAVIGATION MESSAGE AUTHENTICATION READINESS	Note 1
		5.4. EXPOSURE OF ADDITIONAL GALILEO OBSERVABLES	Note 1
2	Sec 6 AML	ETSI TS 103 625	Note 1
3	Sec 7 WiFi	WiFi compatibility	Note 1
		WiFi TTFF (seconds)	1.10
		WiFi horizontal position accuracy	5.20

Remark: Measurement uncertainty is based on 95% confidence level, and may not be applied for qualitative test (Note1).

1.4 Applied Standards

- i. The GUIDELINES FOR COMPLIANCE WITH DELEGATED REGULATION (EU) 2019/320, European Commission, April 2021
- ii. ETSI TS 103 246-5 V1.3.1 (2020-10)
- iii. ETSI EN 303 413 V1.2.1 (2021-04)
- iv. ETSI TS 103 625 V1.2.1 (2022-04)
- v. ISO/IEC 18305: 2016
- vi. 3GPP TS 36.509 V16.0.0 (2021-03)

Note: The ETSI TS 103 625 V1.2.1 (2022-04) deviates from the specified standard ETSI TS 103 625 V1.1.1 (2019-12) listed in the Guidelines (item i).



1.5 Summary

The EUT fulfills the COMMISSOIN DELEGATED REGULATION (EU) 2019/320, 12 December 2018.



1.6 EUT Information

21:34 21:34 ← 关于本机 设备详细信息 SIM 卡状态 (SIM 卡插槽 1) SIM 卡状态 (SIM 卡插槽 2) 无法获取 型号 MA1 IMEI (SIM 卡插槽 1) 016813000002434 IMEI (SIM 卡插槽 2) 016813000002442 RAM 12 GB Android 版本 15 设备标识符 IP 地址 无法获取 WLAN MAC 地址 如需查看, 请选择已保存的网络 设备 WLAN MAC 地址 00:00:00:00:00:00	21:34 21:34 ← 型号 型号 MA1 序列号 MGUGLM54300126
---	---

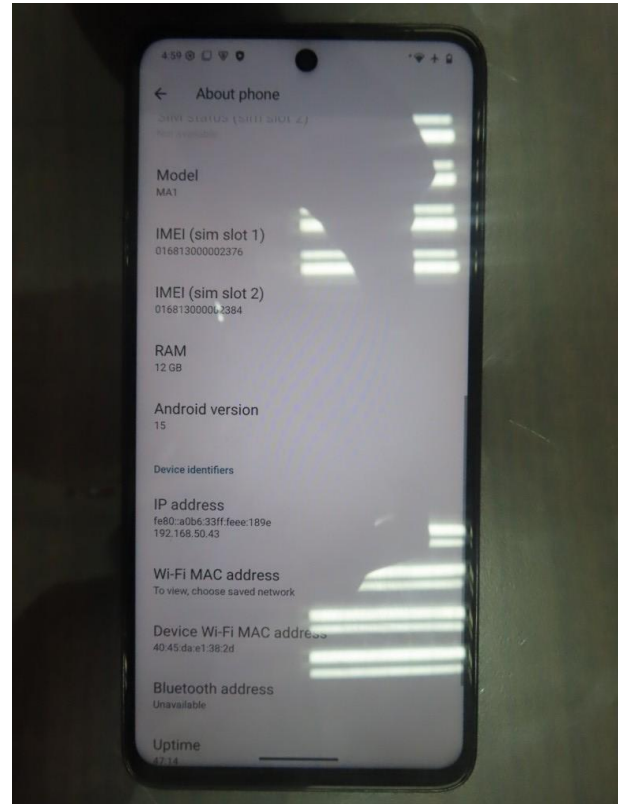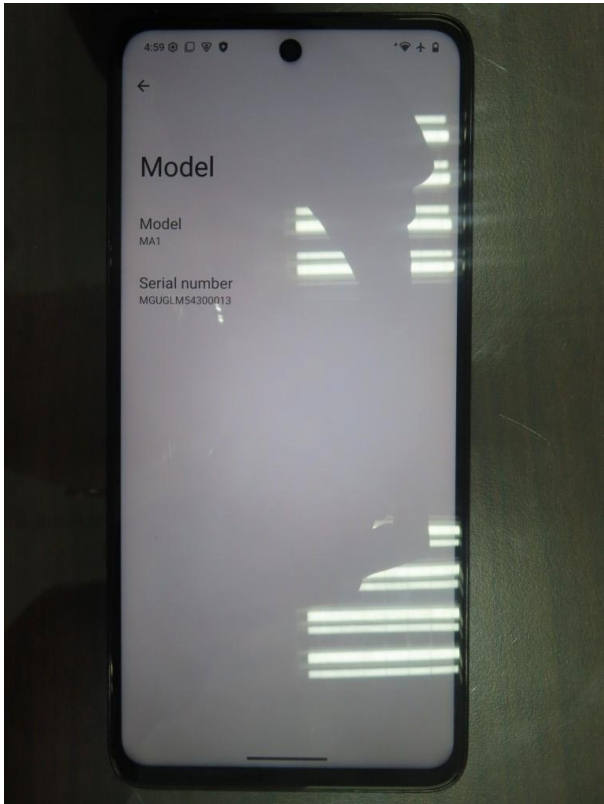



Appendix A. Test Results


A1 - GNSS TEST SPECIFICATIONS

1. Specifications

Follow the section 5. GNSS TEST SPECIFICATIONS of guidelines for compliance with delegated regulation (EU) 2019/320.

1.1 Test Setup

The GNSS test for EUT (smartphone) performance assessment is performed using GNSS simulators and measuring antenna generating GNSS signals toward the EUT in a shielding box. The conformance testing of the smartphone is made in radiated mode and the total path loss including air loss, cable loss, have been well calibrated prior to testing.

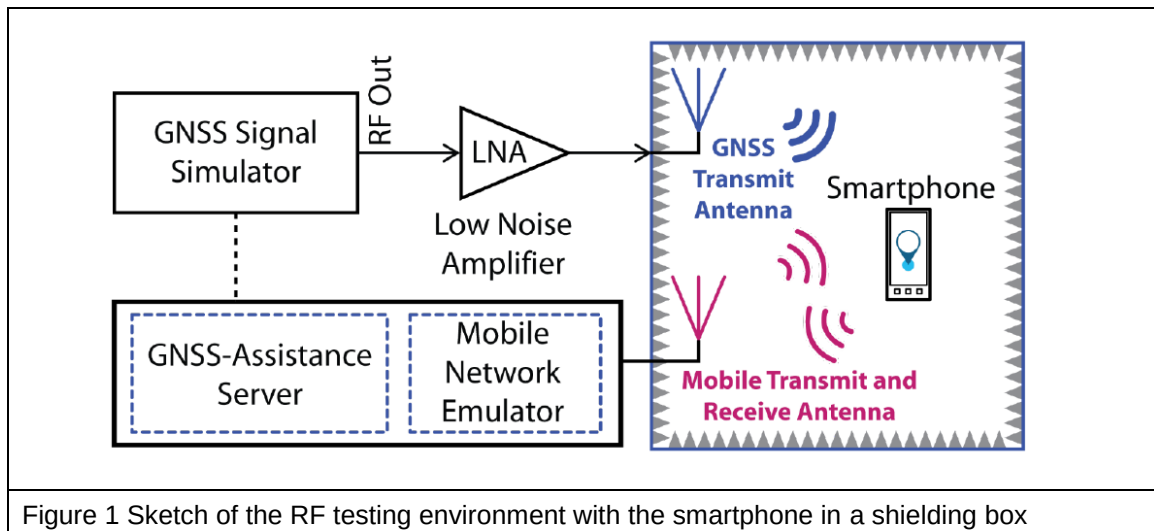

If extra LNA, or Mobile network emulator is used, the equipment will be listed, otherwise, there are no listing in this report.

The configuration of the GNSS simulator used are reported in Table 1.

Table 1. Summary of the main GNSS simulation parameters to be used.

Parameter	Value	Additional Notes									
Location	For the test, any location between 65° N and 65° S in WGS-84 can be used.										
Atmospheric Effects	Ionospheric and Tropospheric effects shall be simulated as described in Annex B Section B.1.1 of ETSI TS 103 246-5 V1.3.1 (2020-10) Part 5.										
Constellations	As a minimum, the Galileo signals of the open service in the E1 and E5a bands shall be activated. The activation of additional GNSS systems in these frequency bands is suggested.										
User movement	Static user condition shall be simulated.										
Signal Strength	The signal strength of the open services of Galileo in the E1 and E5a bands shall be set as follows: <table border="1"> <thead> <tr> <th colspan="3">Open Service of Galileo</th></tr> <tr> <th>Band</th><th>GAL E1bc</th><th>GAL E5a</th></tr> </thead> <tbody> <tr> <td>Signal Strength</td><td>-127 dBm (power of data plus pilot channels)</td><td>-125 dBm</td></tr> </tbody> </table> The strengths of the other GNSS signals (e.g., GPS, GLONASS and Beidou) configured on the simulator must be set in accordance with the values indicated in Table B-1 in Section B.2.2 of ETSI EN 303 413 V1.2.1 (2021-04).	Open Service of Galileo			Band	GAL E1bc	GAL E5a	Signal Strength	-127 dBm (power of data plus pilot channels)	-125 dBm	A preliminary calibration of the testing environment is required to verify the receiver power at the user antenna.
Open Service of Galileo											
Band	GAL E1bc	GAL E5a									
Signal Strength	-127 dBm (power of data plus pilot channels)	-125 dBm									
Number of simulated satellites	The nominal constellation parameters specified in the corresponding ICD shall be used. The GNSS simulator shall be capable to generate the number of satellite signals corresponding to the nominal constellation.										
Signal visibility conditions	The test shall be conducted in two visibility conditions: open sky and urban. The visibility conditions are described in Clause A.3 Section A.3.2 of ETSI TS 103 246-3 V1.3.1 (2020-10) Part 3.										

1.2 Test Equipment

This chapter gives a brief generic description of different types of hardware and software that are part of the infrastructure and are currently available for test, namely:

Item	Equipment	Brand Name	Model Name	S/N	Cal. date	Note
1	GNSS simulator	R&S	SMBV100B	103241	Apr.02, 2025	
2	Shielding Box	UN-TOJOIN	MS9090	SZA22E17058	Apr.02, 2025	
3	Horn Antenna	SME	BBHA 9120D	1285	Apr.03, 2025	
4	RF cable	UN-TOJOIN	60.08.002.005-1M	140526-5	Jan.05, 2026	
5	Test Software	R&S	CMW Run	N/A	N/A	
6	NB	DELL	Latitude3400	89GBMV8	N/A	



2.1. NMEA OUTPUT TEST

2.1.1 Test requirement

Per the section 5.2.2 of guidelines for compliance with delegated regulation (EU) 2019/320, the NMEA-0183 log information includes UTC) time stamp, RMC, GGA or GNS).

2.1.2 Test Procedure

Section 5.2.2 of guidelines

2.1.3 Test Result

Test result: conformance to requirements

NMEA-0183 log	show valid position solution	At least two satellites shown	Note
Pass	Pass	Pass.	

Note:

1. NMEA-0183 log file outputs

2.2 TIME TO FIRST FIX TEST

2.2.1 Test requirement

Per the section 5.2.3 of guidelines for compliance with delegated regulation (EU), 2019/320, the TTFF is that the capability gets a first position fix from any of the processed GNSS signals selected by the smartphone manufacturer, in a maximum of 60 seconds for signal levels down to minus 130 dBm.

2.2.2 Test Procedure

Section 5.2.3 of guidelines

2.2.3 Test Result

The TTFF test result conforms to the requirements, 60 seconds.

Note:

1. Test is under open sky condition.

2.3 HORIZONTAL ACCURACY TEST & POSITION ACCURACY EVALUATION

2.3.1 Test requirement

Per the section 5.2.4 and 5.2.4.1 of guidelines for compliance with delegated regulation (EU) 2019/320, the accuracy is that the *capability achieves a horizontal position error of maximum 5 metres in open sky conditions and maximum 25 metres in urban canyon conditions with a confidence level of 95% (2σ coverage factor)*;

2.3.2 Test Procedure

Section 5.2.4 and 5.2.4.1 of guidelines

2.3.3 Test Result

Test Conditions	Horizontal position accuracy Result (95% confidence level)	Limits (Meter)	Pass / Fail	Note
Open Sky	1.02 meter	≤ 5	Pass	
Urban Canyon	0.74 meter	≤ 25	Pass	

2.4 GALILEO OPEN SERVICE NAVIGATION MESSAGE AUTHENTICATION READINESS

2.4.1 Test requirement

Per the section 5.3 of guidelines for compliance with delegated regulation (EU) 2019/320, the GNSS simulator shall be configured in accordance to the specifications in Table 1, without having to enable the OSNMA authentication scheme. The cross-check that the binary stream of the Galileo I/NAV of a given Galileo satellite is correct is made as follows. The binary stream logged by the smartphone shall match that generated by the GNSS simulator for the same satellite and time window observed.

2.4.2 Test Procedure

Section 5.3 of guidelines

2.4.3 Test Result

The test result conforms to the requirements.

2.5 EXPOSURE OF ADDITIONAL GALILEO OBSERVABLES

2.5.1 Test requirement

Per the section 5.4 of guidelines for compliance with delegated regulation (EU) 2019/320, the fields in the GSV sentence shall include the Galileo Sat ID, the azimuth and elevation angles, and the C/N0 for all Galileo satellites tracked.

2.5.2 Test Procedure

Section 5.4 of guidelines

2.5.3 Test Result

The test result conforms to the requirements.

2.6 Test setup photo

The EUT is rotated in different orientations inside a shielding box and the best position of the EUT is facing toward the GNSS simulator antenna for all testing.

The EUT is inside shielding box



A2 - MAKING AVAILABLE FOR TRANSMISSION OF THE DATA REFERRED TO IN ARTICLE 1(2) OF DELEGATED REGULATION (EU) 2019/320

1. SPECIFICATIONS


This section deals with the requirements on the compatibility of the processing and transmission mechanisms of handset-derived caller location with the national Public Safety Answering Point (PSAP) systems deployed. It shall be demonstrated by compliance with: ETSI TS 103 625 on Emergency Communications (EMTEL); Transporting Handset Location to PSAPs for Emergency Calls - Advanced Mobile Location.

1.1 Test Setup

The AML (Advanced Mobile Location) functionality is triggered by an emergency call (which is progressed normally by the handset and the network), and is designed to supplement the basic network location provided wherever possible, i.e. with some acknowledgement of limitations in GNSS or Wi-Fi availability for the handset.

The AML test uses test equipment, R&S Base Station simulator, GNSS simulator, and WiFi APs. The AML SMS message received at Emergency Service Public Safety Answering Point (PSAP) system, after the EUT automatically sends AML via SMS/HTTPs, when an emergency call is initiated and sent (see Figure 1).

(Figure 1) AML test setup CMW 500, SMBV100B, and WiFi AP

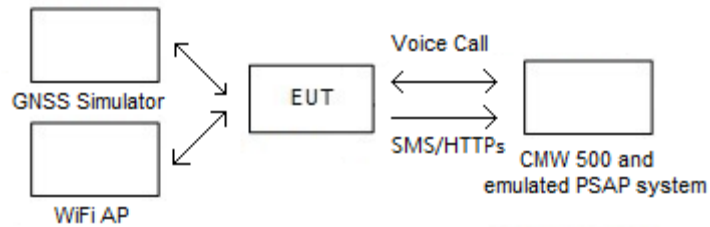

This section gives a generic description of different types of hardware and software that are part of the infrastructure and are currently available in support of testing:

Item	Equipment	Brand Name	Model Name	S/N	Cal. date	Note
1.	Base Station Simulator	R&S	CMW500 (XDD Explorer 10.22.1)	166167	Jul.02, 2025	CMW-LBS_ELS_35.44.40039
2.	GNSS simulator	R&S	SMBV100B	103241	Apr.02, 2025	
3.	WLAN Access Point	ASUS	RT-AX88U	N/A	N/A	
4	NB	DELL	Latitude3400	91GDNW2	N/A	

Note 1: The calibration interval is two years.

2. Evaluation Procedure

While referring to the ETSI TS 103 625, the following test procedures are performed

1. The EUT is placed at a well isolated shielding chamber during AML test.
2. The EUT is inserted with a SIM, set as intended operation, and the location feature and the Emergency Location Service (ELS) feature of the EUT are turned on.
3. The EUT is set as intended operation (WiFi on, GNSS on, Bluetooth off, WWAN on and assisted-GNSS off) and the location feature and the Emergency Location Service (ELS) feature of the EUT are turned on.
4. Configure the GNSS simulator operating with Galileo, GPS, Glonass, and Beidou satellites.
Note: While the GNSS simulator is turned on, the WiFi AP is turned off.
5. Configure the Base station simulator operating LTE with IMS server and the LTE operates with appropriate signal strength.
6. Execute the test cases listed in the section 2.1.
7. After the EUT connects with the Base station simulator and receives the GNSS signal, the emergency call is established by dialing emergency call from the EUT to the Base station simulator. Check if the voice of emergency call can be established and the AML via SMS/HTTPs can be sent to the end-point (PSAP) of Base station simulator.
8. For TP_AML_SMS/HTTPs_BV_05, both the GNSS simulator and WiFi AP are set off and check if there is AML data (without location information) is sent to the end-point (PSAP).
9. Additionally check if the location is from WiFi AP, the AML via SMS/HTTPs can be delivered to the end-point (PSAP). For this step, the WiFi AP is turned on and the output of GNSS simulator is turned off.

2.1 Result of Expected Behavior

Item	TP Id	Result	Note
1	TP_AML_SMS_BV_01	PASS	
2	TP_AML_SMS_BV_02	PASS	
3	TP_AML_SMS_BV_03	PASS	
4	TP_AML_SMS_BV_04	PASS	
5	TP_AML_SMS_BV_05	PASS	
6	TP_AML_SMS_BV_06	PASS	
7	TP_AML_HTTPS_BV_01	PASS	
8	TP_AML_HTTPS_BV_02	PASS	
9	TP_AML_HTTPS_BV_03	PASS	
10	TP_AML_HTTPS_BV_04	PASS	
11	TP_AML_HTTPS_BV_05	PASS	
12	TP_AML_SMS_BV_WiFi	PASS	
13	TP_AML_HTTPS_BV_WiFi	PASS	

Note:

1. Both SIM1 and SIM2 are initially scanned, the SIM 1 is mainly tested for all test cases.
2. The format of IMSI is correct, but some partial content of IMSI may be subjected to the restriction by mobile network operator for test cases above.
3. The SMS format and HTTPs message format can respectively be found in the Annex A and Annex B of ETSI TS 103 625.

2.2 Test Setup Photos

AML test is in shielding box : GNSS simulator, CMW500, and WiFi AP





A3 - WIRELESS LOCAL AREA NETWORK FOR POSITIONING

1. Specifications

This section follows the section 7 WIRELESS LOCAL AREA NETWORK FOR POSITIONING of the guidelines for compliance with delegated regulation (EU) 2019/320.

The WiFi Indoor Positioning is evaluated by three performance metrics:

- WiFi compatibility
- WiFi TTFF (Time To First Fix): maximum 20 seconds.
- WiFi Horizontal position accuracy: maximum 30 meters with a 67% confidence level

Per the section 7 of guidelines, for all the three points specified in the bullet list above, the recommendations are proposed for the definition of the compliance test scenarios and environments

- The conformance assessment shall be performed with the smartphone set to its **normal operation mode**
- The following test scenarios defined in ISO/IEC 18305 should be used for the compliance assessment: The **Test Scenarios 1 and 2** should be repeated four times by the ELT with the smartphone in the right hand stood facing north, west, south, and east when prompting the emergency communications to generate the location estimate during the test scenario.
- The tests should be performed in **one** or more of the following building types with the noted modifications: single-family house (not only wooden type), **concrete or steel office building** and high-rise steel building. The guidelines in section 10.5 for the design and deployment of the test scenarios in the specific building types can be used to ensure a significant number of generations of location estimates in the compliance test (**more than 50 generations** are recommended).

Based on above, the EUT (mobile phone) set to its normal operation mode is performed at two test Scenarios in one building type, concrete/steel office building, to generate more than 50 generations to fulfill this requirement.

1.1.Environment – office building

The office building is located in Taiwan and is a brick & concrete office building defined in the ISO 18305, including a garage one floor below ground and total five floors above ground (~ 12000 m²). Many people bustling in each of the offices of the premises, constant opening of doors or slight movements of office furniture (chairs, tables, etc.) are expected as usual, in addition to uncontrolled wireless interference typical for the environments can be expected.


This testbed is positioned on the 3rd floor, equipped with multiple rooms, including a medium size office, two conference rooms, seven small meeting rooms and few offices made of brick walls, concrete walls, and steel metal studs framing with some wooden construction and some office room with glass windows as shown in the Figure 1 and 2 below.

Figure 1: brick & concrete office building



Location: No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan

Figure 2: testbed at the 3rd floor of building

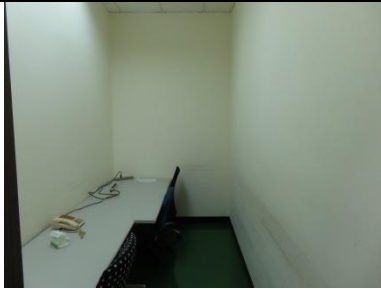



1.2. Test Setup


This section gives a generic description of different types of hardware and software that are part of the infrastructure and are currently available in support of testing:

Item	Equipment	Brand Name	Model Name	Note
1.	WLAN Access Point	Zyxel	NWA 50 AX	
2.	APP Test Program	Sporton_WiFi	-	

1.2.1 WiFi Indoor Positioning Test Setup Infrastructure

The infrastructure of the testbed is set on the 3rd floor with total 51 test points selected as pre-determined test nodes/points and are randomly deployed to be about 5 ~ 10 meters away from one another, and a number of 13 units of WiFi APs which fulfil the existing IEEE 802.11 based infrastructure, is deployed in this floor.

Figure.3 - Locations of pre-determined 51 test points and WiFi APs deployment.

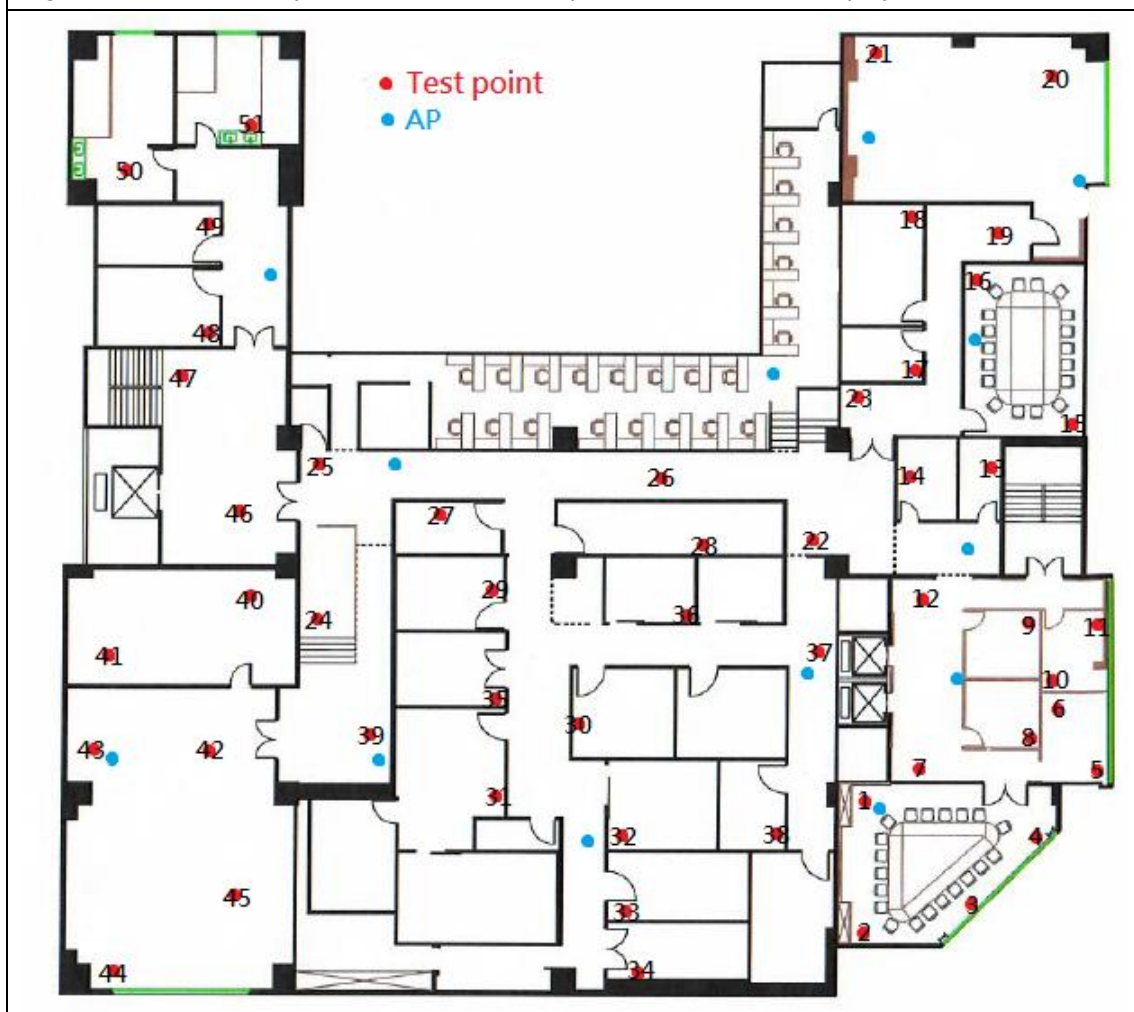

2. Evaluation Procedure

The EUT is set as intended operation (WiFi on, GNSS on, Bluetooth off and WWAN on, and Assisted-GNSS off) and the location feature and the Emergency Location Service (ELS) feature of the EUT are turned on. A person carries the EUT in his/her right hand stood facing the north in the floor of the building and starts the two scenarios as defined in the ISO 18305.

After above, the worst position is repeatedly performed when the person carrying the EUT stands facing to the rest of orientations (i.e West, East, and South).

The maximum TTFF time is chosen from all TTFF data and is reported to demonstrate the conformance with the performance metrics.

The horizontal level position accuracy is the 67% confidence level of Horizontal test point accuracy.

2.1 Performance metrics:

- WiFi compatibility: capability to implement positioning based on the 802.11 family of standards and existing 802.11 based infrastructure.
- WiFi TTFF (Time To First Fix): maximum 20 seconds.
- WiFi position accuracy: maximum 30 metres (67% confidence level).



2.2 Test Results

Performance Metric	Scenario 1	Scenario 2	Average	Limit (max)	Result
TTFF (seconds)	6.8s	6.9s	6.85s	<= 20 sec	PASS
Horizontal test point accuracy (meter) (67% confidence level)	14.8m	16.9m	15.85m	<= 30 m	PASS

Average = (Scenario 1 + Scenario 2) / 2

According to above result, it proves that the EUT has a capability using WiFi for indoor positioning and is compatibility with 802.11 family of standards and existing 802.11 based infrastructure for indoor positioning.

2.3 Test Setup and EUT information

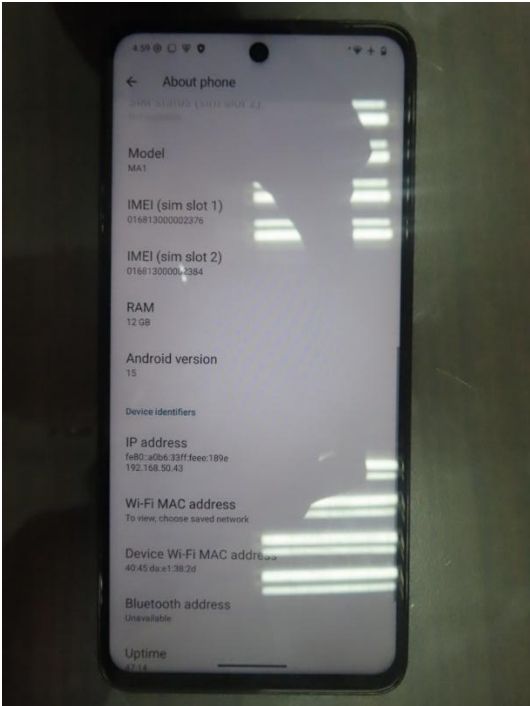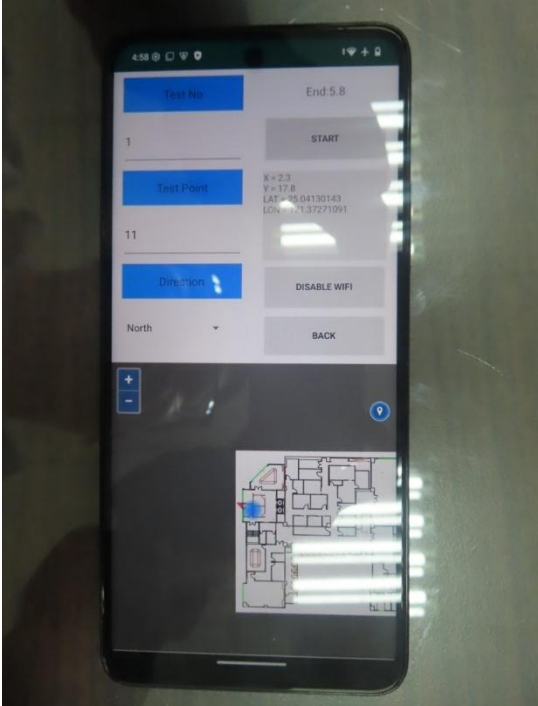EUT information	EUT Phone installed APP
	
Person carries with the EUT	
	

Scenario 1	<i>Horizontal accuracy</i>	<i>TTFF</i>	Orientation
Test Point #	(m)	(s)	
1	3.4	5.8	North
2	4.1	5.9	North
3	2.8	5.9	North
4	6.8	5.8	North
5	8.4	5.8	North
6	8.0	5.8	North
7	1.8	5.8	North
8	5.9	5.8	North
9	8.7	5.8	North
10	7.7	5.9	North
11	10.5	5.8	North
12	6.7	5.8	North
13	12.0	5.8	North
14	10.5	5.9	North
15	11.6	5.8	North
16	17.1	6.1	North
17	13.1	5.8	North
18	18.6	5.8	North
19	17.9	5.8	North
20	23.9	5.8	North
21	23.8	5.8	North
22	7.1	5.8	North
23	12.4	5.9	North
24	18.0	5.8	North
25	20.2	5.7	North
26	9.8	5.8	North
27	15.0	5.9	North
28	6.8	5.8	North
29	13.3	5.9	North
30	1.6	5.8	North
31	11.4	5.8	North
32	7.6	5.7	North
33	8.8	5.8	North
34	9.9	5.8	North
35	11.0	5.8	North
36	8.1	5.9	North
37	4.8	5.8	North
38	2.9	5.8	North
39	14.7	5.8	North
40	20.0	5.8	North
41	25.4	5.8	North
42	2.5	5.8	North
43	25.5	5.8	North
44	26.2	5.8	North
45	20.6	5.9	North
46	21.3	5.8	North
47	25.2	5.8	North
48	24.1	5.8	North
49	7.5	5.8	North
50	18.7	6.8	North
51	7.8	5.8	North
50(Worse)	19.6	5.8	South
50(Worse)	19.7	5.9	East
50(Worse)	19.6	6.8	West

67% confidence level (m)

14.8

Scenario 2	Horizontal accuracy	TTF	Orientation
Test Point #	(m)	(s)	
1	2.9	5.8	NA
2	3.5	6.0	NA
3	3.4	5.8	NA
4	3.6	5.8	NA
5	6.2	5.8	NA
6	9.5	5.8	NA
7	2.9	5.8	NA
8	6.3	5.7	NA
9	8.0	5.8	NA
10	6.5	5.8	NA
11	5.4	5.8	NA
12	5.8	5.8	NA
13	12.0	5.8	NA
14	10.3	5.8	NA
15	12.9	5.7	NA
16	16.9	5.8	NA
17	13.2	5.8	NA
18	18.0	5.9	NA
19	16.9	5.8	NA
20	23.2	5.8	NA
21	22.9	5.8	NA
22	6.9	5.8	NA
23	13.0	5.8	NA
24	17.4	5.8	NA
25	20.3	5.8	NA
26	10.0	5.8	NA
27	16.0	5.8	NA
28	6.7	5.8	NA
29	15.1	5.8	NA
30	8.9	5.8	NA
31	11.3	5.9	NA
32	7.8	5.8	NA
33	8.3	5.8	NA
34	10.1	5.8	NA
35	11.6	5.9	NA
36	8.3	5.9	NA
37	5.1	5.8	NA
38	3.9	5.9	NA
39	14.2	5.8	NA
40	19.3	5.9	NA
41	25.3	5.8	NA
42	20.1	5.8	NA
43	25.2	5.8	NA
44	26.5	5.8	NA
45	20.5	5.8	NA
46	20.6	5.9	NA
47	2.9	5.9	NA
48	24.5	5.8	NA
49	27.0	5.8	NA
50	21.1	6.9	NA
51	28.5	5.8	NA
50(Worse)	19.6	5.8	North
50(Worse)	19.1	5.8	West
50(Worse)	20.6	5.8	East
50(Worse)	19.9	5.9	South

67% confidence level (m)

16.9

Appendix B. Photograph of EUT

External Photograph of EUT

