



CE Radio Test Report

APPLICANT : Magne AI Global tech limited
EQUIPMENT : MAG1
BRAND NAME : MaQ
MODEL NAME : MA1
STANDARD : ETSI EN 300 328 V2.2.2 (2019-07)
TEST DATE(S) : Feb. 17, 2026 ~ Mar. 14, 2026

The measurement shown in this test report is tested in accordance with the test procedures given in ETSI EN 300 328 V2.2.2 (2019-07).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Facility	7
1.7 Test Software	7
1.8 Applied Standards	7
1.9 Test Condition.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Descriptions of Test Mode	8
2.2 Connection Diagram of EUT Test Configurations	8
2.3 Supported Unit used in test configuration and system	9
2.4 EUT Operation Test Setup	9
3 TRANSMITTER PARAMETERS	10
3.1 Maximum Transmit Power	10
3.2 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Spectral Density	14
3.3 Occupied Channel Bandwidth	16
3.4 Frequency Hopping Requirements	18
3.5 Transmitter unwanted emissions in the out-of-band domain	22
3.6 Transmitter spurious emissions	23
4 RECEIVER PARAMETERS.....	25
4.1 Receiver spurious emissions	25
4.2 Receiver Blocking Test	27
5 ADAPTIVITY TEST	32
5.1 Adaptivity	32
6 GEO-LOCATION CAPABILITY.....	51
6.1 Geo-location	51
7 PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION.....	52
8 LIST OF MEASURING EQUIPMENT	53
9 MEASUREMENT UNCERTAINTY	54
APPENDIX A. TEST RESULT OF CONDUCTED TEST ITEMS	
APPENDIX B. TEST RESULT OF RADIATED SPURIOUS EMISSION	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
ER612311A	Rev. 01	Initial issue of report	May 25, 2026

SUMMARY OF TEST RESULT

CLAUSE (EN 300 328)	TEST PARAMETER	PASS/FAIL	REMARK
Transmitter Parameters			
4.3.1.2 4.3.2.2	Maximum Transmit Power	PASS	-
4.3.2.3	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Spectral Density	PASS	Only applicable for modulations other than FHSS
4.3.1.8 4.3.2.7	Occupied Channel Bandwidth	PASS	-
4.3.1.4 4.3.1.5	Frequency Hopping Requirements	PASS	Only applicable for FHSS
4.3.1.9 4.3.2.8	Transmitter spurious emissions in OOB	PASS	-
4.3.1.10 4.3.2.9	Transmitter spurious emissions	PASS	Under limit 8.85 dB at 12696.91 MHz
Receiver Parameters			
4.3.1.11 4.3.2.10	Receiver spurious emissions	PASS	Under limit 5.83 dB at 31.94 MHz
Adaptive Test Item			
4.3.1.7 4.3.2.6	Adaptivity	PASS	Only applicable for adaptive equipment Output Power >10dBm
4.3.1.12 4.3.2.11	Receiver Blocking	PASS	-
Non-Adaptive Test Item			
4.3.1.3 4.3.2.4	Duty cycle, Tx-Sequence, Tx-gap	Not Applicable	Only applicable for non-adaptive equipment Output Power >10dBm
4.3.1.6 4.3.2.5	Medium Utilization (MU) factor	Not Applicable	
Note: 1. Bluetooth belongs to adaptive equipment and EIRP < 10dBm. 2. WiFi belongs to adaptive equipment and EIRP > 10dBm.			

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. 2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Magne AI Global tech limited

FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.2 Manufacturer

Magne AI Global tech limited

FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	MAG1
Brand Name	MaQ
Model Name	MA1
IMEI / SN Code	Conducted: MGUGLM54300121 Radiation: 016813000001816 Adaptivity / Receiver Blocking: 016813000001410/016813000001428
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For other wireless features of this EUT, test report will be issued separately.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Transmitter / Receiver Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	WLAN : 13 Bluetooth : 79 Bluetooth LE: 40
Channel Spacing	WLAN : 5 MHz Bluetooth : 1 MHz Bluetooth LE: 2 MHz
Maximum EIRP Average Power	802.11b : 17.94 dBm 802.11g : 14.69 dBm 802.11n HT20 : 14.96 dBm 802.11n HT40 : 12.04 dBm Bluetooth BR (1Mbps) : 8.37 dBm Bluetooth LE (1Mbps) : 1.37 dBm Bluetooth LE (2Mbps) : 1.12 dBm Bluetooth LE (125Kbps) : 1.07 dBm Bluetooth LE (500Kbps) : 0.99 dBm
Antenna Type / Gain	WLAN : LDS Antenna type / -1 dBi Bluetooth : LDS Antenna type / -1 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK Bluetooth LE : GFSK 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Power Supply	Battery / AC Adapter

Note: For BLE 1Mbps & 125Kbps & 500Kbps mode, the whole testing has assessed BLE 1Mbps mode by referring to the higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Facility

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Lab.	Sporton International Inc. (Kunshan)
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158
Test Site No.	Sporton Site No. : TH01-KS; DFS01-KS 05CH02-KS

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system	3.3.10
2.	05CH02-KS	AUDIX	E3	210616
3.	DFS01-KS	SPORTON	DFS & Adaptivity	1.0

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of **ETSI EN 300 328 V2.2.2 (2019-07)**.

Note: All test items were verified and recorded according to the standards and without any deviation during the test.

1.9 Test Condition

Normal Voltage	DC 3.87V
Normal Temperature	25°C
Extreme Temperature	-10°C and 40°C

Note: The test temperature was between -10°C ~ 40°C by manufacturer requested.


2 Test Configuration of Equipment under Test

2.1 Descriptions of Test Mode


- During testing, the interface cables and equipment positions were varied according to ETSI EN 300 328 V2.2.2 (2019-07).
- The complete test system included EUT for RF test.
- For radiated measurement, pre-scanned in three orthogonal panels (X, Y, Z). The worst cases (X Plane) were recorded in Appendix B of this report.

2.2 Connection Diagram of EUT Test Configurations

<Bluetooth BR/EDR TX/RX mode>

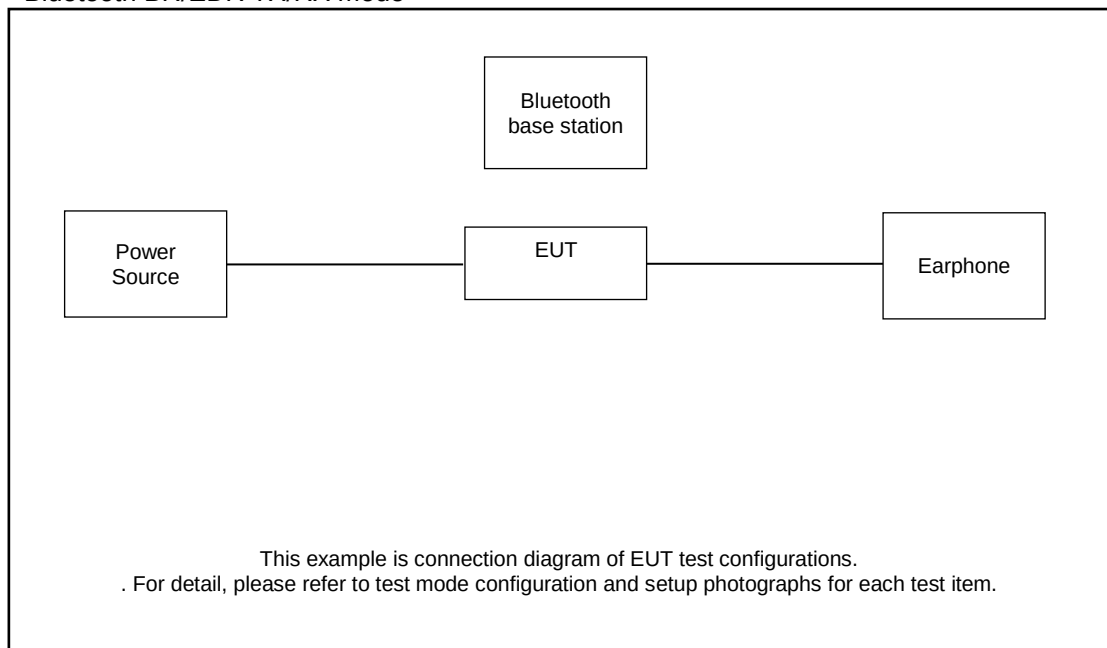

<Bluetooth LE & WLAN TX/RX mode>

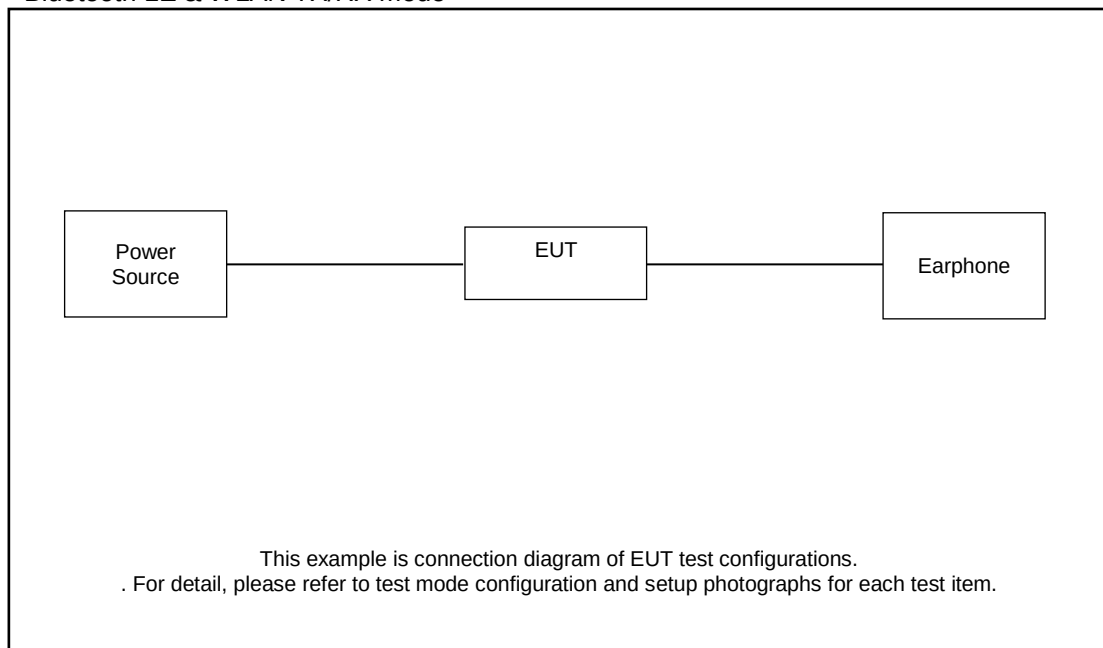

2.3 Supported Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	N/A	N/A	N/A	N/A	N/A

2.4 EUT Operation Test Setup

For Bluetooth test items, an engineering test program was provided and enabled to make EUT contact with Bluetooth base station for continuous transmitting and receiving signals.

For WLAN and Bluetooth LE test items, an engineering test program was provided and enabled to make EUT continuous transmitting and receiving signals

3 Transmitter Parameters

3.1 Maximum Transmit Power

3.1.1 Limit of Effective Isotropic Radiated Power

SUBCLAUSE 4.3.1.2.3 and 4.3.2.2.3	
TEST CONDITION	LIMIT
Normal and Extreme Temperature Conditions	20dBm (e.i.r.p)


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 8 of this test report.

3.1.3 Test Procedure


1. The measurement procedure follows the clause 5.4.2.2.1 of the ETSI EN 300 328 V2.2.2 (2019-07).
2. Placing the EUT in thermal chamber.
3. The EUT is connected to external power supply.
4. Setting thermal chamber temperature and power supply voltage at suitable values.
5. Use a fast power sensor with a minimum sensitivity of -40 dBm and capable of minimum 1 MS/s.
Use the following settings:
 - Sample speed 1 MS/s or faster.
 - The samples shall represent the RMS power of the signal.
 - Measurement duration: 1 second to ensure a minimum number of bursts (at least 10) are captured.For conducted measurements on devices with one transmit chain:
 - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.For conducted measurements on devices with multiple transmit chains:
 - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
 - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
6. The EIRP = A+G+Y, where A is the power measured, G is the assembly gain of the individual antenna of the EUT in dBi and Y is the additional beamforming gain of the EUT in dB if applicable, here, Y=0.

3.1.4 Test Setup

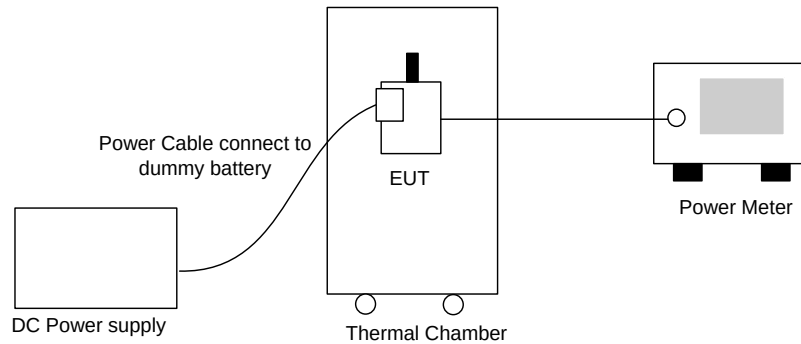

3.1.5 Test Results

Refer to Appendix A of this test report.

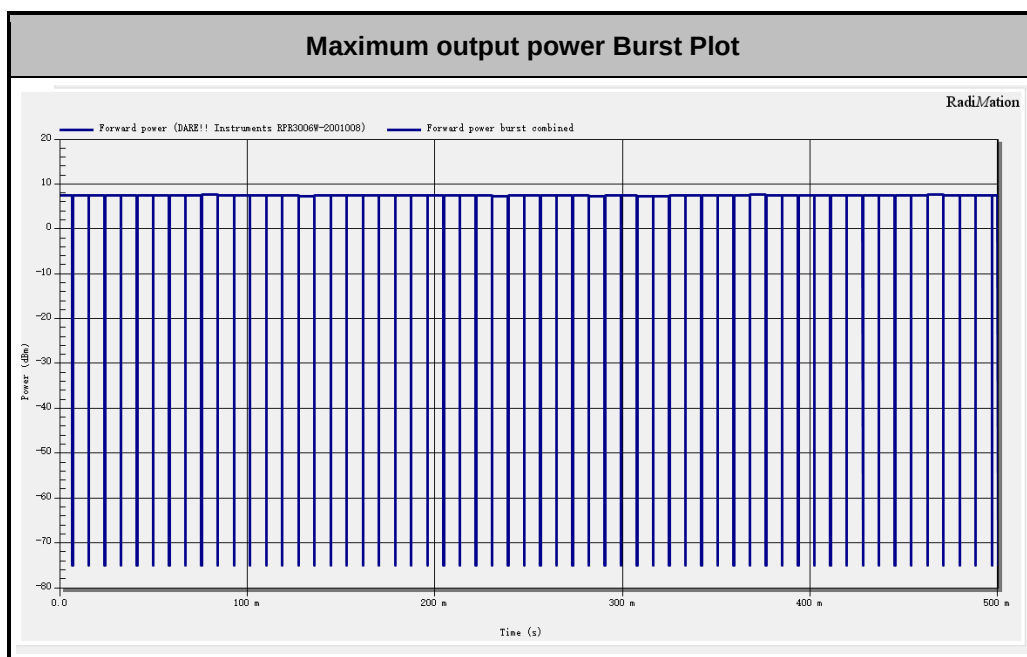

Note: Conducted power = measured output power + offset



TEST RESULTS DATA									
EIRP Power									
2.4G-BT									
Mode						Power Setting	Conducted Power (dBm)		
Band	SISO	N _{TX}	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High
							25 °C	-10 °C	40 °C
							Ant 6	Ant 6	Ant 6
BR	SISO	1	Hopping		1Mbps	Default	8.62	9.37	8.32
EDR	SISO	1	Hopping		2Mbps	Default	7.25	7.95	6.90
EDR	SISO	1	Hopping		3Mbps	Default	7.06	7.73	6.73
BLE	SISO	1	0	2402	1Mbps	Default	1.63	2.37	1.31
BLE	SISO	1	19	2440	1Mbps	Default	1.61	2.26	1.26
BLE	SISO	1	39	2480	1Mbps	Default	1.11	1.83	0.77
BLE	SISO	1	1	2404	2Mbps	Default	1.45	2.12	1.12
BLE	SISO	1	19	2440	2Mbps	Default	1.44	2.09	1.08
BLE	SISO	1	38	2478	2Mbps	Default	0.92	1.62	0.62
BLE-125K	SISO	1	0	2402	125kbps	Default	1.33	2.07	1.01
BLE-125K	SISO	1	19	2440	125kbps	Default	1.30	1.95	0.95
BLE-125K	SISO	1	39	2480	125kbps	Default	0.79	1.51	0.45
BLE-500K	SISO	1	0	2402	500kbps	Default	1.21	1.88	0.88
BLE-500K	SISO	1	19	2440	500kbps	Default	1.34	1.99	0.98
BLE-500K	SISO	1	39	2480	500kbps	Default	1.04	1.74	0.74

Mode						Power Setting	EIRP Power (dBm)			Gain(dBi)	EIRP Power Limit (dBm)	Pass/Fail
Band	SISO	N _{TX}	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High			
							25 °C	-10 °C	40 °C			
							Ant 6	Ant 6	Ant 6			
BR	SISO	1	Hopping		1Mbps	Default	7.62	8.37	7.32	-1.00	20.00	Pass
EDR	SISO	1	Hopping		2Mbps	Default	6.25	6.95	5.90	-1.00	20.00	Pass
EDR	SISO	1	Hopping		3Mbps	Default	6.06	6.73	5.73	-1.00	20.00	Pass
BLE	SISO	1	0	2402	1Mbps	Default	0.63	1.37	0.31	-1.00	20.00	Pass
BLE	SISO	1	19	2440	1Mbps	Default	0.61	1.26	0.26	-1.00	20.00	Pass
BLE	SISO	1	39	2480	1Mbps	Default	0.11	0.83	-0.23	-1.00	20.00	Pass
BLE	SISO	1	1	2404	2Mbps	Default	0.45	1.12	0.12	-1.00	20.00	Pass
BLE	SISO	1	19	2440	2Mbps	Default	0.44	1.09	0.08	-1.00	20.00	Pass
BLE	SISO	1	38	2478	2Mbps	Default	-0.08	0.62	-0.38	-1.00	20.00	Pass
BLE-125K	SISO	1	0	2402	125kbps	Default	0.33	1.07	0.01	-1.00	20.00	Pass
BLE-125K	SISO	1	19	2440	125kbps	Default	0.30	0.95	-0.05	-1.00	20.00	Pass
BLE-125K	SISO	1	39	2480	125kbps	Default	-0.21	0.51	-0.55	-1.00	20.00	Pass
BLE-500K	SISO	1	0	2402	500kbps	Default	0.21	0.88	-0.12	-1.00	20.00	Pass
BLE-500K	SISO	1	19	2440	500kbps	Default	0.34	0.99	-0.02	-1.00	20.00	Pass
BLE-500K	SISO	1	39	2480	500kbps	Default	0.04	0.74	-0.26	-1.00	20.00	Pass



TEST RESULTS DATA									
EIRP Power									
2.4G WIFI									
Mode						Power Setting	Conducted Power (dBm)		
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High
							25 °C	-10 °C	40 °C
							Ant 6	Ant 6	Ant 6
11b	SISO	1	1	2412	1Mbps	15.00	17.74	18.46	17.42
11b	SISO	1	7	2442	1Mbps	15.00	18.27	18.94	17.97
11b	SISO	1	13	2472	1Mbps	15.00	17.41	18.11	17.11
11g	SISO	1	1	2412	6Mbps	12.00	14.57	15.22	14.24
11g	SISO	1	7	2442	6Mbps	12.00	14.99	15.69	14.62
11g	SISO	1	13	2472	6Mbps	12.00	14.96	15.69	14.66
HT20	SISO	1	1	2412	MCS0	12.00	14.93	15.66	14.63
HT20	SISO	1	7	2442	MCS0	12.00	15.31	15.96	14.97
HT20	SISO	1	13	2472	MCS0	12.00	14.12	14.78	13.80
HT40	SISO	1	3	2422	MCS0	9.00	12.39	13.04	12.06
HT40	SISO	1	7	2442	MCS0	9.00	11.76	12.46	11.39
HT40	SISO	1	11	2462	MCS0	9.00	11.22	11.95	10.92

Mode						Power Setting	EIRP Power (dBm)			Gain (dBi)	EIRP Power Limit(dBm)	Pass/Fail
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High			
							25 °C	-10 °C	40 °C			
							Ant 6	Ant 6	Ant 6			
11b	SISO	1	1	2412	1Mbps	15.00	16.74	17.46	16.42	-1.00	20.00	Pass
11b	SISO	1	7	2442	1Mbps	15.00	17.27	17.94	16.97	-1.00	20.00	Pass
11b	SISO	1	13	2472	1Mbps	15.00	16.41	17.11	16.11	-1.00	20.00	Pass
11g	SISO	1	1	2412	6Mbps	12.00	13.57	14.22	13.24	-1.00	20.00	Pass
11g	SISO	1	7	2442	6Mbps	12.00	13.99	14.69	13.62	-1.00	20.00	Pass
11g	SISO	1	13	2472	6Mbps	12.00	13.96	14.69	13.66	-1.00	20.00	Pass
HT20	SISO	1	1	2412	MCS0	12.00	13.93	14.66	13.63	-1.00	20.00	Pass
HT20	SISO	1	7	2442	MCS0	12.00	14.31	14.96	13.97	-1.00	20.00	Pass
HT20	SISO	1	13	2472	MCS0	12.00	13.12	13.78	12.80	-1.00	20.00	Pass
HT40	SISO	1	3	2422	MCS0	9.00	11.39	12.04	11.06	-1.00	20.00	Pass
HT40	SISO	1	7	2442	MCS0	9.00	10.76	11.46	10.39	-1.00	20.00	Pass
HT40	SISO	1	11	2462	MCS0	9.00	10.22	10.95	9.92	-1.00	20.00	Pass

3.2 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Spectral Density

3.2.1 Limit of Maximum Power Spectral Density

SUBCLAUSE 4.3.2.3.3	
TEST CONDITION	LIMIT
Normal and Extreme Temperature Conditions	10dBm / MHz

Remark: Maximum spectral power density is not applicable to FHSS system device.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 8 of this test report.

3.2.3 Test Procedure

1. The measurement procedure follows the clause 5.4.3.2.1 of the ETSI EN 300 328 V2.2.2 (2019-07).
2. These measurements shall only be performed at normal test conditions.
3. The measurement shall be repeated for the equipment being configured to operate at the lowest, the middle, and the highest frequency of the stated frequency range.
4. The test procedure shall be as follows:

Step 1:

Connect the EUT to the spectrum analyzer and use the following settings:

Start Frequency	2400MHz
Stop Frequency	2483.5MHz
Resolution BW	10kHz
Video BW	30kHz
Sweep Points	8350
Detector	RMS
Trace Mode	Max Hold
Sweep time	10 sec

Step 2:

Add up the values for amplitude (power) for all the samples in the file.

Step 3:

Normalize the individual values for amplitude so that the sum is equal to the RF Output Power (e.i.r.p.) measured.

Step 4:

Starting from the first sample in the file (lowest frequency), add up the power of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

Step 5:


Shift the start point of the samples added up in step 4 by 1 sample and repeat the procedure in step 4 (i.e. sample #2 to #101).

Step 6:

Repeat step 5 until the end of the data set and record the radiated Power Spectral Density values for each of the 1 MHz segments.

From all the recorded results, the highest value is the maximum Power Spectral Density for the EUT. This value shall be recorded in the test report.

3.2.4 Test Setup

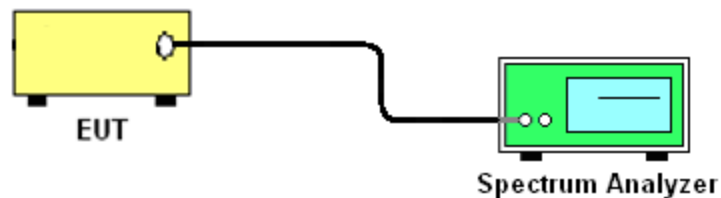

3.2.5 Test Results

Refer to Appendix A of this test report.

3.3 Occupied Channel Bandwidth

3.3.1 Limit of Occupied Channel Bandwidth

Occupied Channel Bandwidth fall completely within 2.4 GHz – 2.4835 GHz

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 8 of this test report.

3.3.3 Test Procedure

1. The measurement procedure follows the clause 5.4.7.2.1 of the ETSI EN 300 328 V2.2.2 (2019-07).
2. The measurement shall be performed only on the lowest and the highest frequency within the stated frequency range.
3. The test procedure shall be as follows:

Step 1:

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	Channel under test
Resolution BW	1 % of the span
Video BW	3 × RBW
Frequency Span	2 × Nominal Channel Bandwidth
Detector	RMS
Trace Mode	Max Hold
Sweep Time	1 s

Step 2:

Wait until the trace is completed.

Find the peak value of the trace and place the analyzer marker on this peak.

Step 3:

Use the 99 % bandwidth function of the spectrum analyzer to measure the Occupied Channel Bandwidth of the EUT.

3.3.4 Test Setup



3.3.5 Test Results

Refer to Appendix A of this test report.

3.4 Frequency Hopping Requirements

3.4.1 Dwell Time and Minimum Frequency Occupation Time

3.4.1.1 Limit of Dwell Time

SUBCLAUSE 4.3.1.4.3	
TEST CONDITION	LIMIT
Non-Adaptive Frequency Hopping Systems	15 ms within 15ms * hopping frequencies (N)
Adaptive Frequency Hopping Systems	0.4s within 0.4s * hopping frequencies (N)

Limit of Minimum Frequency Occupation Time

SUBCLAUSE 4.3.1.4.3	
TEST CONDITION	LIMIT
Normal Condition	Option1: The Minimum Frequency Occupation Time shall be equal to one dwell time within a period not exceeding four times the product of the dwell time per hop and the number of hopping frequencies in use.

Remark: This test item is not applicable to DSSS/OFDM device.

3.4.1.2 Measuring Instruments

The measuring equipment is listed in the section 8 of this test report.


3.4.1.3 Test Procedures

1. The measurement shall be performed on a minimum of 2 hopping frequencies chosen arbitrary from the actual hopping sequence. The results as well as the frequencies on which the test was performed shall be recorded in the test report.
2. The measurement procedure follows the clause 5.4.4.2.1 of the ETSI EN 300 328 V2.2.2 (2019-07).
3. The analyzer shall be set as follows:

Center Frequency	Channel under test
Frequency Span	0 Hz
Resolution BW	500kHz
Video BW	2000kHz
Detector	RMS
Sweep time	Equal to the Dwell Time × Minimum number of hopping frequencies (N)
Number of sweep points	30000
Trace Mode	Clear / Write
Trigger	Free Run

4. For accuracy measurement, the sweep time would be zoomed in and verify the dwell time which is from the dwell time per hop across the total number of hopping channel. Then record test result.
5. Make the following changes on the analyzer to get Minimum Frequency Occupation Time
Sweep time: Equal to $4 \times \text{Dwell Time} \times \text{Actual number of hopping frequencies in use}$

3.4.1.4 Test Setup

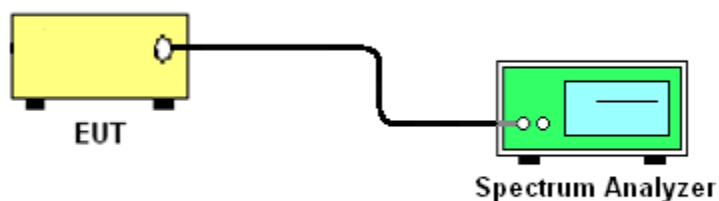

3.4.1.5 Test Results

Refer to Appendix A of this test report.

3.4.1.6 Test Plots

Refer to Appendix A of this test report.

3.4.2 Hopping Sequence

3.4.2.1 Limit of Hopping Sequence

SUBCLAUSE 4.3.1.4.3	
TEST CONDITION	LIMIT
Non-Adaptive Frequency Hopping Systems	N
Adaptive Frequency Hopping Systems	N Ch 70% of band

N= 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

Remark: Hopping Sequence is not applicable to DSSS/OFDM device.


3.4.2.2 Measuring Instruments

The measuring equipment is listed in the section 8 of this test report.

3.4.2.3 Test Procedures

The measurement procedure follows the clause 5.4.4.2.1 of the ETSI EN 300 328 V2.2.2 (2019-07).

3.4.2.4 Test Setup

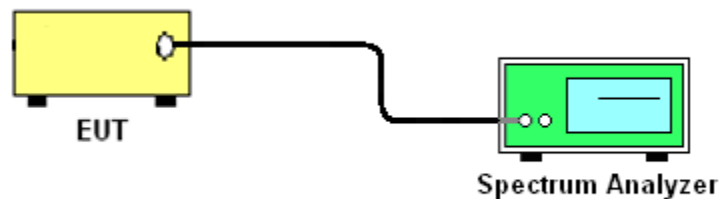

3.4.2.5 Test Results

Refer to Appendix A of this test report.

3.4.3 Hopping Frequency Separation

3.4.3.1 Limit of Hopping Frequency Separation

SUBCLAUSE 4.3.1.5.3.	
TEST CONDITION	LIMIT
Non-Adaptive Frequency Hopping Systems	MAX [OBW, 100kHz]
Adaptive Frequency Hopping Systems	100kHz

Remark: Hopping Frequency Separation is not applicable to DSSS/OFDM device.


3.4.3.2 Measuring Instruments

The measuring equipment is listed in the section 8 of this test report.

3.4.3.3 Test Procedures

1. These measurements shall only be performed at normal test conditions.
2. The measurement shall be performed on 2 adjacent hopping frequencies.
3. The frequencies on which the test was performed shall be recorded.
4. The measurement procedure follows the clause 5.4.5.2.1.3 Option 2 of the ETSI EN 300 328 V2.2.2 (2019-07).

3.4.3.4 Test Setup

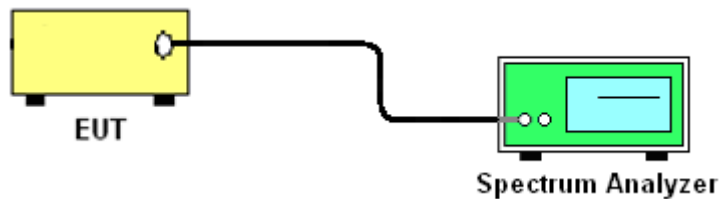


3.4.3.5 Test Results

Refer to Appendix A of this test report.

3.5 Transmitter unwanted emissions in the out-of-band domain

3.5.1 Transmitter unwanted emissions in the out-of-band domain limit

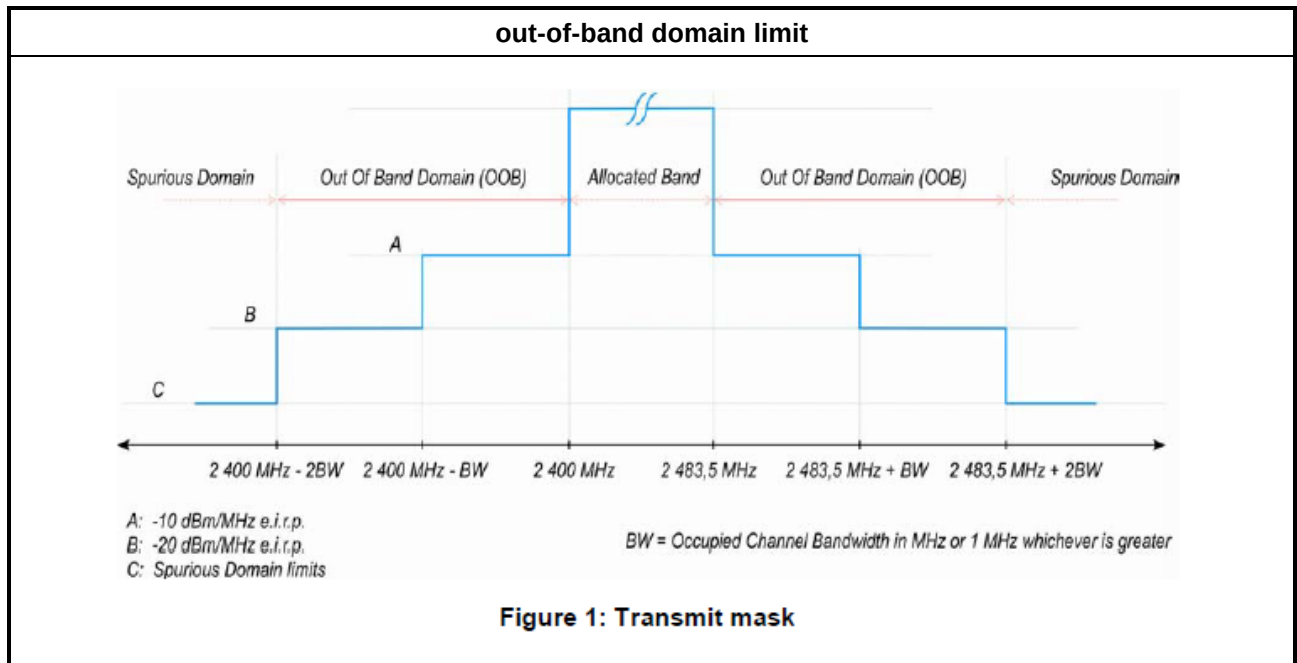

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 8 of this test report.

3.5.3 Test Procedures

1. The measurement procedure follows the clause 5.4.8.2.1 of the ETSI EN 300 328 V2.2.2 (2019-07).
2. These measurements shall only be performed at normal test conditions.
3. For conducted measurements on devices with multiple transmit chains using the results for each of the transmit chains for the corresponding 1 MHz segments shall be added and compared with the transmit mask limit.

3.5.4 Test Setup



3.5.5 Test Results

Refer to Appendix A of this test report.

3.6 Transmitter spurious emissions

3.6.1 Limit of Transmitter spurious emissions

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

SUBCLAUSE 4.3.1.10.3 and 4.3.2.9.3		
FREQUENCY RANGE	MAXIMUM POWER	BANDWIDTH
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 8 of this test report.

3.6.3 Test Procedures


1. The measurement procedure follows the clause 5.4.9.2.2 of the ETSI EN 300 328 V2.2.2 (2019-07).
2. The EUT was placed on a turntable with 1.5m height.
3. The test distance between the receiving antenna and the EUT is 3meter below 1GHz frequency range, and 3 meter which is in far field test condition for measured frequency above 1GHz, while the receiving (test) antenna scanning from 1m to 4m height in an OATS or SAR (or in a FAR the height scan is omitted).
4. Set EUT in continuous transmitting with maximum output power.
5. The table was rotated from 0 to 360 degree to search the highest radiated emission.
6. Repeating step 3 and 4 for each polarization and channel to find the worst emission level.
7. The results obtained are compared to the limits in order to prove compliance with the requirement.
8. Test Results Explanation:

$$\text{Level (dBm)} = \text{Read Level (dBm)} + \text{Factor (dB)}$$


$$\text{Over Limit (dB)} = \text{Level (dBm)} - \text{Limit Line (dBm)}$$

3.6.4 Test Setup

<Below 1GHz>

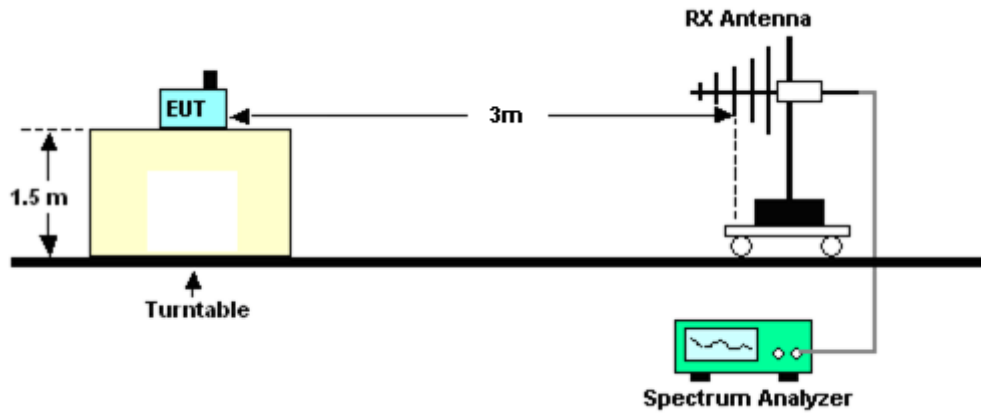

<Above 1GHz>

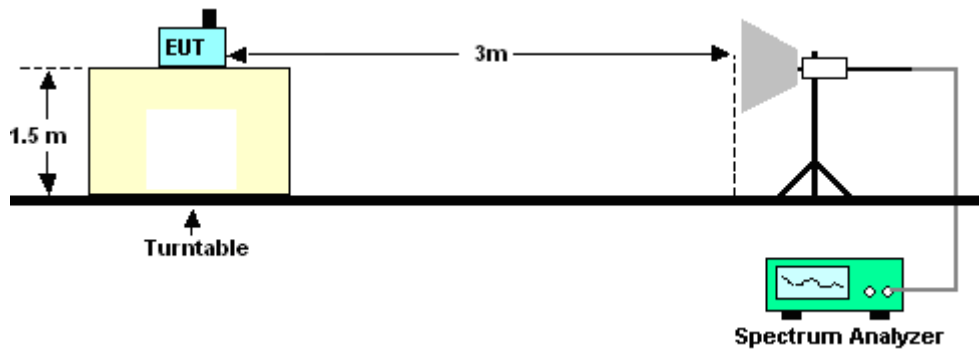

3.6.5 Test Results

Refer to Appendix B of this test report.

4 Receiver Parameters

4.1 Receiver spurious emissions

4.1.1 Limit of Receiver spurious emissions

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

SUBCLAUSE 4.3.1.11.3 and 4.3.2.10.3		
FREQUENCY RANGE	MAXIMUM POWER	BANDWIDTH
30 MHz to 1 GHz	-57 dBm	100kHz
1 GHz to 12,75 GHz	-47 dBm	1MHz

4.1.2 Measuring Instruments


The measuring equipment is listed in the section 8 of this test report.

4.1.3 Test Procedures


1. The measurement procedure follows the clause 5.4.10.2.2 of the ETSI EN 300 328 V2.2.2 (2019-07).
2. The EUT was placed on a turntable with 1.5m height.
3. The test distance between the receiving antenna and the EUT is 3meter below 1GHz frequency range, and 3 meter which is in far field test condition for measured frequency above 1GHz, while the receiving (test) antenna scanning from 1m to 4m height in an OATS or SAR (or in a FAR the height scan is omitted).
4. Set EUT in receiving mode.
5. The table was rotated from 0 to 360 degree to search the highest radiated emission.
6. Repeating step 3 and 4 for each polarization and channel to find the worst emission level.
7. The results obtained are compared to the limits in order to prove compliance with the requirement.
8. Test Results Explanation:
Level (dBm) = Read Level (dBm) + Factor (dB)
Over Limit (dB) = Level (dBm) – Limit Line (dBm)

4.1.4 Test Setup

<Below 1GHz>

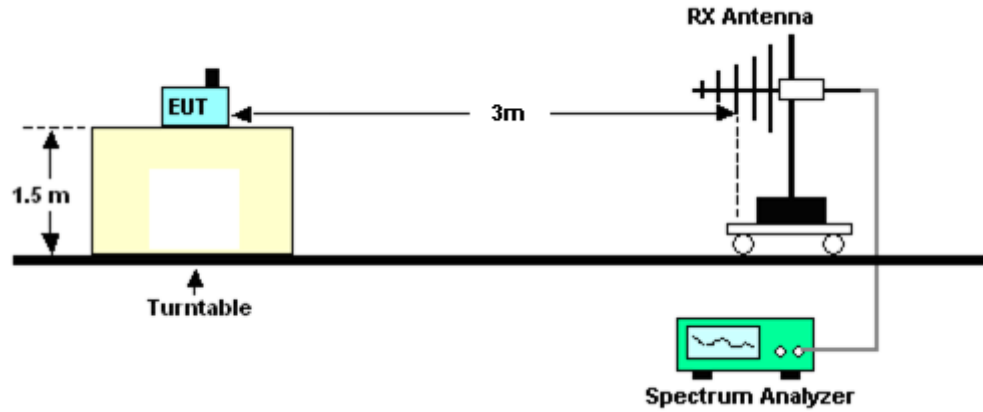

<Above 1GHz>

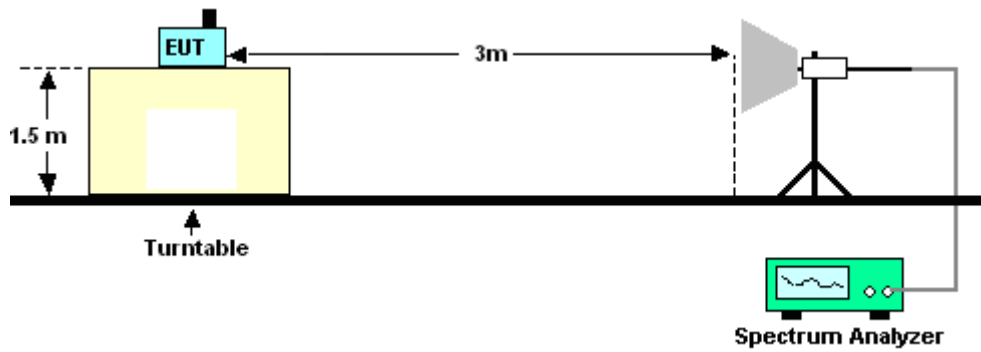

4.1.5 Test Results

Refer to Appendix B of this test report.

4.2 Receiver Blocking Test

4.2.1 Limit of Receiver Blocking Test

The minimum performance criterion shall be a PER less than or equal to 10%.

Receiver category 1

- Adaptive equipment with maximum RF output power > 10dBm e.i.r.p.

NOTE: Non-adaptive equipment is categorized as receiver category 2 or receiver category 3

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log ₁₀ (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 × log ₁₀ (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 26 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 20 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Receiver category 2

1. Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % (irrespective of the maximum RF output power); or
2. Equipment (adaptive or non-adaptive) with a maximum RF output power greater than 0 dBm e.i.r.p. and less than or equal to 10 dBm e.i.r.p.

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + $10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB}$) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Receiver category 3

1. Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % (irrespective of the maximum RF output power); or
2. Equipment (adaptive or non-adaptive) with a maximum RF output power of 0 dBm e.i.r.p.

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + $10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB}$) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 30 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			


4.2.2 Measuring Instruments

The measuring equipment is listed in the section 8 of this test report.

4.2.3 Test Procedures

1. The measurement procedure follows the clause 5.4.11.2.1 of the ETSI EN 300 328 V2.2.2 (2019-07).
2. For systems using multiple receive chains only one chain (antenna port) need to be tested. All other receiver inputs shall be terminated.

4.2.4 Test Setup

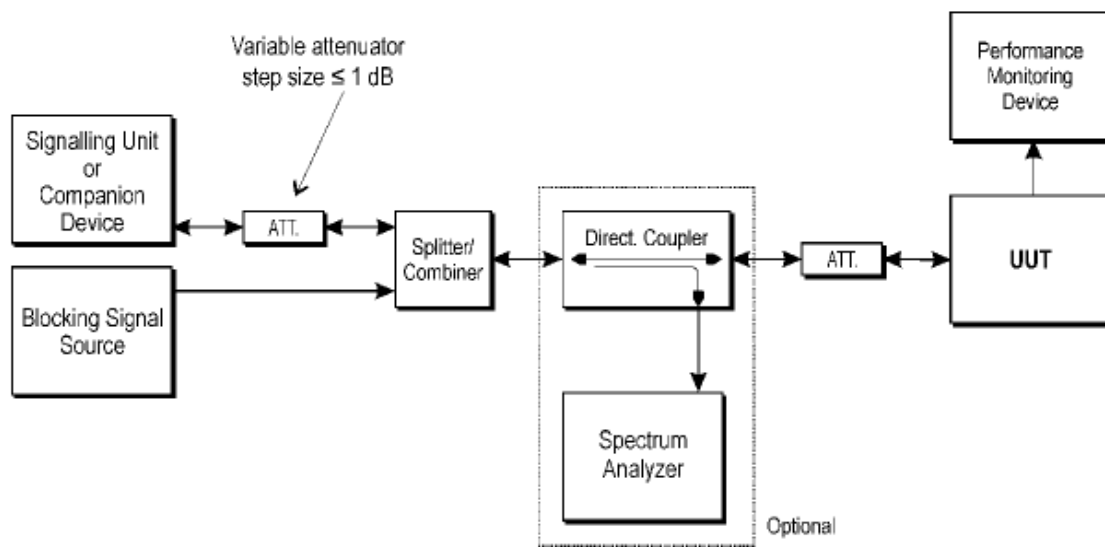

4.2.5 Test Results of Receiver Blocking

The minimum performance criterion shall be a PER less than or equal to 10%.

When the Blocking signal is injected, the PER maintain less than or equal to 10%, the test result is Pass.

Bluetooth BR/EDR <EN300328 Receiver category 2>

Wanted Frequency (MHz)	Wanted Level + Gain (dBm)	Unwanted Frequency (MHz)	Unwanted Level + Gain (dBm)	PER (%)
2402	-70	2380	-35	0
2402	-70	2300	-35	0
2480	-70	2504	-35	0
2480	-70	2584	-35	0

BLE 125kbps <EN300328 Receiver category 2>

Wanted Frequency (MHz)	Wanted Level + Gain (dBm)	Unwanted Frequency (MHz)	Unwanted Level + Gain (dBm)	PER (%)
2402	-70	2380	-35	0
2402	-70	2300	-35	0.0499
2480	-70	2504	-35	0.1497
2480	-70	2584	-35	0.1497

Note:

The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain.

In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G).

WIFI 2.4G <EN300328 Receiver category 1>
802.11b

Wanted Frequency (MHz)	Wanted Level + Gain (dBm)	Unwanted Frequency (MHz)	Unwanted Level + Gain (dBm)	PER (%)
2412	-69	2380	-35	0.05
2412	-75	2300	-35	1.75
2412	-75	2330	-35	0.1
2412	-75	2360	-35	0.05
2472	-69	2504	-35	0
2472	-75	2524	-35	1.8
2472	-75	2584	-35	0.45
2472	-75	2674	-35	0.05

802.11g

Wanted Frequency (MHz)	Wanted Level + Gain (dBm)	Unwanted Frequency (MHz)	Unwanted Level + Gain (dBm)	PER (%)
2412	-69	2380	-35	0.2
2412	-75	2300	-35	0.2
2412	-75	2330	-35	0.2
2412	-75	2360	-35	0.05
2472	-69	2504	-35	0
2472	-75	2524	-35	0
2472	-75	2584	-35	0
2472	-75	2674	-35	0

Note:

The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain.
In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G).

5 Adaptivity Test

5.1 Adaptivity

5.1.1 Limit of Adaptivity

Only for adaptive systems and RF Output Power > 10 dBm

LBT based Detect and Avoid (Load Based Equipment with spectrum sharing mechanism IEEE Std.):

LBT based spectrum sharing mechanism may implement in IEEE 802.11™ [i.3], clause 10 clause 11, clause 15, clause 16, clause 18 and clause 19, or in IEEE 802.15.4™ [i.4], clause 5, clause 6 and clause 10.

Short Control Signaling Transmissions shall have a maximum TxOn / (TxOn + TxOff) ratio of 10 % within an observation period of 50 ms.


5.1.2 Measurement Instruments

The measuring equipment is listed in the section 8 of this test report.

5.1.3 Test Procedures

1. The measurement procedure follows the clause 5.4.6.2.1 of the ETSI EN 300 328 V2.2.2 (2019-07).
2. For conducted measurements on devices with multiple transmit chains and receive chains. The power splitter/combiner shall be used to combine all the transmit/receive chains (antenna outputs) into a single test point. The insertion loss of the power splitter/combiner shall be taken into account.

5.1.4 Test Setup

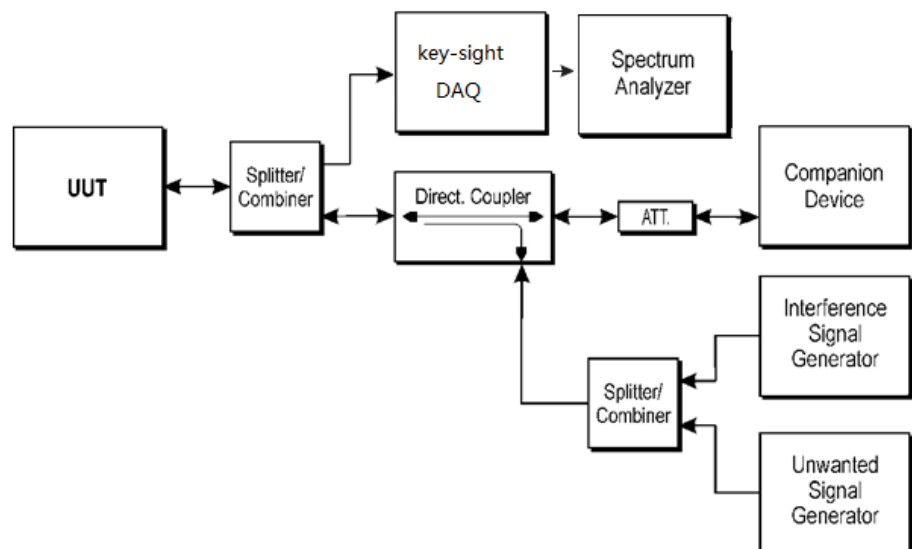

5.1.5 Support Unit used in test configuration and system

Item	Instrument	Manufacturer	Model No.	Characteristics
1.	WLAN AP	D-LINK	DIR-855	Dual Band AP
2.	Notebook	Lenovo	E335	FTP / LAN


5.1.6 Test Results of Adaptivity Test

Equipment Information:	
☐	Non-Adaptive Equipment
	The maximum RF output power (E.I.R.P.) dBm:
	The maximum (Corresponding) Duty Cycle : %
☒	Adaptive Equipment without the possibility to switch to a non-adaptive mode:
☒	The equipment has implemented an LBT based DAA mechanism:
	☐ The equipment is Frame Based equipment
	☒ The equipment is Load Based equipment
	☐ The equipment can switch dynamically between Frame Based and Load Based equipment
☐	The equipment has implemented an non-LBT based DAA mechanism
☐	The equipment can operate in more than one adaptive mode
☐	Adaptive Frequency Hopping using other forms of DAA (non-LBT based)
☐	Adaptive Equipment which can also operate in non-adaptive mode


	Modulation	Nominal Bandwidth	Channel	Test Frequency	Test Result
WIFI 2.4GHz	802.11b	20MHz	01	2412 MHz	PASS
			13	2472 MHz	PASS
	802.11g	20MHz	01	2412 MHz	PASS
			13	2472 MHz	PASS
	802.11n HT20	20MHz	01	2412 MHz	PASS
			13	2472 MHz	PASS
	802.11n HT40	40MHz	03	2422 MHz	PASS
			11	2462 MHz	PASS

5.1.7 Test Plots of Adaptivity Test


1. Detection Level = $-70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{\text{out}}) + \text{Gain}$ for conducted measurement.
(P_{out} in mW e.i.r.p.)
2. Blocking signal is injected while interference signal is present. With the presence of the blocking signal, channel of the observation does not resume the link.

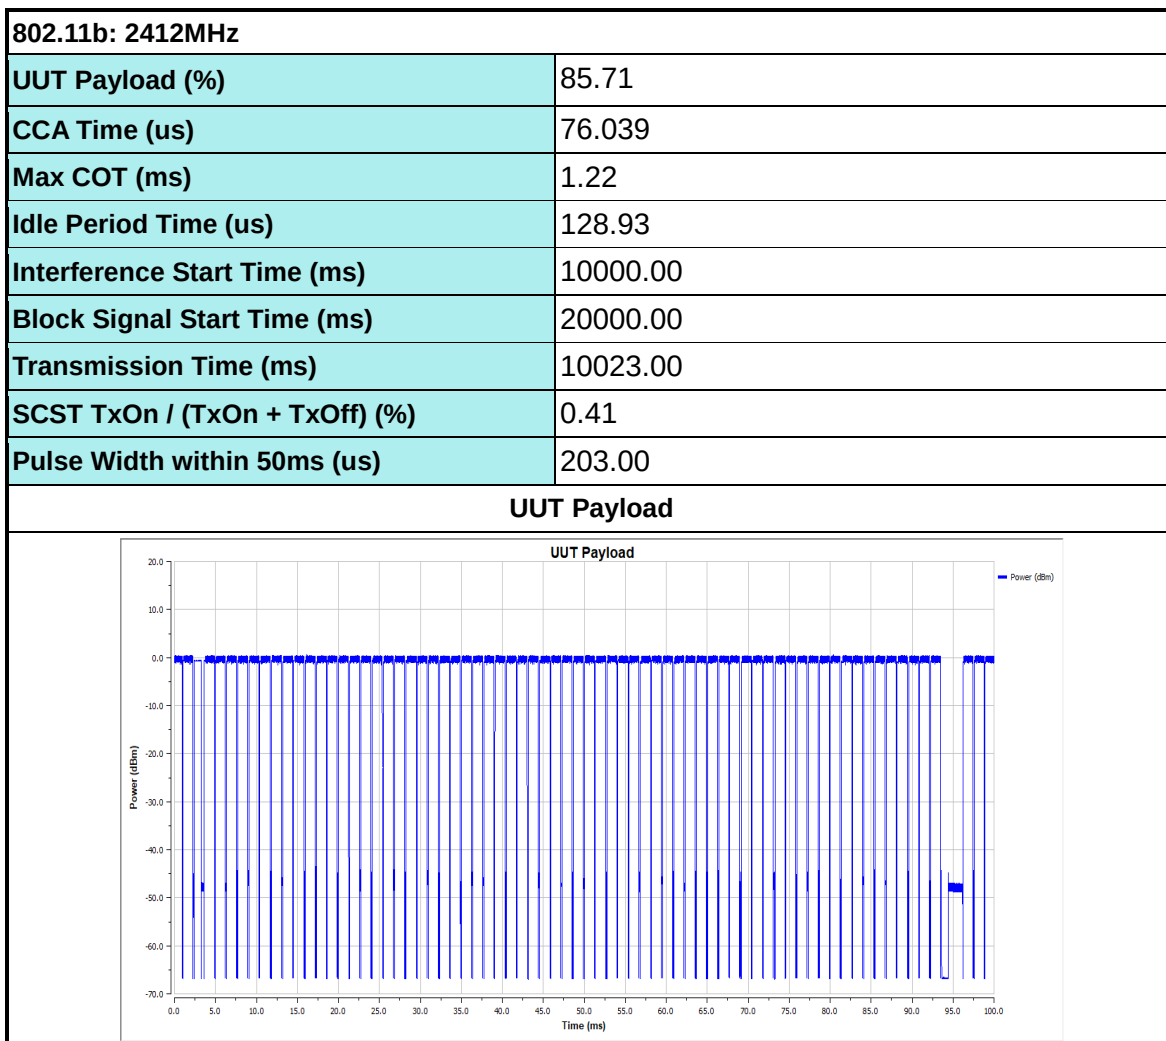


Adaptivity Test

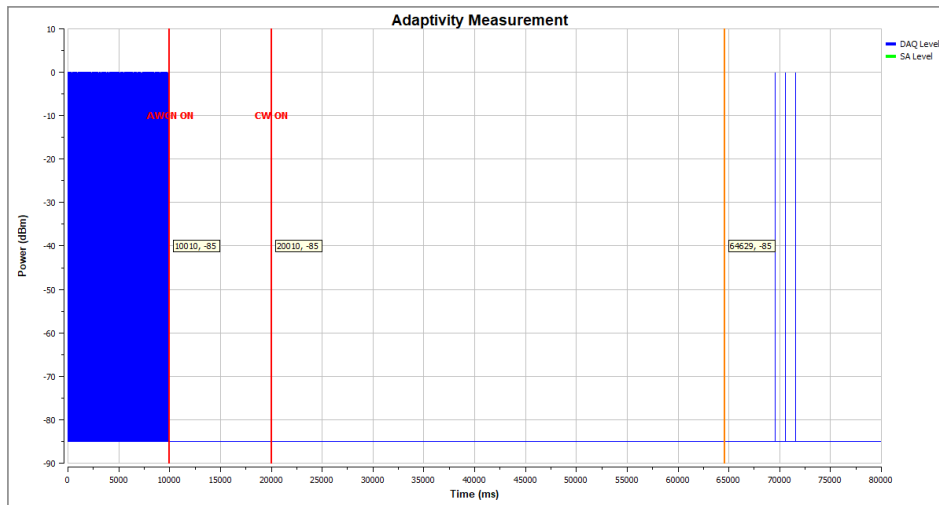


Occupancy Time

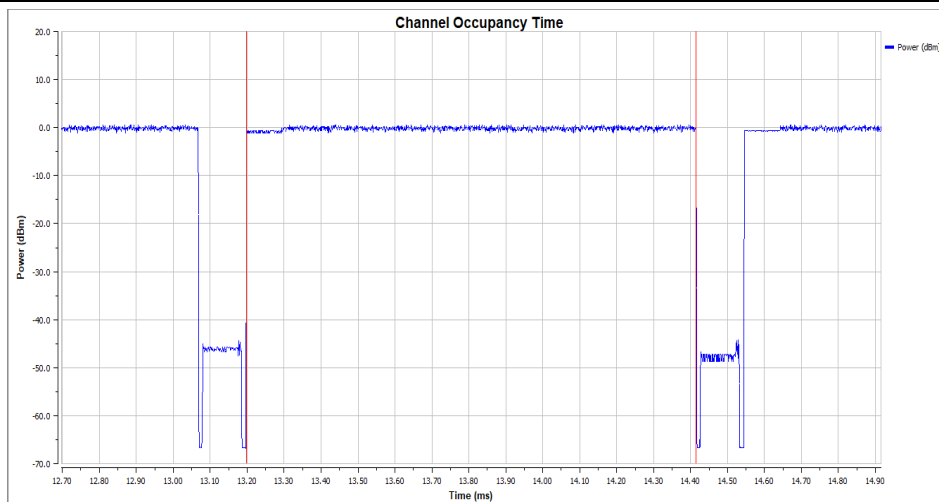

Idle Time


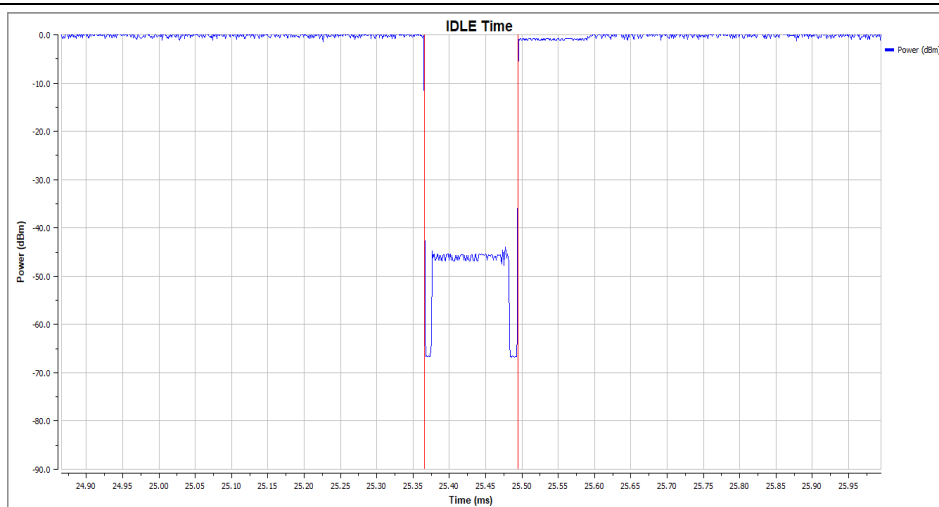


Short Control Signal Check

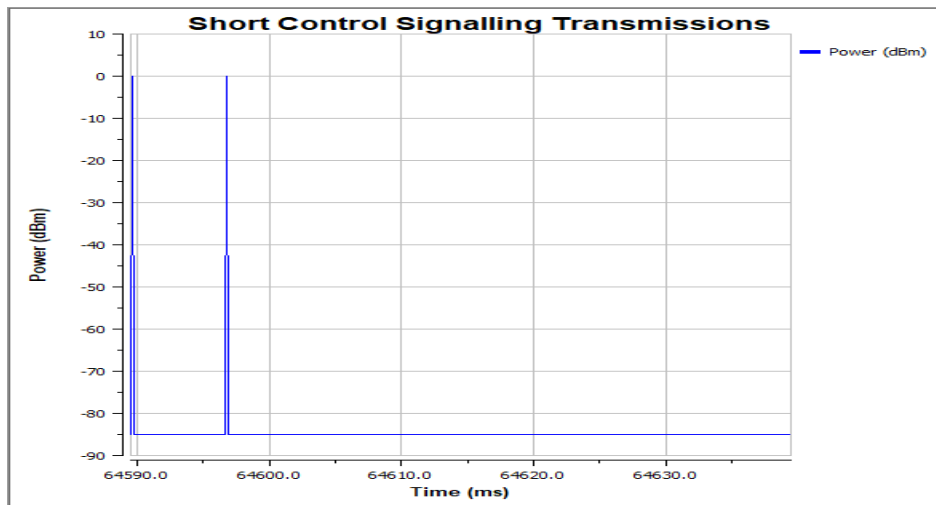


802.11b: 2472MHz


UUT Payload (%)	85.71
CCA Time (us)	76.039
Max COT (ms)	1.22
Idle Period Time (us)	128.93
Interference Start Time (ms)	10000.00
Block Signal Start Time (ms)	20000.00
Transmission Time (ms)	10023.00
SCST TxOn / (TxOn + TxOff) (%)	0.41
Pulse Width within 50ms (us)	203.00

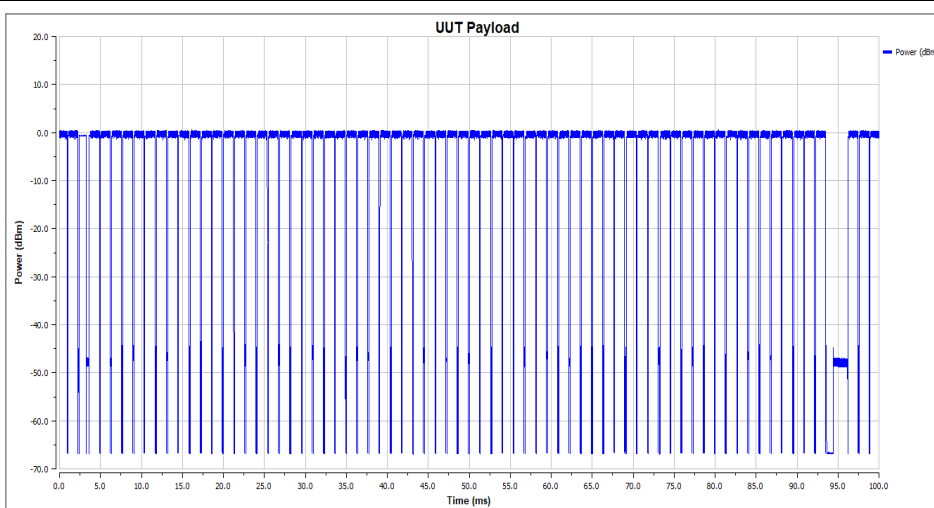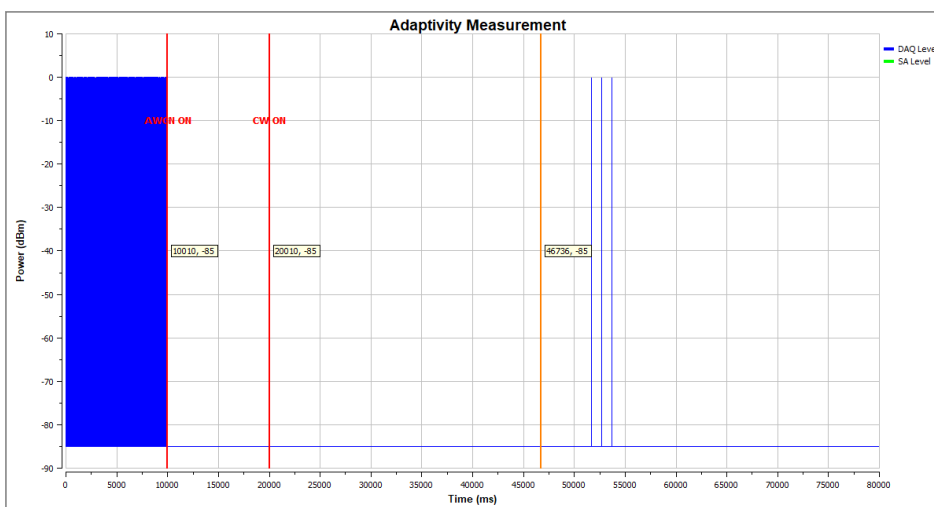UUT Payload

Adaptivity Test

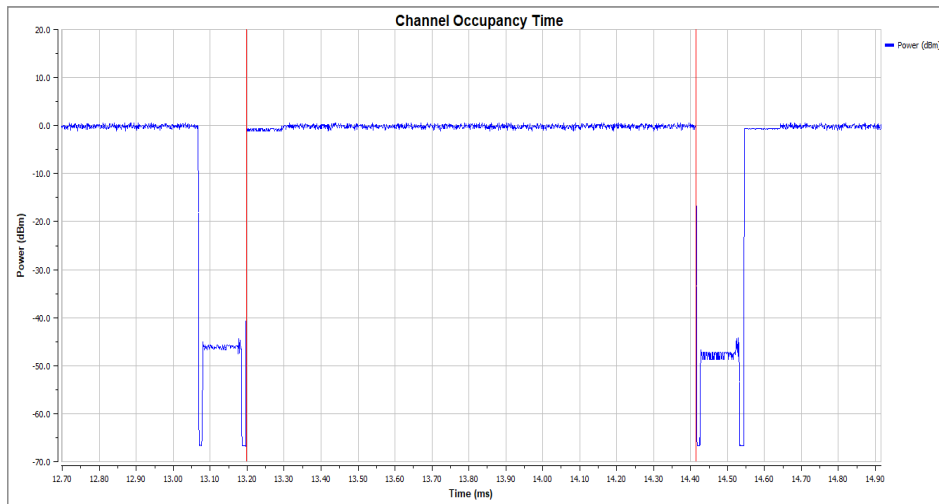
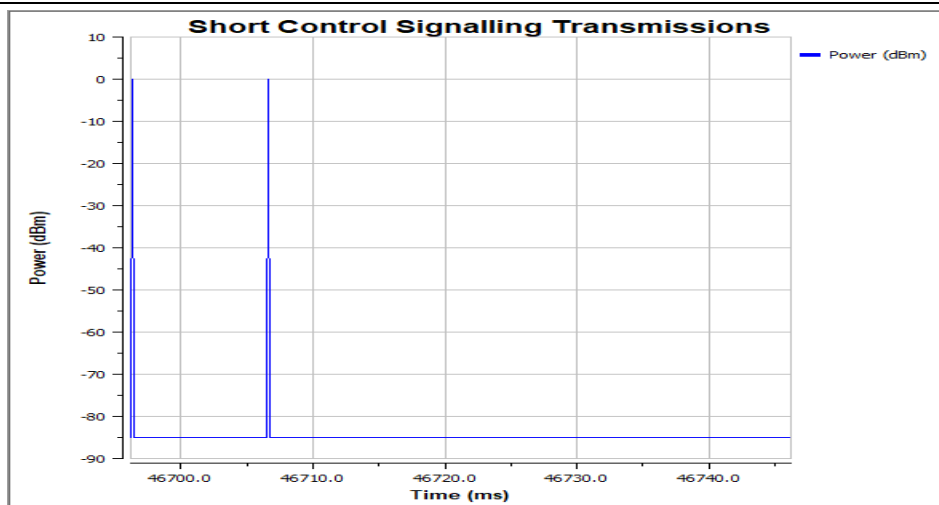
Occupancy Time

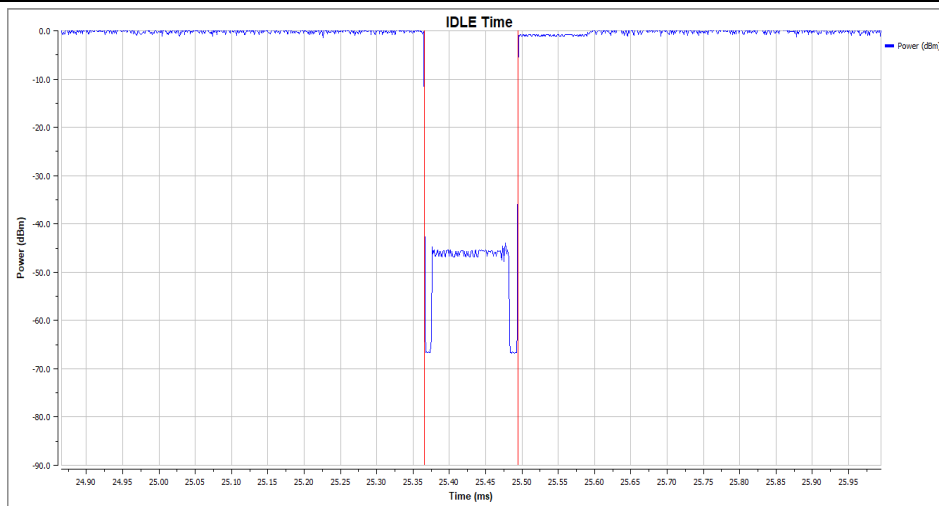

Idle Time





Short Control Signal Check




802.11g: 2412MHz


UUT Payload (%)	82.48
CCA Time (us)	120.935
Max COT (ms)	0.54
Idle Period Time (us)	17.99
Interference Start Time (ms)	10000.00
Block Signal Start Time (ms)	20000.00
Transmission Time (ms)	10023.00
SCST TxOn / (TxOn + TxOff) (%)	0.20
Pulse Width within 50ms (us)	98.00

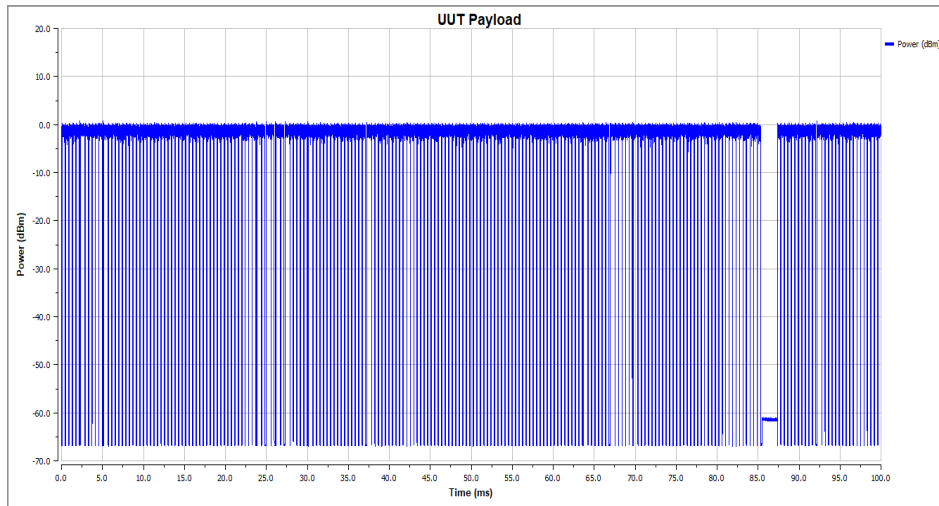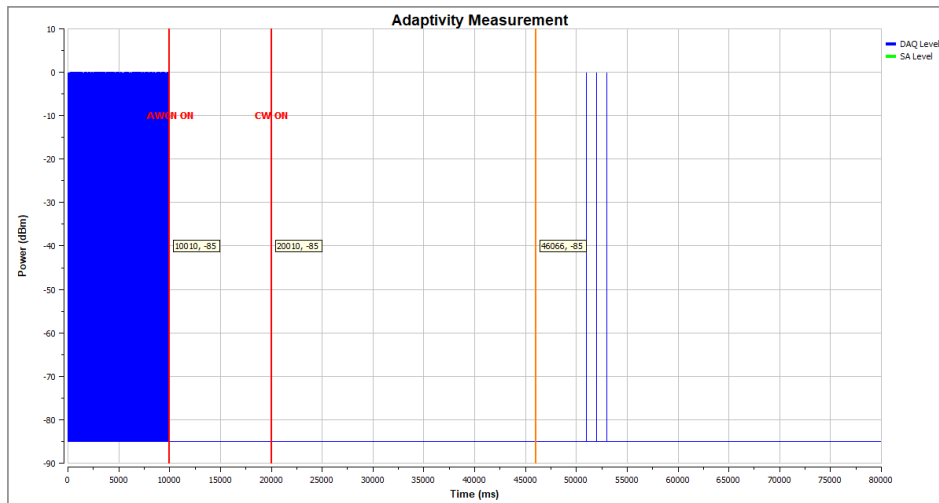UUT Payload

Adaptivity Test

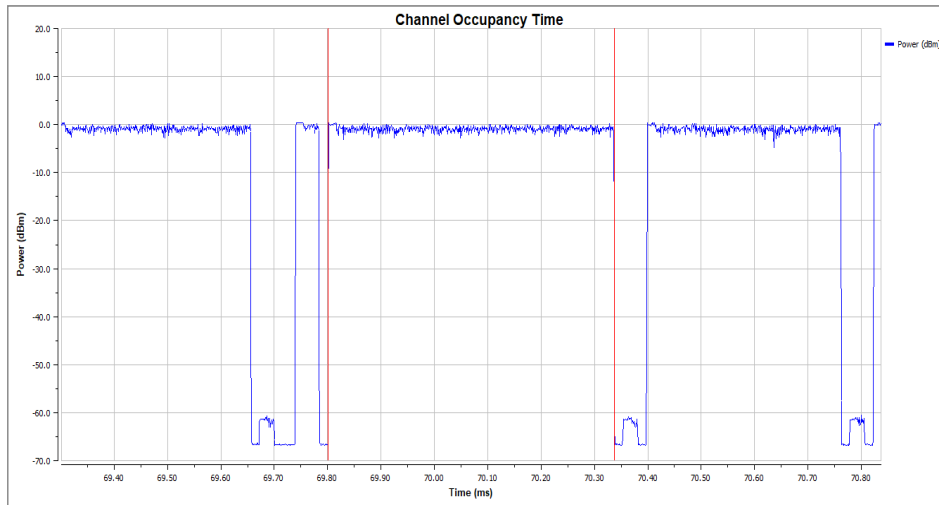
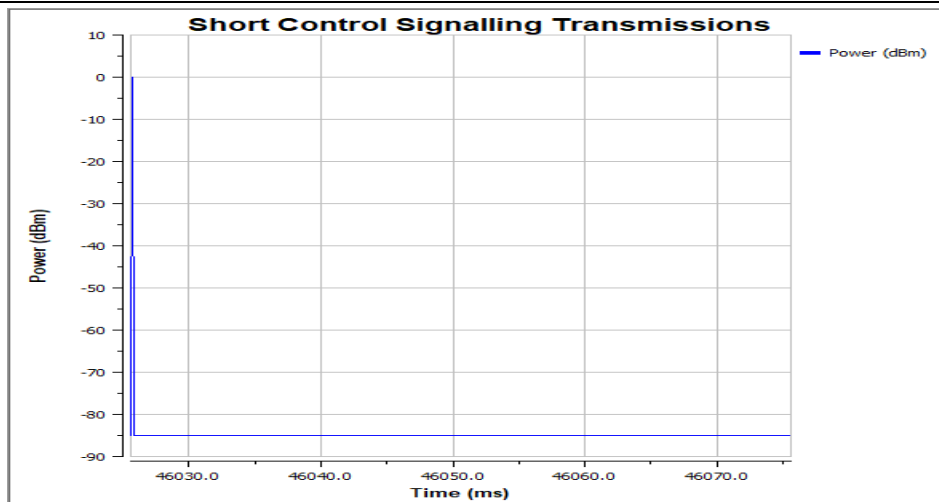
Occupancy Time

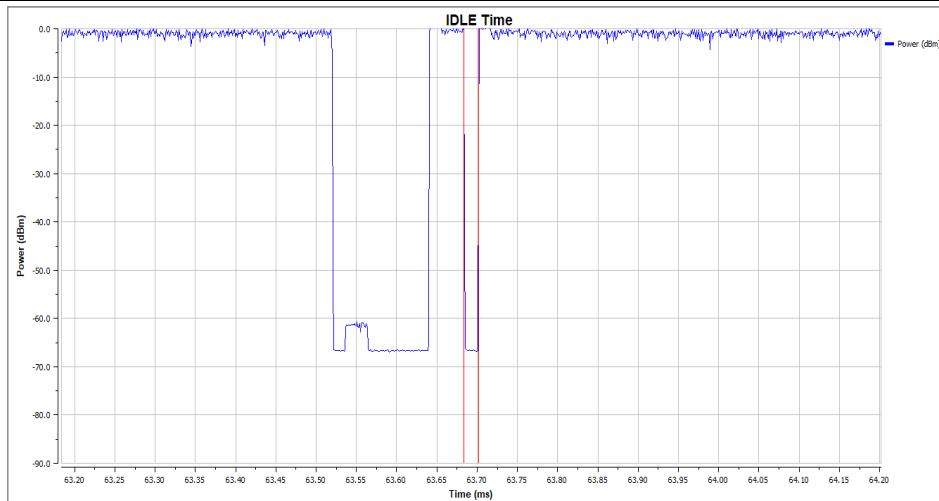

Idle Time




Short Control Signal Check




802.11g: 2472MHz	
UUT Payload (%)	82.48
CCA Time (us)	120.935
Max COT (ms)	0.54
Idle Period Time (us)	17.99
Interference Start Time (ms)	10000.00
Block Signal Start Time (ms)	20000.00
Transmission Time (ms)	10023.00
SCST TxOn / (TxOn + TxOff) (%)	0.80
Pulse Width within 50ms (us)	400.00


UUT Payload

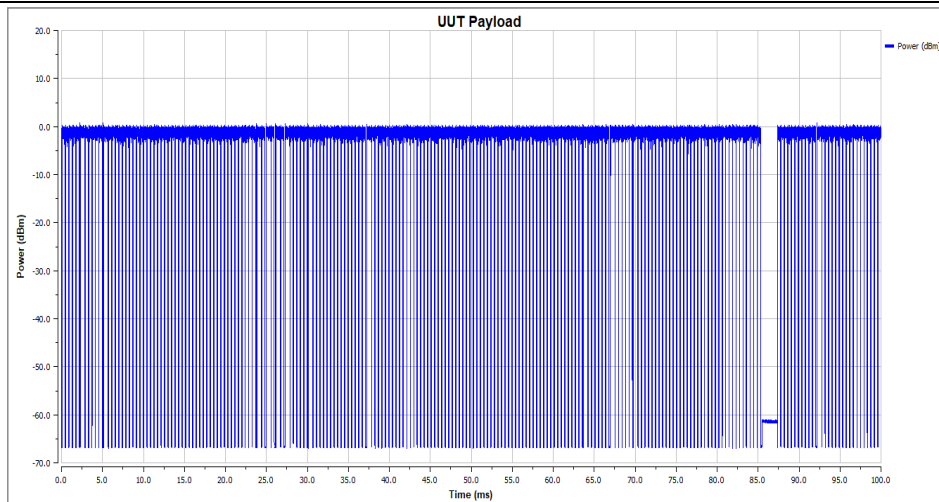


Adaptivity Test

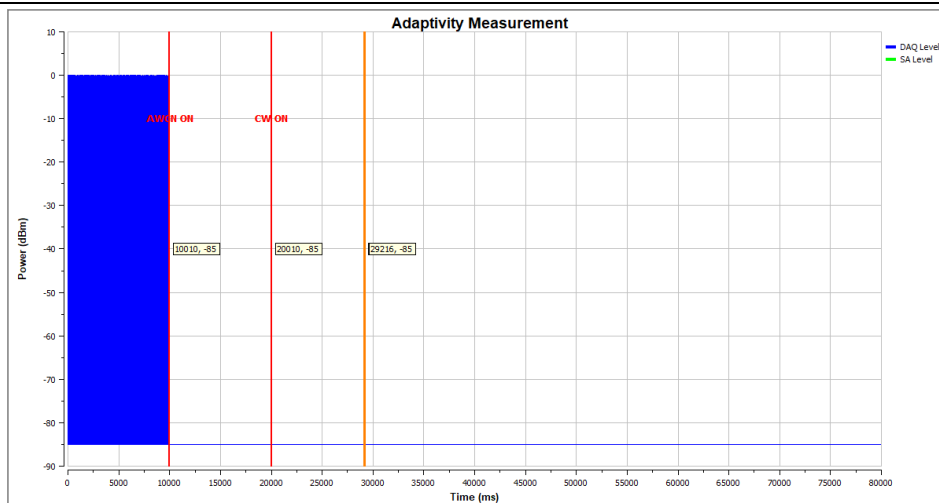


Occupancy Time

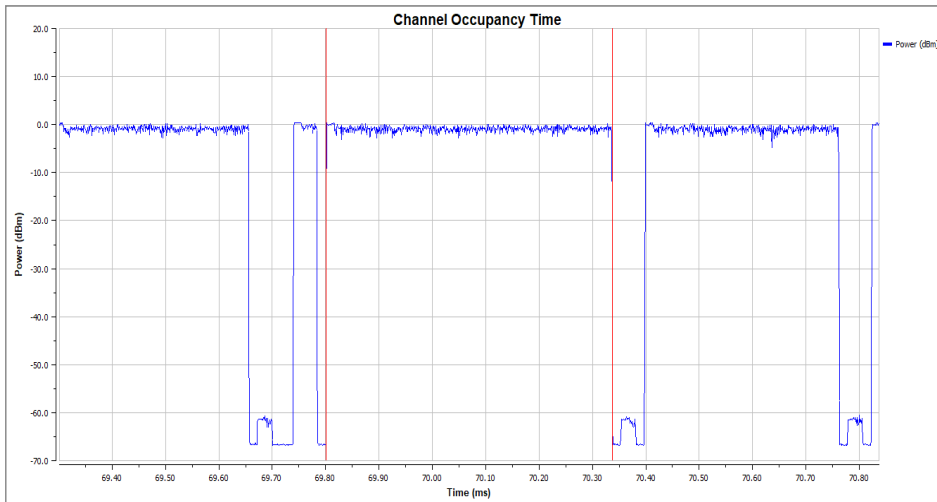

Idle Time


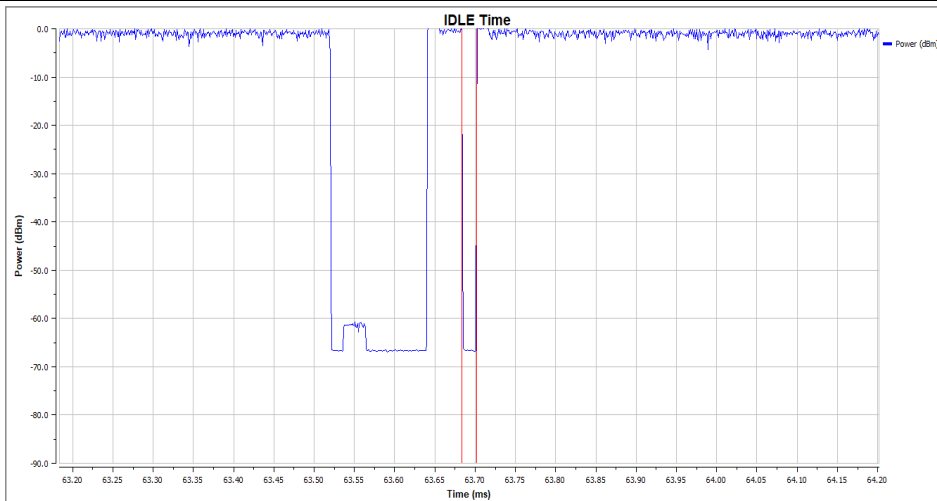


Short Control Signal Check

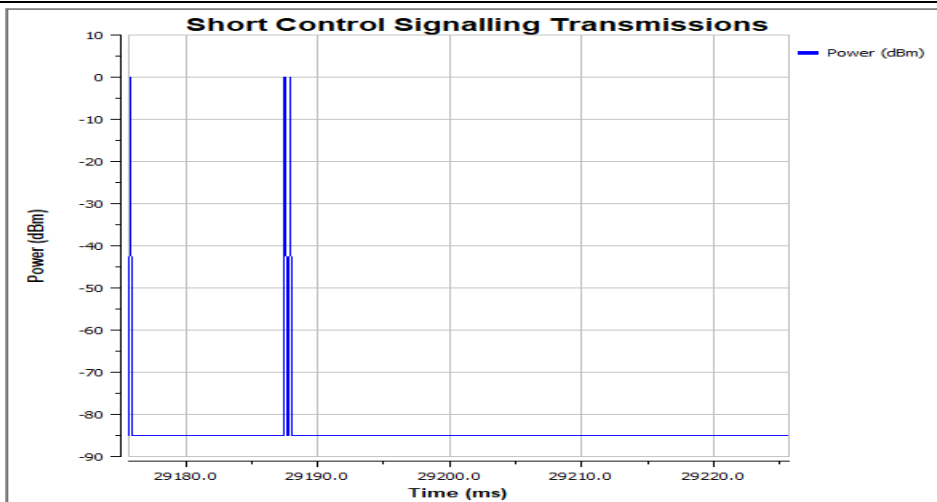


802.11n HT20: 2412MHz


UUT Payload (%)	94.01
CCA Time (us)	141.945
Max COT (ms)	5.44
Idle Period Time (us)	17.99
Interference Start Time (ms)	10000.00
Block Signal Start Time (ms)	20000.00
Transmission Time (ms)	10023.00
SCST TxOn / (TxOn + TxOff) (%)	0.40
Pulse Width within 50ms (us)	199.00

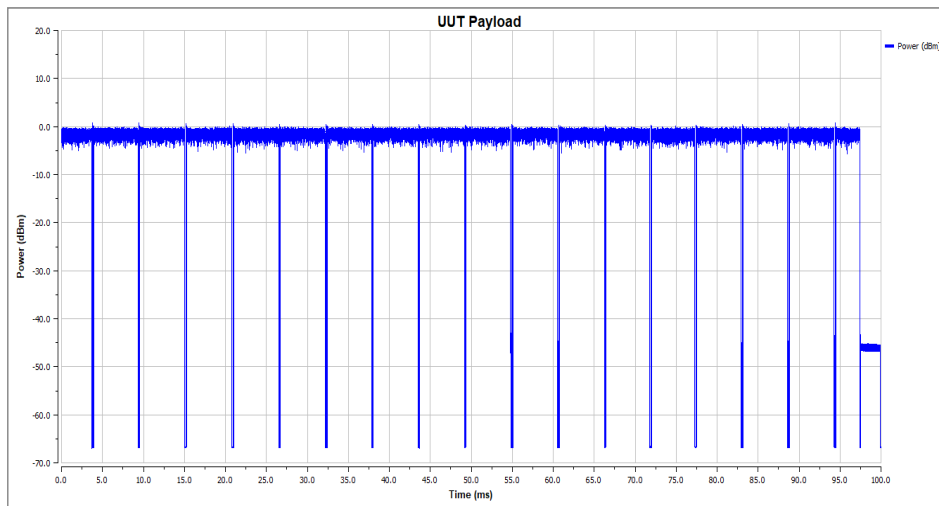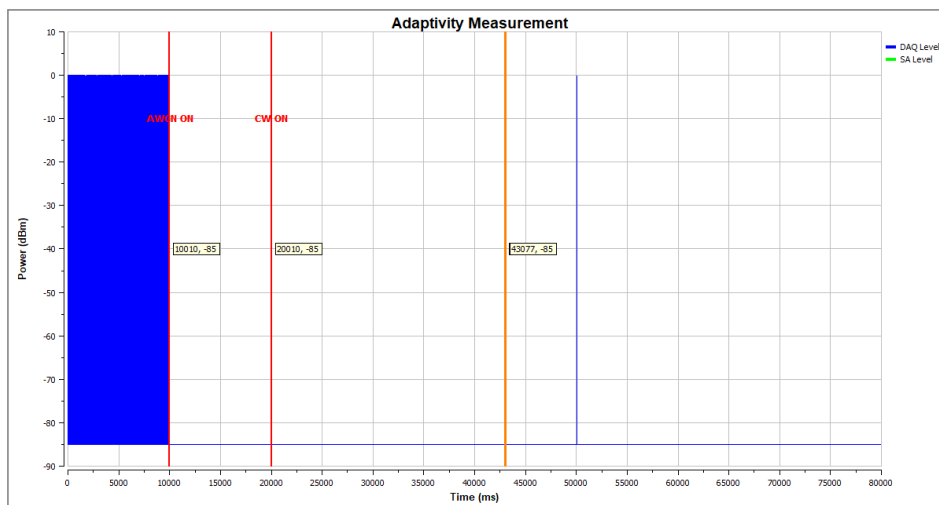UUT Payload

Adaptivity Test

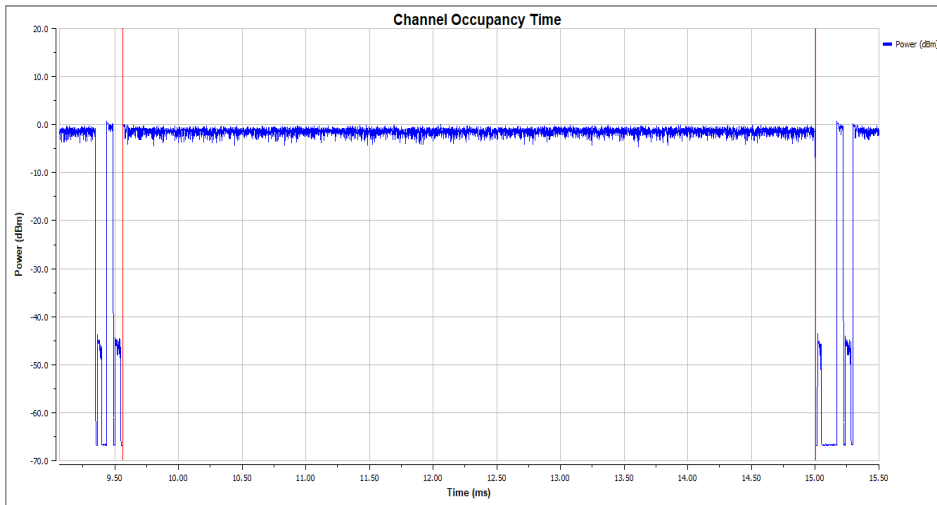
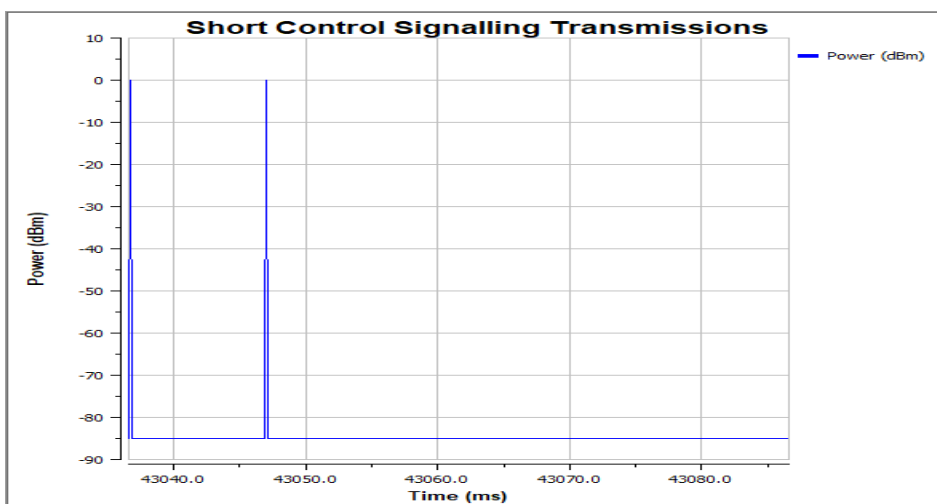
Occupancy Time

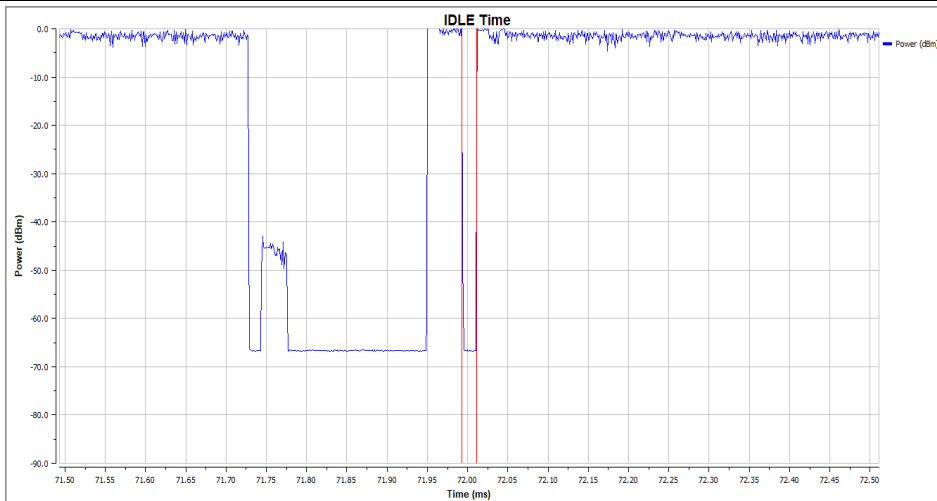

Idle Time





Short Control Signal Check




802.11n HT20: 2472MHz


UUT Payload (%)	94.01
CCA Time (us)	141.945
Max COT (ms)	5.44
Idle Period Time (us)	17.99
Interference Start Time (ms)	10000.00
Block Signal Start Time (ms)	20000.00
Transmission Time (ms)	10023.00
SCST TxOn / (TxOn + TxOff) (%)	1.80
Pulse Width within 50ms (us)	898.00

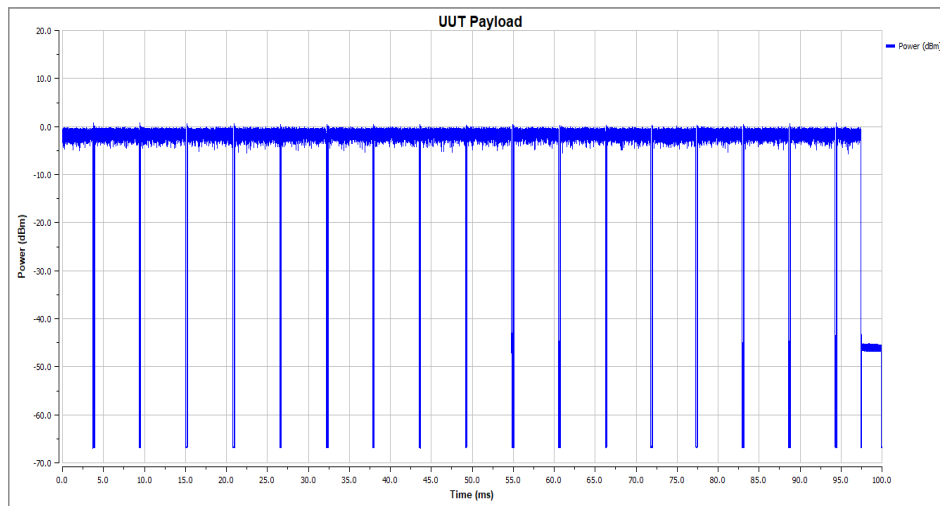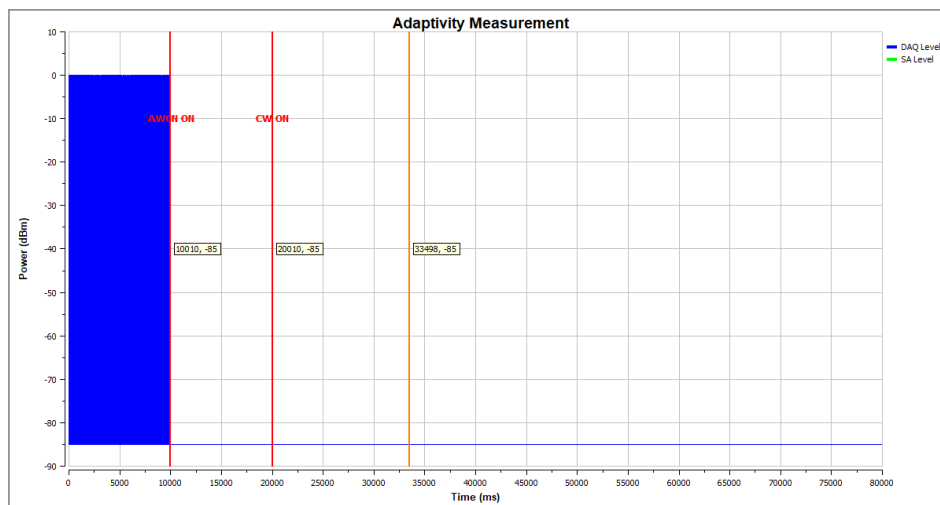UUT Payload

Adaptivity Test

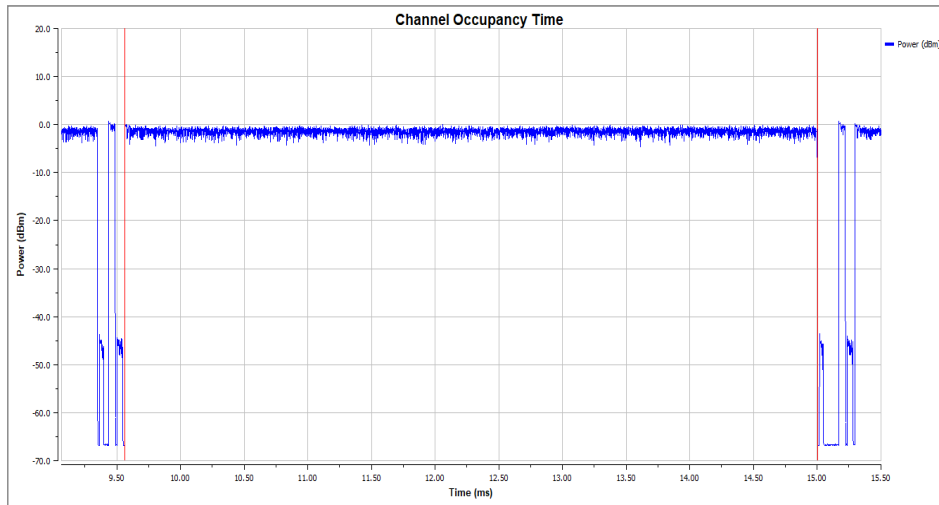
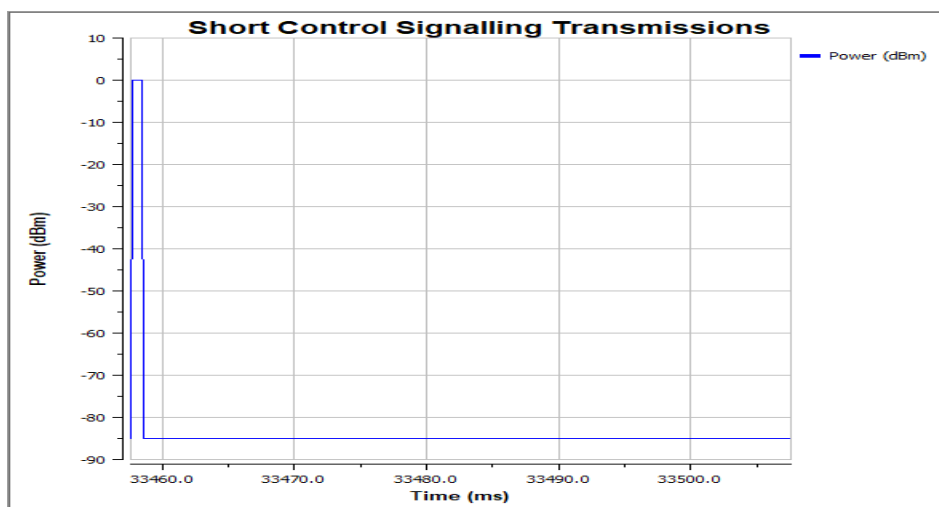
Occupancy Time

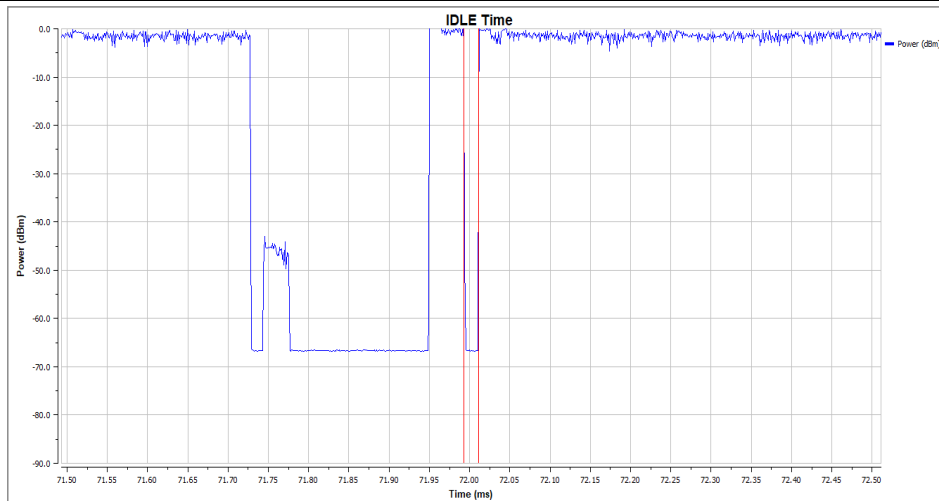

Idle Time





Short Control Signal Check




802.11n HT40: 2422MHz


UUT Payload (%)	88.89
CCA Time (us)	117.954
Max COT (ms)	2.97
Idle Period Time (us)	16.99
Interference Start Time (ms)	10000.00
Block Signal Start Time (ms)	20000.00
Transmission Time (ms)	10023.00
SCST TxOn / (TxOn + TxOff) (%)	0.41
Pulse Width within 50ms (us)	203.00

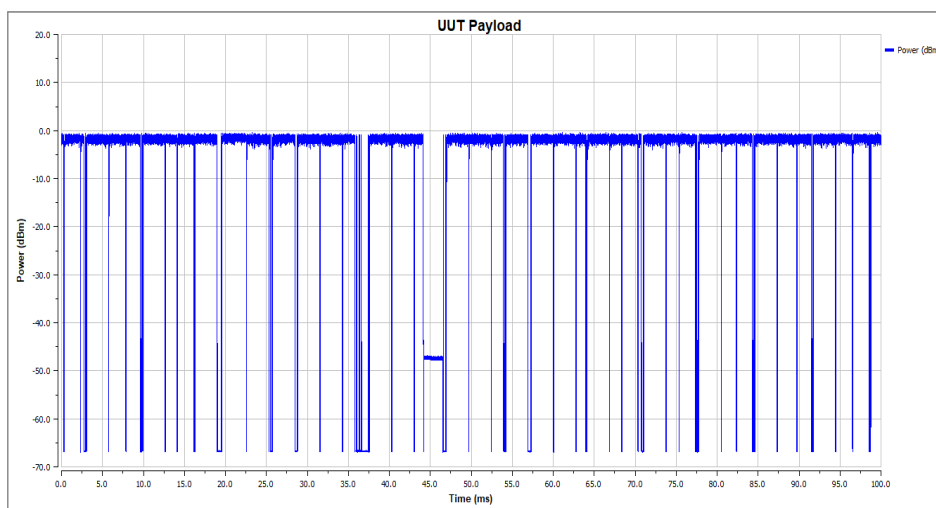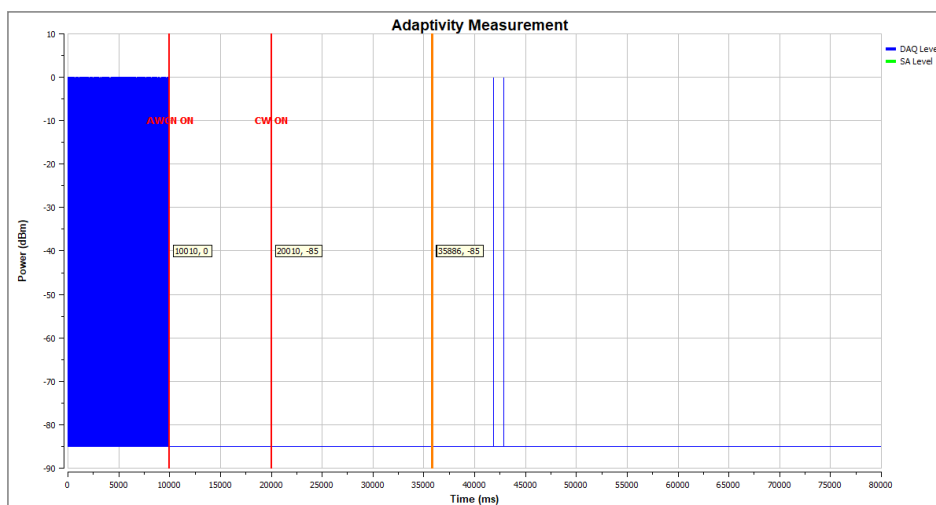UUT Payload

Adaptivity Test

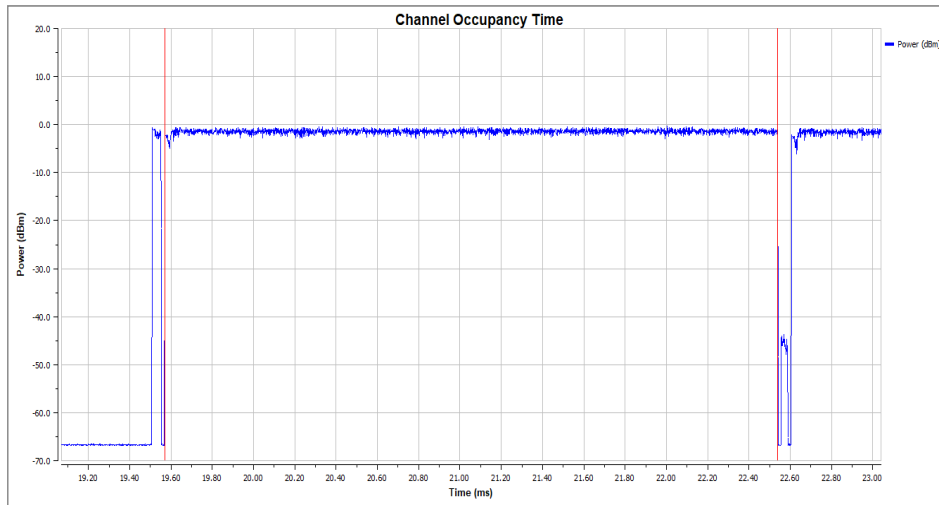
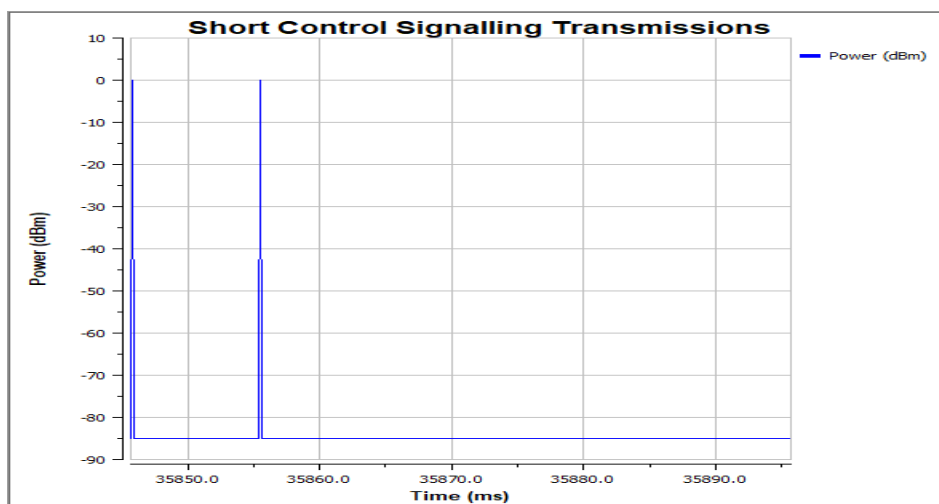
Occupancy Time

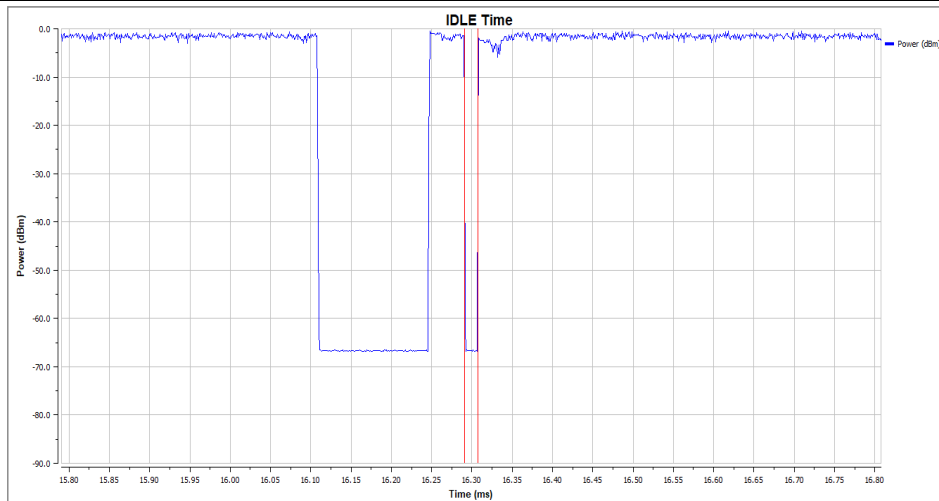

Idle Time





Short Control Signal Check




802.11n HT40: 2462MHz


UUT Payload (%)	88.89
CCA Time (us)	117.954
Max COT (ms)	2.97
Idle Period Time (us)	16.99
Interference Start Time (ms)	10000.00
Block Signal Start Time (ms)	20000.00
Transmission Time (ms)	10023.00
SCST TxOn / (TxOn + TxOff) (%)	2.80
Pulse Width within 50ms (us)	1402.00

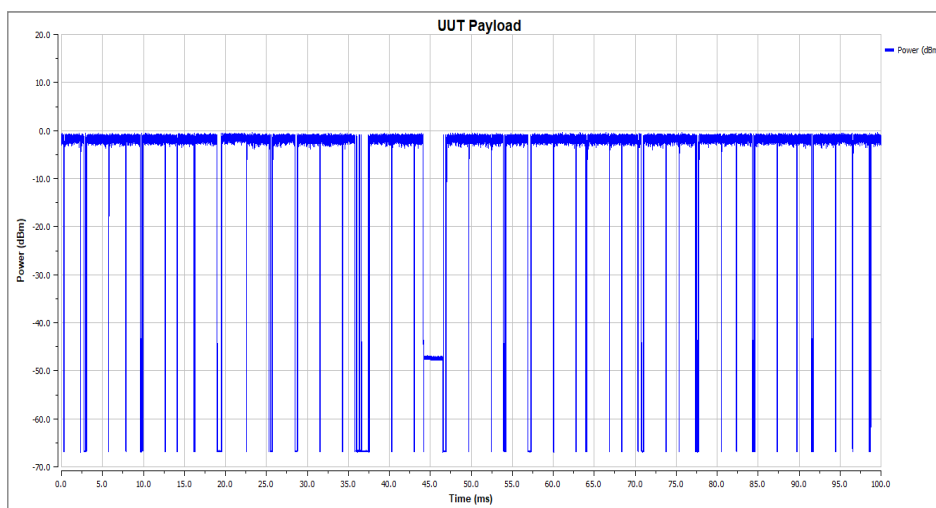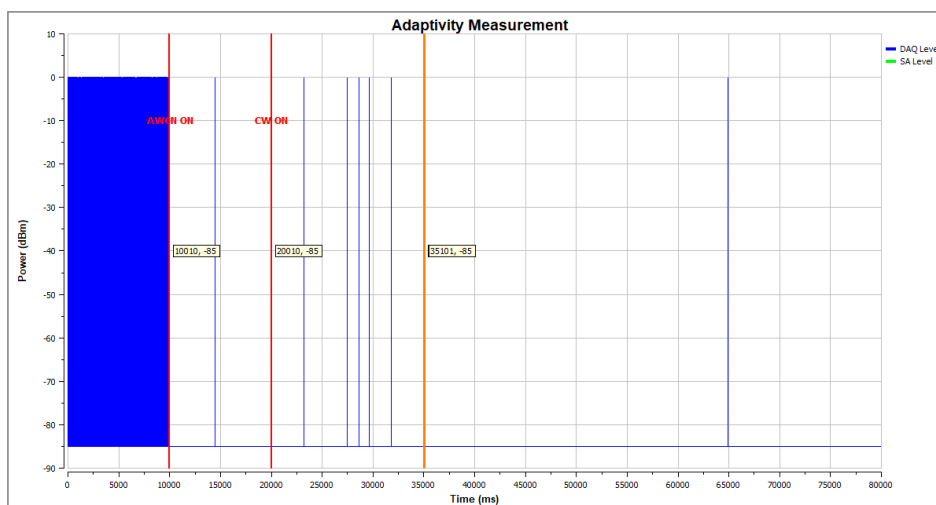UUT Payload

Adaptivity Test

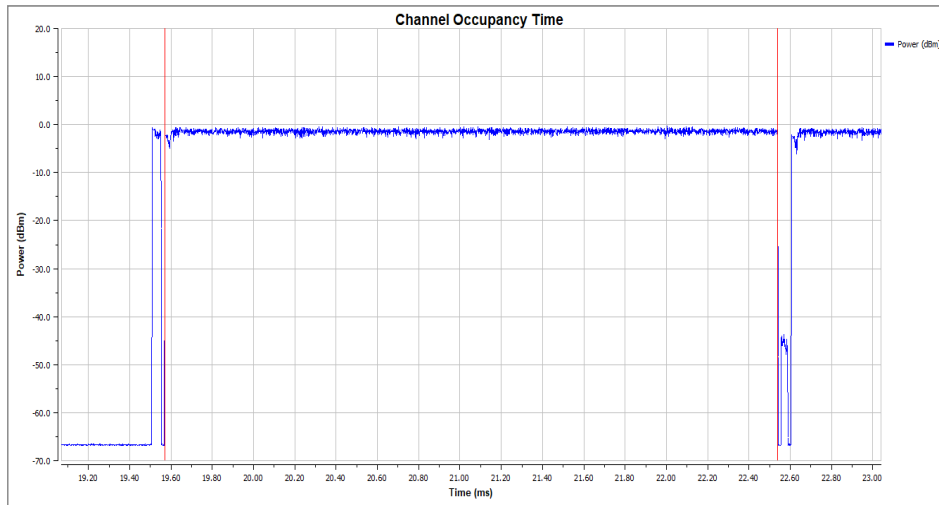
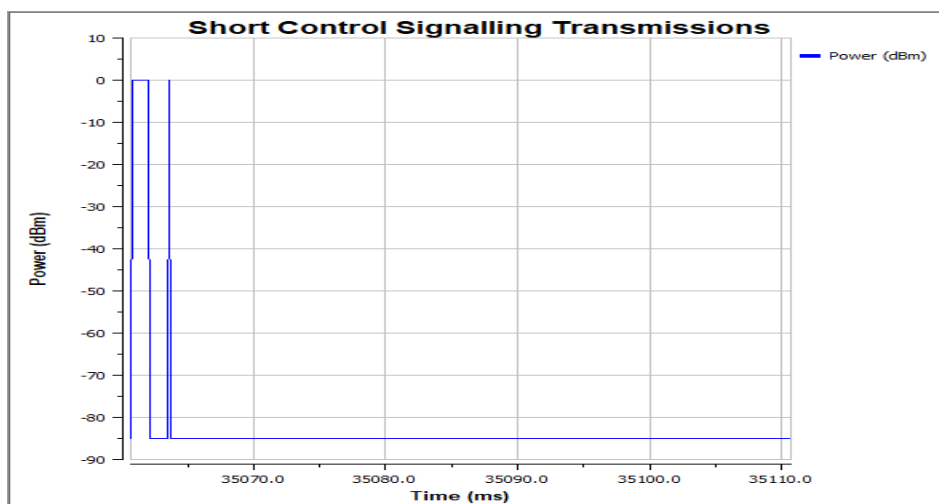
Occupancy Time

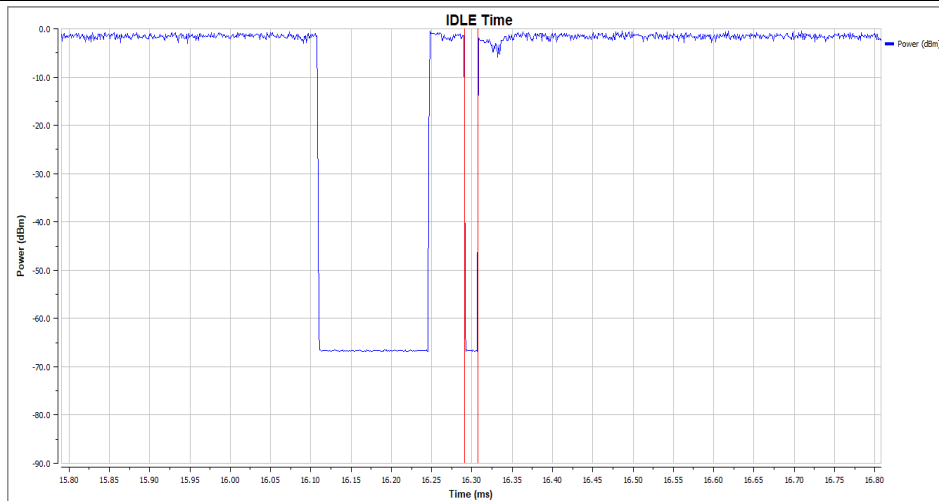

Idle Time



Short Control Signal Check



6 Geo-location Capability

6.1 Geo-location

6.1.1 Definition and Requirement

Geo-location capability is a feature of the equipment to determine its geographical location with the purpose to configure itself according to the regulatory requirements applicable at the geographical location where it operates.

The geo-location capability may be present in the equipment or in an external device (temporary) associated with the equipment operating at the same geographical location during the initial power up of the equipment. The geographical location may also be available in equipment already installed and operating at the same geographical location.

The geographical location determined by the equipment shall not be accessible to the user.

6.1.2 Description

Manufacturer shall implement the requirement for marketing units when this function is supported.

7 Photographs of Radiated Emission Test Configuration

X Plane





8 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal and spectrum analyzer	Rohde & Schwarz	FSV3044	101177	10Hz-44GHz	Jul, 03, 2025	Mar. 14, 2026	Jul, 02, 2026	Radiation (05CH02-KS)
Log-periodic antenna	R&S	HL562	100446	30MHz-3GHz	Jan. 09, 2026	Mar. 14, 2026	Jan. 08, 2027	Radiation (05CH02-KS)
Horn Antenna	R&S	HF906	100681	1GHz~18GHz	Apr 20, 2025	Mar. 14, 2026	Apr 19, 2026	Radiation (05CH02-KS)
SHF-EHF Horn	Com-Power	AH-840	101116	18GHz~40GHz	Oct. 18, 2025	Mar. 14, 2026	Oct. 17, 2026	Radiation (05CH02-KS)
Amplifier	Keysight	83017A	MY53270360	500MHz~26.5G Hz	Apr 18, 2025	Mar. 14, 2026	Apr 17, 2026	Radiation (05CH02-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Dec. 24, 2025	Mar. 14, 2026	Dec. 23, 2026	Radiation (05CH02-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Dec. 26, 2025	Mar. 14, 2026	Dec. 25, 2026	Radiation (05CH02-KS)
Amplifier	EM	EM01G18GA	060839	1GHz-18GHz	Sep, 19, 2025	Mar. 14, 2026	Sep, 18, 2026	Radiation (05CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Feb. 17, 2026	Jul. 06, 2026	Conducted (TH01-KS)
USB RFPower Sensor	Dare	RPR3006W	RPR6W-200 1008	50MHz~6GHz , -50dBm~+10dBm	Jan. 03, 2026	Feb. 17, 2026	Jan. 02, 2027	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H201401144 0	-40~+150°C 20%~95%RH	Jul. 02, 2025	Feb. 17, 2026	Jul. 01, 2026	Conducted (TH01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2026	Mar. 06, 2026	Jan. 01, 2027	Conducted (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2026	Mar. 06, 2026	Jan. 01, 2027	Conducted (DFS01-KS)
Base Station	R&S	CMW500	132725	Base Station	Jan. 02, 2026	Mar. 06, 2026	Jan. 01, 2027	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Mar. 06, 2026	NCR	Conducted (DFS01-KS)

Note:

1. Test equipment calibration is traceable to the procedure of ISO17025.
2. NCR: No Calibration Required



9 Measurement Uncertainty

Test Item	Uncertainty
Occupied Channel Bandwidth	$\pm 0.384 \%$
RF output power, conducted	$\pm 0.90 \text{ dB}$
Power density, conducted	$\pm 0.90 \text{ dB}$
Unwanted Emissions, conducted	$\pm 2.00 \text{ dB}$
Radiated spurious emissions (25MHz~1GHz)	$\pm 2.54 \text{ dB}$
Radiated spurious emissions (1GHz~12.75GHz)	$\pm 2.54 \text{ dB}$
Temperature	$\pm 0.86 \text{ }^{\circ}\text{C}$
Humidity	$\pm 0.022 \%$
Supply voltages	$\pm 1.0 \%$
Time	$\pm 0.44\%$

----- THE END -----



Appendix A. Test Result of Conducted Test Items

Ambient Condition: 25 °C, 45 %RH

Test Date: 2026-2-17

Test Engineer: YANG

<Bluetooth BR/EDR>


Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant6	2402	0.883	2401.5584	2402.4416	2400 to 2483.5	PASS
		2480	0.881	2479.5584	2480.4396	2400 to 2483.5	PASS
2DH1	Ant6	2402	1.161	2401.4106	2402.5714	2400 to 2483.5	PASS
		2480	1.161	2479.4106	2480.5714	2400 to 2483.5	PASS
3DH1	Ant6	2402	1.167	2401.4246	2402.5914	2400 to 2483.5	PASS
		2480	1.163	2479.4266	2480.5894	2400 to 2483.5	PASS




Test Graphs

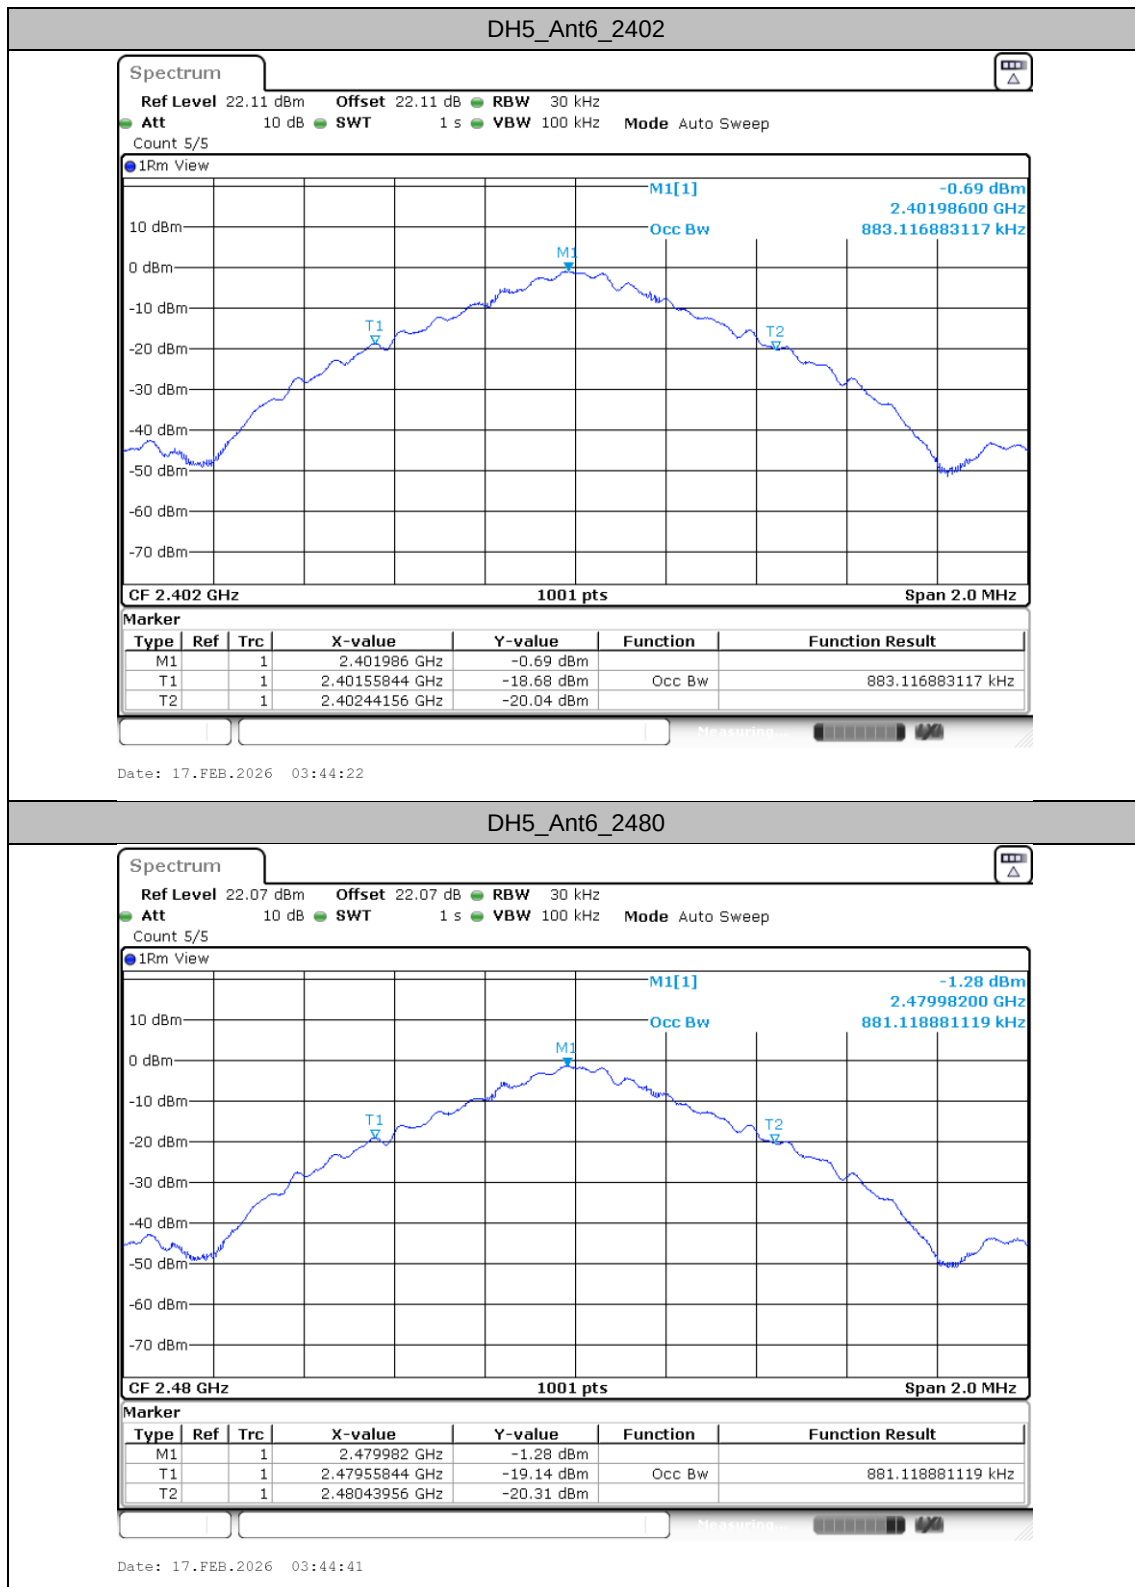




2DH1_Ant6_2402


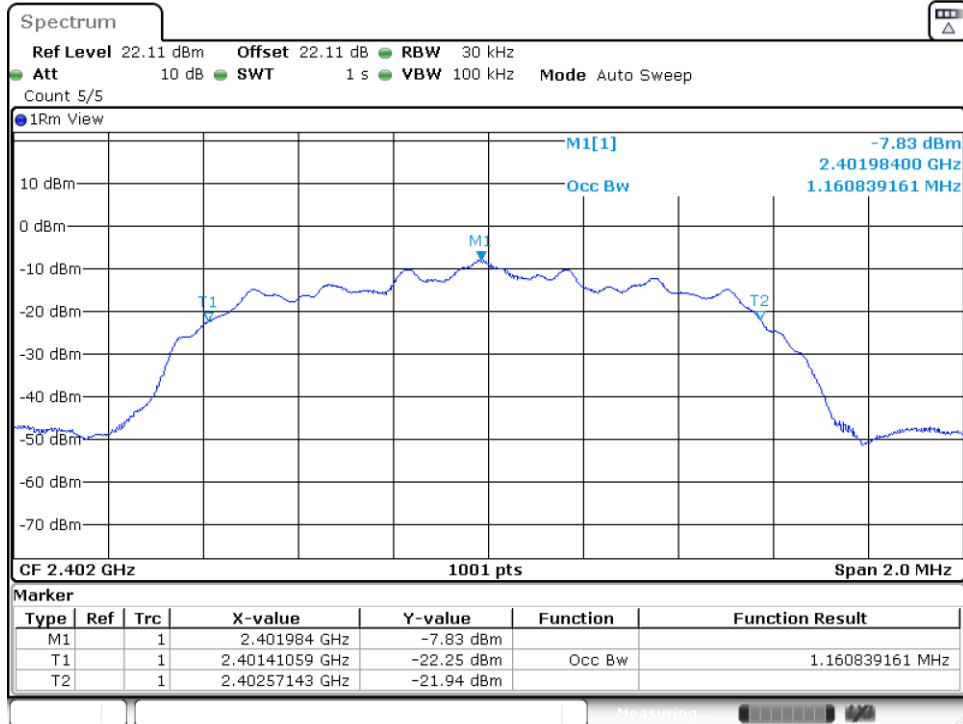


Date: 17.FEB.2026 03:45:01

2DH1_Ant6_2480

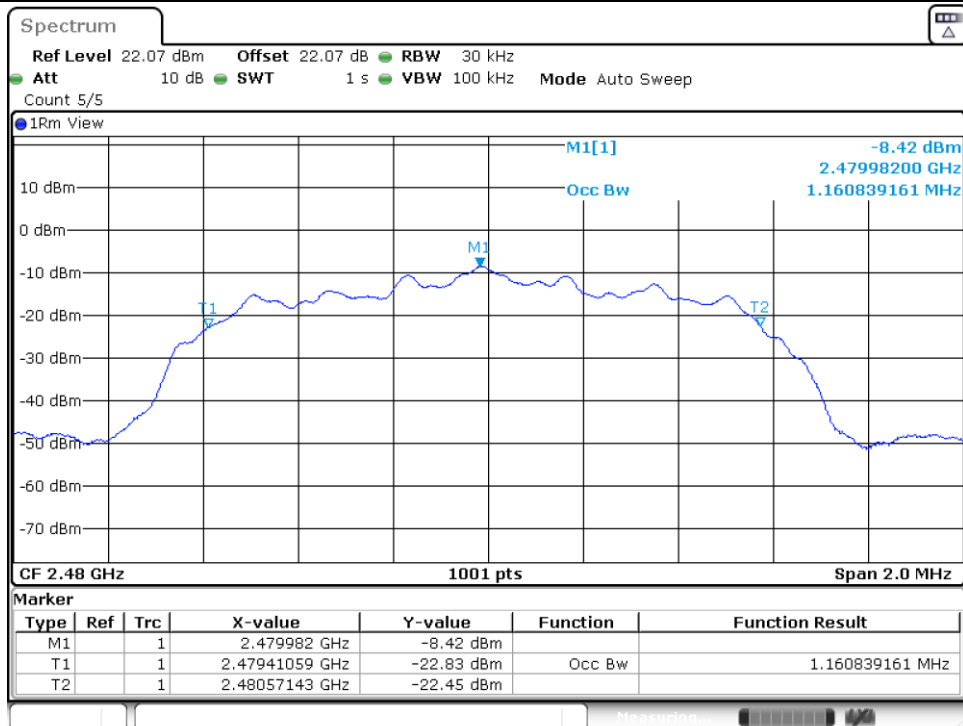

Date: 17.FEB.2026 03:45:21

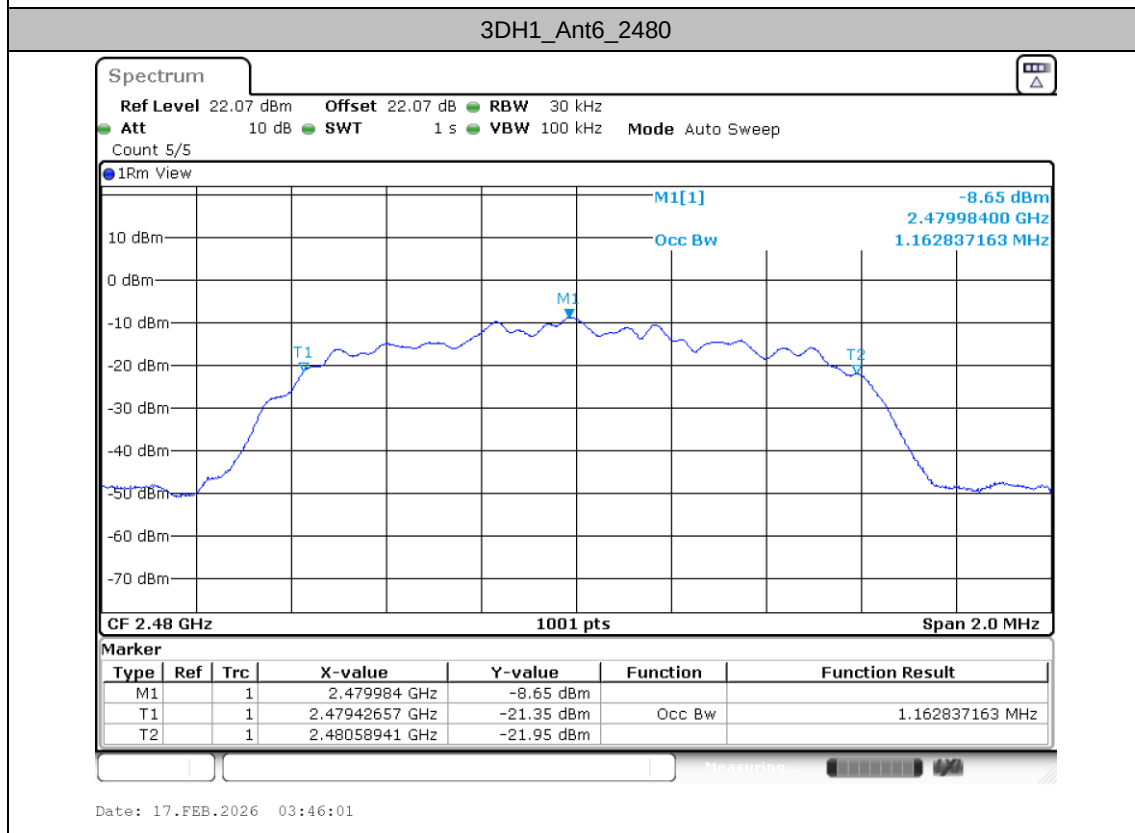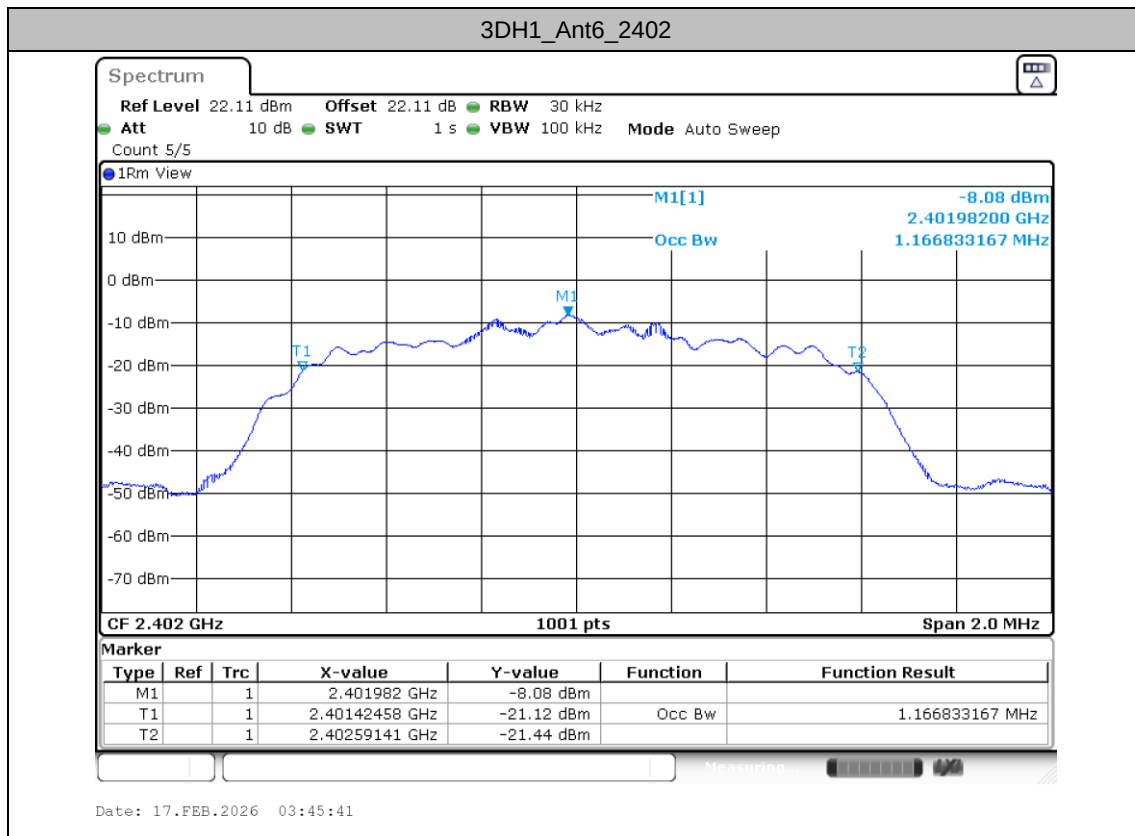

Accumulated Transmit Time, Frequency Occupation and Hopping Sequence

Test Result

Accumulated Transmit Time

TestMode	Antenna	Freq(MHz)	Result [ms]	Limit[ms]	Verdict
DH1	Ant6	Hop_2402	128.872	400	PASS
		Hop_2480	128.468	400	PASS
DH3	Ant6	Hop_2402	280.178	400	PASS
		Hop_2480	280.178	400	PASS
DH5	Ant6	Hop_2402	319.150	400	PASS
		Hop_2480	289.658	400	PASS


Frequency Occupation



TestMode	Antenna	Freq(MHz)	Result [Num.]	Limit [Num.]	Verdict
DH1	Ant6	Hop_2402	2	1	PASS
		Hop_2480	2	1	PASS
DH3	Ant6	Hop_2402	1	1	PASS
		Hop_2480	1	1	PASS
DH5	Ant6	Hop_2402	4	1	PASS
		Hop_2480	3	1	PASS



Hopping Sequence



TestMode	Antenna	Freq(MHz)	Hop. [Num.]	Limit[Num.]	Band Use [%]	Limit [%]	Verdict
DH5	Ant6	Hop	79	15	95.30	70	PASS


Test Graphs

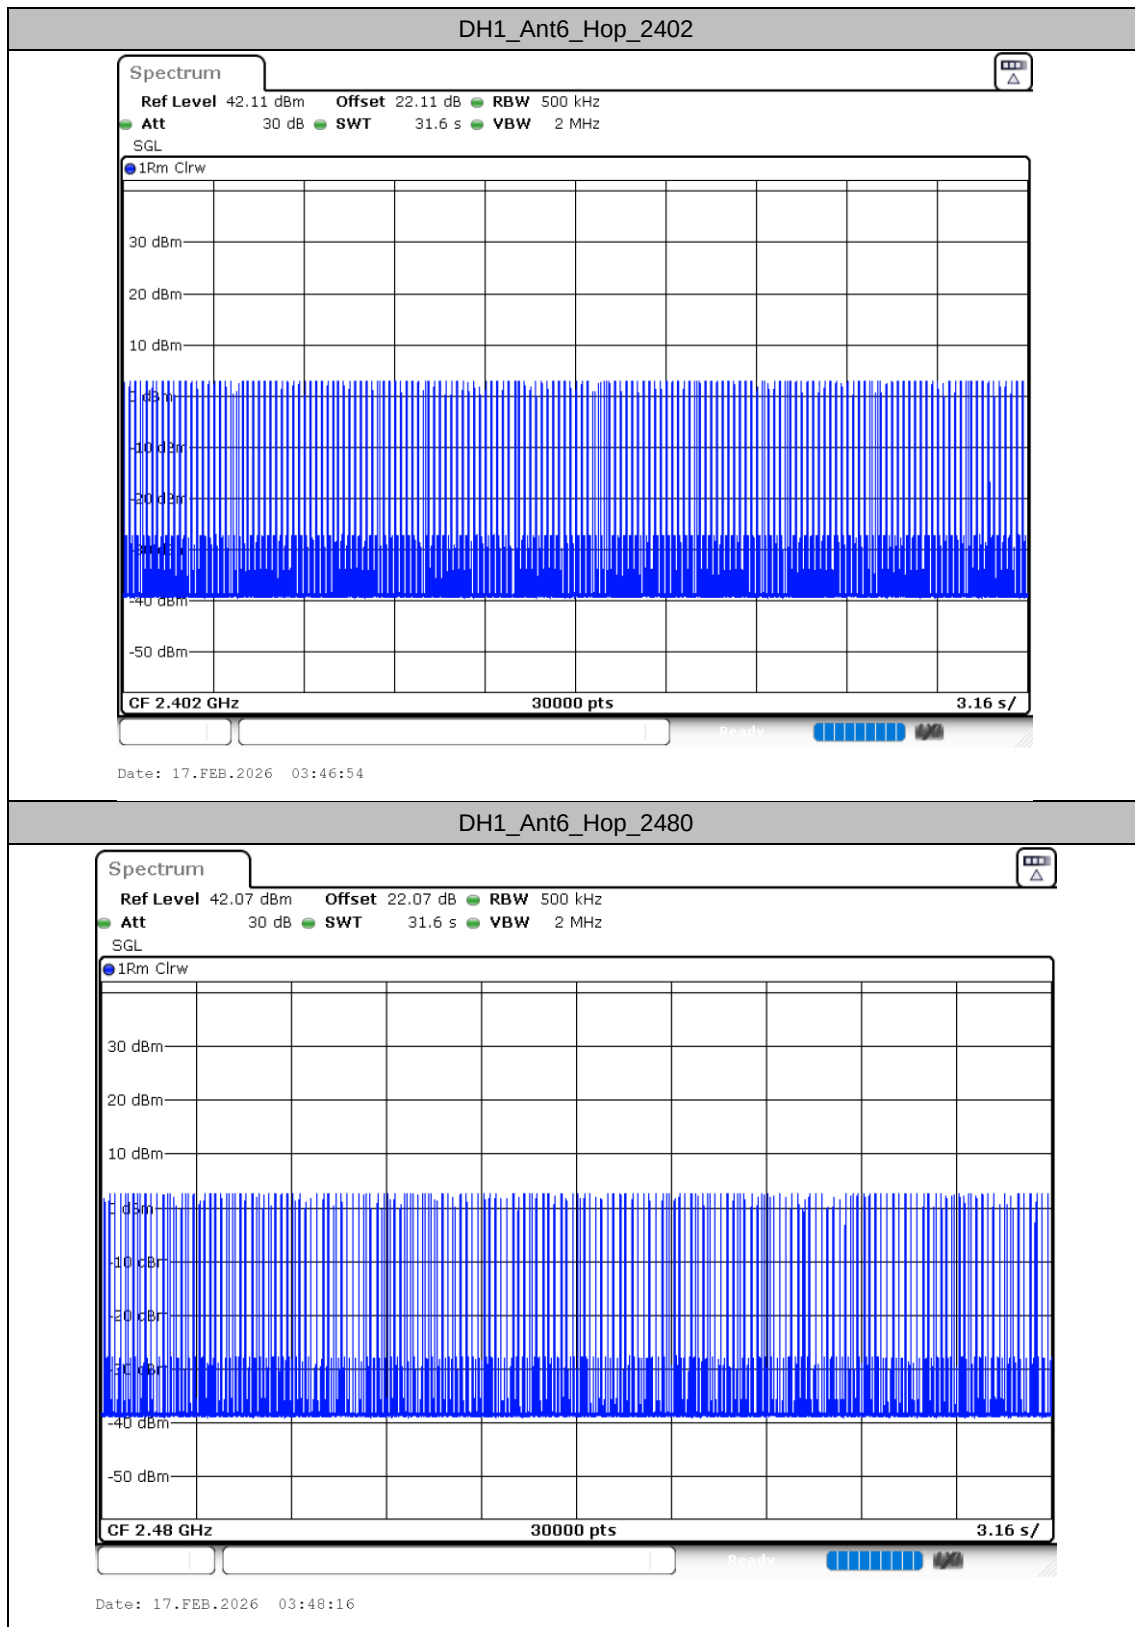


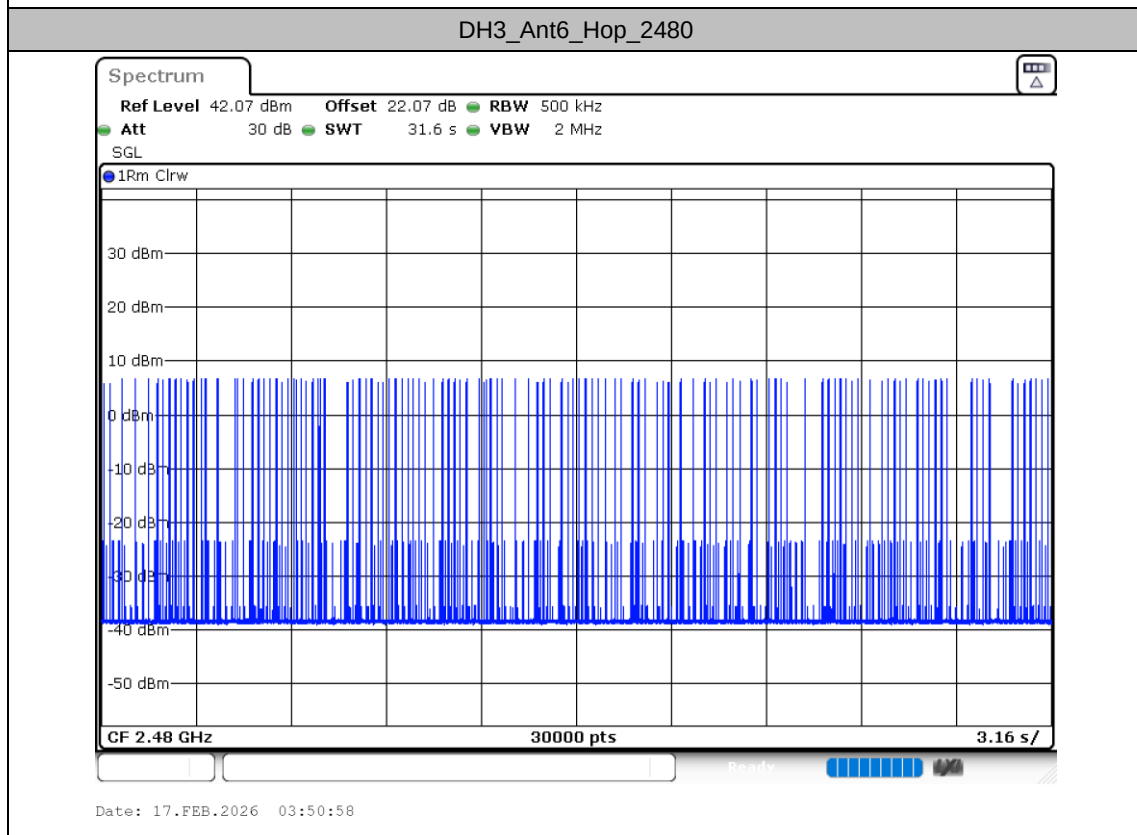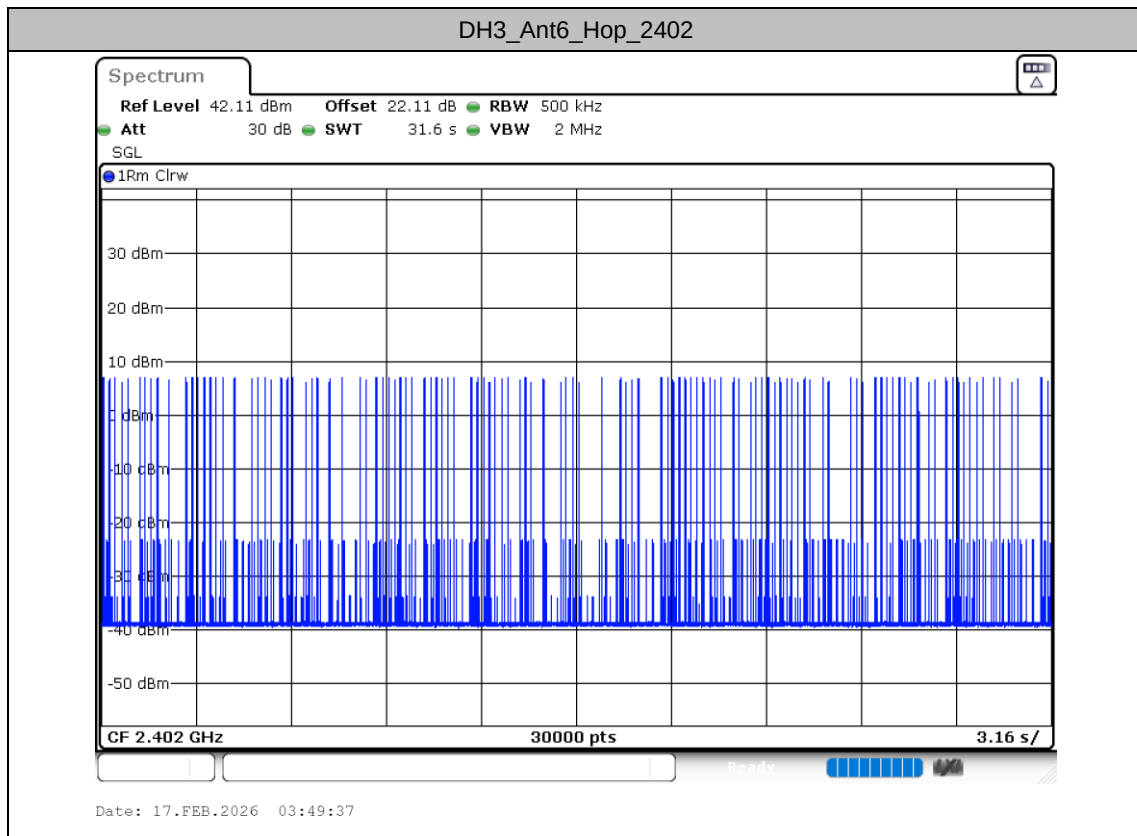


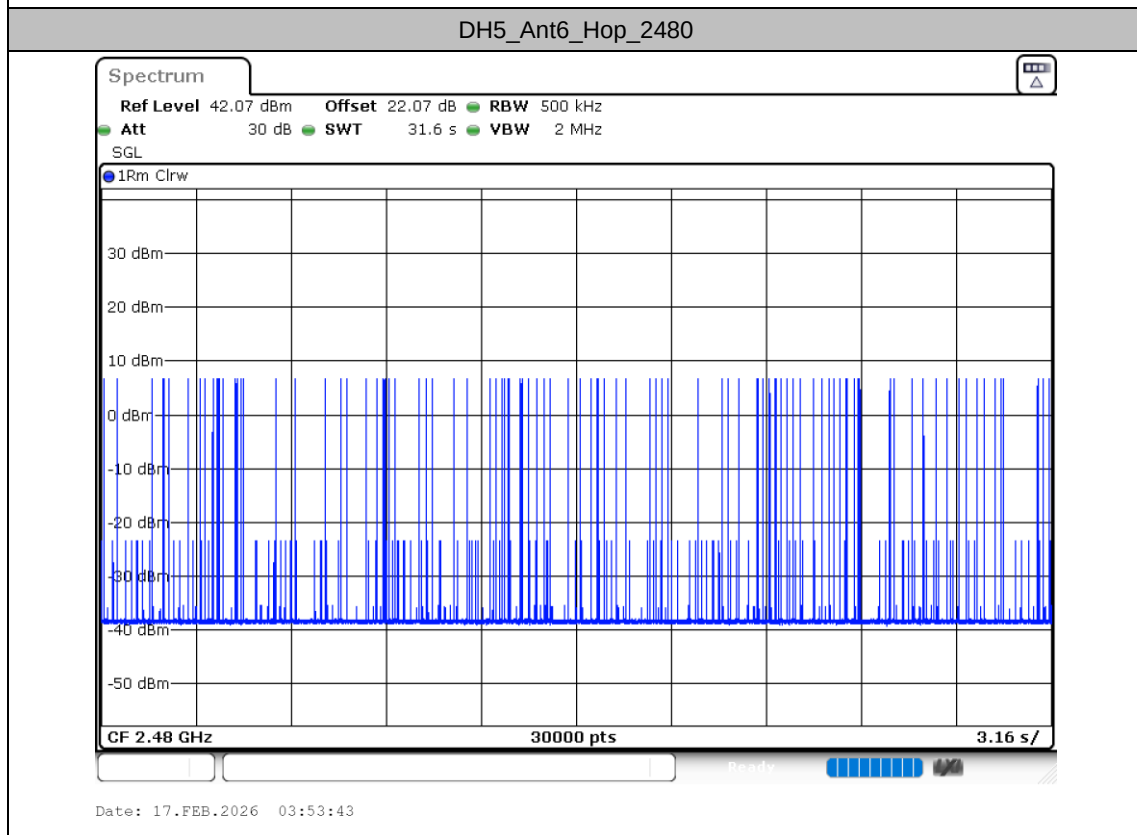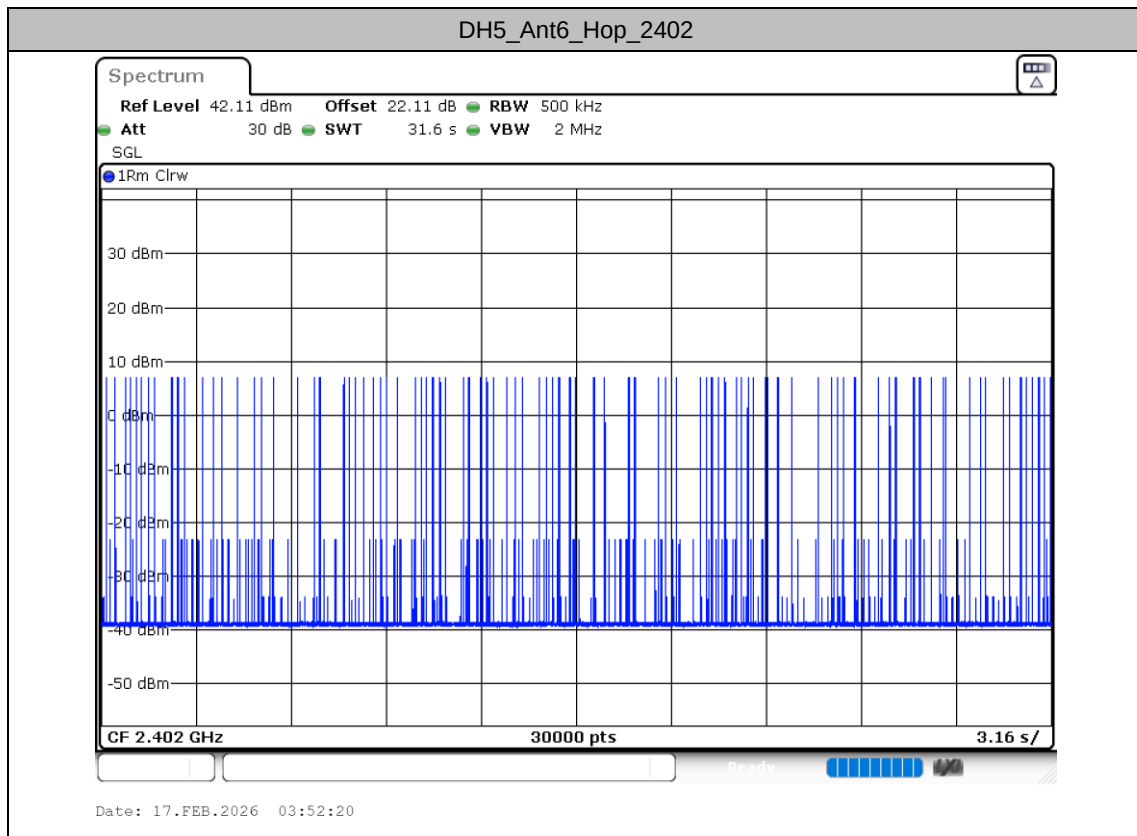


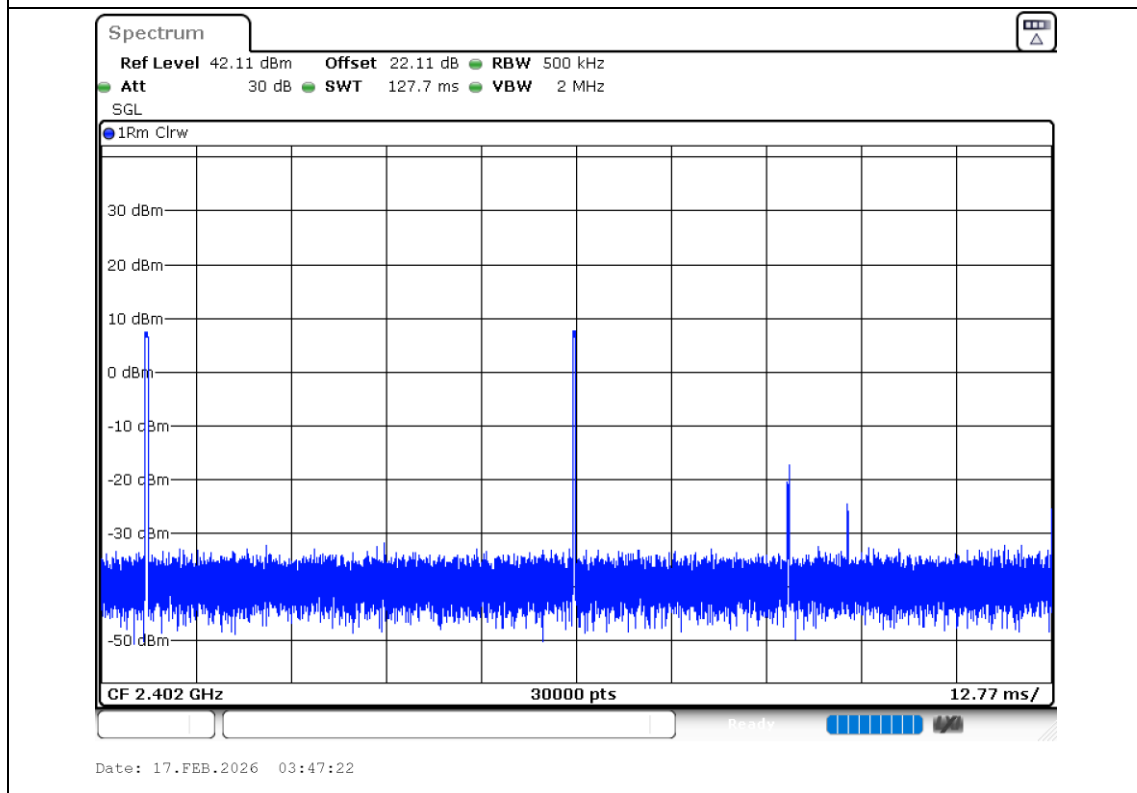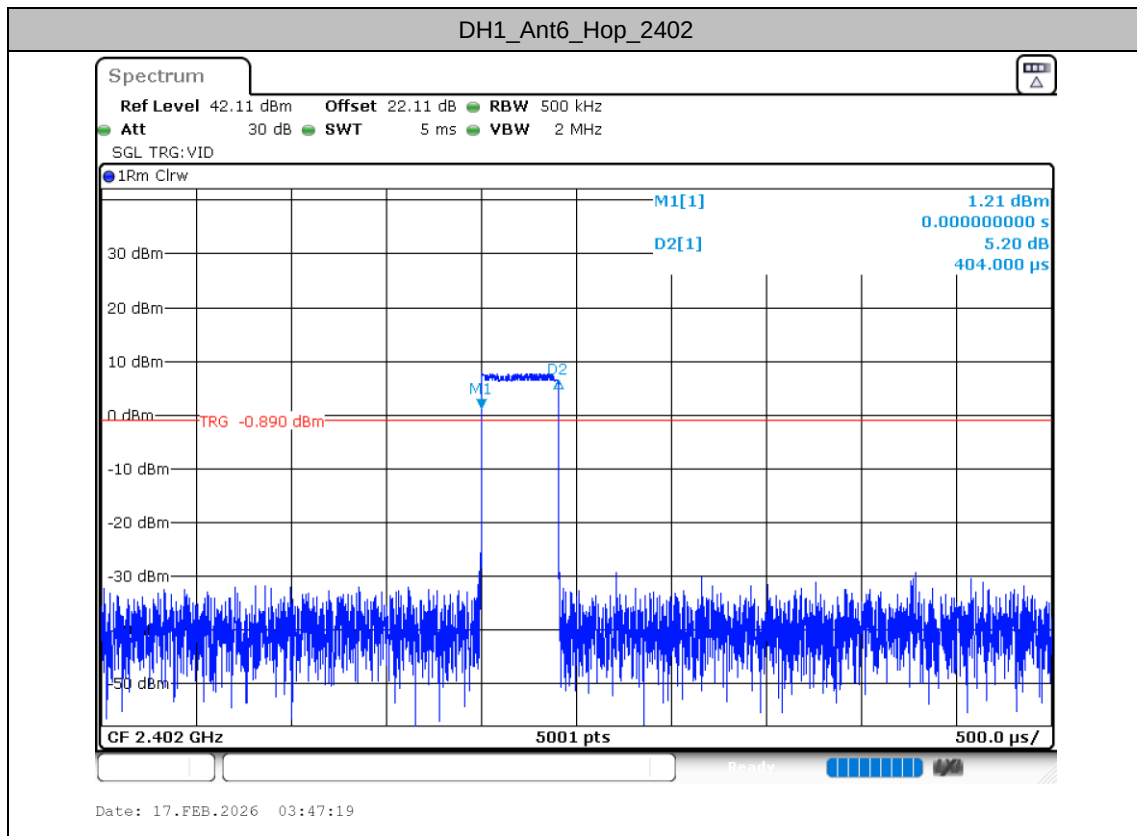


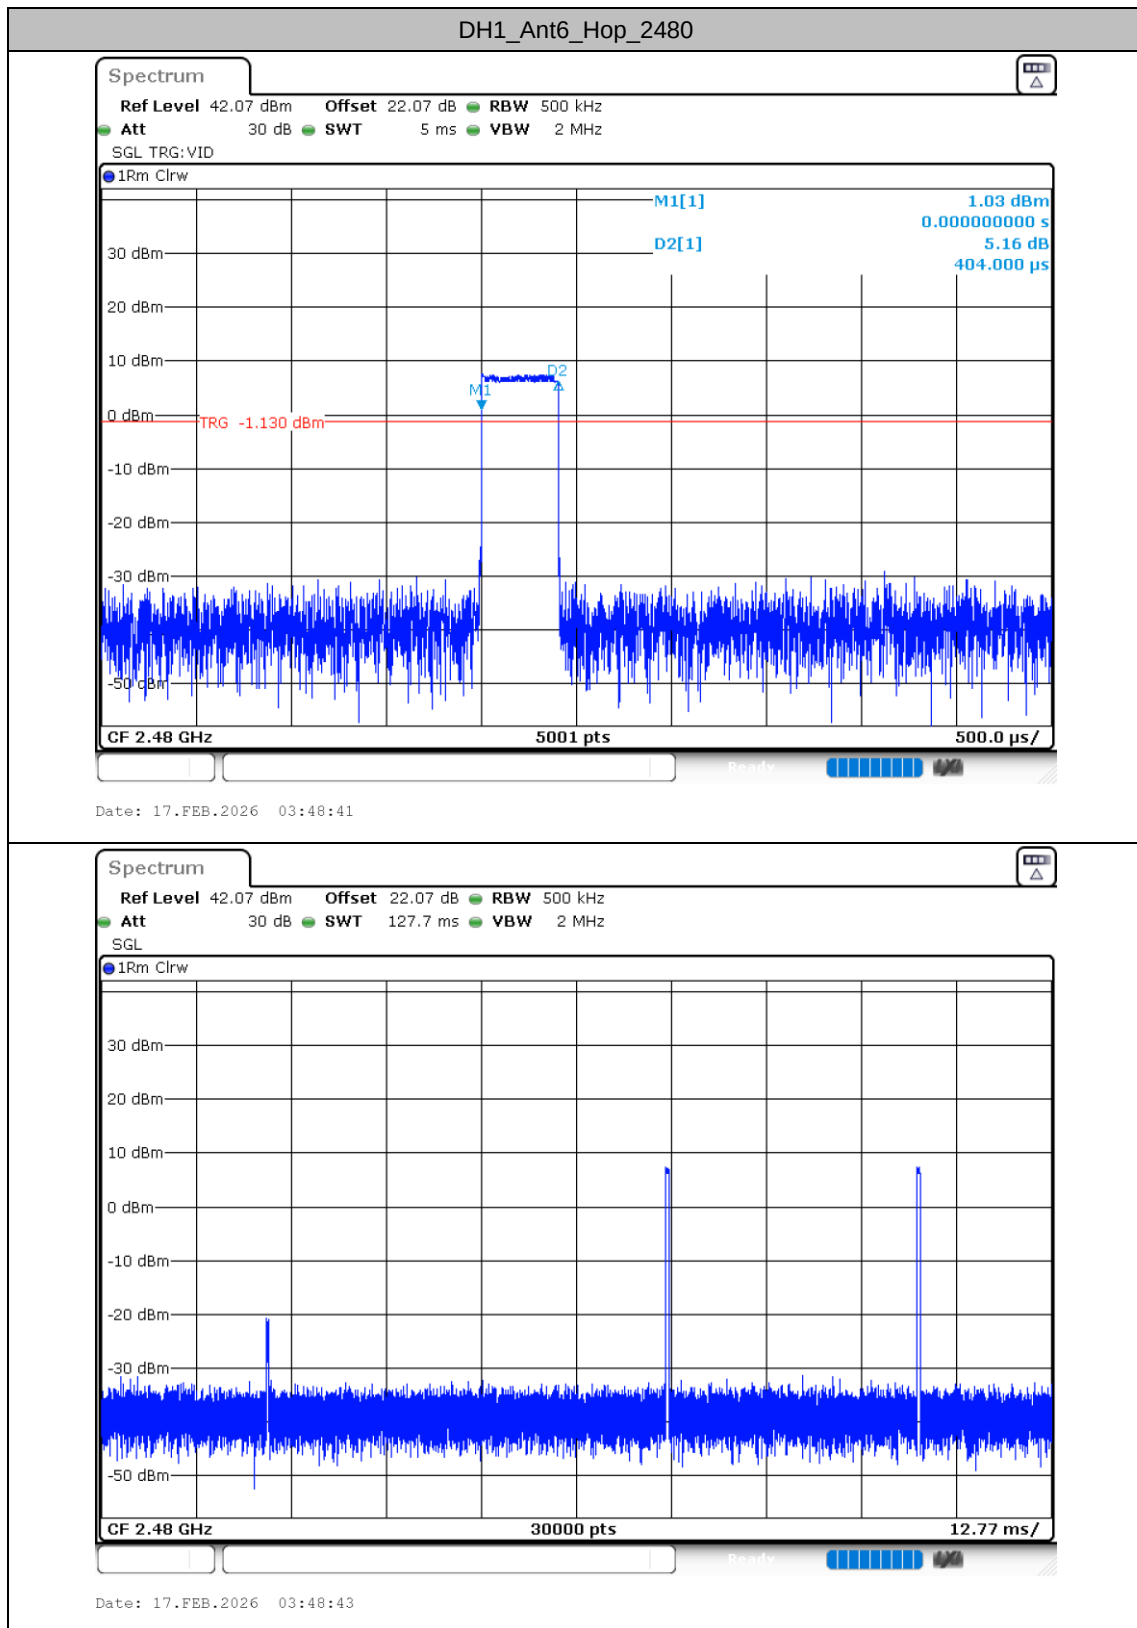


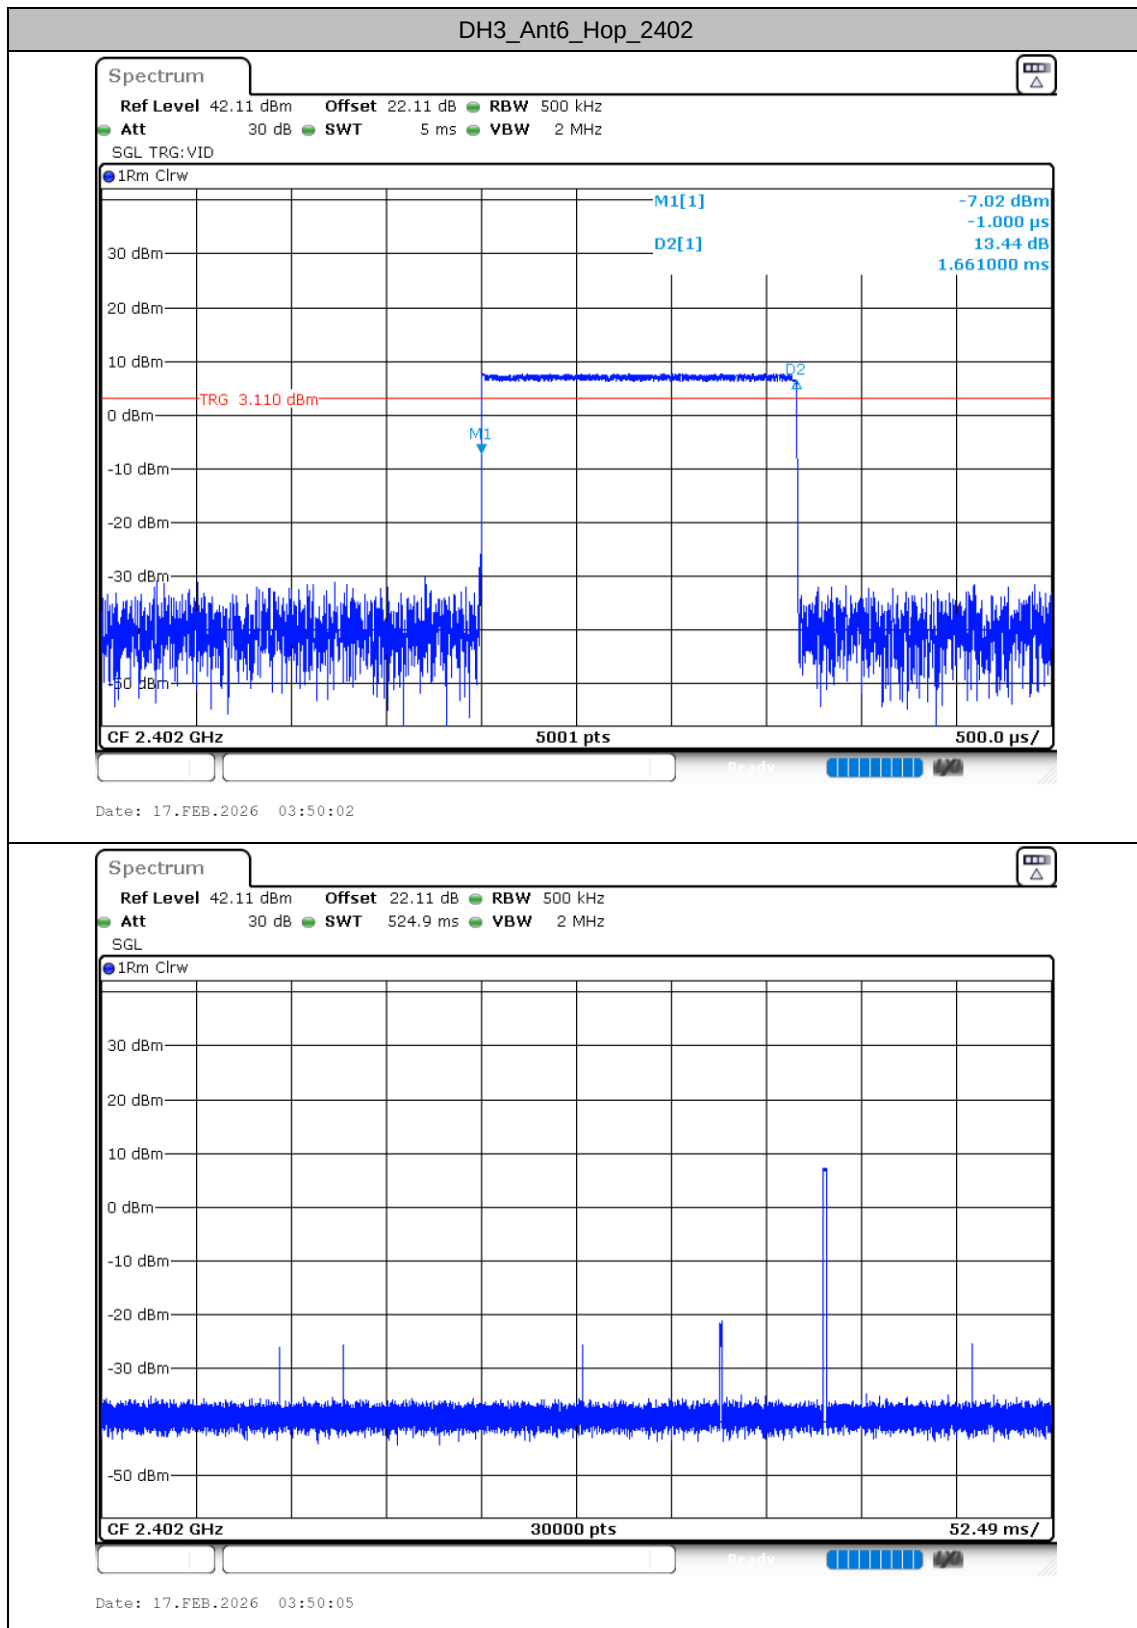

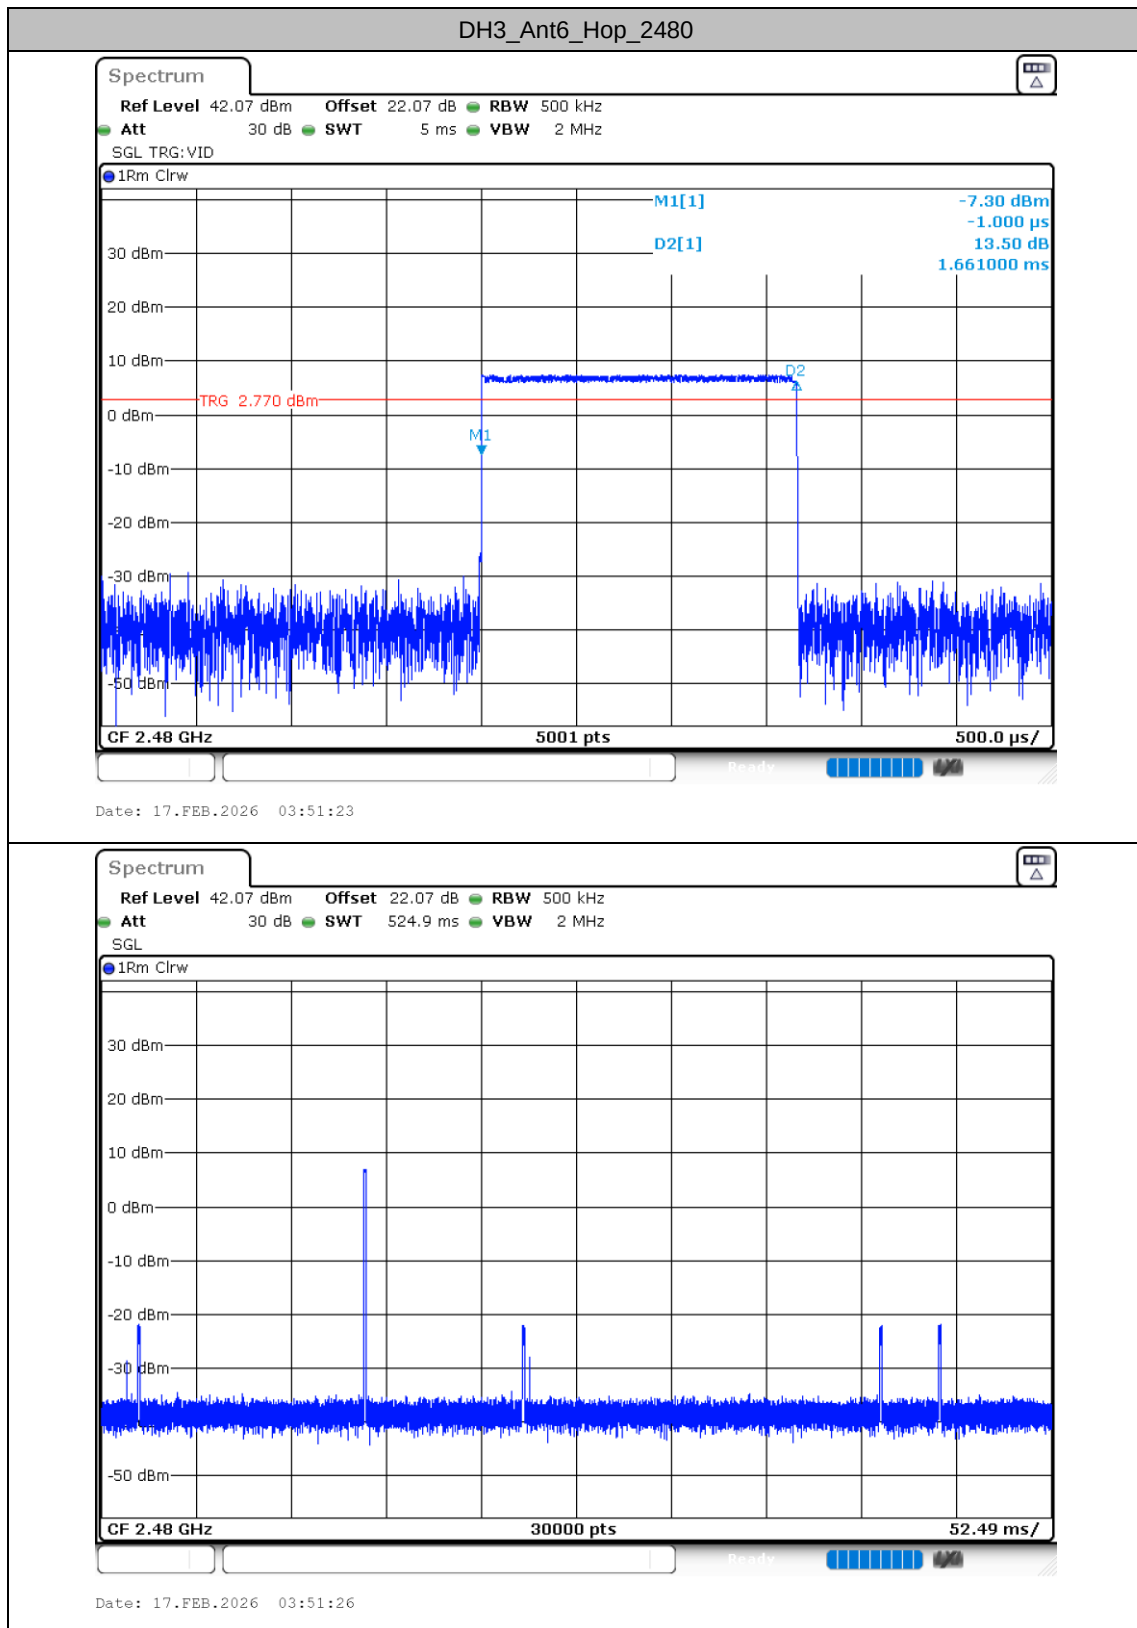

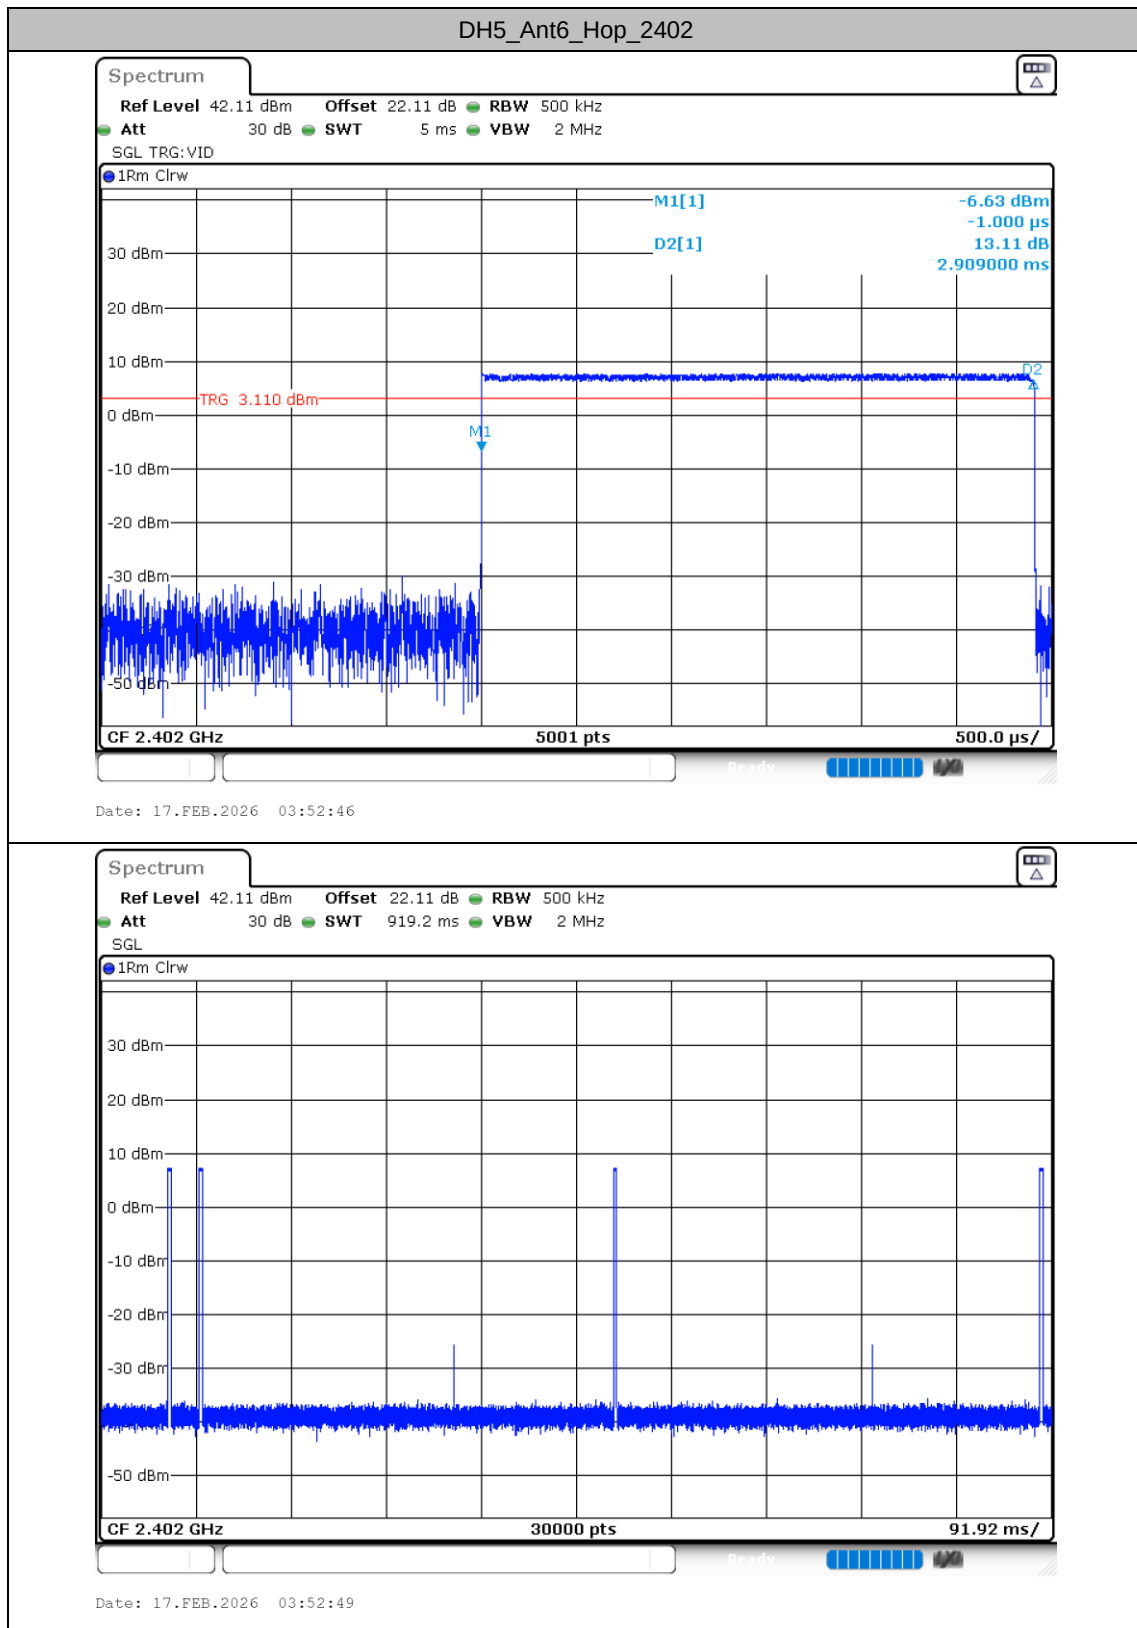

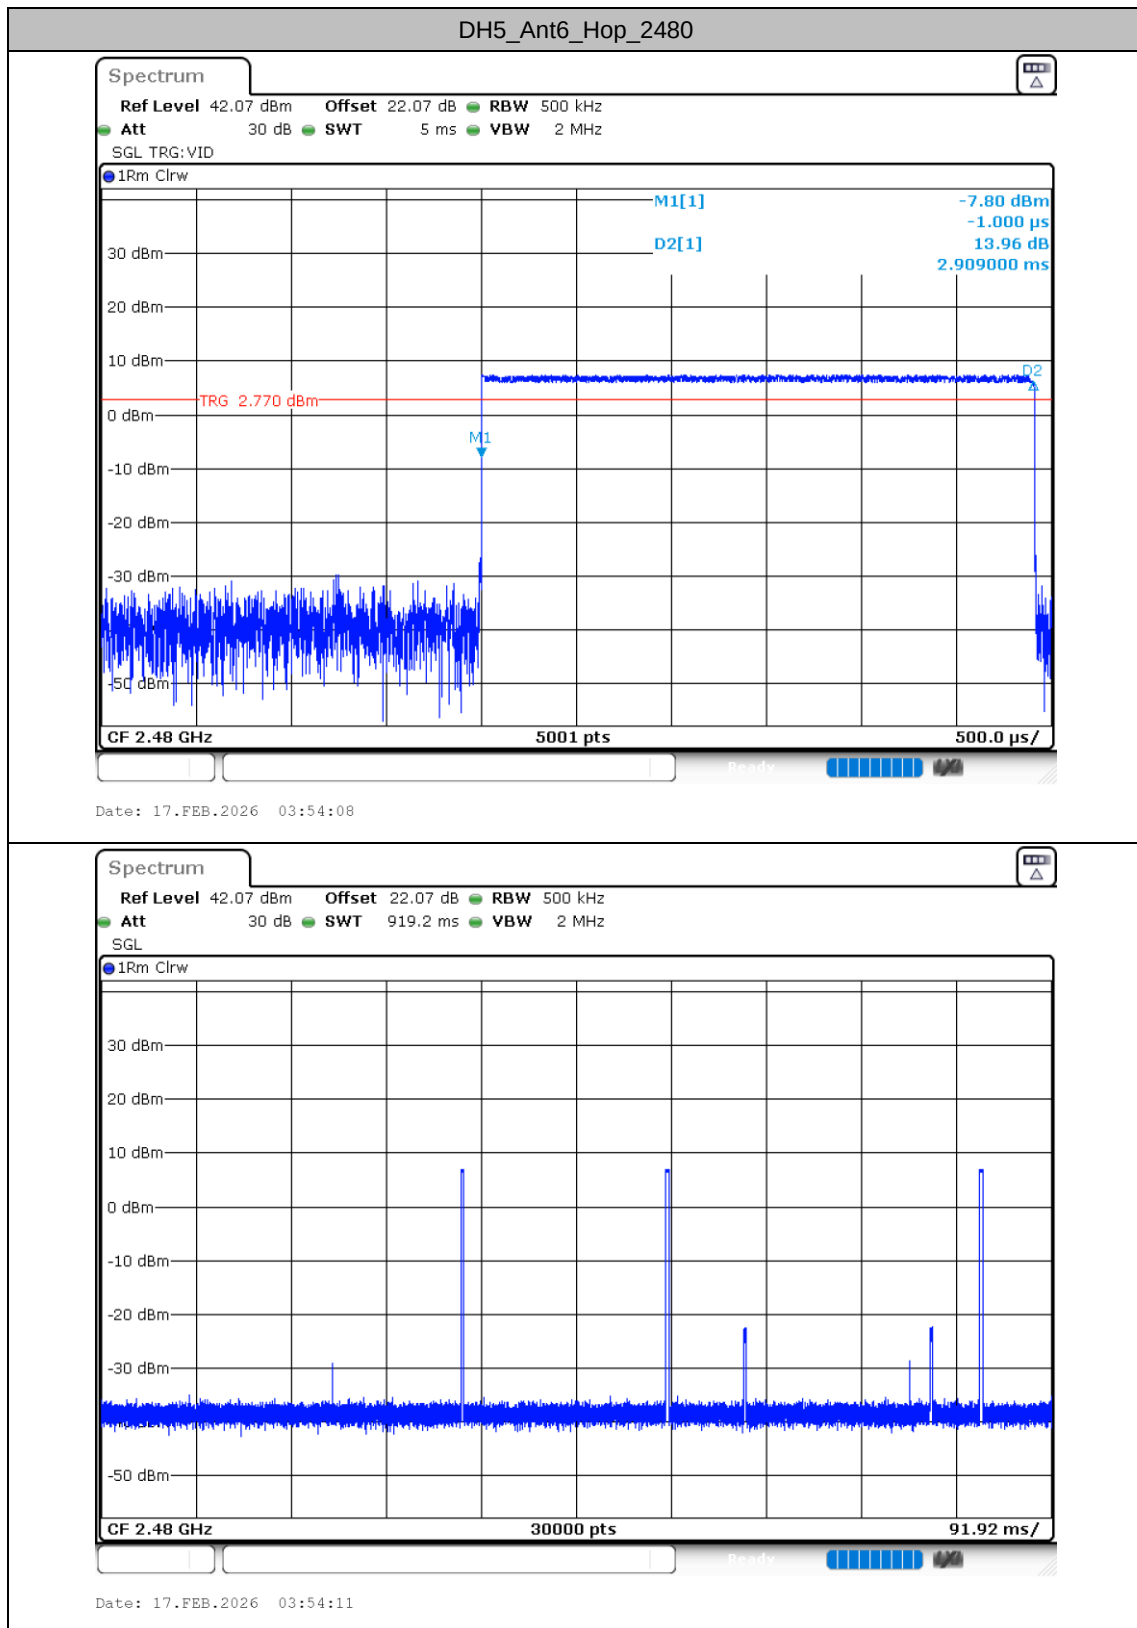

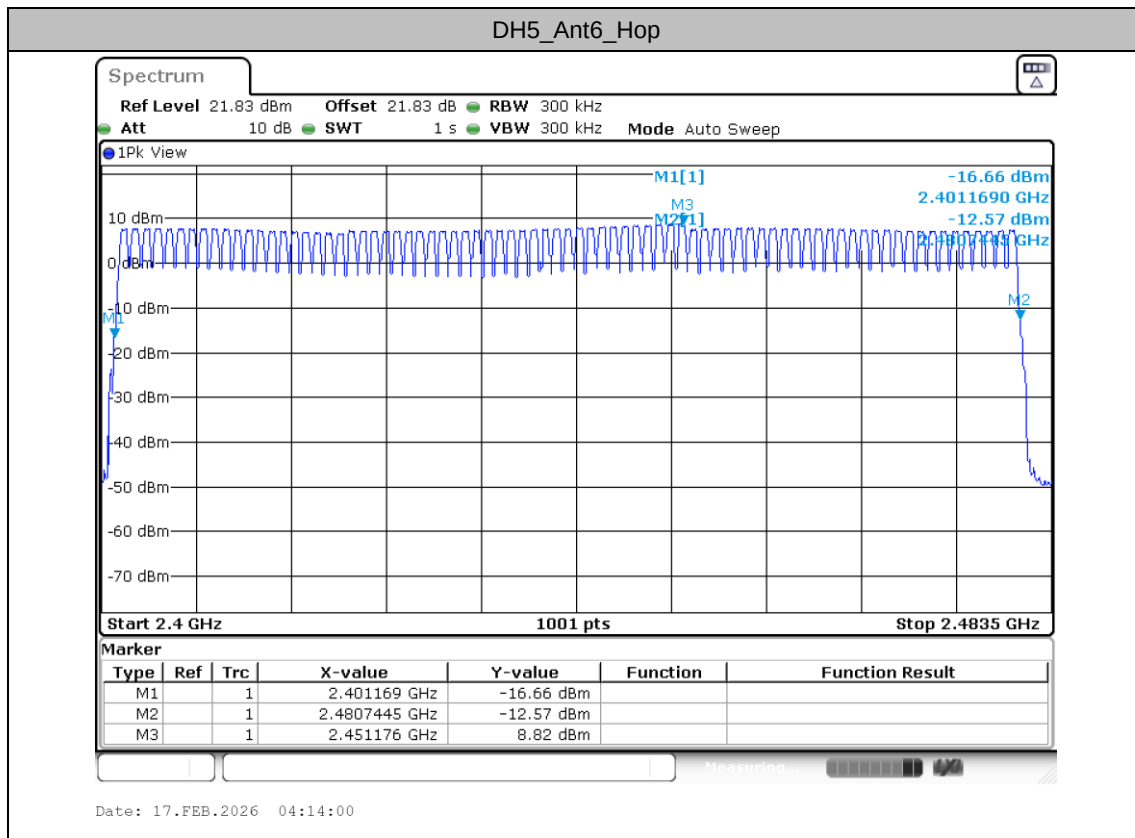

Hopping Frequency Separation

Test Result


TestMode	Antenna	Freq(MHz)	Result [MHz]	Limit[MHz]	Verdict
DH5	Ant6	2402	1	0.100	PASS
		2441	1	0.100	PASS
		2480	1	0.100	PASS


Transmitter Unwanted Emissions In The Out-Of-BandDomain


Test Result

TestMode	Antenna	Freq(MHz)	Freq. [MHz]	Level[dBm/MHz]	Limit[dBm/MHz]	Verdict
DH5	Ant6	Hop	2398.5	-55.92	-20.00	PASS
			2399.5	-54.49	-10.00	PASS
			2484	-55.62	-10.00	PASS
			2485	-54.45	-20.00	PASS
2DH1	Ant6	Hop	2398.34	-51.71	-20.00	PASS
			2399.5	-50.44	-10.00	PASS
			2484	-52.07	-10.00	PASS
			2485.16	-54.78	-20.00	PASS
3DH1	Ant6	Hop	2398.33	-51.45	-20.00	PASS
			2399.5	-59.93	-10.00	PASS
			2484.17	-55.12	-10.00	PASS
			2485.33	-55.32	-20.00	PASS

Test Graphs

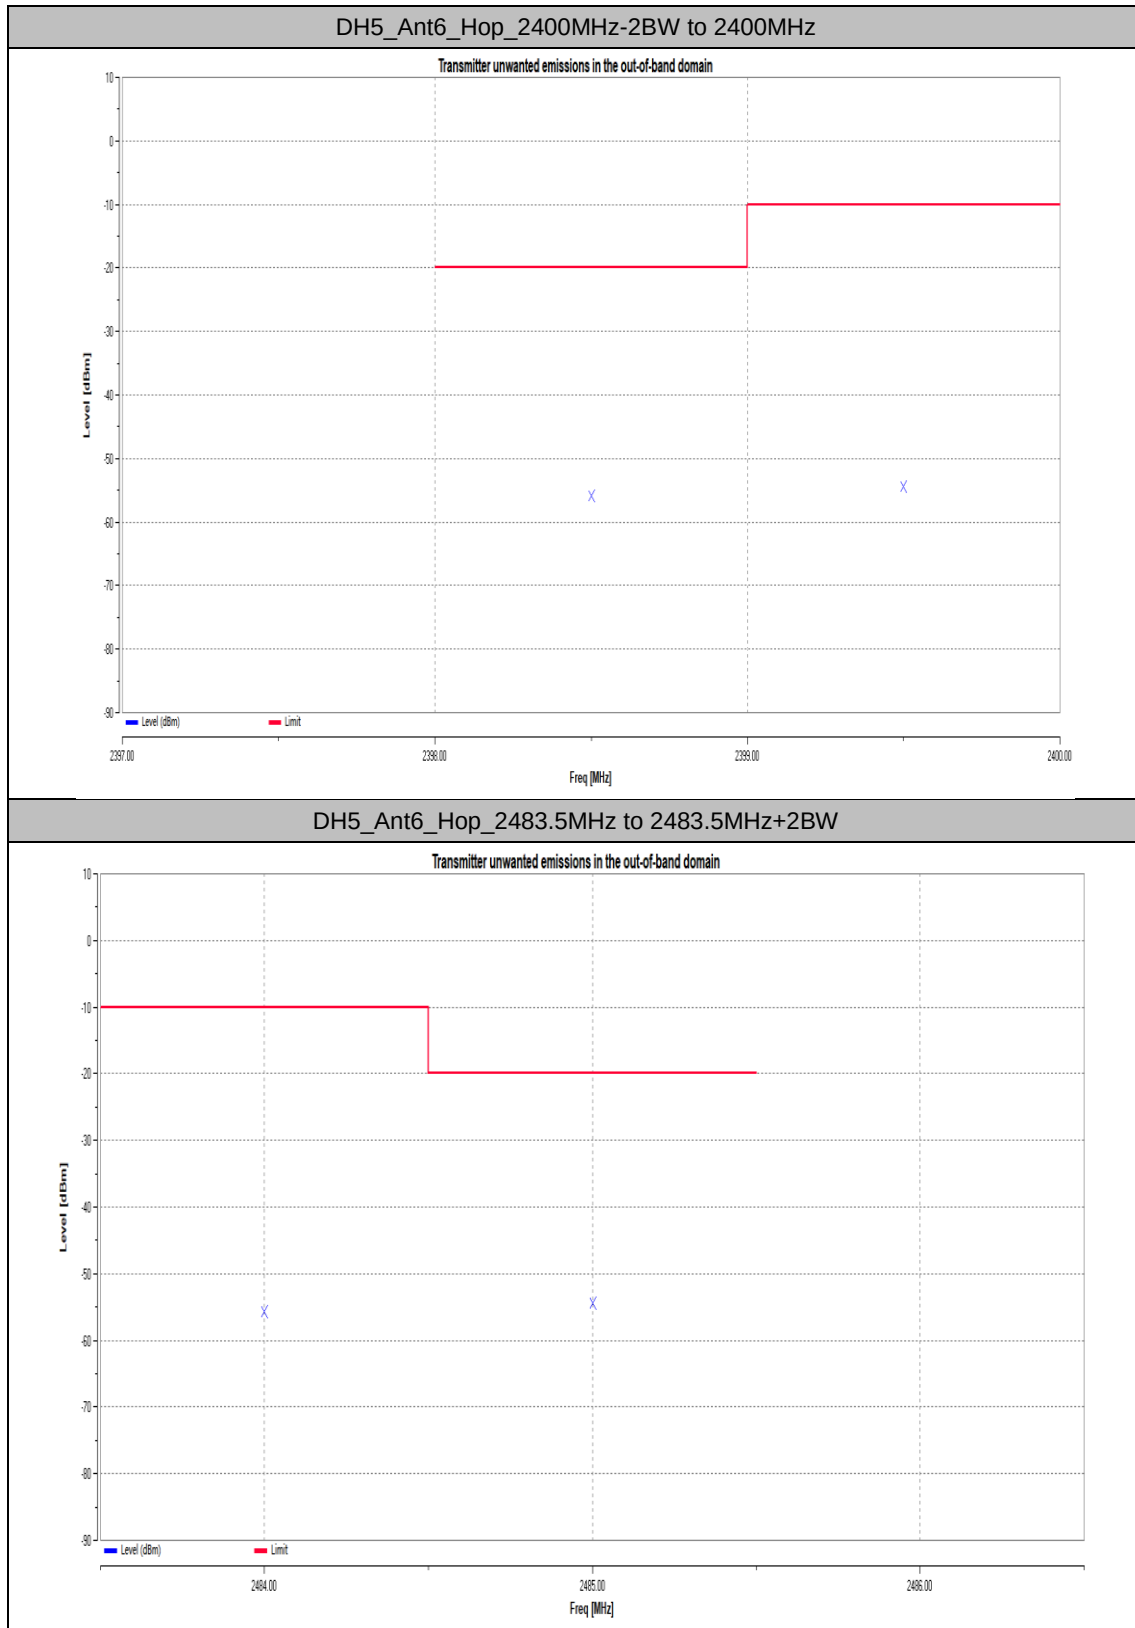

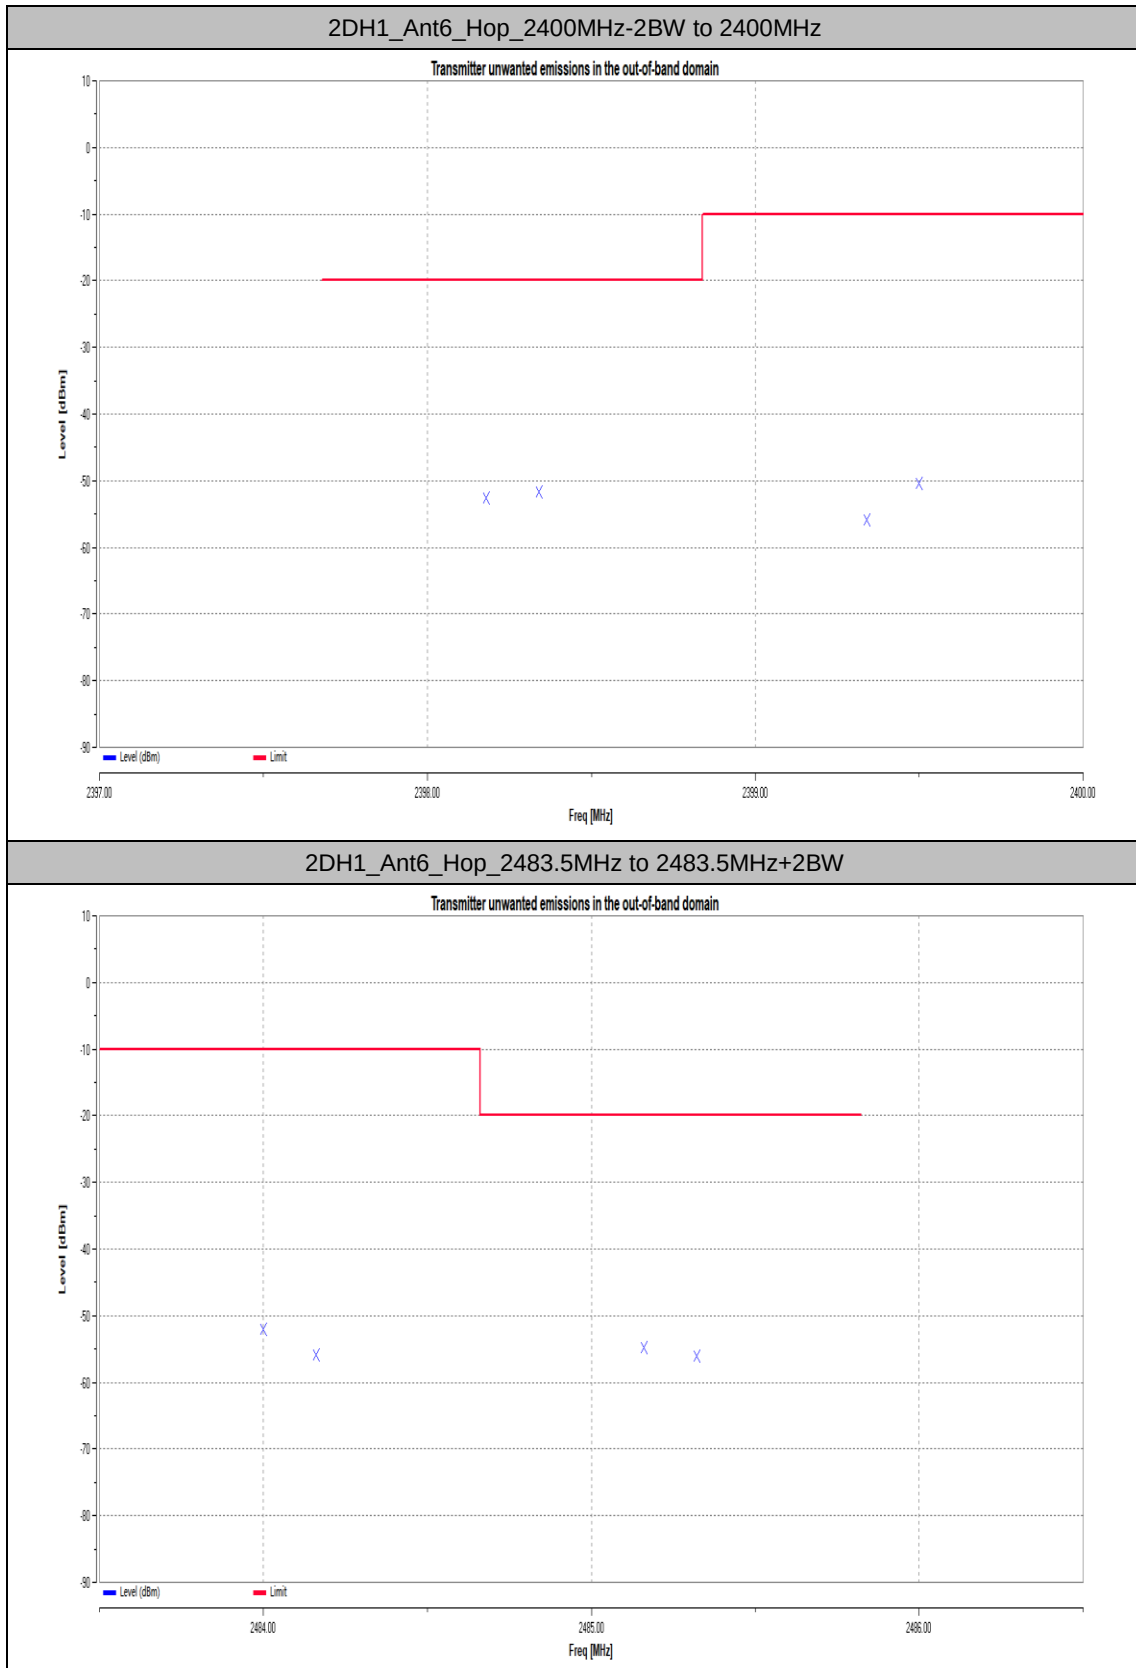

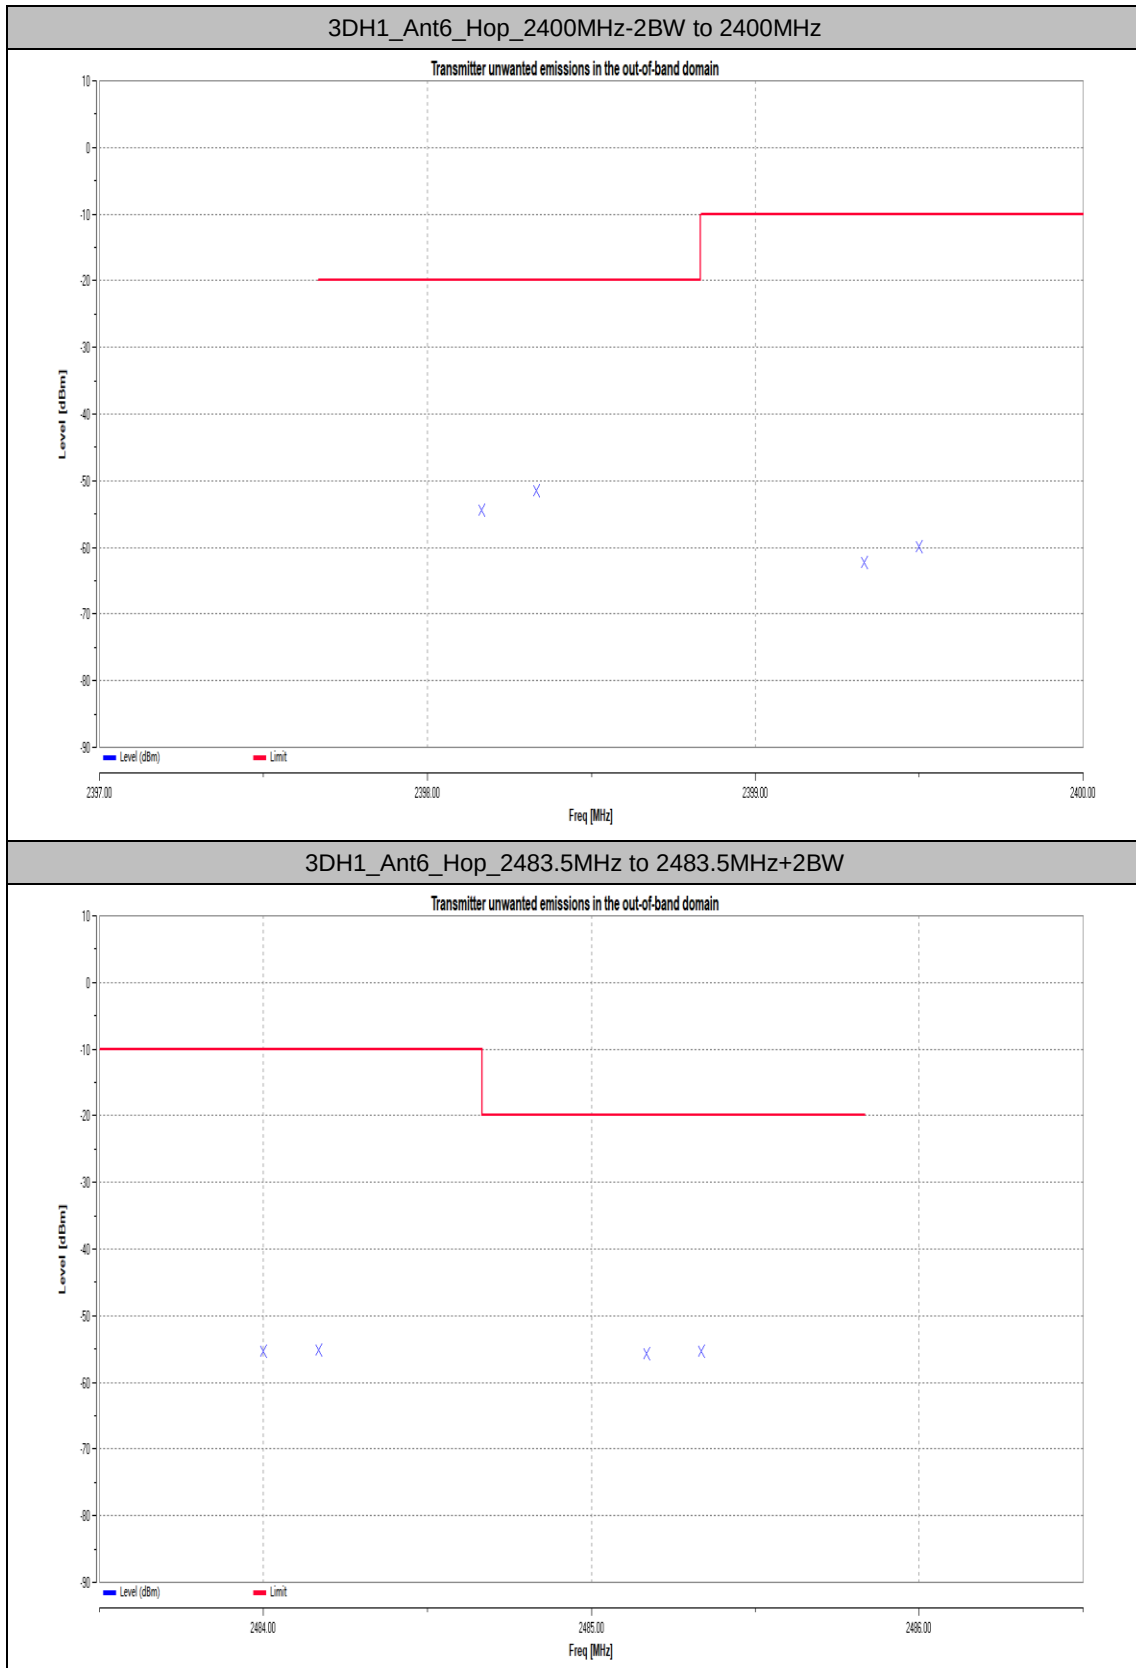

<BLE>

Power Spectral Density

Test Result


TestMode	Antenna	Freq(MHz)	EIRP PSD[dBm/MHz]	Limit[dBm/MHz]	Verdict
BLE_1M	Ant6	2402	0.57	10	PASS
		2440	0.55	10	PASS
		2480	0.05	10	PASS
BLE_2M	Ant6	2402	-0.59	10	PASS
		2440	-0.60	10	PASS
		2480	-1.12	10	PASS
BLE_125K	Ant6	2402	0.28	10	PASS
		2440	0.25	10	PASS
		2480	-0.26	10	PASS
BLE_500K	Ant6	2402	0.16	10	PASS
		2440	0.29	10	PASS
		2480	-0.01	10	PASS

Occupied Channel Bandwidth

Test Result


TestMode	Antenna	Freq(MHz)	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant6	2402	1.027	2401.4965	2402.5235	2400 to 2483.5	PASS
		2480	1.027	2479.4965	2480.5235	2400 to 2483.5	PASS
BLE_2M	Ant6	2402	2.042	2401.0010	2403.0430	2400 to 2483.5	PASS
		2480	2.038	2479.0010	2481.0390	2400 to 2483.5	PASS
BLE_125K	Ant6	2402	1.031	2401.4845	2402.5155	2400 to 2483.5	PASS
		2480	1.031	2479.4845	2480.5155	2400 to 2483.5	PASS
BLE_500K	Ant6	2402	1.011	2401.4965	2402.5075	2400 to 2483.5	PASS
		2480	1.015	2479.4925	2480.5075	2400 to 2483.5	PASS

Test Graphs

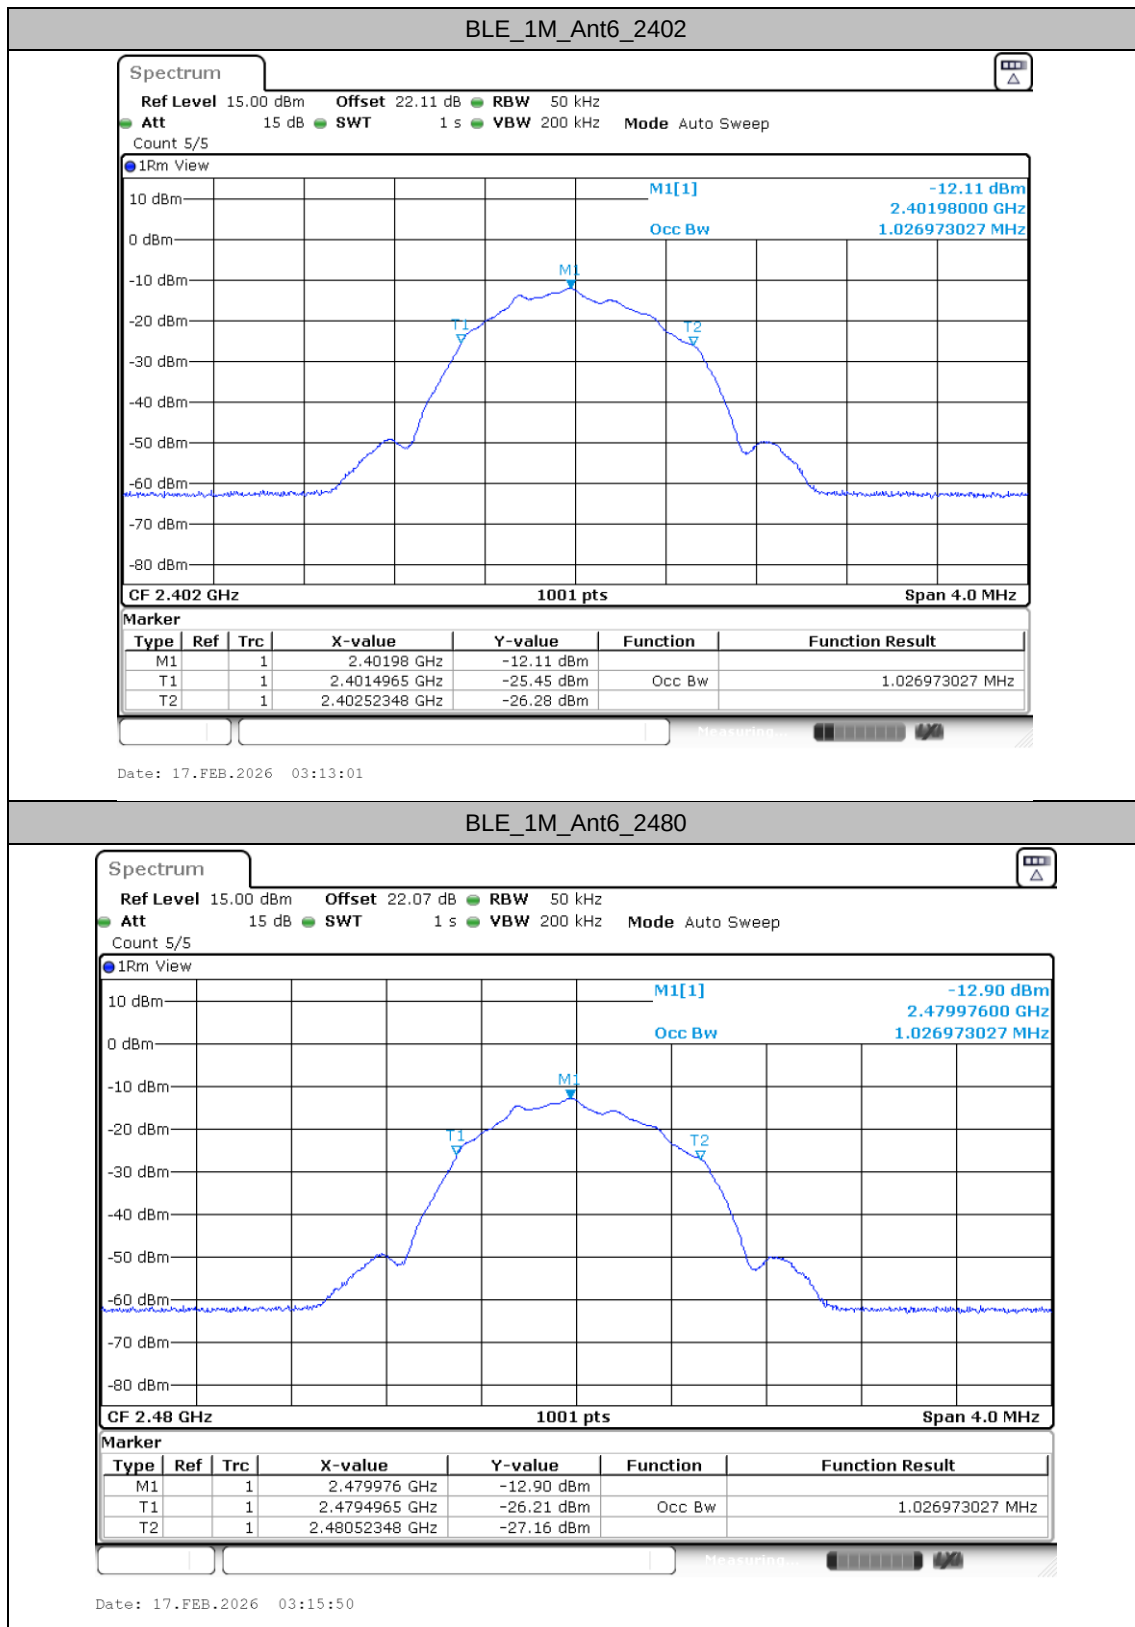




BLE_2M_Ant6_2402

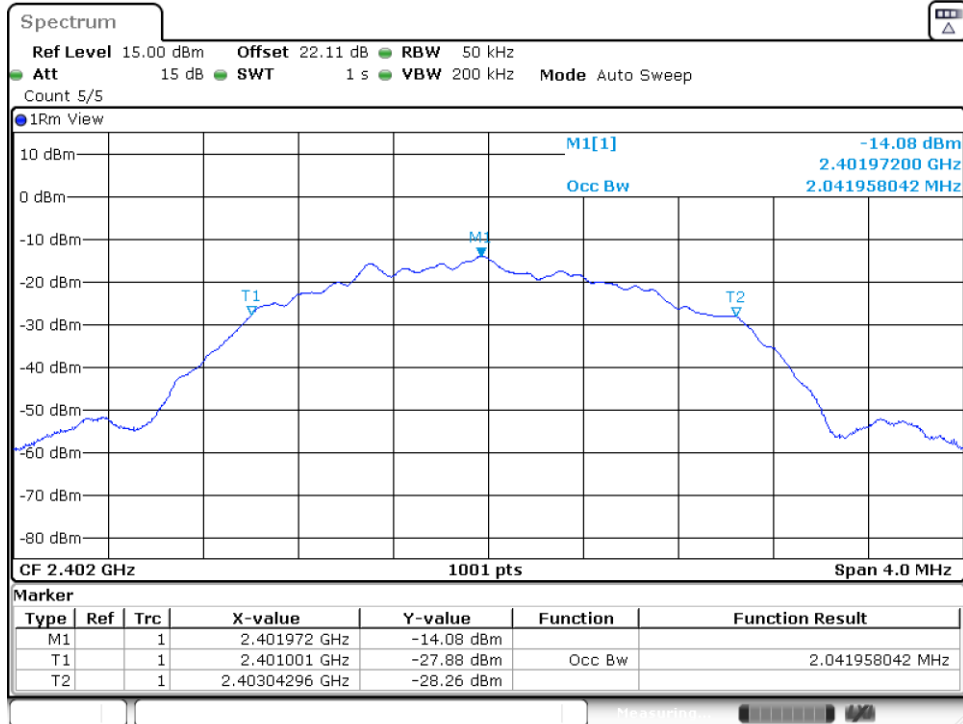

Date: 17.FEB.2026 03:27:02


BLE_2M_Ant6_2480

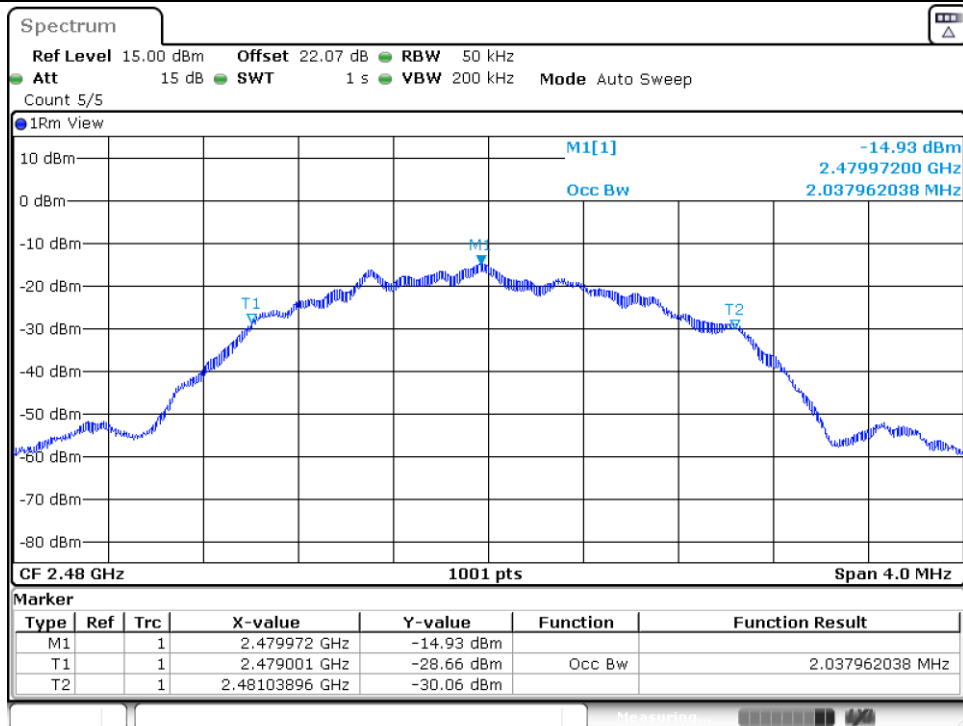

Date: 17.FEB.2026 03:29:29




BLE_125K_Ant6_2402

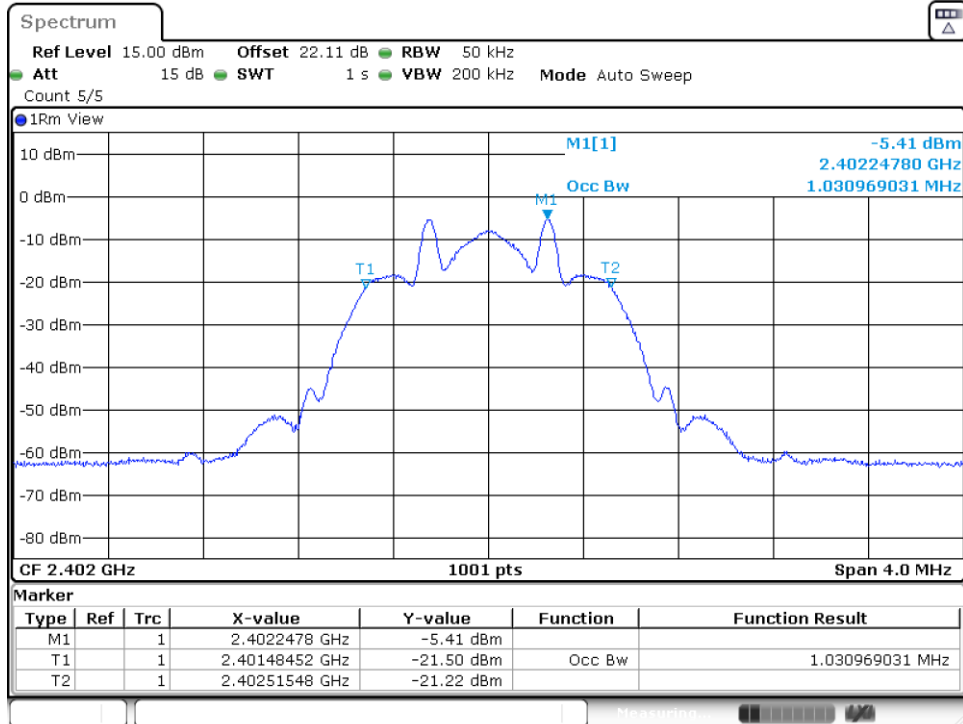

Date: 17.FEB.2026 03:17:31


BLE_125K_Ant6_2480

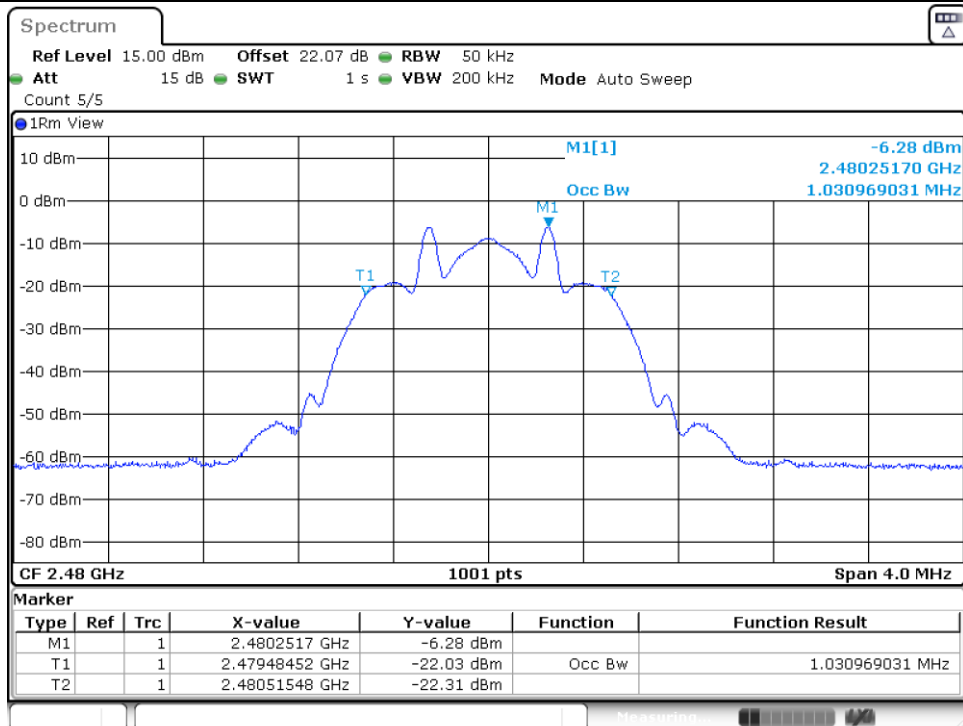

Date: 17.FEB.2026 03:21:01




BLE_500K_Ant6_2402

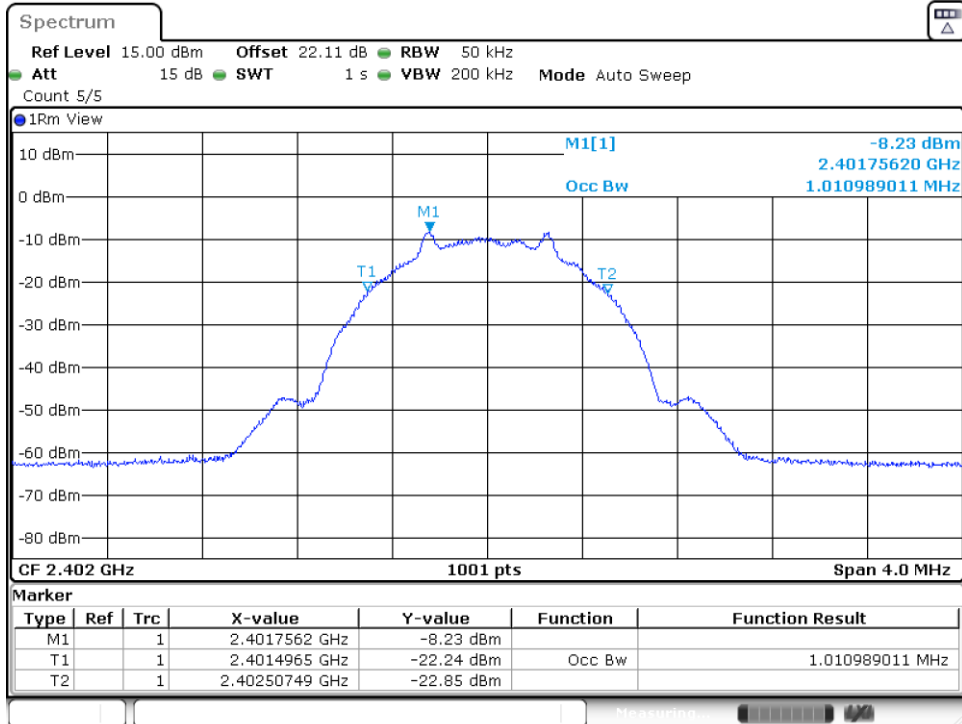

Date: 17.FEB.2026 03:22:50

BLE_500K_Ant6_2480

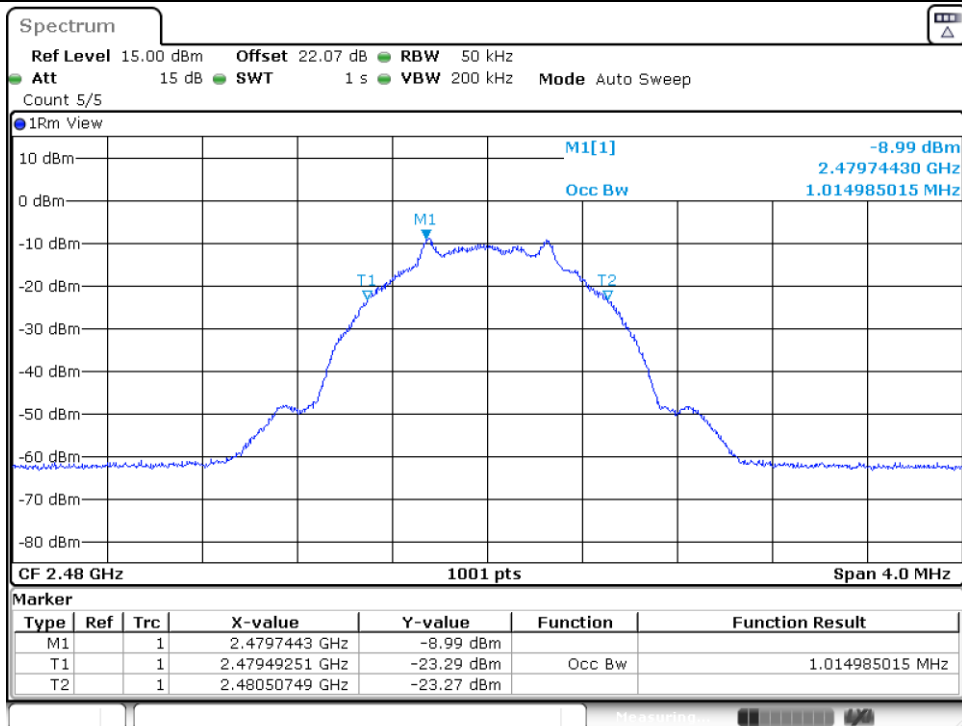

Date: 17.FEB.2026 03:25:18


Transmitter Unwanted Emissions In The Out-Of-BandDomain



Test Result


TestMode	Antenna	Freq(MHz)	Freq. [MHz]	Level[dBm/MHz]	Limit[dBm/MHz]	Verdict
BLE_1M	Ant6	2402	2398.446	-55.70	-20.00	PASS
			2398.473	-55.85	-20.00	PASS
			2399.473	-54.38	-10.00	PASS
			2399.5	-55.03	-10.00	PASS
			2484	-56.07	-10.00	PASS
			2484.027	-56.01	-10.00	PASS
			2485.027	-55.71	-20.00	PASS
			2485.054	-55.85	-20.00	PASS
		2480	2398.446	-56.66	-20.00	PASS
			2398.473	-56.79	-20.00	PASS
			2399.473	-56.02	-10.00	PASS
			2399.5	-56.96	-10.00	PASS
			2484	-55.25	-10.00	PASS
			2484.027	-54.81	-10.00	PASS
			2485.027	-55.66	-20.00	PASS
			2485.054	-55.36	-20.00	PASS
BLE_2M	Ant6	2402	2396.416	-56.07	-20.00	PASS
			2396.458	-56.02	-20.00	PASS
			2397.458	-55.88	-20.00	PASS
			2398.458	-55.14	-10.00	PASS
			2398.5	-55.27	-10.00	PASS
			2399.5	-48.72	-10.00	PASS
			2484	-55.58	-10.00	PASS
			2485	-56.04	-10.00	PASS
			2485.042	-55.90	-10.00	PASS
			2486.042	-55.97	-20.00	PASS
			2487.042	-55.50	-20.00	PASS
			2487.084	-55.87	-20.00	PASS
		2480	2396.424	-56.92	-20.00	PASS
			2396.462	-56.84	-20.00	PASS
			2397.462	-56.60	-20.00	PASS
			2398.462	-56.85	-10.00	PASS
			2398.5	-56.39	-10.00	PASS
			2399.5	-56.82	-10.00	PASS
			2484	-54.91	-10.00	PASS


			2485	-54.60	-10.00	PASS
			2485.038	-55.33	-10.00	PASS
			2486.038	-55.71	-20.00	PASS
			2487.038	-55.78	-20.00	PASS
			2487.076	-55.43	-20.00	PASS
BLE_125K	Ant6	2402	2398.438	-55.39	-20.00	PASS
			2398.469	-55.19	-20.00	PASS
			2399.469	-54.83	-10.00	PASS
			2399.5	-54.55	-10.00	PASS
			2484	-56.20	-10.00	PASS
			2484.031	-55.79	-10.00	PASS
			2485.031	-55.89	-20.00	PASS
			2485.062	-55.99	-20.00	PASS
		2480	2398.438	-56.71	-20.00	PASS
			2398.469	-56.77	-20.00	PASS
			2399.469	-56.91	-10.00	PASS
			2399.5	-56.42	-10.00	PASS
			2484	-54.78	-10.00	PASS
			2484.031	-54.86	-10.00	PASS
			2485.031	-55.13	-20.00	PASS
			2485.062	-55.44	-20.00	PASS
BLE_500K	Ant6	2402	2398.478	-55.20	-20.00	PASS
			2398.489	-55.65	-20.00	PASS
			2399.489	-54.61	-10.00	PASS
			2399.5	-54.71	-10.00	PASS
			2484	-56.11	-10.00	PASS
			2484.011	-55.49	-10.00	PASS
			2485.011	-55.77	-20.00	PASS
			2485.022	-55.76	-20.00	PASS
		2480	2398.47	-56.30	-20.00	PASS
			2398.485	-56.56	-20.00	PASS
			2399.485	-56.69	-10.00	PASS
			2399.5	-56.46	-10.00	PASS
			2484	-54.89	-10.00	PASS
			2484.015	-54.73	-10.00	PASS
			2485.015	-55.21	-20.00	PASS
			2485.03	-55.26	-20.00	PASS


Test Graphs

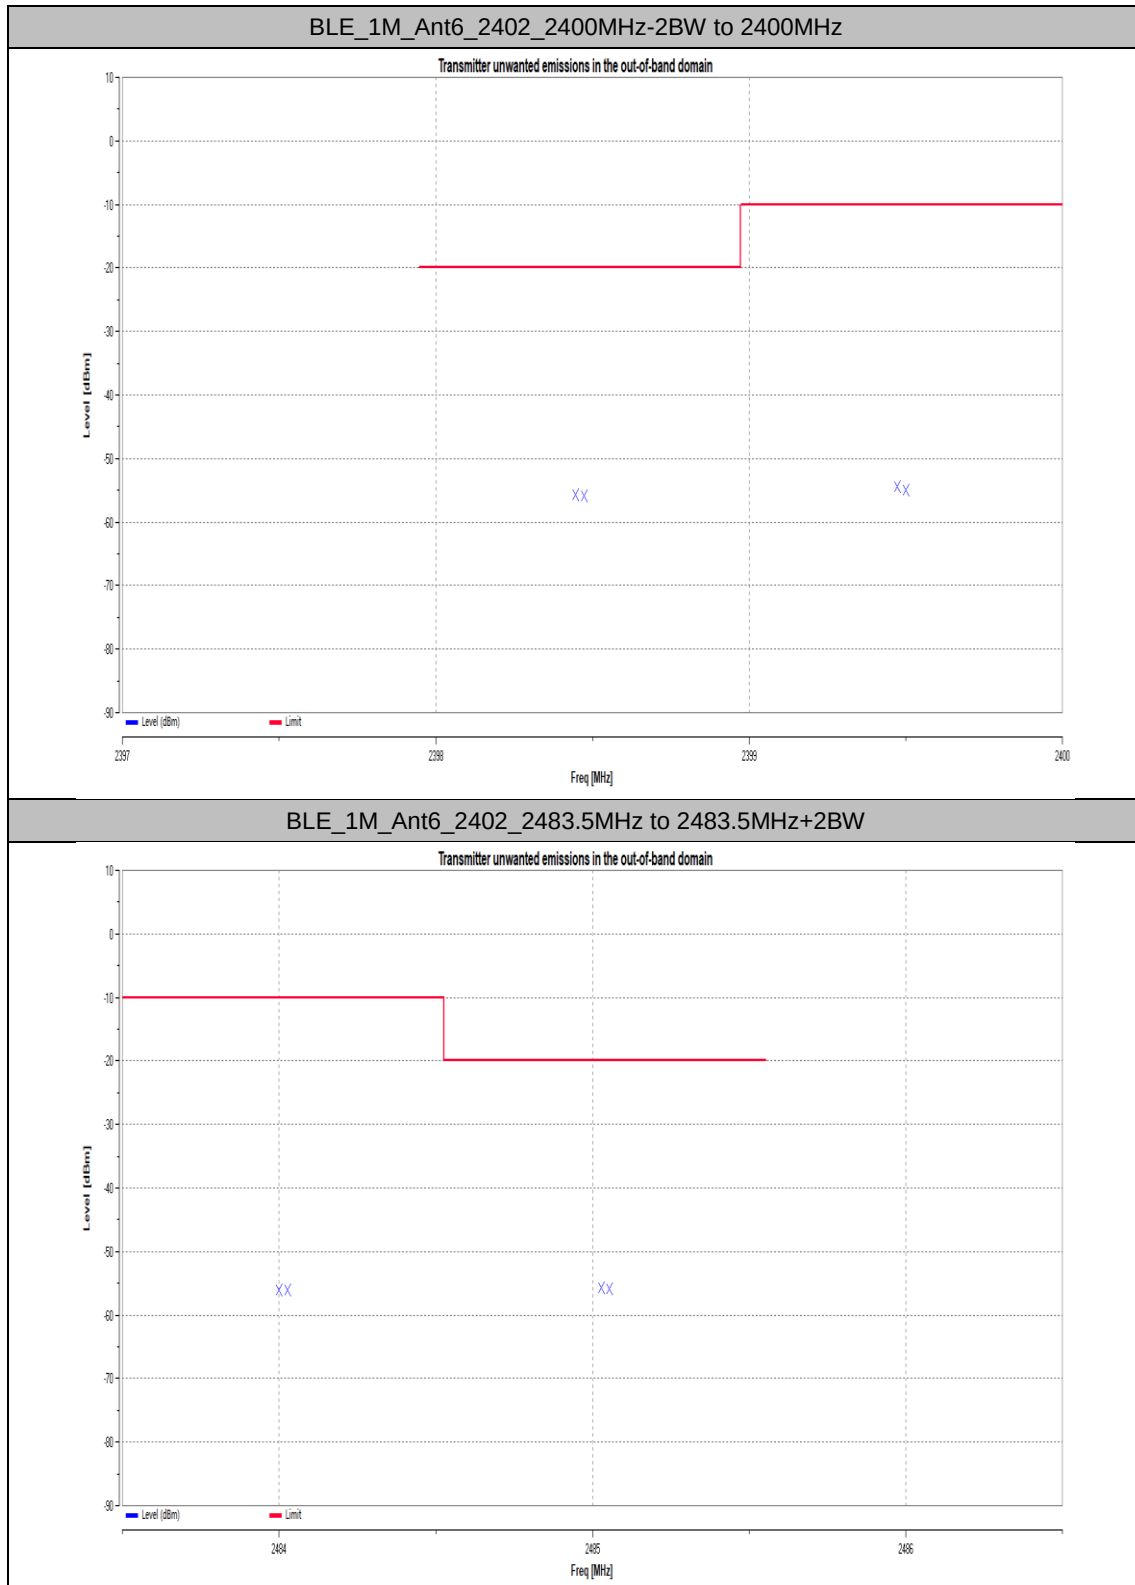


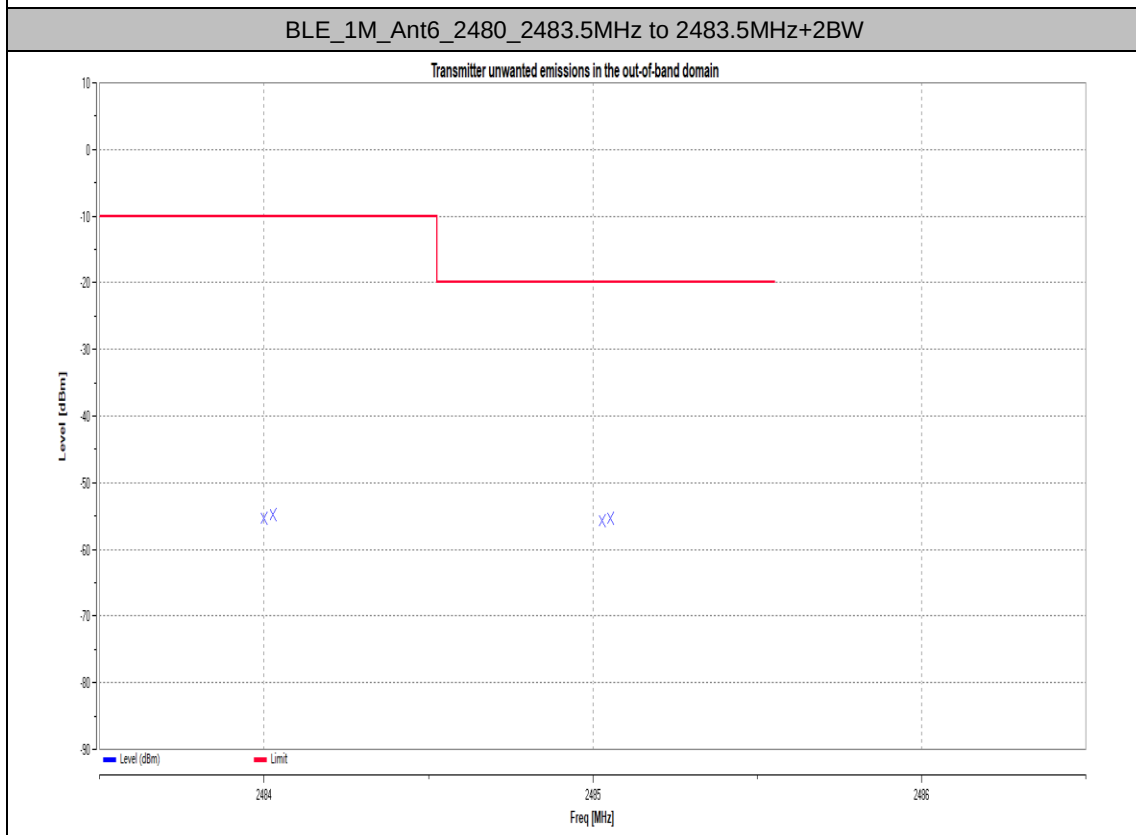
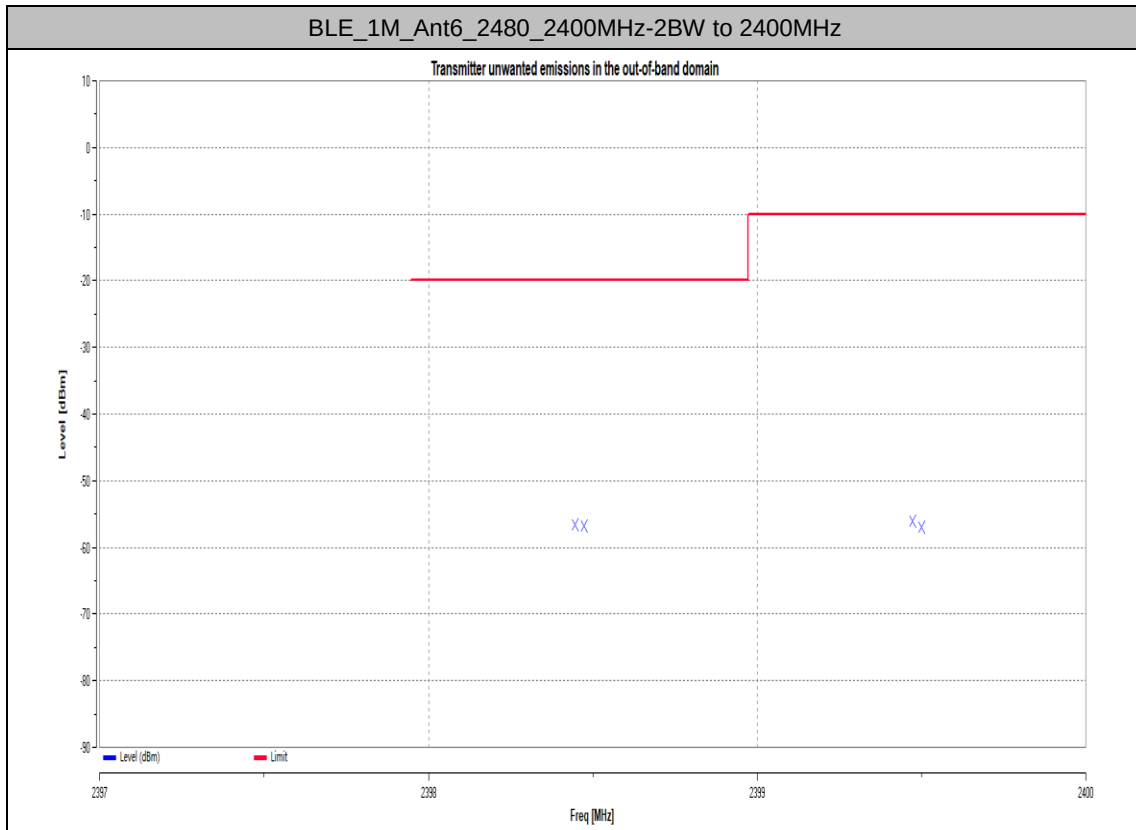



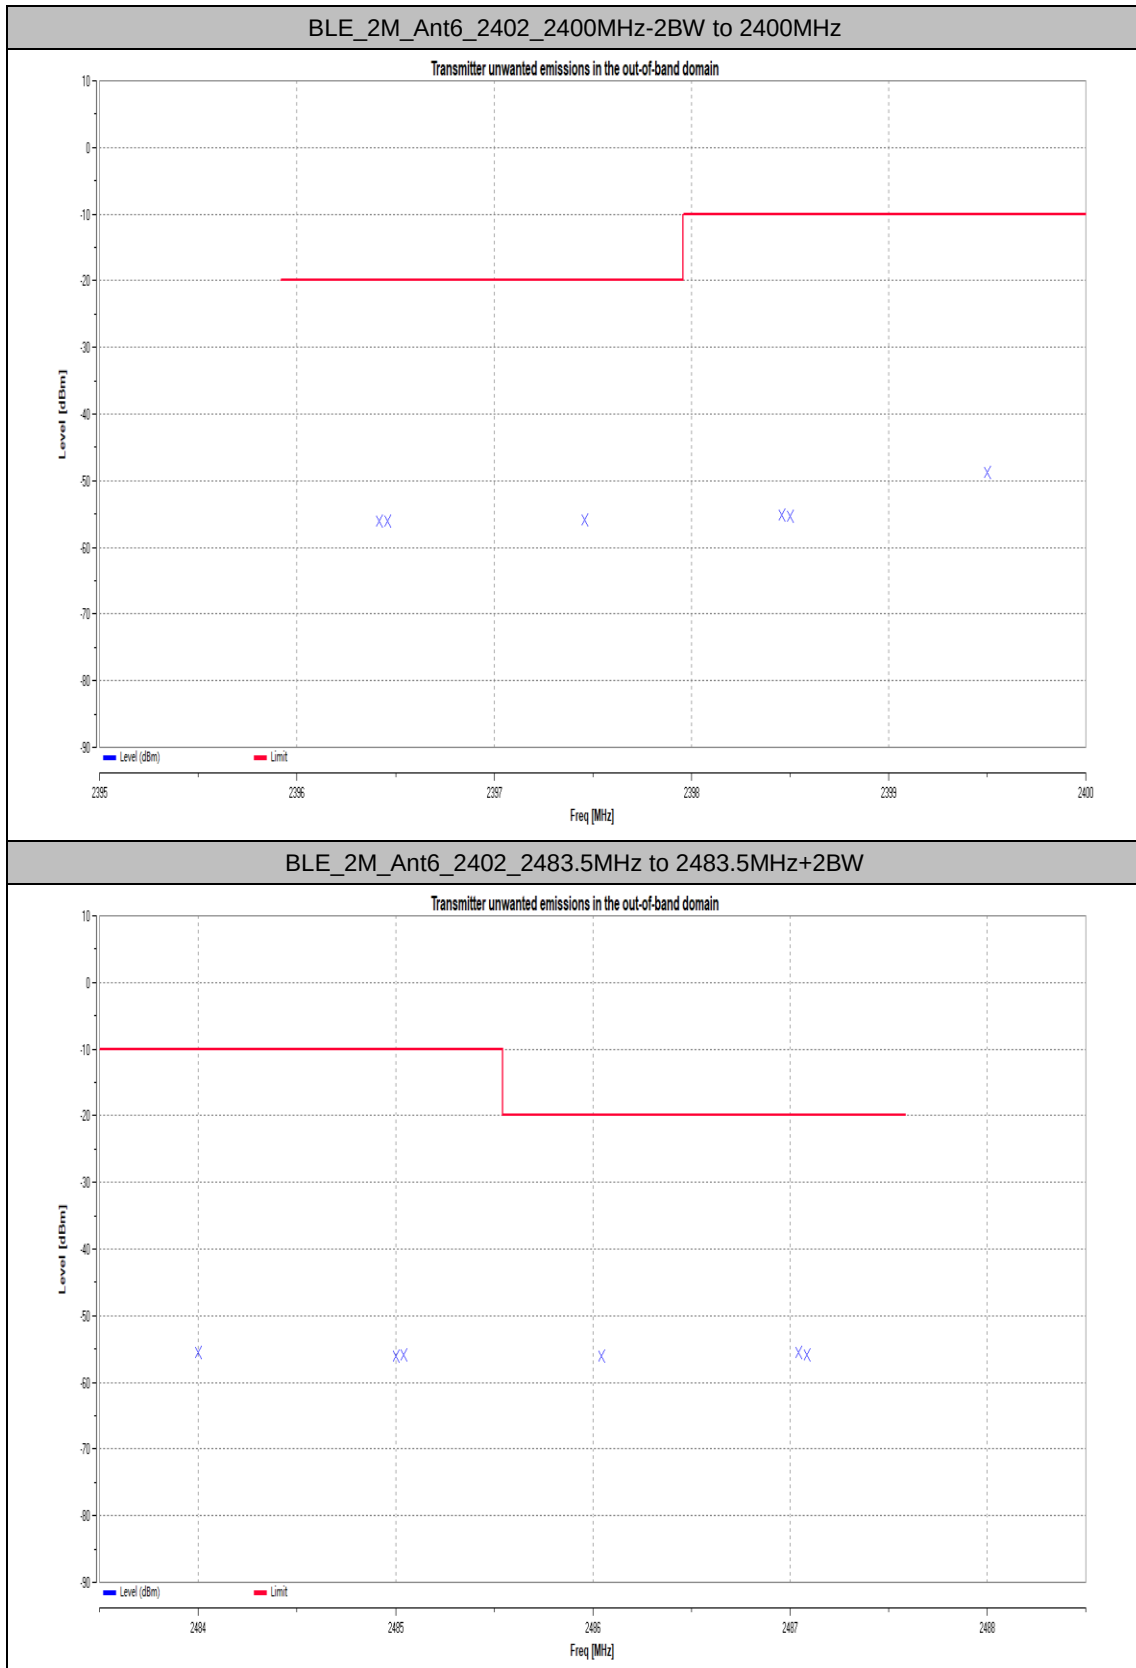


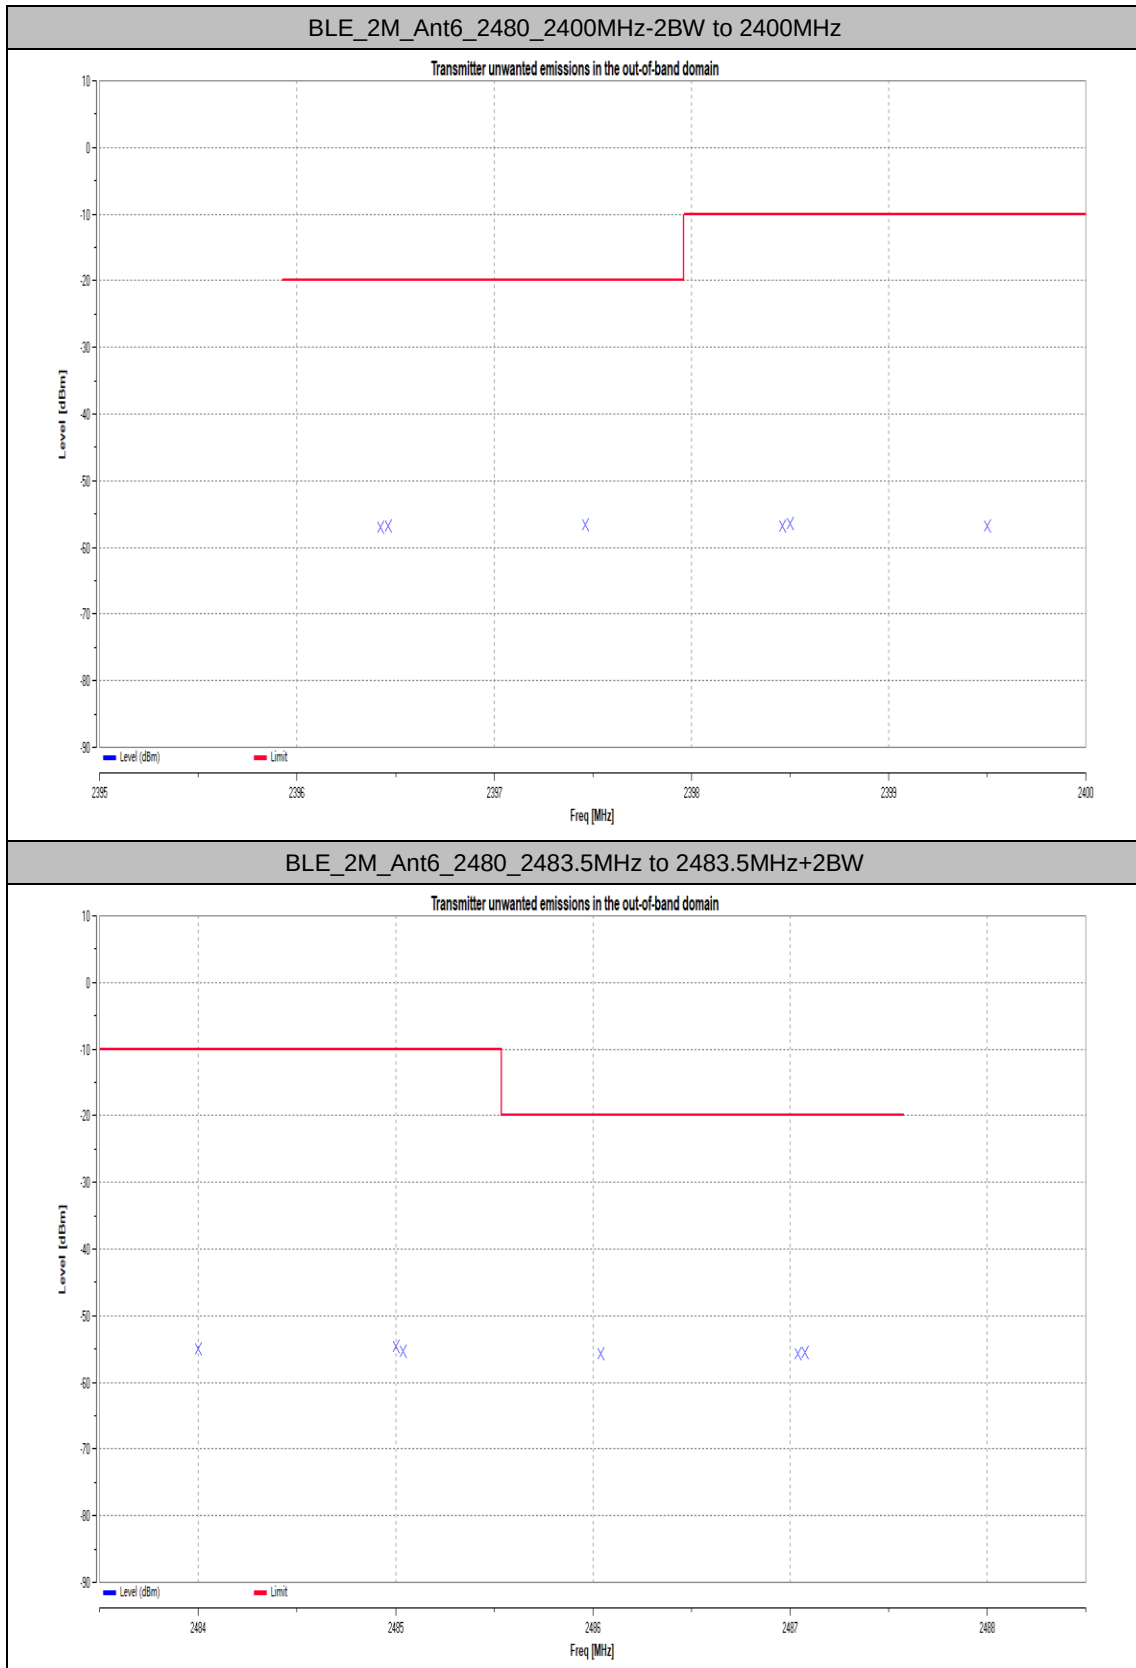

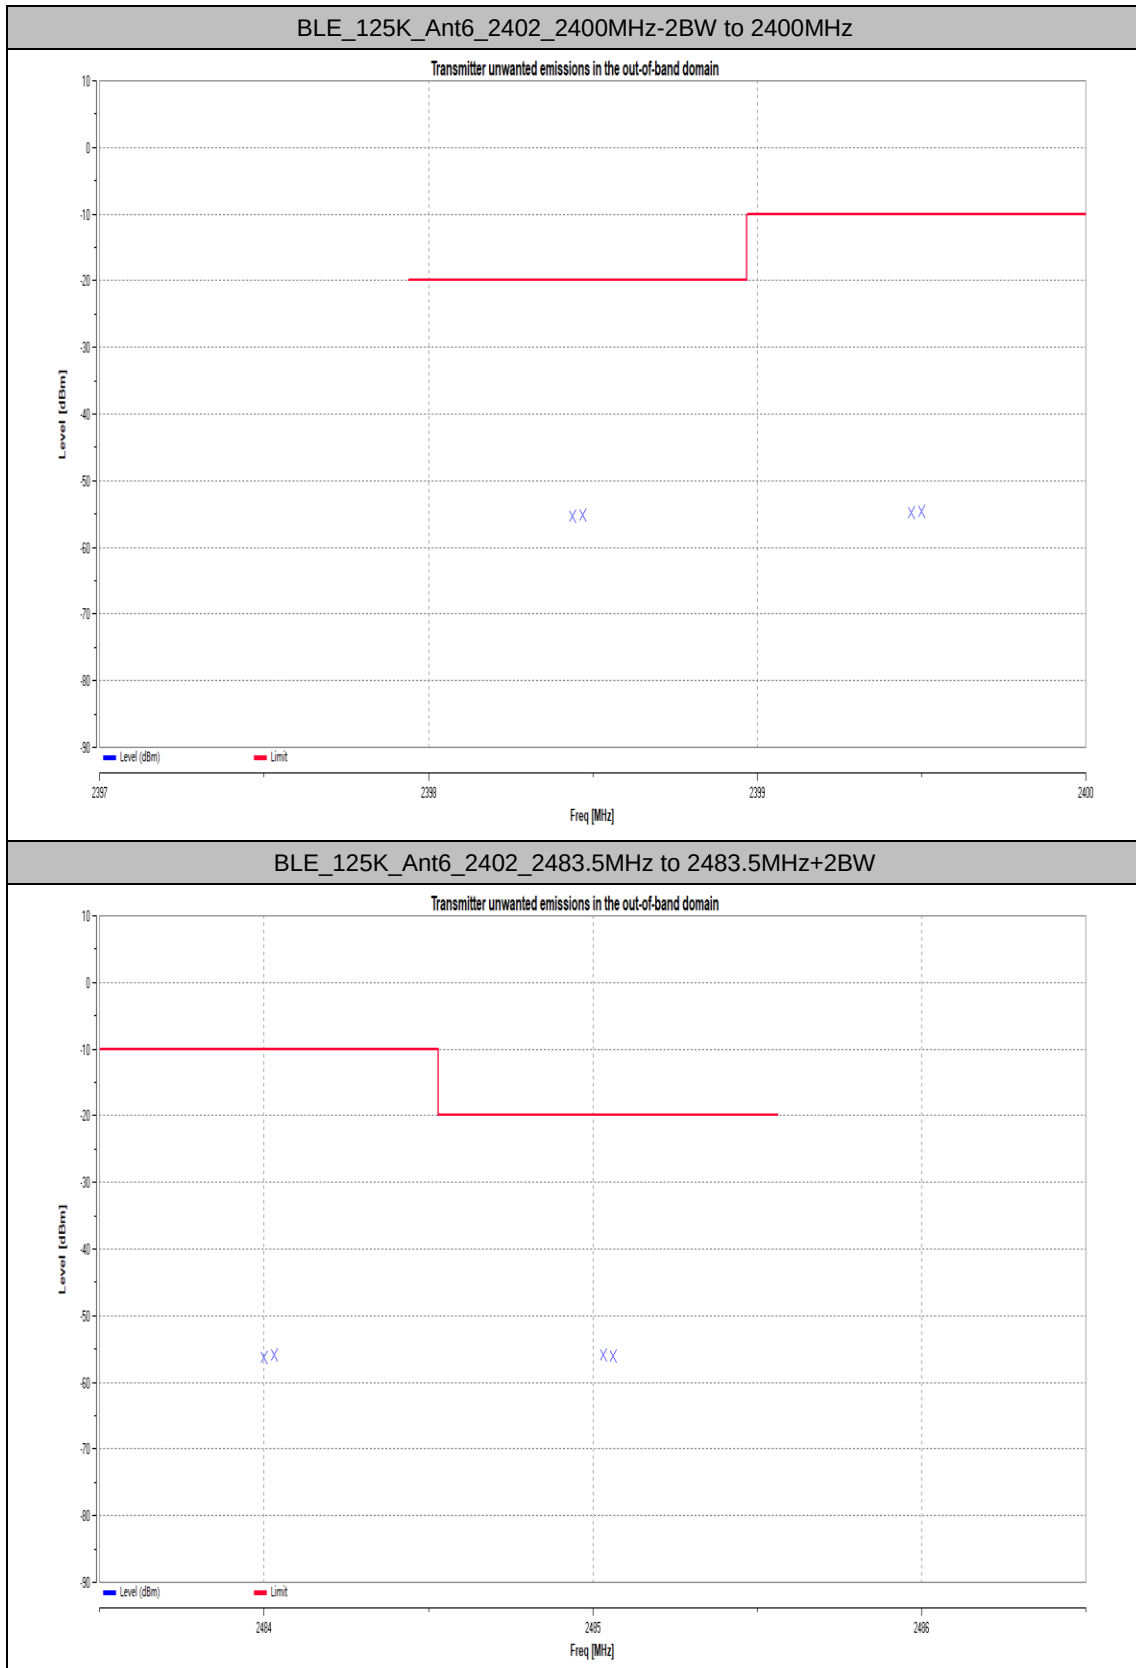

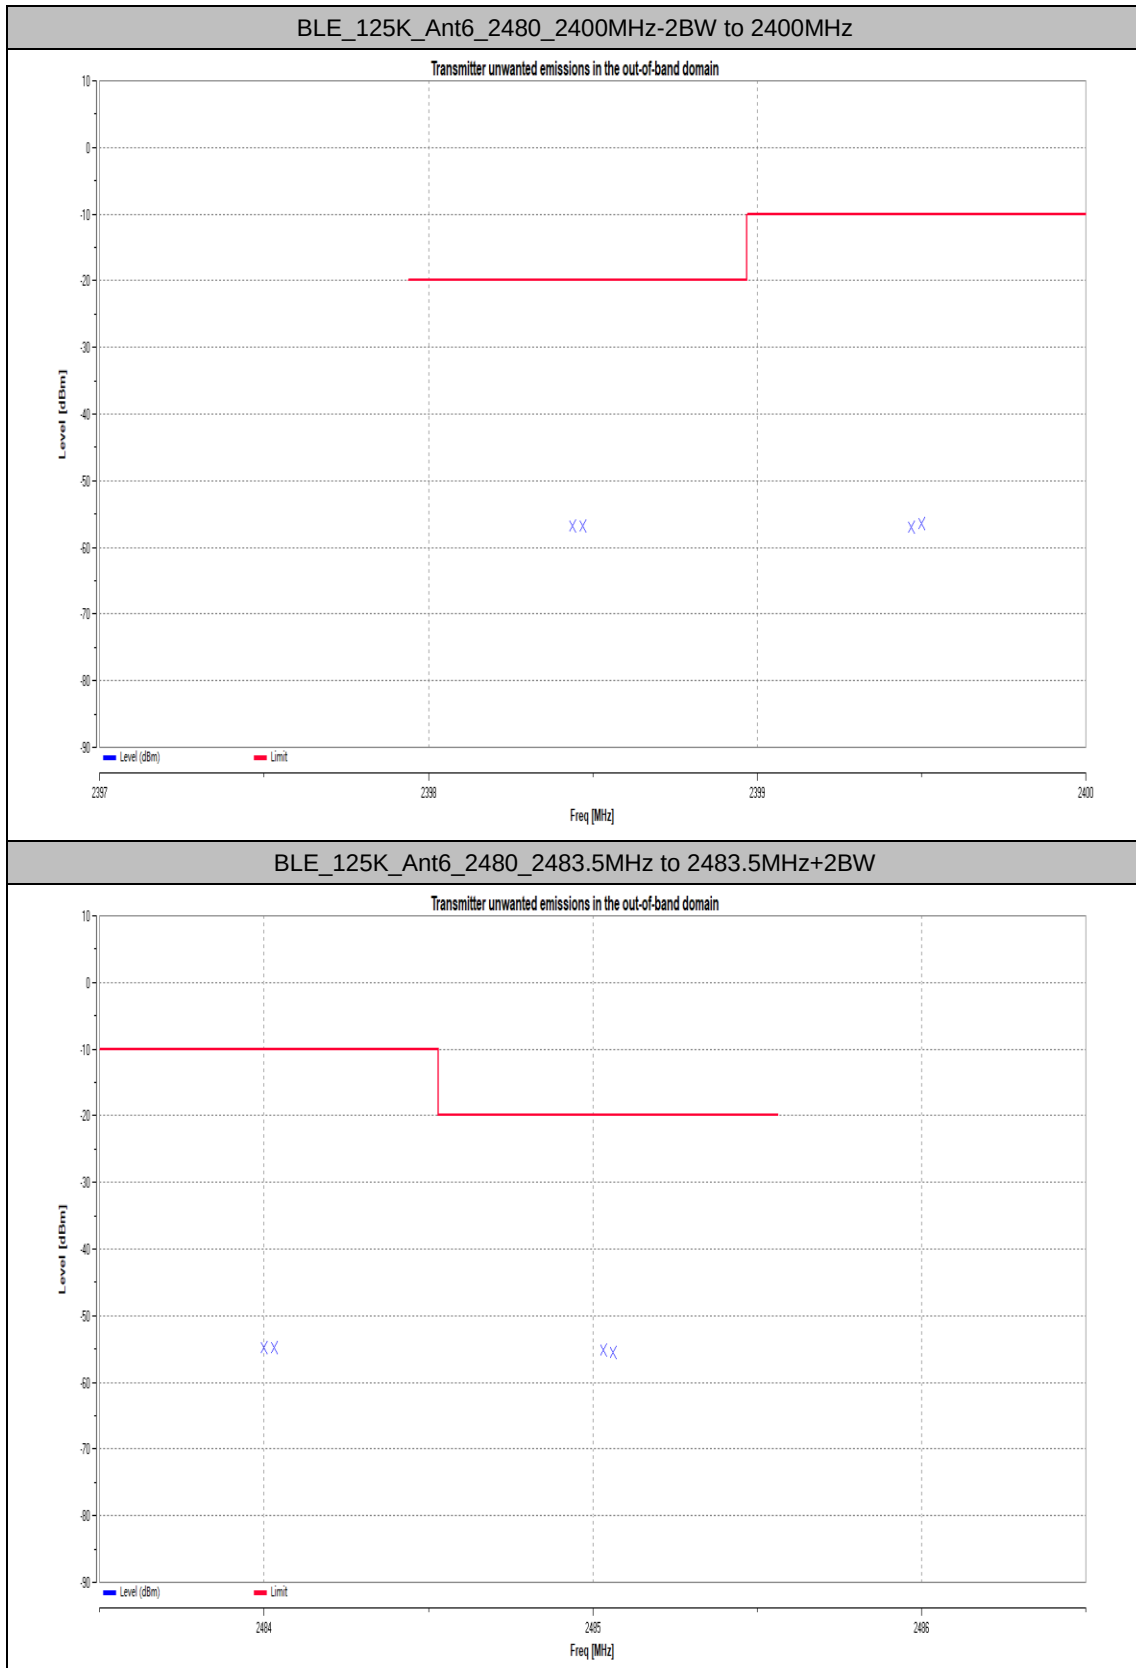

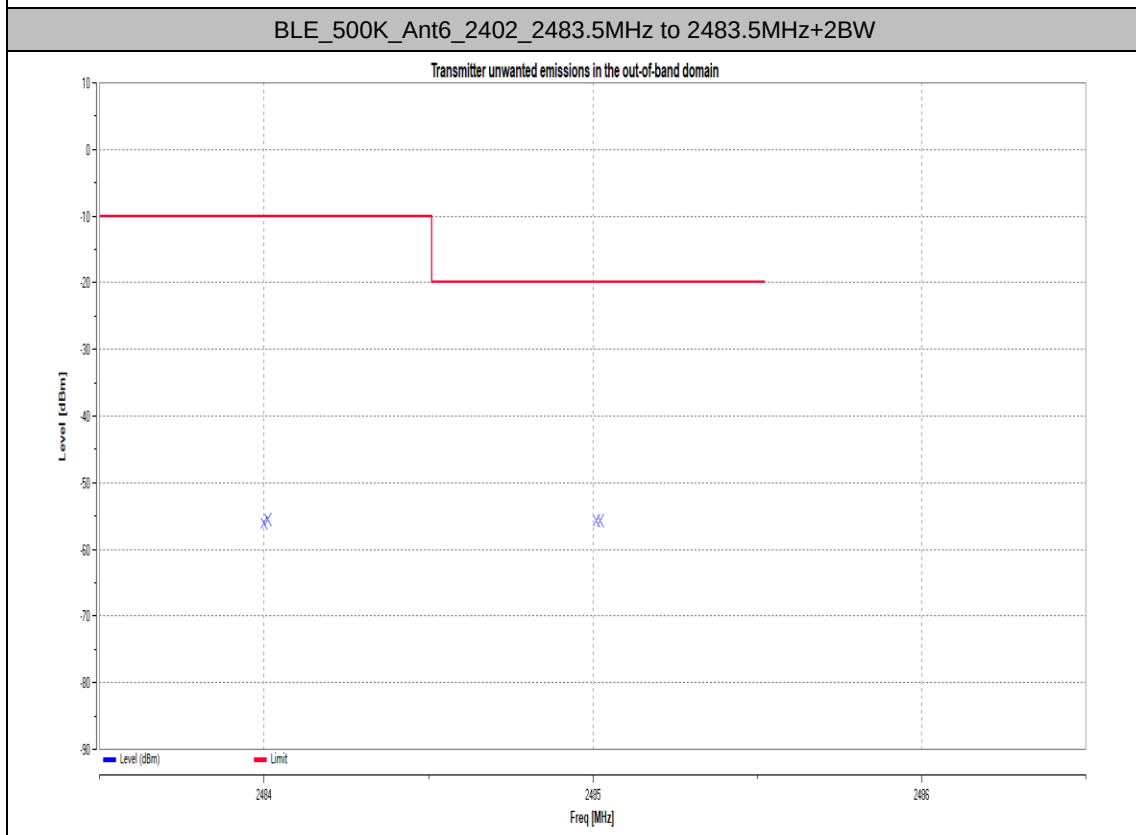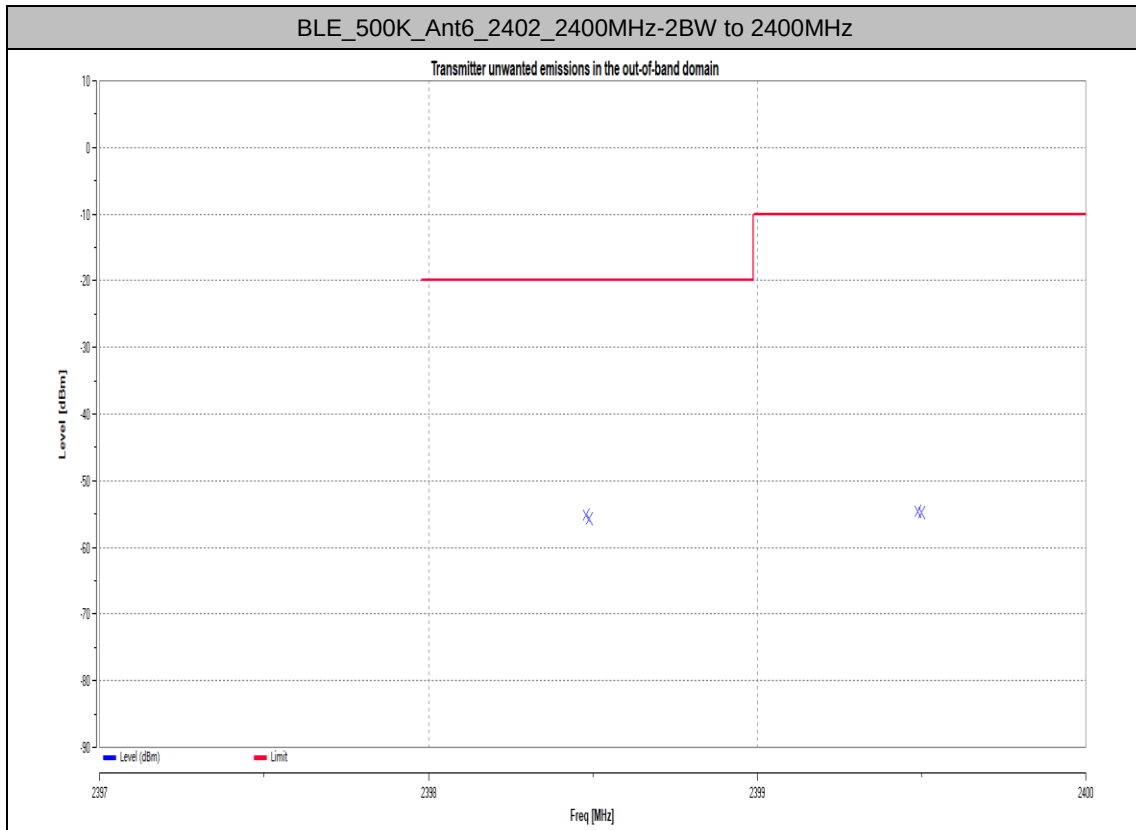

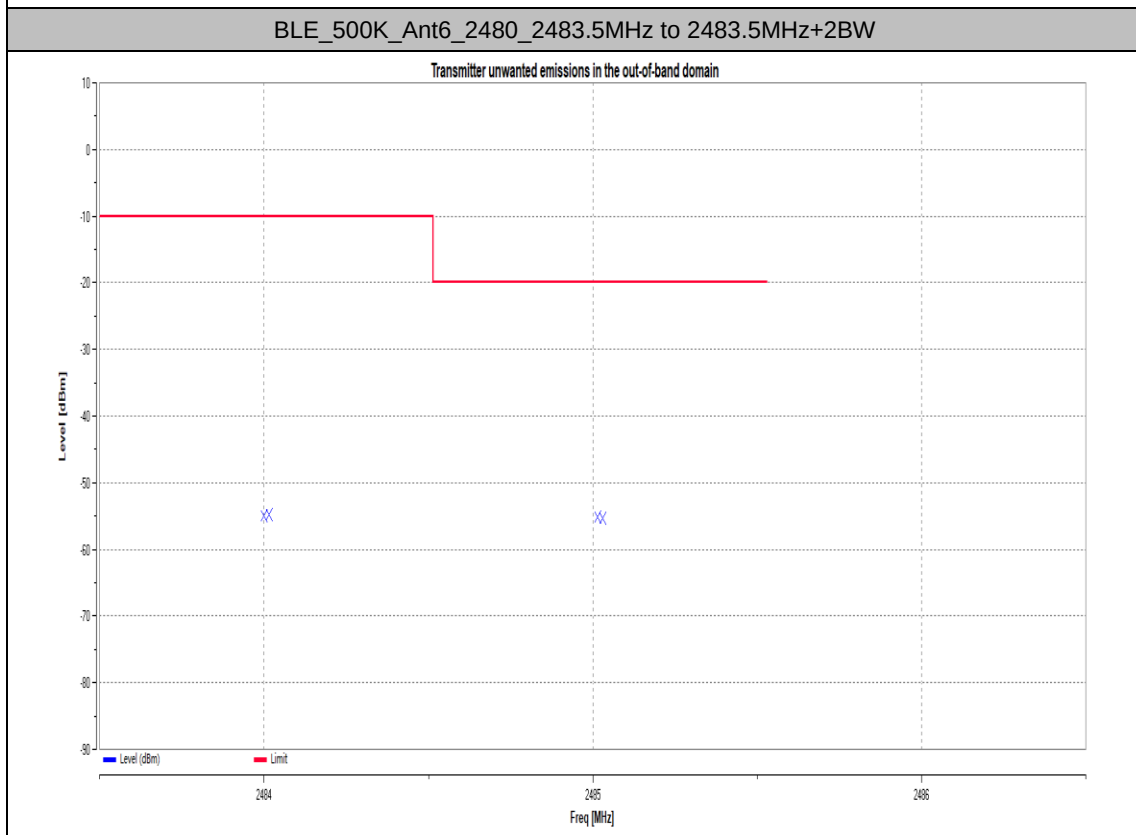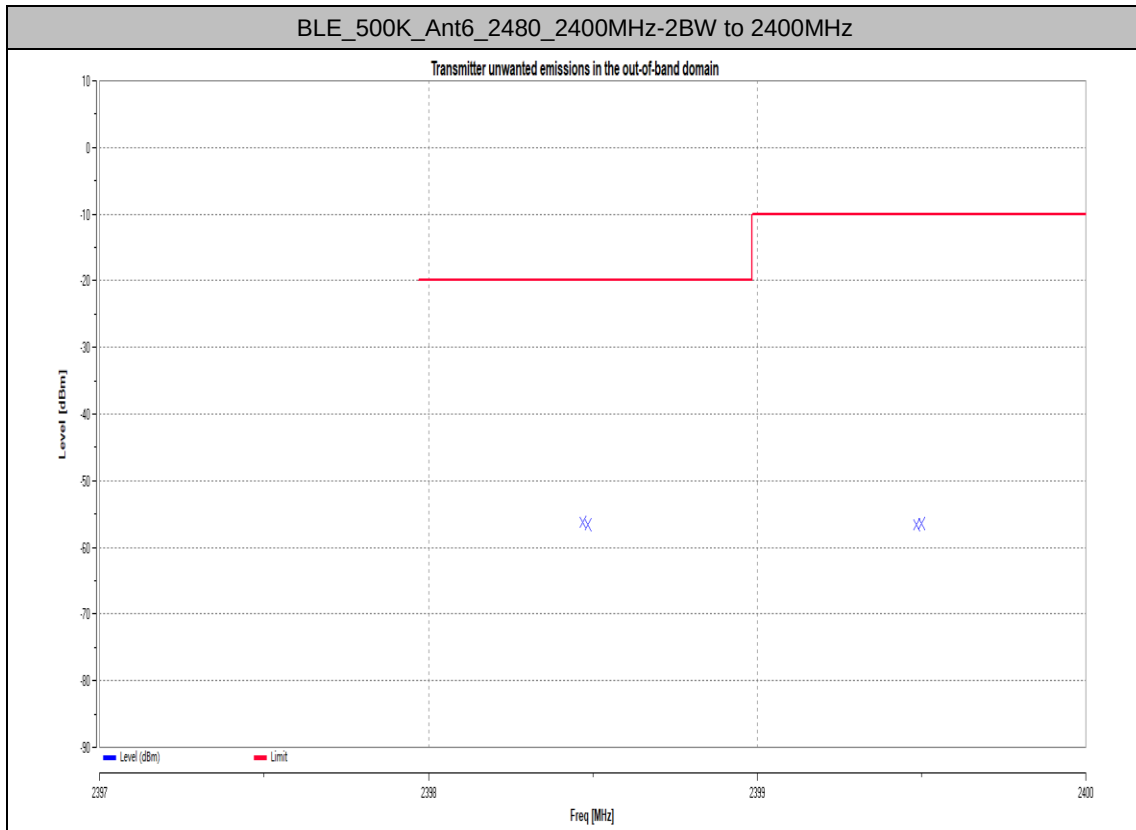



<WLAN>

Power Spectral Density

Test Result


TestMode	Antenna	Freq(MHz)	EIRP PSD[dBm/MHz]	Limit[dBm/MHz]	Verdict
11B	Ant6	2412	9.00	10	PASS
		2442	9.48	10	PASS
		2472	8.43	10	PASS
11G	Ant6	2412	2.39	10	PASS
		2442	2.59	10	PASS
		2472	2.53	10	PASS
11N20SISO	Ant6	2412	2.53	10	PASS
		2442	2.59	10	PASS
		2472	1.49	10	PASS
11N40SISO	Ant6	2422	-3.40	10	PASS
		2442	-3.88	10	PASS
		2462	-4.59	10	PASS



Occupied Channel Bandwidth



Test Result

TestMode	Antenna	Freq(MHz)	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant6	2412	11.189	2406.1259	2417.3147	2400 to 2483.5	PASS
		2472	11.349	2466.2857	2477.6344	2400 to 2483.5	PASS
11G	Ant6	2412	16.543	2403.7682	2420.3117	2400 to 2483.5	PASS
		2472	16.583	2463.6883	2480.2717	2400 to 2483.5	PASS
11N20SISO	Ant6	2412	17.622	2403.2488	2420.8711	2400 to 2483.5	PASS
		2472	17.662	2463.1289	2480.7912	2400 to 2483.5	PASS
11N40SISO	Ant6	2422	36.444	2403.7782	2440.2218	2400 to 2483.5	PASS
		2462	36.284	2443.9381	2480.2218	2400 to 2483.5	PASS

Test Graphs

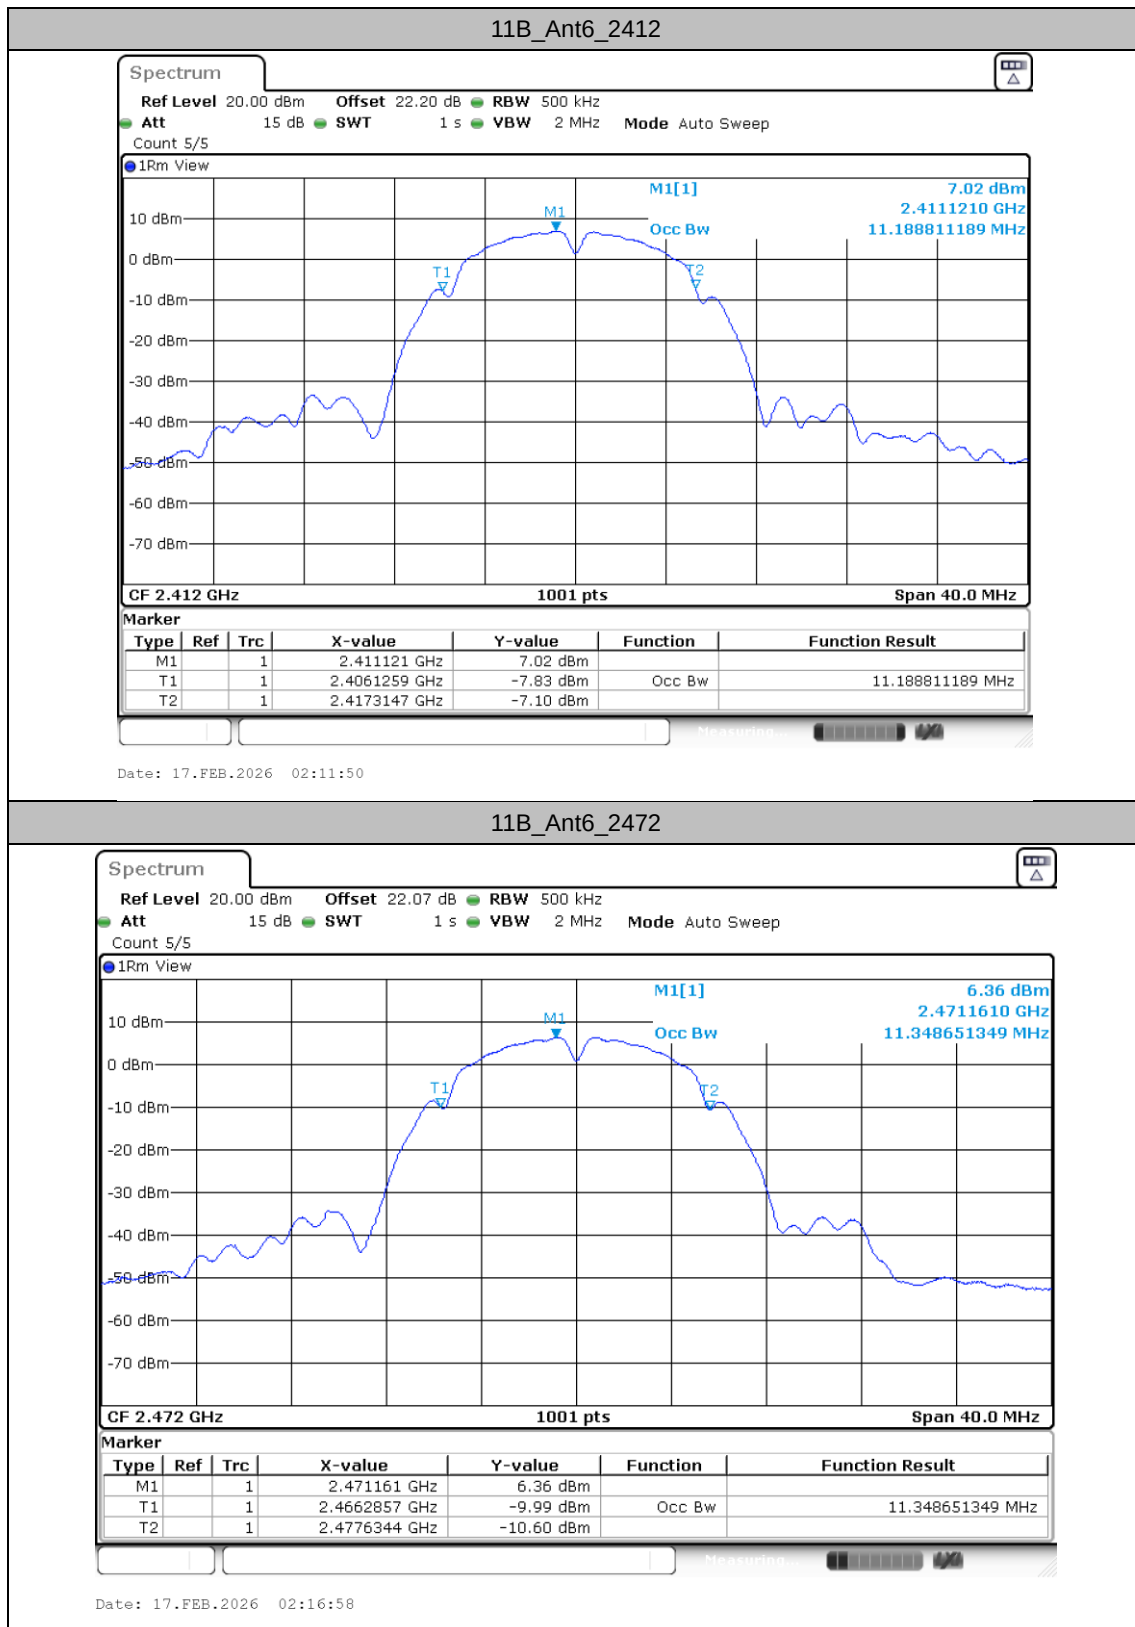


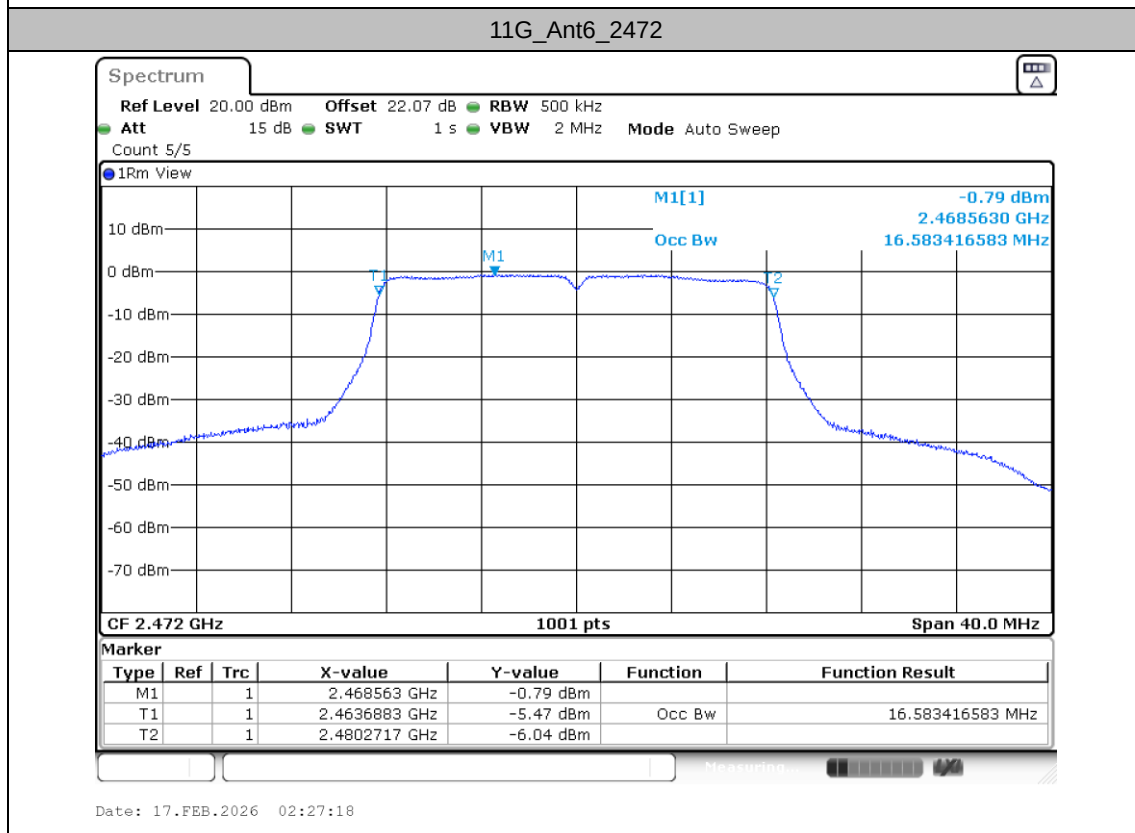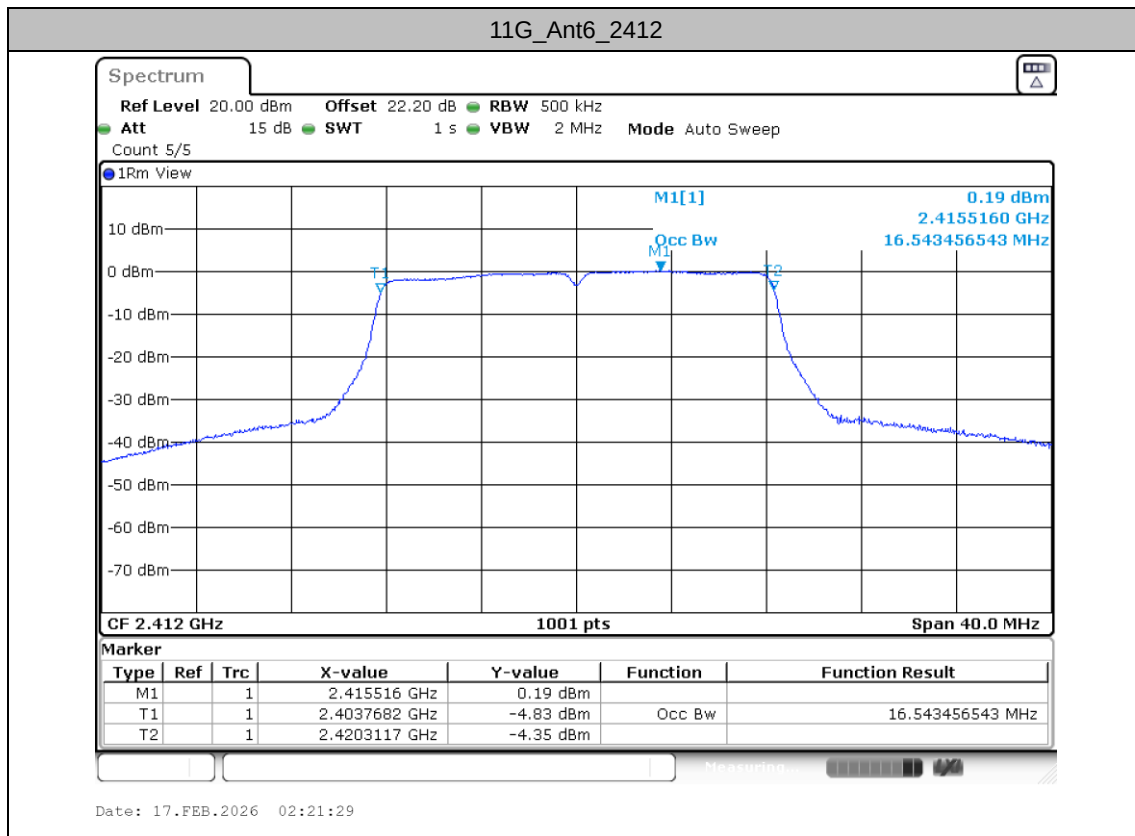

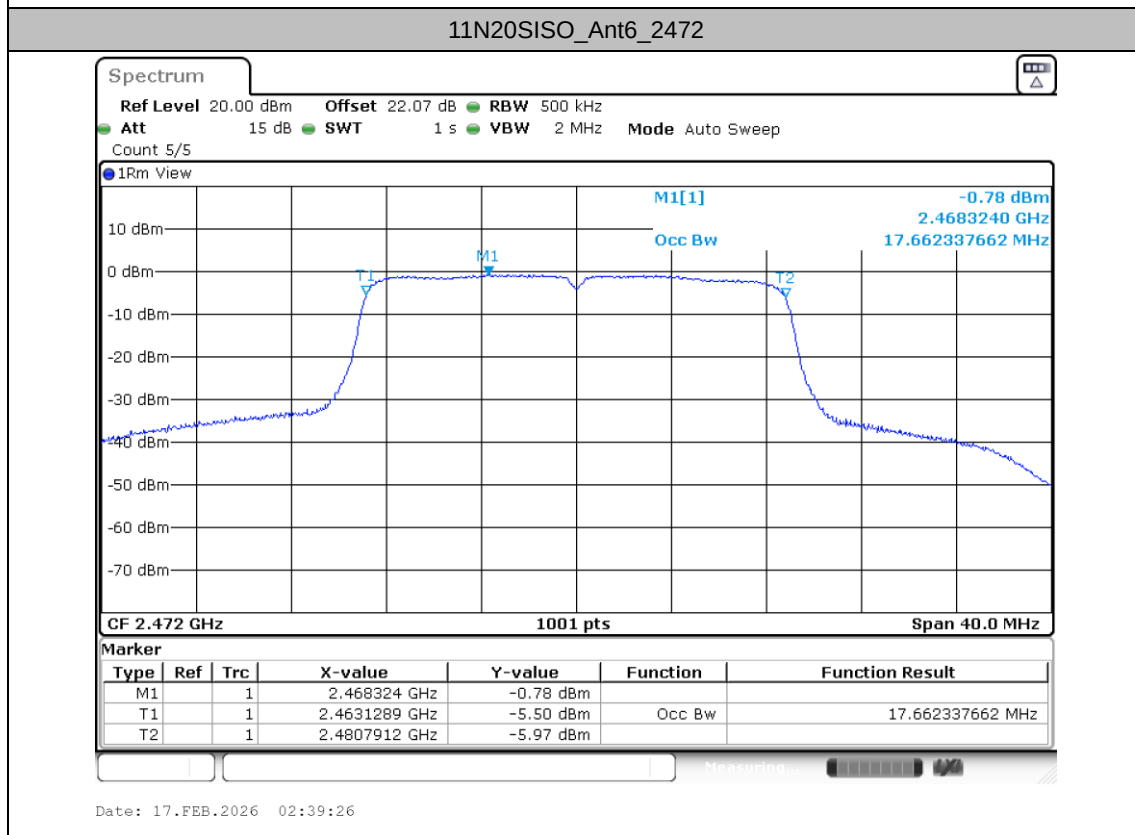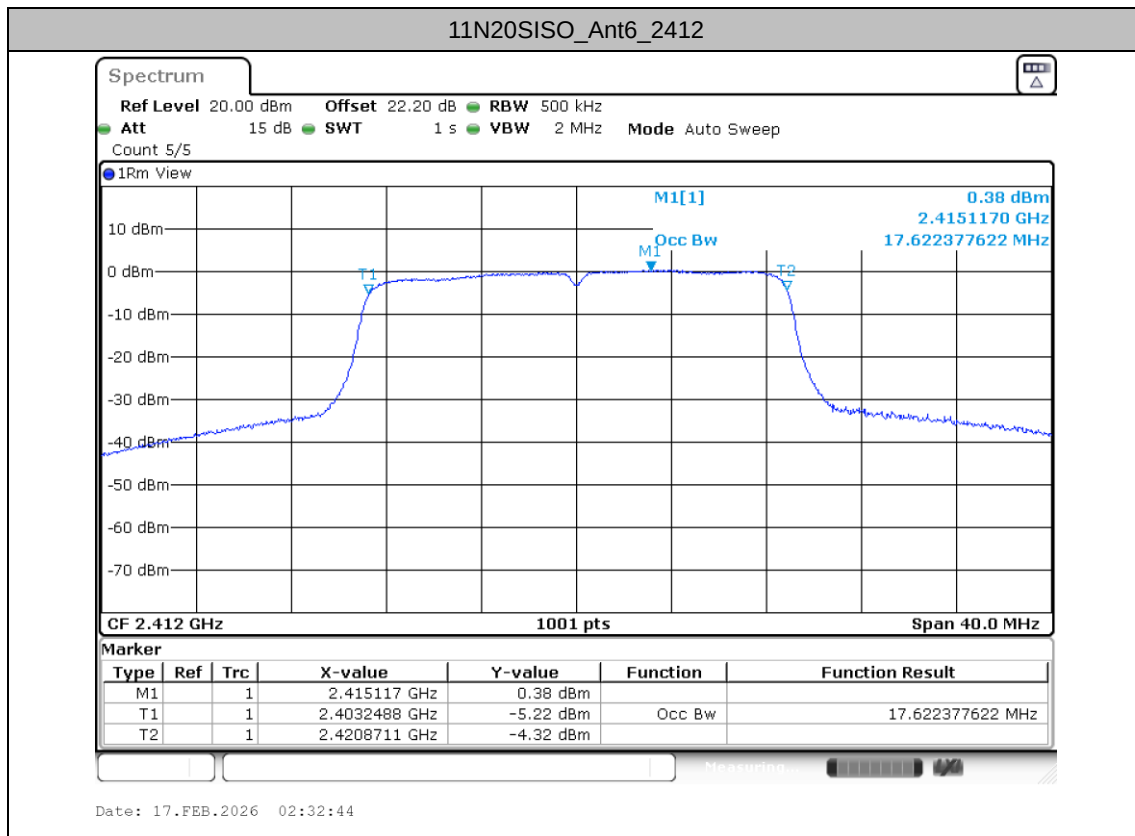




11N40SISO_Ant6_2422

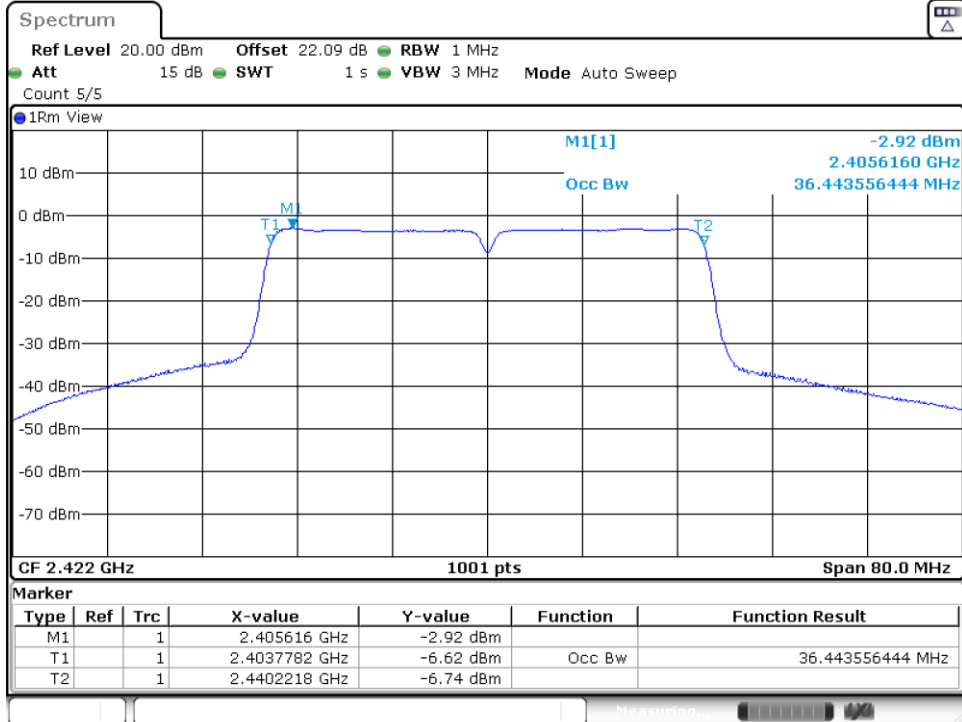

Date: 17.FEB.2026 02:45:13

11N40SISO_Ant6_2462

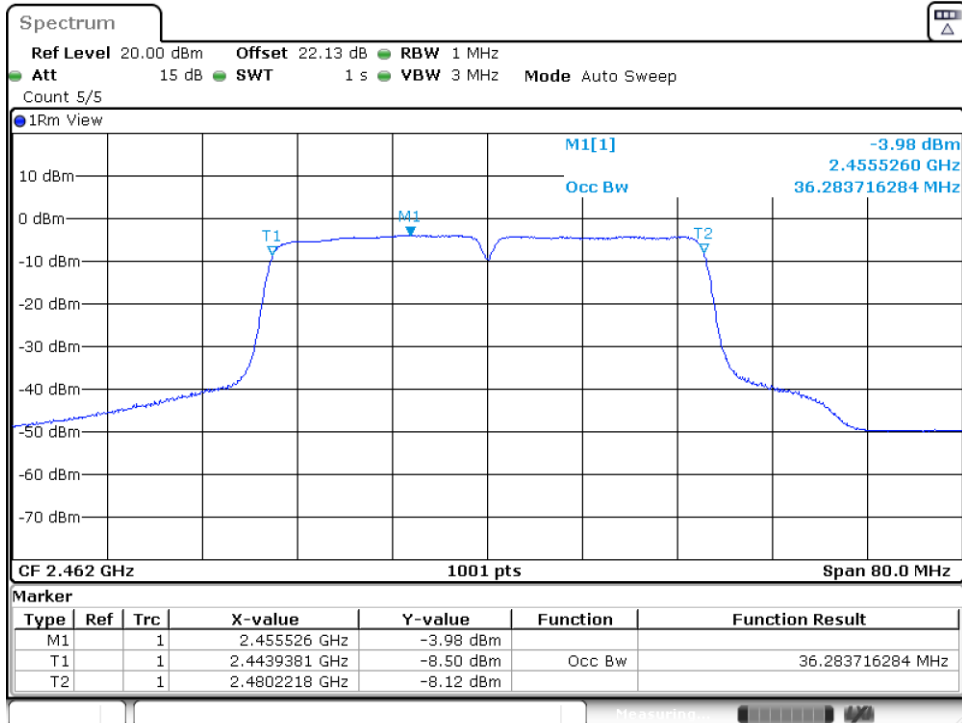


Date: 17.FEB.2026 02:55:22

Transmitter Unwanted Emissions In The Out-Of-Band Domain


Test Result

TestMode	Antenna	Freq(MHz)	Freq. [MHz]	Level [dBm/MHz]	Ant Factor[dBi]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11B	Ant6	2412	2387.31	-49.55	0.00	-49.55	-20.00	PASS
			2399.5	-35.08	0.00	-35.08	-10.00	PASS
			2485	-54.83	0.00	-54.83	-10.00	PASS
			2496.19	-55.29	0.00	-55.29	-20.00	PASS
		2472	2388.15	-55.53	0.00	-55.53	-20.00	PASS
			2397.5	-54.63	0.00	-54.63	-10.00	PASS
			2484	-34.56	0.00	-34.56	-10.00	PASS
			2497.35	-55.3	0.00	-55.3	-20.00	PASS
11G	Ant6	2412	2382.96	-48.78	0.00	-48.78	-20.00	PASS
			2399.5	-23.08	0.00	-23.08	-10.00	PASS
			2499	-55.16	0.00	-55.16	-10.00	PASS
			2510.54	-55.61	0.00	-55.61	-20.00	PASS
		2472	2375.92	-55.84	0.00	-55.84	-20.00	PASS
			2391.5	-54.39	0.00	-54.39	-10.00	PASS
			2484	-22.28	0.00	-22.28	-10.00	PASS
			2514.58	-55.39	0.00	-55.39	-20.00	PASS
11N20SISO	Ant6	2412	2381.88	-47.31	0.00	-47.31	-20.00	PASS
			2399.5	-19.75	0.00	-19.75	-10.00	PASS
			2487	-55.08	0.00	-55.08	-10.00	PASS
			2517.62	-55.46	0.00	-55.46	-20.00	PASS
		2472	2370.84	-55.78	0.00	-55.78	-20.00	PASS
			2399.5	-53.73	0.00	-53.73	-10.00	PASS
			2484	-19.55	0.00	-19.55	-10.00	PASS
			2506.66	-55.13	0.00	-55.13	-20.00	PASS
11N40SISO	Ant6	2422	2359.06	-56.14	0.00	-56.14	-20.00	PASS
			2399.5	-23.76	0.00	-23.76	-10.00	PASS
			2484	-53.39	0.00	-53.39	-10.00	PASS
			2542.44	-55.09	0.00	-55.09	-20.00	PASS
		2462	2327.93	-56.25	0.00	-56.25	-20.00	PASS
			2399.5	-53.02	0.00	-53.02	-10.00	PASS
			2484	-26.55	0.00	-26.55	-10.00	PASS
			2540.28	-55.42	0.00	-55.42	-20.00	PASS


Test Graphs

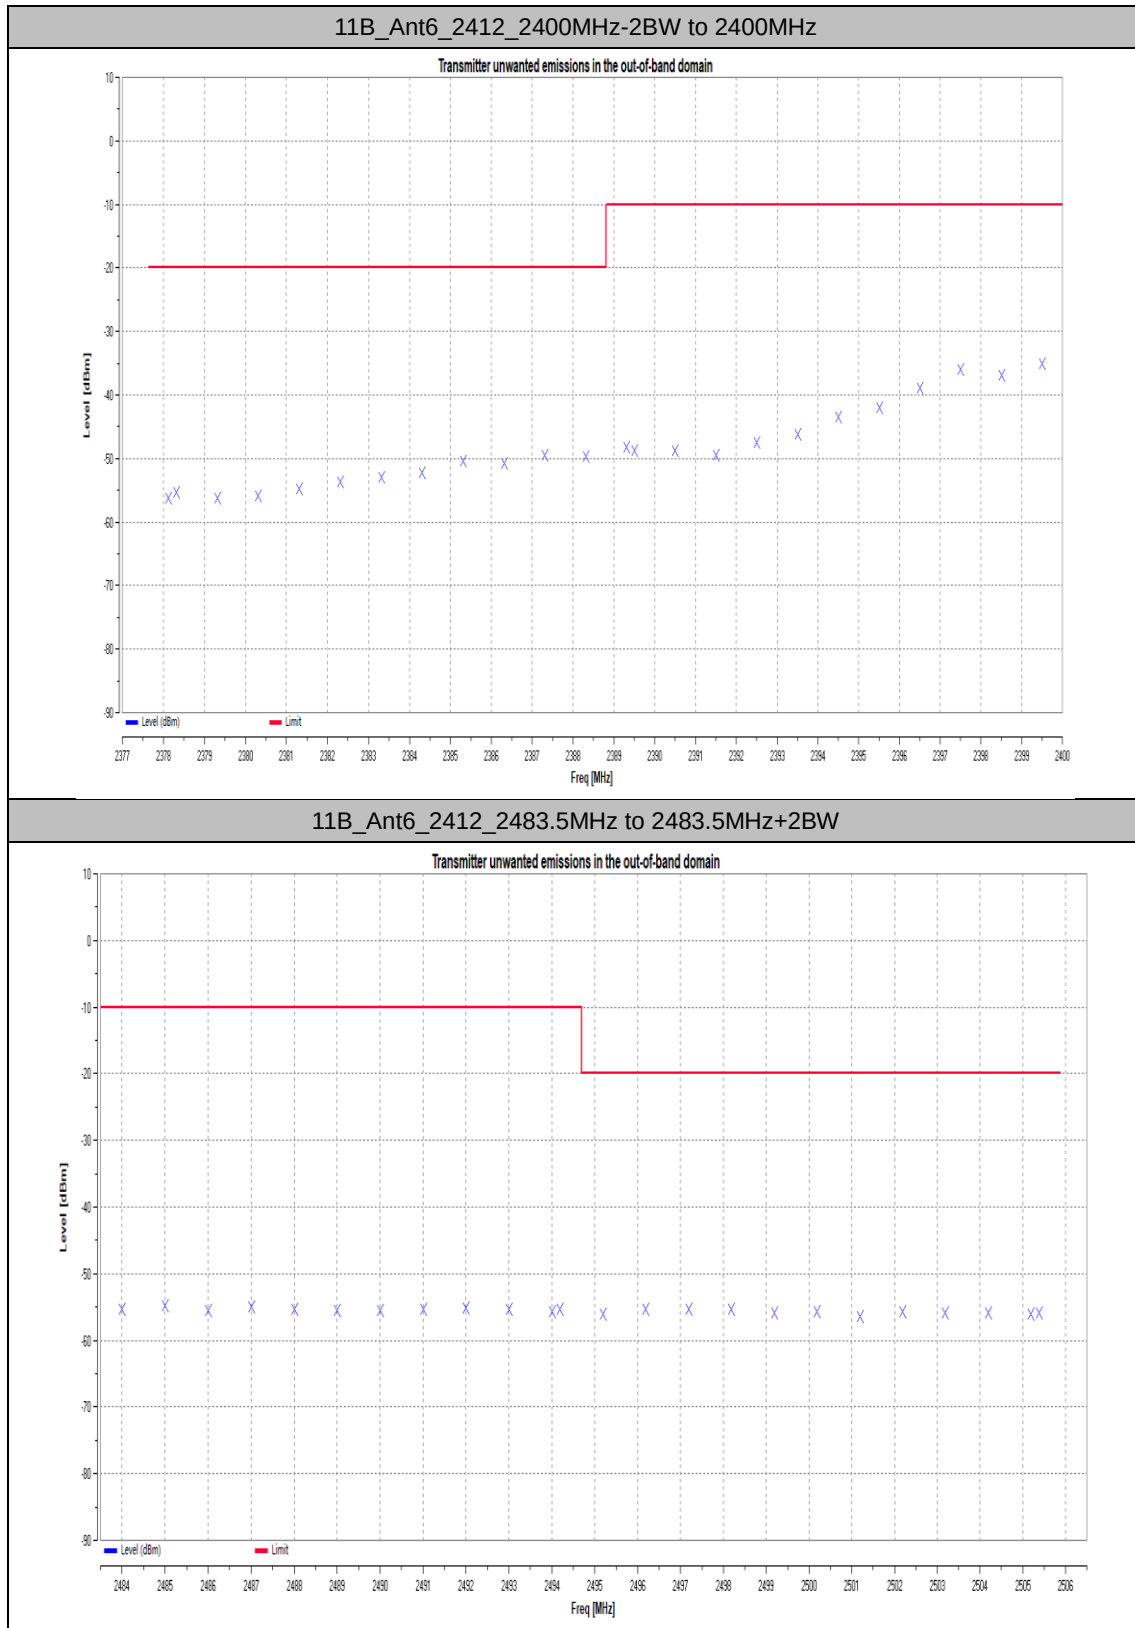


11B_Ant6_2472_2400MHz-2BW to 2400MHz

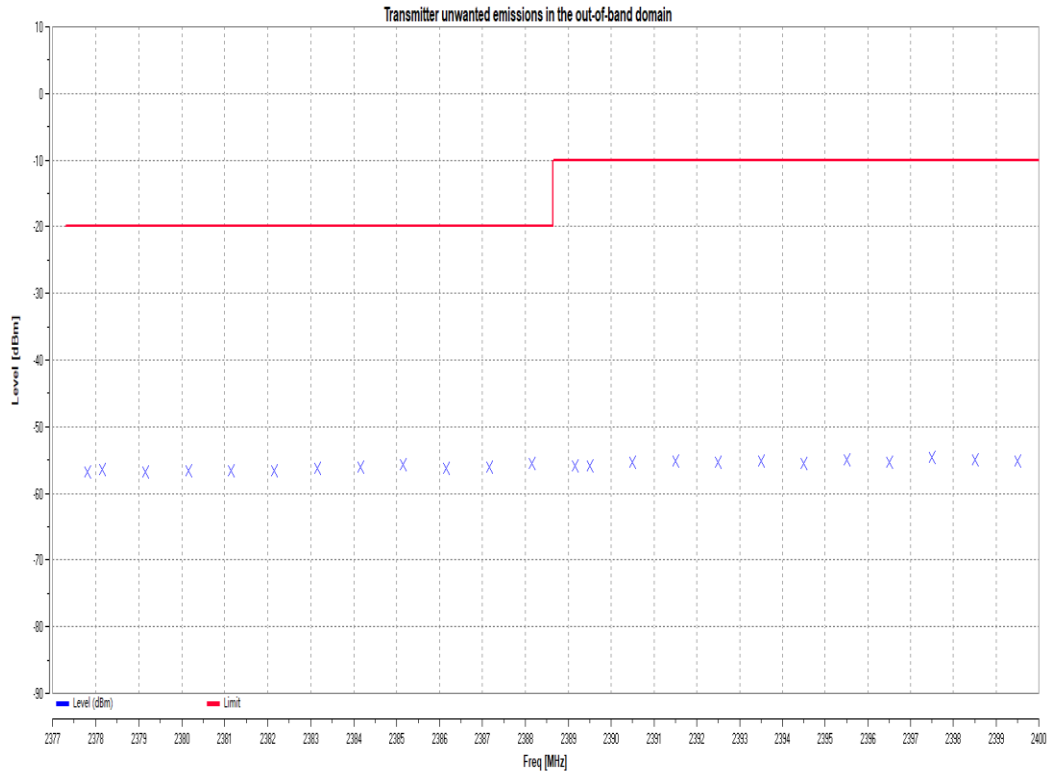


11B_Ant6_2472_2483.5MHz to 2483.5MHz+2BW

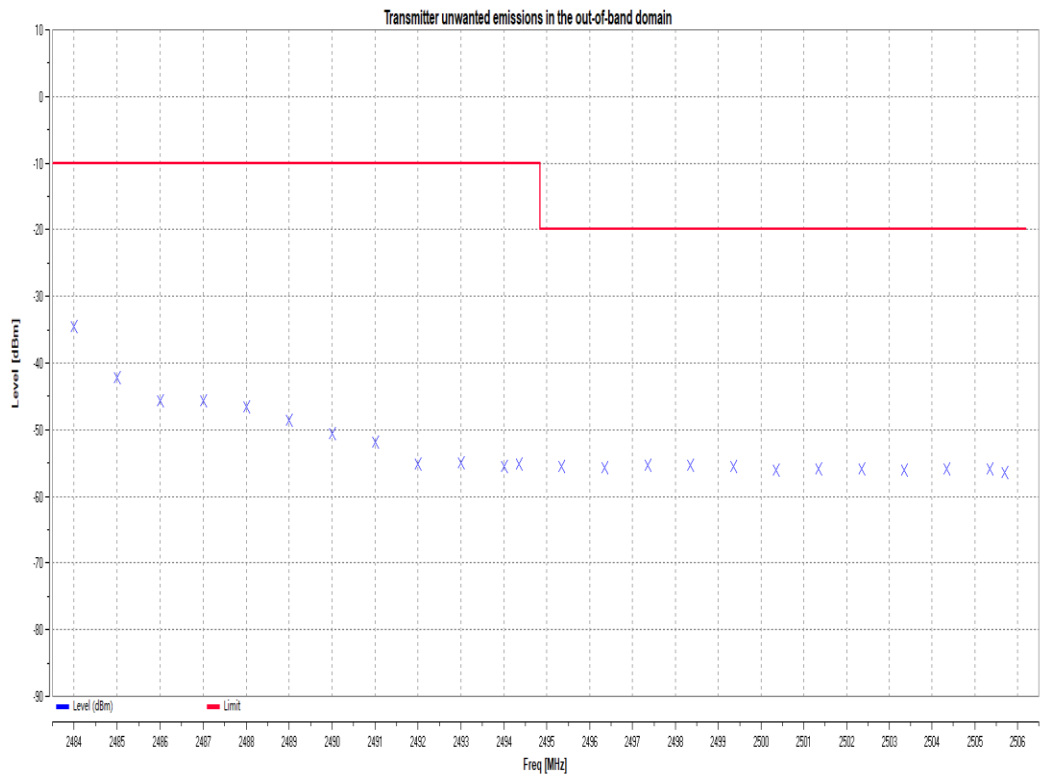


11G_Ant6_2412_2400MHz-2BW to 2400MHz

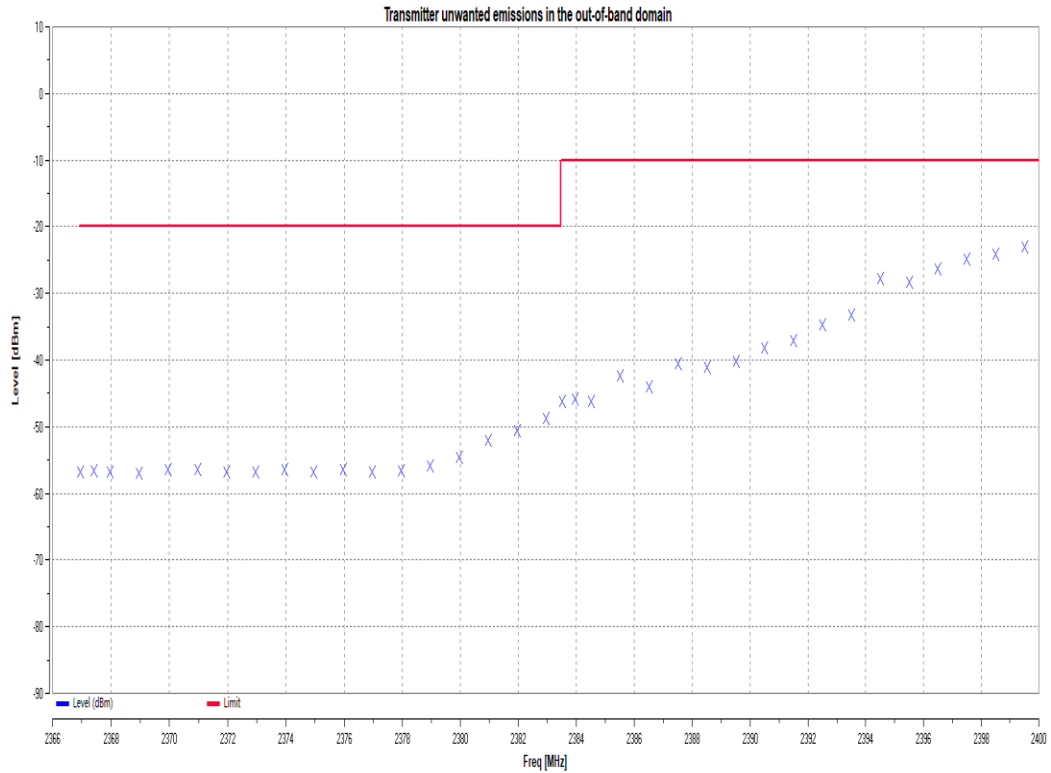


11G_Ant6_2412_2483.5MHz to 2483.5MHz+2BW

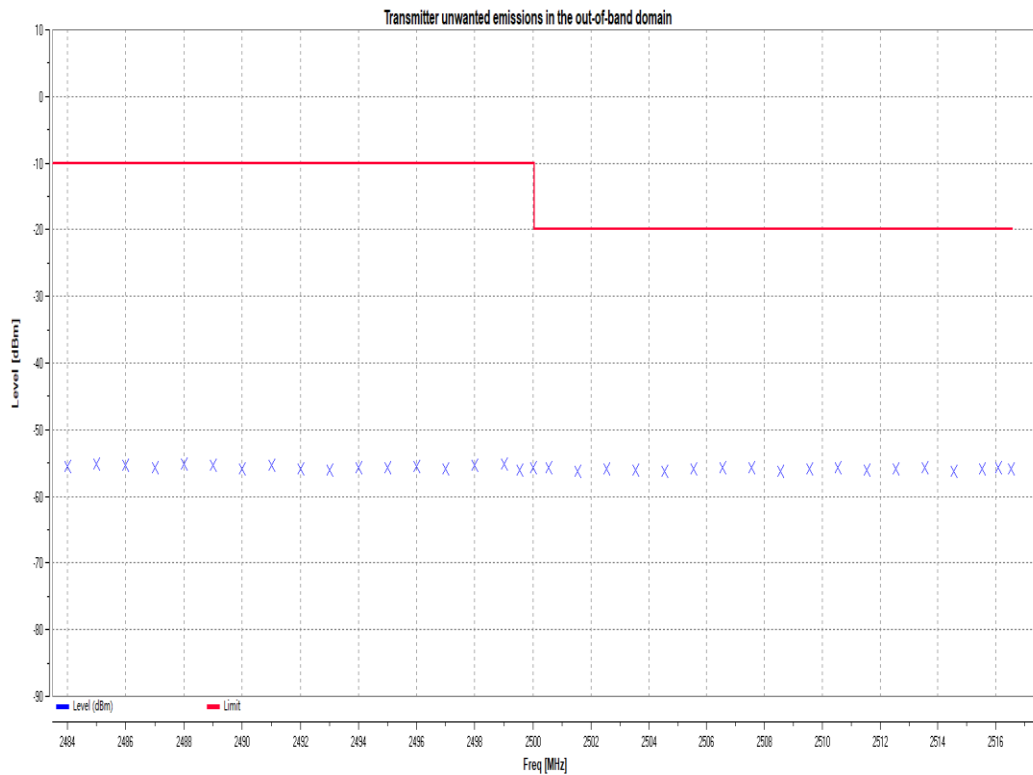


11G_Ant6_2472_2400MHz-2BW to 2400MHz

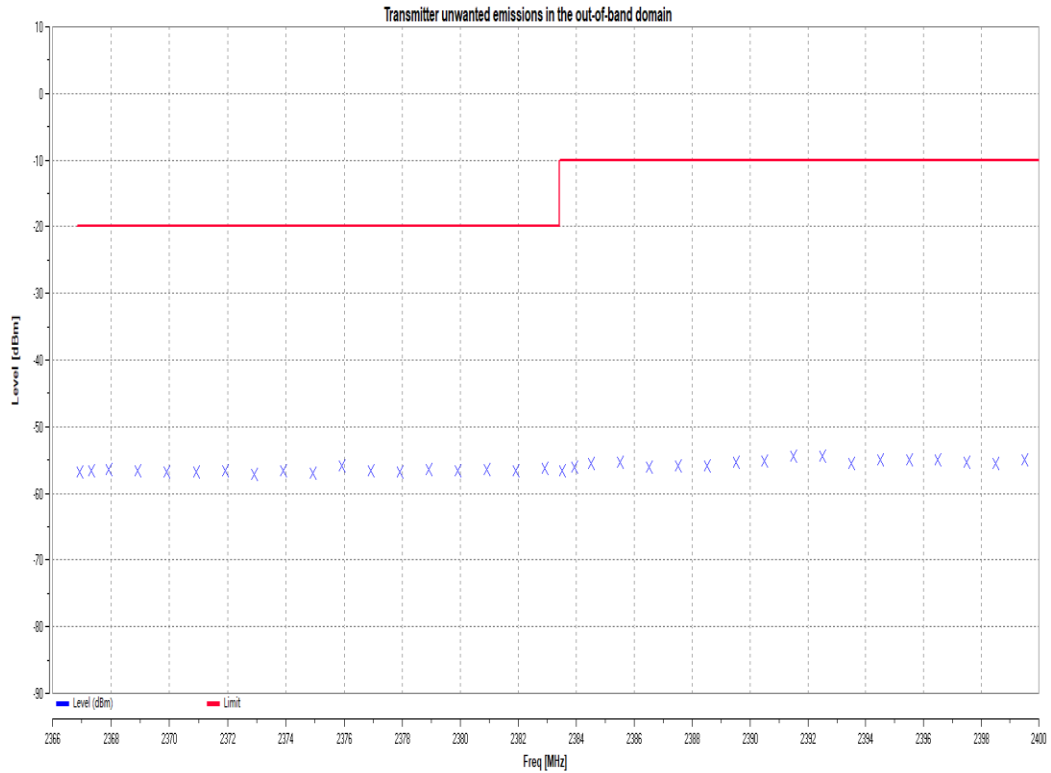


11G_Ant6_2472_2483.5MHz to 2483.5MHz+2BW

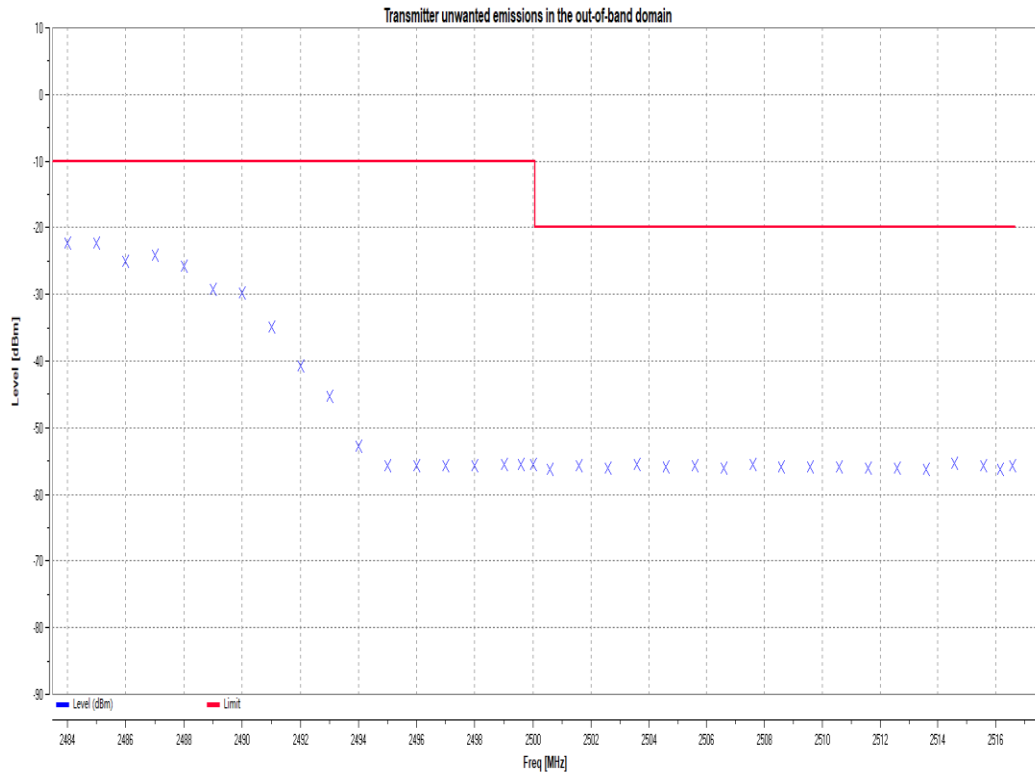


11N20SISO_Ant6_2412_2400MHz-2BW to 2400MHz

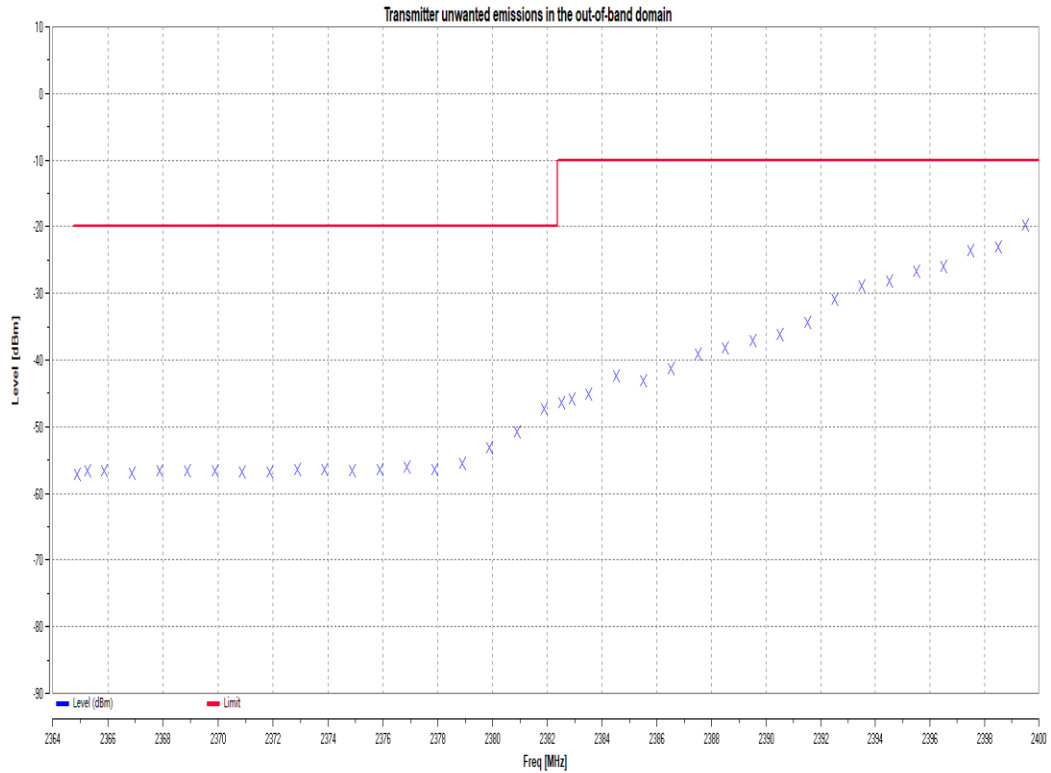


11N20SISO_Ant6_2412_2483.5MHz to 2483.5MHz+2BW

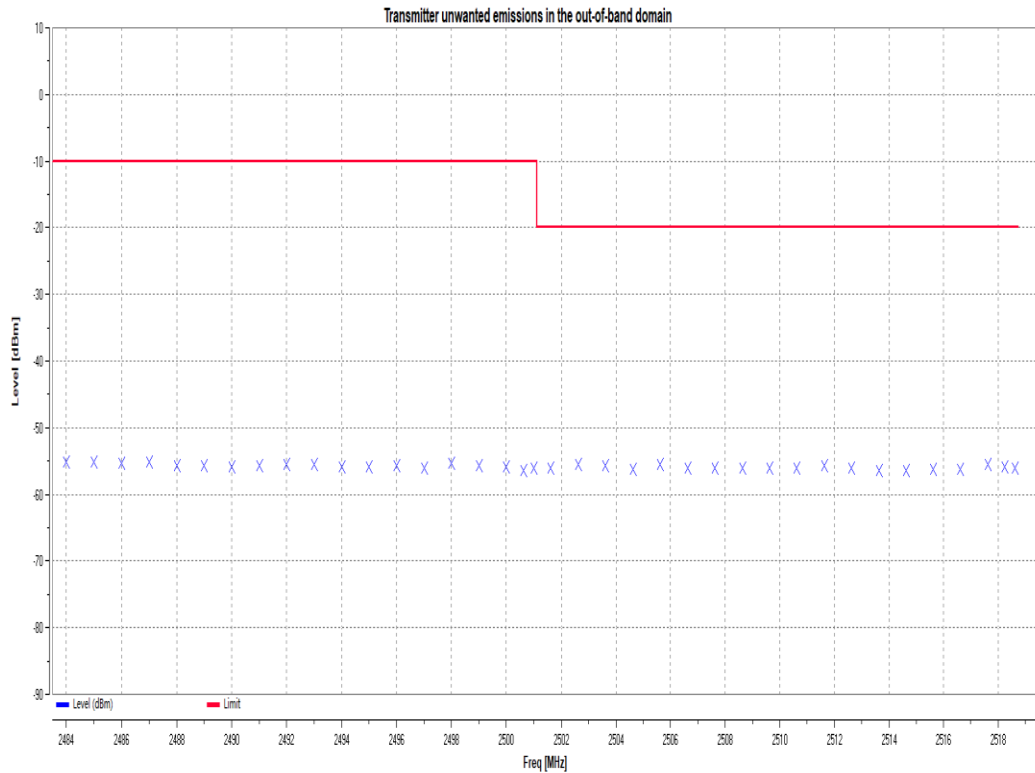


11N20SISO_Ant6_2472_2400MHz-2BW to 2400MHz

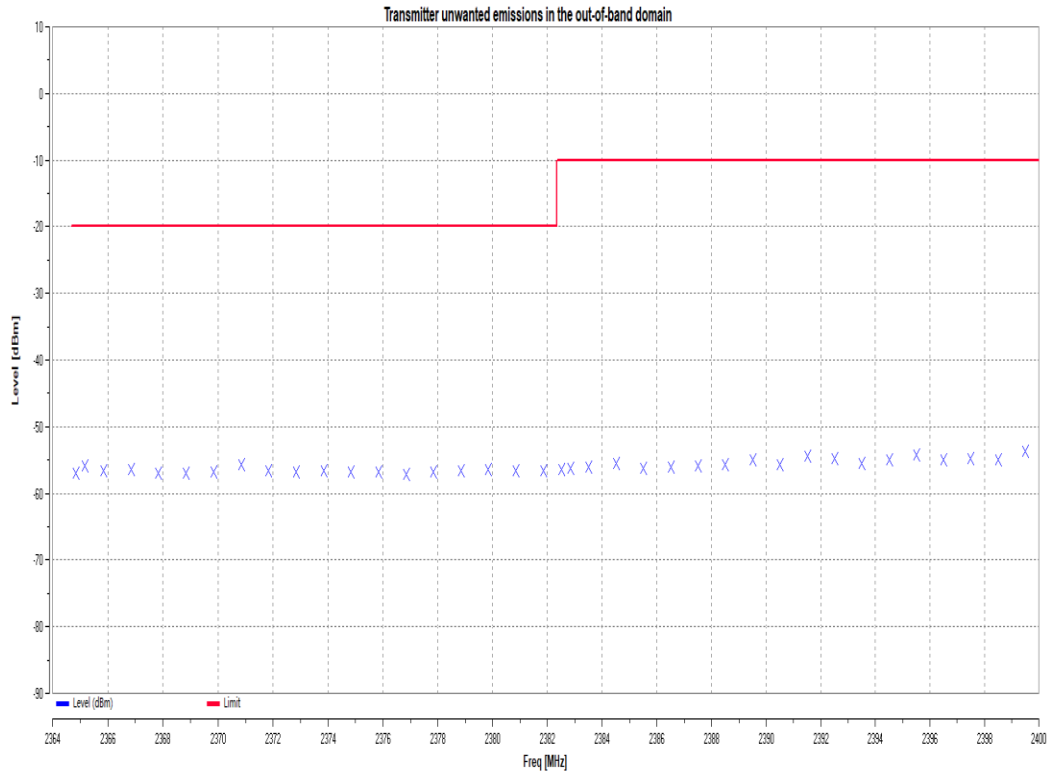


11N20SISO_Ant6_2472_2483.5MHz to 2483.5MHz+2BW

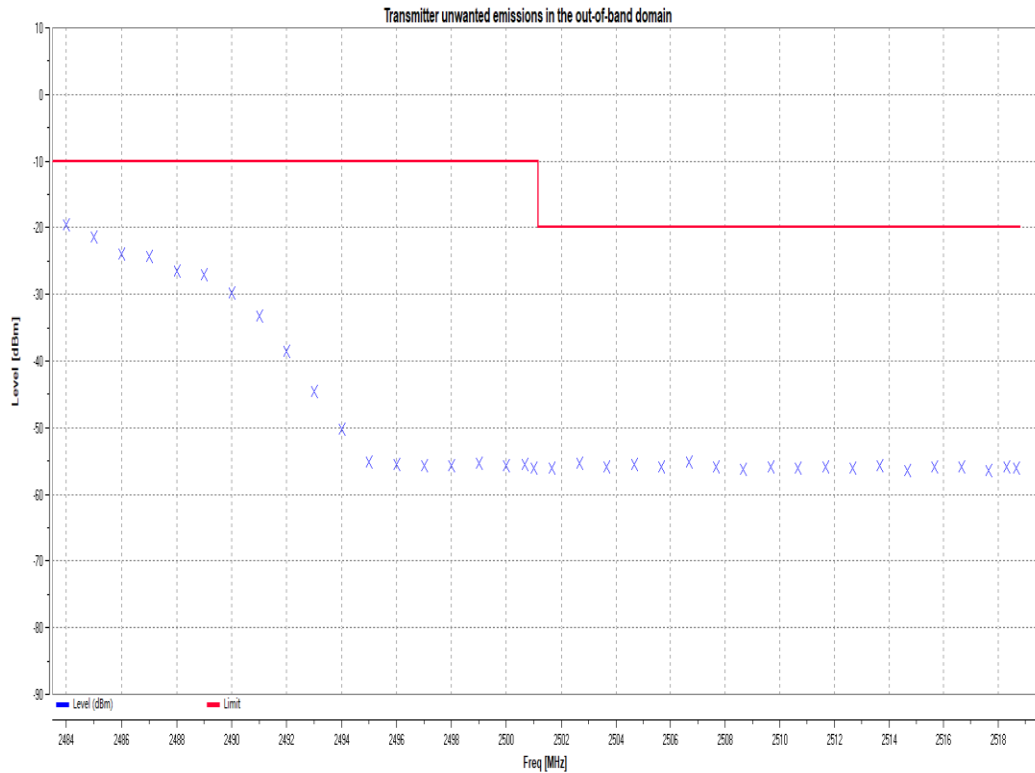


11N40SISO_Ant6_2422_2400MHz-2BW to 2400MHz

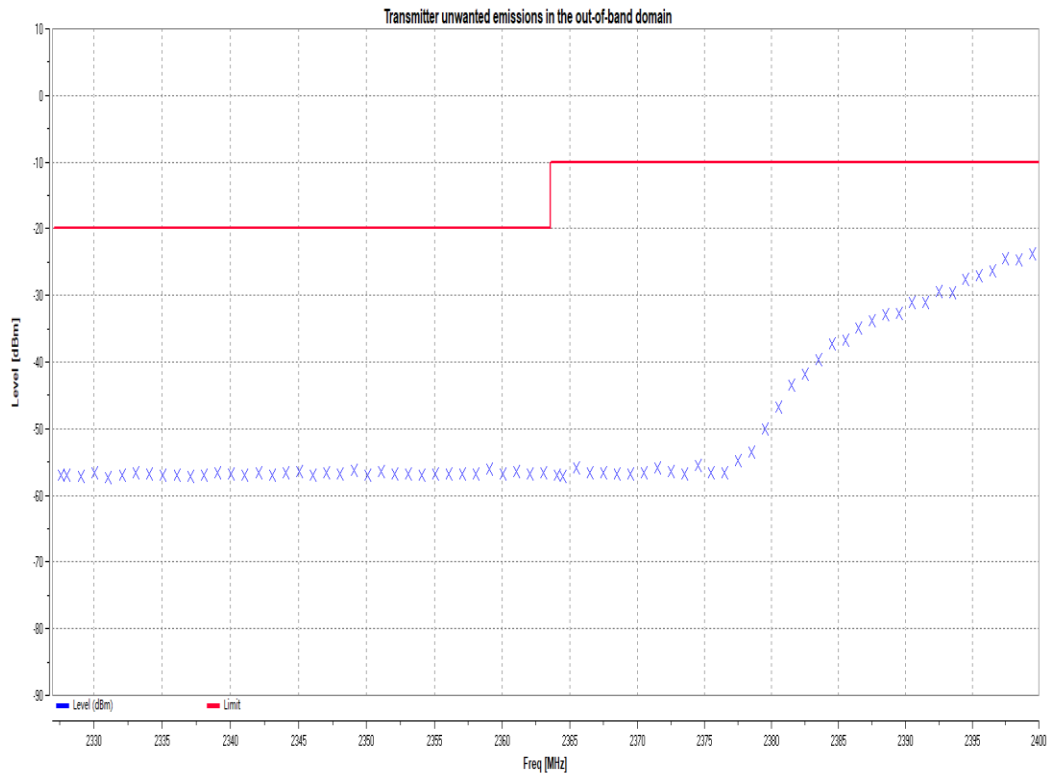


11N40SISO_Ant6_2422_2483.5MHz to 2483.5MHz+2BW

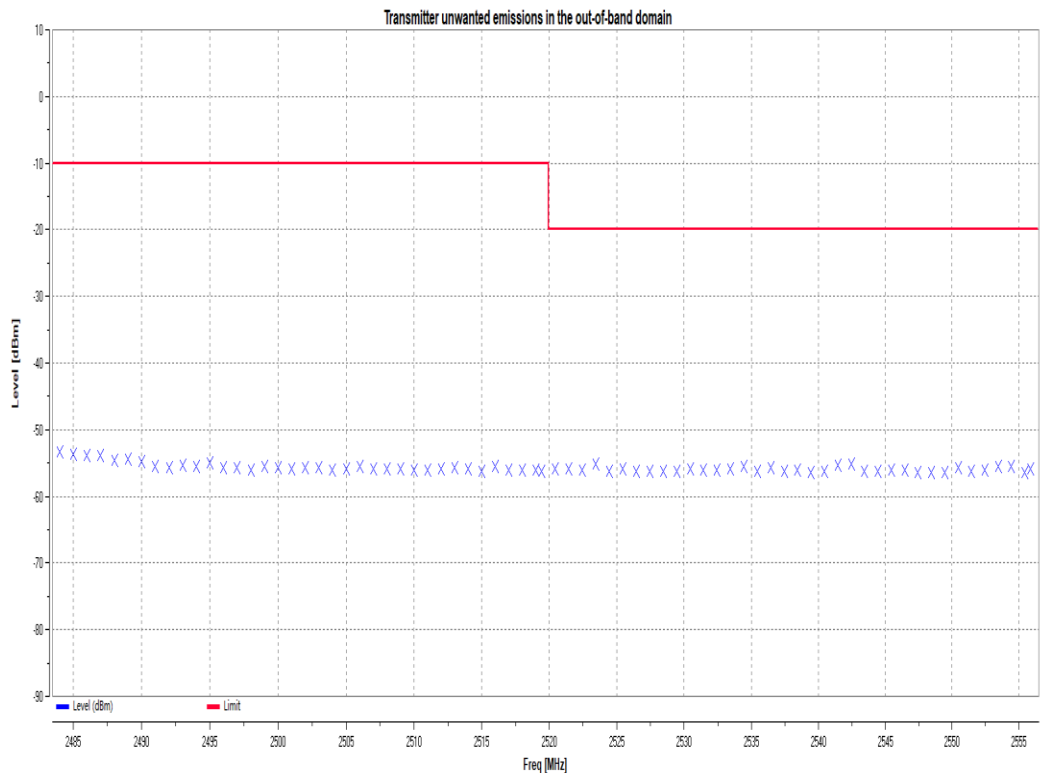

11N40SISO_Ant6_2462_2400MHz-2BW to 2400MHz

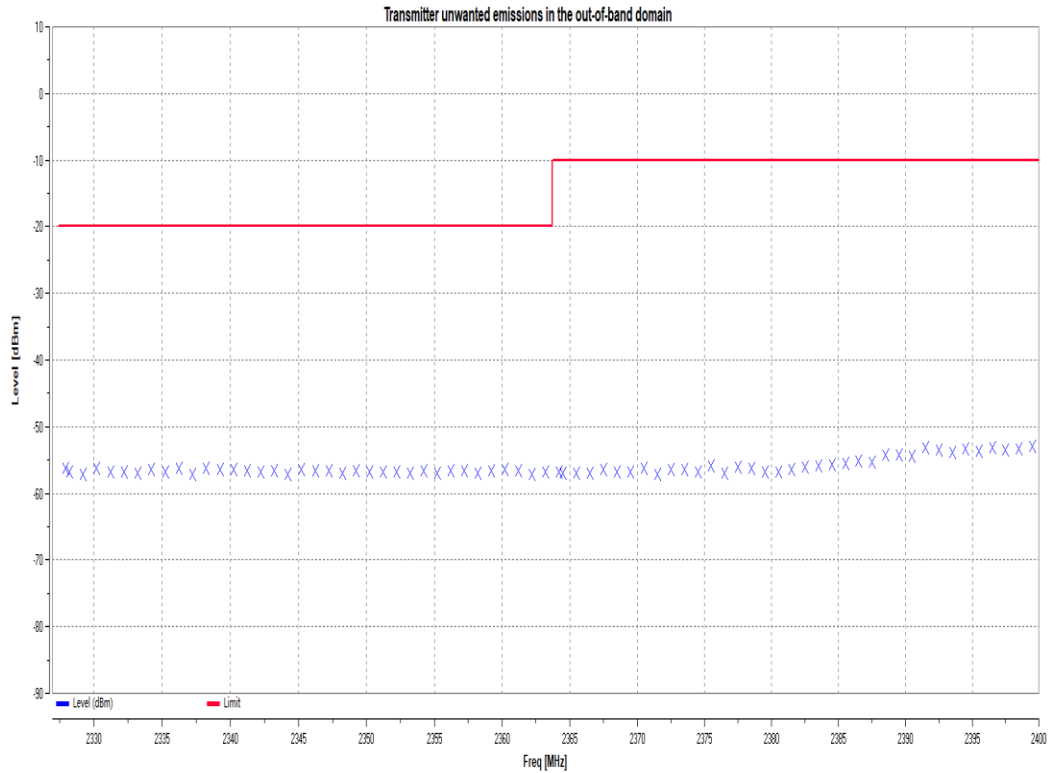

11N40SISO_Ant6_2462_2483.5MHz to 2483.5MHz+2BW

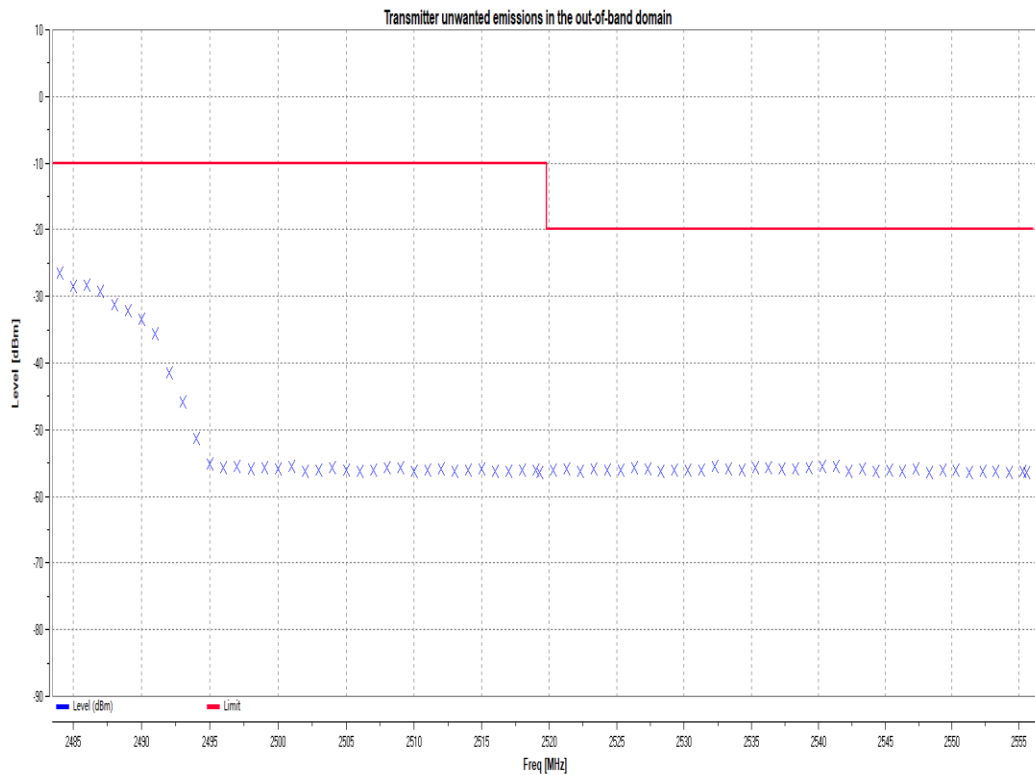



Appendix B Radiated Spurious Emission Test Data

Test Engineer :	Juggler Zhang	Relative Humidity :	41~42%
		Temperature :	21~22℃



Radiated Spurious Emission Test Modes



Antenna	Mode	TX/RX	Test Function	Condition	Modulation	Channel	Frequency	Axis
6	Mode 1	Tx	Bluetooth	1DH5	GFSK	CH00	2402	X
6	Mode 2	Tx	Bluetooth	1DH5	GFSK	CH78	2480	X
6	Mode 3	Tx	Bluetooth LE	1Mbps	GFSK	CH00	2402	X
6	Mode 4	Tx	Bluetooth LE	1Mbps	GFSK	CH39	2480	X
6	Mode 5	Tx	Bluetooth LE	2Mbps	GFSK	CH01	2404	X
6	Mode 6	Tx	Bluetooth LE	2Mbps	GFSK	CH38	2478	X
6	Mode 7	Tx	802.11b	1Mbps	DSSS	CH01	2412	X
6	Mode 8	Tx	802.11b	1Mbps	DSSS	CH03	2472	X
6	Mode 9	Tx	802.11g	6Mbps	OFDM	CH01	2412	X
6	Mode 10	Tx	802.11g	6Mbps	OFDM	CH13	2472	X
6	Mode 11	Tx	802.11n HT20	MCS0	OFDM	CH01	2412	X
6	Mode 12	Tx	802.11n HT20	MCS0	OFDM	CH13	2472	X
6	Mode 13	Tx	802.11n HT40	MCS0	OFDM	CH03	2422	X
6	Mode 14	Tx	802.11n HT40	MCS0	OFDM	CH11	2462	X
6	Mode 15	Rx	Bluetooth	1DH5	GFSK	CH00	2402	X
6	Mode 16	Rx	Bluetooth LE	1Mbps	GFSK	CH39	2480	X
6	Mode 17	Rx	802.11b	1Mbps	DSSS	CH03	2472	X



Summary of each worse mode



Mode	Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization	Result
1	12696.91	-38.85	-30.00	-8.85	Horizontal	Pass
2	12625.41	-39.16	-30.00	-9.16	Horizontal	Pass
3	12689.87	-39.45	-30.00	-9.45	Horizontal	Pass
4	12588.57	-39.32	-30.00	-9.32	Horizontal	Pass
5	12744.58	-40.20	-30.00	-10.20	Horizontal	Pass
6	12683.37	-40.02	-30.00	-10.02	Horizontal	Pass
7	2833.50	-46.93	-30.00	-16.93	Horizontal	Pass
8	12678.50	-39.73	-30.00	-9.73	Horizontal	Pass
9	12704.50	-39.88	-30.00	-9.88	Horizontal	Pass
10	12642.74	-40.38	-30.00	-10.38	Horizontal	Pass
11	12742.96	-40.45	-30.00	-10.45	Horizontal	Pass
12	12684.46	-40.02	-30.00	-10.02	Horizontal	Pass
13	12673.08	-40.13	-30.00	-10.13	Horizontal	Pass
14	12702.87	-40.25	-30.00	-10.25	Horizontal	Pass
15	11683.96	-55.41	-47.00	-8.41	Vertical	Pass
16	11712.03	-55.51	-47.00	-8.51	Vertical	Pass
17	31.94	-62.83	-57.00	-5.83	Horizontal	Pass

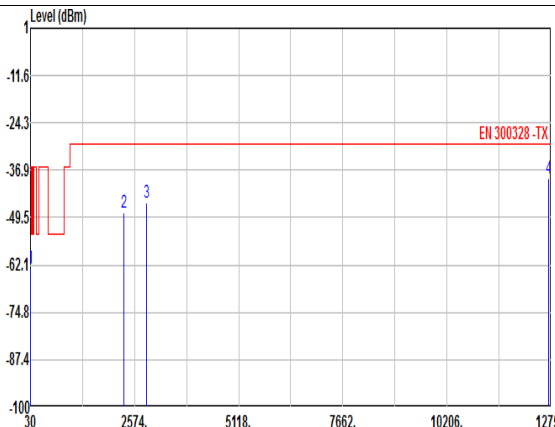
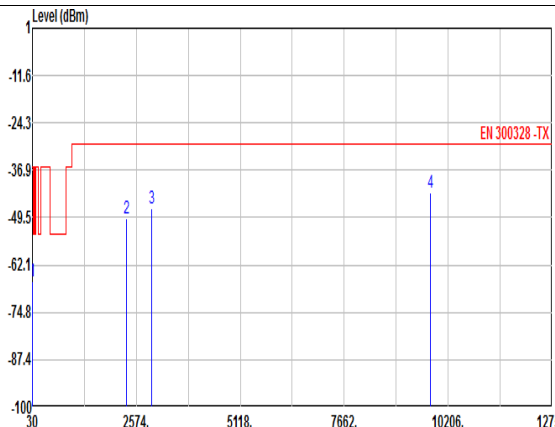


Mode	1																																																																																																							
	Bluetooth GFSK_CH00																																																																																																							
Ant	6																																																																																																							
Pol.	Horizontal				Vertical																																																																																																			
Tx																																																																																																								
	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr><tr><td>1</td><td>31.94</td><td>-63.15</td><td>-27.15</td><td>-36.00</td><td>-66.24</td><td>3.09</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2310.00</td><td>-47.99</td><td>-17.99</td><td>-30.00</td><td>-67.36</td><td>19.37</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>2860.00</td><td>-45.60</td><td>-15.60</td><td>-30.00</td><td>-66.97</td><td>21.37</td><td>HORIZONTAL</td></tr><tr><td>4 @</td><td>12696.91</td><td>-38.85</td><td>-8.85</td><td>-30.00</td><td>-77.04</td><td>38.19</td><td>HORIZONTAL</td></tr></table>				Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	31.94	-63.15	-27.15	-36.00	-66.24	3.09	HORIZONTAL	2	2310.00	-47.99	-17.99	-30.00	-67.36	19.37	HORIZONTAL	3	2860.00	-45.60	-15.60	-30.00	-66.97	21.37	HORIZONTAL	4 @	12696.91	-38.85	-8.85	-30.00	-77.04	38.19	HORIZONTAL	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr><tr><td>1</td><td>31.94</td><td>-66.47</td><td>-30.47</td><td>-36.00</td><td>-67.53</td><td>1.06</td><td>VERTICAL</td></tr><tr><td>2</td><td>2331.00</td><td>-49.71</td><td>-19.71</td><td>-30.00</td><td>-65.77</td><td>16.06</td><td>VERTICAL</td></tr><tr><td>3</td><td>2951.00</td><td>-47.15</td><td>-17.15</td><td>-30.00</td><td>-65.47</td><td>18.32</td><td>VERTICAL</td></tr><tr><td>4 @</td><td>9769.58</td><td>-42.73</td><td>-12.73</td><td>-30.00</td><td>-77.07</td><td>34.34</td><td>VERTICAL</td></tr></table>				Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	31.94	-66.47	-30.47	-36.00	-67.53	1.06	VERTICAL	2	2331.00	-49.71	-19.71	-30.00	-65.77	16.06	VERTICAL	3	2951.00	-47.15	-17.15	-30.00	-65.47	18.32	VERTICAL	4 @	9769.58	-42.73	-12.73	-30.00	-77.07	34.34	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																																
		MHz	dBm	dB	dBm	dBm	dB																																																																																																	
	1	31.94	-63.15	-27.15	-36.00	-66.24	3.09	HORIZONTAL																																																																																																
2	2310.00	-47.99	-17.99	-30.00	-67.36	19.37	HORIZONTAL																																																																																																	
3	2860.00	-45.60	-15.60	-30.00	-66.97	21.37	HORIZONTAL																																																																																																	
4 @	12696.91	-38.85	-8.85	-30.00	-77.04	38.19	HORIZONTAL																																																																																																	
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																																	
	MHz	dBm	dB	dBm	dBm	dB																																																																																																		
1	31.94	-66.47	-30.47	-36.00	-67.53	1.06	VERTICAL																																																																																																	
2	2331.00	-49.71	-19.71	-30.00	-65.77	16.06	VERTICAL																																																																																																	
3	2951.00	-47.15	-17.15	-30.00	-65.47	18.32	VERTICAL																																																																																																	
4 @	9769.58	-42.73	-12.73	-30.00	-77.07	34.34	VERTICAL																																																																																																	

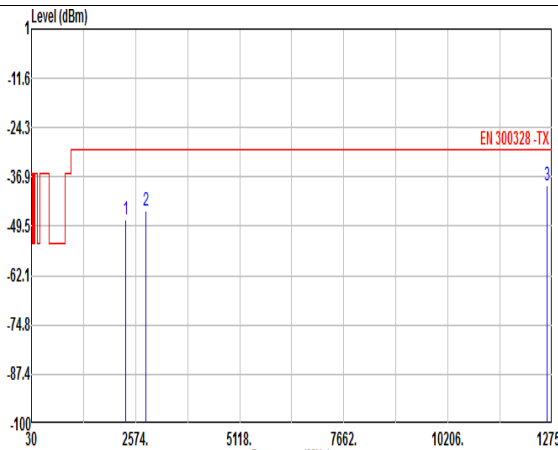
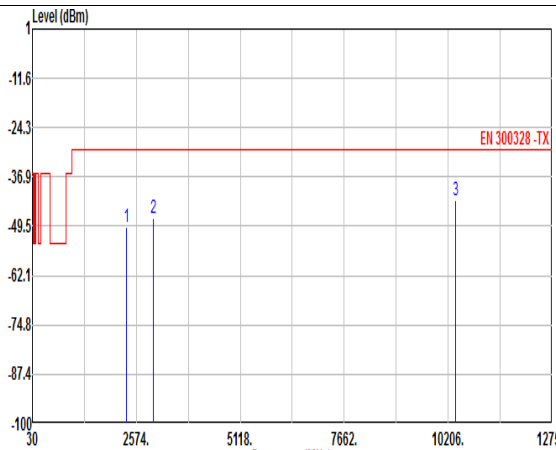
Mode	2																																																																																						
	Bluetooth GFSK_CH78																																																																																						
Ant	6																																																																																						
Pol.	Horizontal				Vertical																																																																																		
Tx																																																																																							
	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2338.00</td><td>-47.66</td><td>-17.66</td><td>-30.00</td><td>-67.11</td><td>19.45</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2816.00</td><td>-45.39</td><td>-15.39</td><td>-30.00</td><td>-66.83</td><td>21.44</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12625.41</td><td>-39.16</td><td>-9.16</td><td>-30.00</td><td>-77.09</td><td>37.93</td><td>HORIZONTAL</td></tr></tbody></table>				Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2338.00	-47.66	-17.66	-30.00	-67.11	19.45	HORIZONTAL	2	2816.00	-45.39	-15.39	-30.00	-66.83	21.44	HORIZONTAL	3 @	12625.41	-39.16	-9.16	-30.00	-77.09	37.93	HORIZONTAL	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2338.33</td><td>-49.52</td><td>-19.52</td><td>-30.00</td><td>-65.60</td><td>16.08</td><td>VERTICAL</td></tr><tr><td>2</td><td>2988.00</td><td>-47.26</td><td>-17.26</td><td>-30.00</td><td>-65.71</td><td>18.45</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>10379.54</td><td>-42.79</td><td>-12.79</td><td>-30.00</td><td>-76.49</td><td>33.70</td><td>VERTICAL</td></tr></tbody></table>			Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2338.33	-49.52	-19.52	-30.00	-65.60	16.08	VERTICAL	2	2988.00	-47.26	-17.26	-30.00	-65.71	18.45	VERTICAL	3 @	10379.54	-42.79	-12.79	-30.00	-76.49	33.70	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																															
		MHz	dBm	dB	dBm	dBm	dB																																																																																
1	2338.00	-47.66	-17.66	-30.00	-67.11	19.45	HORIZONTAL																																																																																
2	2816.00	-45.39	-15.39	-30.00	-66.83	21.44	HORIZONTAL																																																																																
3 @	12625.41	-39.16	-9.16	-30.00	-77.09	37.93	HORIZONTAL																																																																																
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																
	MHz	dBm	dB	dBm	dBm	dB																																																																																	
1	2338.33	-49.52	-19.52	-30.00	-65.60	16.08	VERTICAL																																																																																
2	2988.00	-47.26	-17.26	-30.00	-65.71	18.45	VERTICAL																																																																																
3 @	10379.54	-42.79	-12.79	-30.00	-76.49	33.70	VERTICAL																																																																																

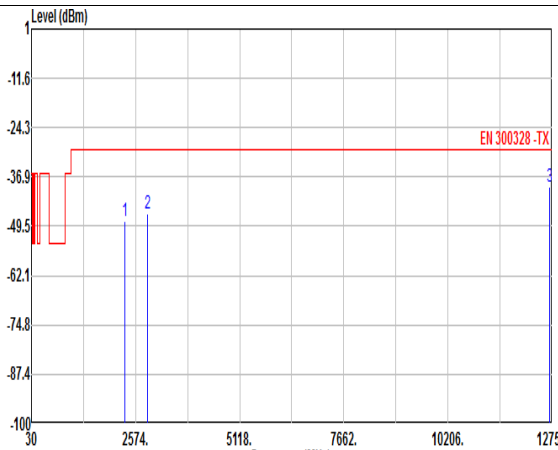
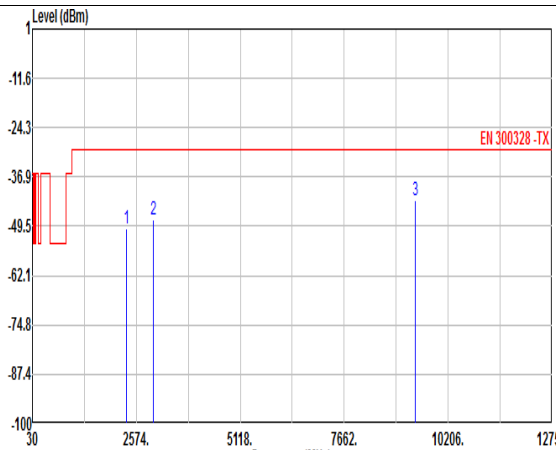
Mode	3																																																																																	
	Bluetooth LE GFSK_CH00																																																																																	
Ant	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Tx	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2311.67</td><td>-48.10</td><td>-18.10</td><td>-30.00</td><td>-67.47</td><td>19.37</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2864.33</td><td>-46.08</td><td>-16.08</td><td>-30.00</td><td>-67.44</td><td>21.36</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12689.87</td><td>-39.45</td><td>-9.45</td><td>-30.00</td><td>-77.61</td><td>38.16</td><td>HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2311.67	-48.10	-18.10	-30.00	-67.47	19.37	HORIZONTAL	2	2864.33	-46.08	-16.08	-30.00	-67.44	21.36	HORIZONTAL	3 @	12689.87	-39.45	-9.45	-30.00	-77.61	38.16	HORIZONTAL	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2334.67</td><td>-49.93</td><td>-19.93</td><td>-30.00</td><td>-66.01</td><td>16.08</td><td>VERTICAL</td></tr><tr><td>2</td><td>2992.33</td><td>-47.68</td><td>-17.68</td><td>-30.00</td><td>-66.14</td><td>18.46</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>9410.44</td><td>-43.01</td><td>-13.01</td><td>-30.00</td><td>-77.14</td><td>34.13</td><td>VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2334.67	-49.93	-19.93	-30.00	-66.01	16.08	VERTICAL	2	2992.33	-47.68	-17.68	-30.00	-66.14	18.46	VERTICAL	3 @	9410.44	-43.01	-13.01	-30.00	-77.14	34.13	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																										
		MHz	dBm	dB	dBm	dBm	dB																																																																											
	1	2311.67	-48.10	-18.10	-30.00	-67.47	19.37	HORIZONTAL																																																																										
2	2864.33	-46.08	-16.08	-30.00	-67.44	21.36	HORIZONTAL																																																																											
3 @	12689.87	-39.45	-9.45	-30.00	-77.61	38.16	HORIZONTAL																																																																											
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																											
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2334.67	-49.93	-19.93	-30.00	-66.01	16.08	VERTICAL																																																																											
2	2992.33	-47.68	-17.68	-30.00	-66.14	18.46	VERTICAL																																																																											
3 @	9410.44	-43.01	-13.01	-30.00	-77.14	34.13	VERTICAL																																																																											

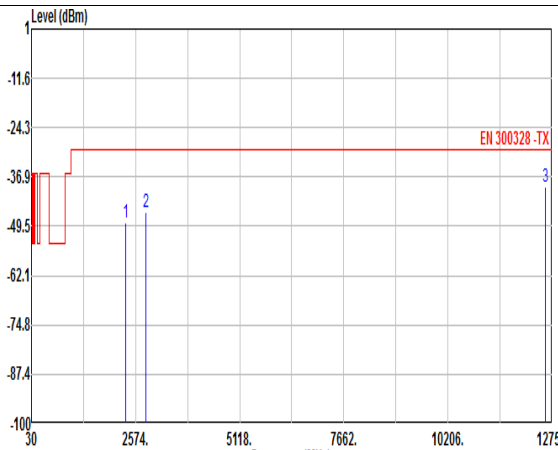
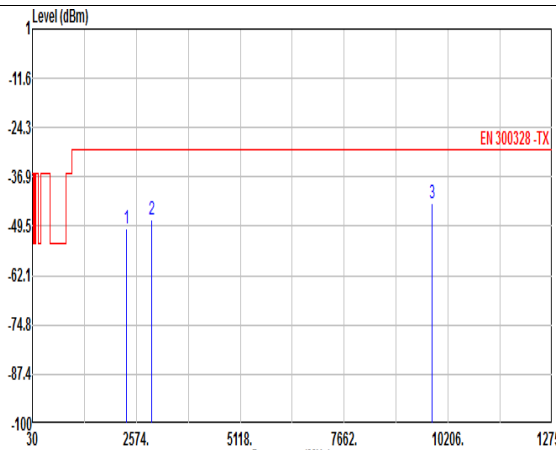
Mode	4																																																																																	
	Bluetooth LE GFSK_CH39																																																																																	
Ant	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Tx	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2340.67</td><td>-48.46</td><td>-18.46</td><td>-30.00</td><td>-67.92</td><td>19.46</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2820.67</td><td>-45.76</td><td>-15.76</td><td>-30.00</td><td>-67.18</td><td>21.42</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12588.57</td><td>-39.32</td><td>-9.32</td><td>-30.00</td><td>-77.12</td><td>37.80</td><td>HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2340.67	-48.46	-18.46	-30.00	-67.92	19.46	HORIZONTAL	2	2820.67	-45.76	-15.76	-30.00	-67.18	21.42	HORIZONTAL	3 @	12588.57	-39.32	-9.32	-30.00	-77.12	37.80	HORIZONTAL	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2338.00</td><td>-50.13</td><td>-20.13</td><td>-30.00</td><td>-66.21</td><td>16.08</td><td>VERTICAL</td></tr><tr><td>2</td><td>2953.67</td><td>-47.79</td><td>-17.79</td><td>-30.00</td><td>-66.12</td><td>18.33</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>9817.80</td><td>-43.42</td><td>-13.42</td><td>-30.00</td><td>-77.64</td><td>34.22</td><td>VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2338.00	-50.13	-20.13	-30.00	-66.21	16.08	VERTICAL	2	2953.67	-47.79	-17.79	-30.00	-66.12	18.33	VERTICAL	3 @	9817.80	-43.42	-13.42	-30.00	-77.64	34.22	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																										
		MHz	dBm	dB	dBm	dBm	dB																																																																											
	1	2340.67	-48.46	-18.46	-30.00	-67.92	19.46	HORIZONTAL																																																																										
2	2820.67	-45.76	-15.76	-30.00	-67.18	21.42	HORIZONTAL																																																																											
3 @	12588.57	-39.32	-9.32	-30.00	-77.12	37.80	HORIZONTAL																																																																											
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																											
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2338.00	-50.13	-20.13	-30.00	-66.21	16.08	VERTICAL																																																																											
2	2953.67	-47.79	-17.79	-30.00	-66.12	18.33	VERTICAL																																																																											
3 @	9817.80	-43.42	-13.42	-30.00	-77.64	34.22	VERTICAL																																																																											

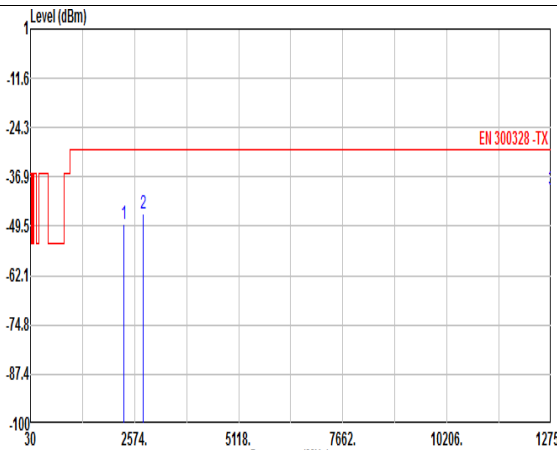
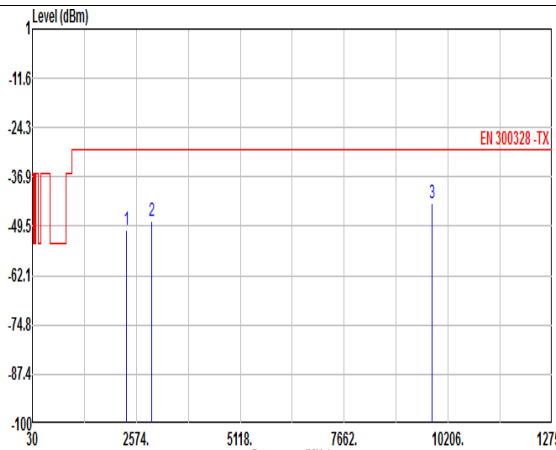
Mode	5																																																																																	
	Bluetooth LE GFSK_CH01																																																																																	
Ant	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Tx	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2306.00</td><td>-48.87</td><td>-18.87</td><td>-30.00</td><td>-68.23</td><td>19.36</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2783.33</td><td>-46.42</td><td>-16.42</td><td>-30.00</td><td>-67.69</td><td>21.27</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12744.58</td><td>-40.20</td><td>-10.20</td><td>-30.00</td><td>-78.55</td><td>38.35</td><td>HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2306.00	-48.87	-18.87	-30.00	-68.23	19.36	HORIZONTAL	2	2783.33	-46.42	-16.42	-30.00	-67.69	21.27	HORIZONTAL	3 @	12744.58	-40.20	-10.20	-30.00	-78.55	38.35	HORIZONTAL	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2331.33</td><td>-50.58</td><td>-20.58</td><td>-30.00</td><td>-66.64</td><td>16.06</td><td>VERTICAL</td></tr><tr><td>2</td><td>2942.67</td><td>-48.09</td><td>-18.09</td><td>-30.00</td><td>-66.38</td><td>18.29</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>9809.67</td><td>-43.75</td><td>-13.75</td><td>-30.00</td><td>-78.05</td><td>34.30</td><td>VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2331.33	-50.58	-20.58	-30.00	-66.64	16.06	VERTICAL	2	2942.67	-48.09	-18.09	-30.00	-66.38	18.29	VERTICAL	3 @	9809.67	-43.75	-13.75	-30.00	-78.05	34.30	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																										
		MHz	dBm	dB	dBm	dBm	dB																																																																											
	1	2306.00	-48.87	-18.87	-30.00	-68.23	19.36	HORIZONTAL																																																																										
2	2783.33	-46.42	-16.42	-30.00	-67.69	21.27	HORIZONTAL																																																																											
3 @	12744.58	-40.20	-10.20	-30.00	-78.55	38.35	HORIZONTAL																																																																											
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																											
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2331.33	-50.58	-20.58	-30.00	-66.64	16.06	VERTICAL																																																																											
2	2942.67	-48.09	-18.09	-30.00	-66.38	18.29	VERTICAL																																																																											
3 @	9809.67	-43.75	-13.75	-30.00	-78.05	34.30	VERTICAL																																																																											

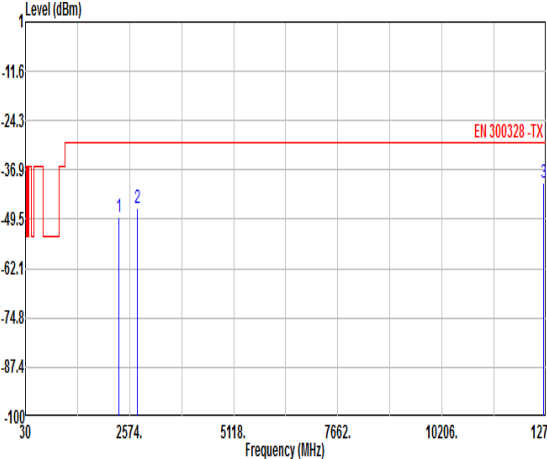
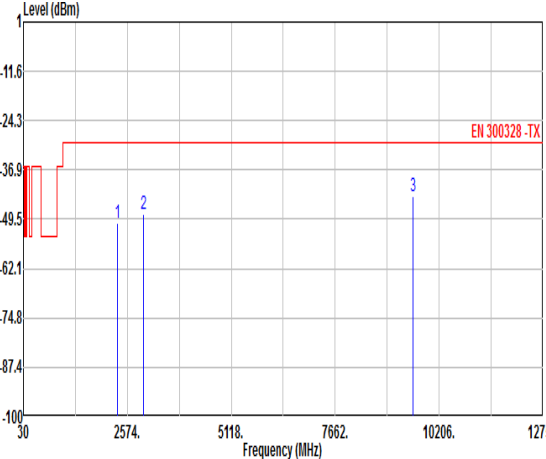




Mode	6																																																																																														
	Bluetooth LE GFSK_CH38																																																																																														
Ant	6																																																																																														
Pol.	Horizontal				Vertical																																																																																										
Tx																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th></th></tr><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Line</th><th>Level</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2310.33</td><td>-48.78</td><td>-18.78</td><td>-30.00</td><td>-68.15</td><td>19.37</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2768.33</td><td>-46.51</td><td>-16.51</td><td>-30.00</td><td>-67.62</td><td>21.11</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12683.37</td><td>-40.02</td><td>-10.02</td><td>-30.00</td><td>-78.16</td><td>38.14</td><td>HORIZONTAL</td></tr></tbody></table>					Limit	Read		Result	Freq	Level	Margin	Line	Level	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2310.33	-48.78	-18.78	-30.00	-68.15	19.37	HORIZONTAL	2	2768.33	-46.51	-16.51	-30.00	-67.62	21.11	HORIZONTAL	3 @	12683.37	-40.02	-10.02	-30.00	-78.16	38.14	HORIZONTAL	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th></th></tr><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Line</th><th>Level</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2333.00</td><td>-50.64</td><td>-20.64</td><td>-30.00</td><td>-66.70</td><td>16.06</td><td>VERTICAL</td></tr><tr><td>2</td><td>2960.67</td><td>-48.19</td><td>-18.19</td><td>-30.00</td><td>-66.55</td><td>18.36</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>9573.49</td><td>-43.44</td><td>-13.44</td><td>-30.00</td><td>-77.55</td><td>34.11</td><td>VERTICAL</td></tr></tbody></table>				Limit	Read		Result	Freq	Level	Margin	Line	Level	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2333.00	-50.64	-20.64	-30.00	-66.70	16.06	VERTICAL	2	2960.67	-48.19	-18.19	-30.00	-66.55	18.36	VERTICAL	3 @	9573.49	-43.44	-13.44	-30.00	-77.55	34.11	VERTICAL
		Limit	Read																																																																																												
Result	Freq	Level	Margin	Line	Level	Factor	Pol/Phase																																																																																								
	MHz	dBm	dB	dBm	dBm	dB																																																																																									
1	2310.33	-48.78	-18.78	-30.00	-68.15	19.37	HORIZONTAL																																																																																								
2	2768.33	-46.51	-16.51	-30.00	-67.62	21.11	HORIZONTAL																																																																																								
3 @	12683.37	-40.02	-10.02	-30.00	-78.16	38.14	HORIZONTAL																																																																																								
	Limit	Read																																																																																													
Result	Freq	Level	Margin	Line	Level	Factor	Pol/Phase																																																																																								
	MHz	dBm	dB	dBm	dBm	dB																																																																																									
1	2333.00	-50.64	-20.64	-30.00	-66.70	16.06	VERTICAL																																																																																								
2	2960.67	-48.19	-18.19	-30.00	-66.55	18.36	VERTICAL																																																																																								
3 @	9573.49	-43.44	-13.44	-30.00	-77.55	34.11	VERTICAL																																																																																								

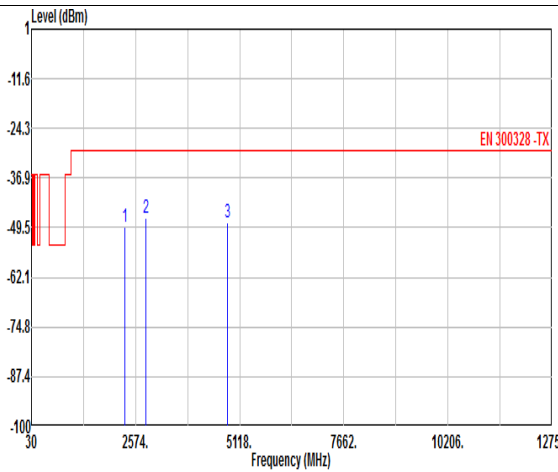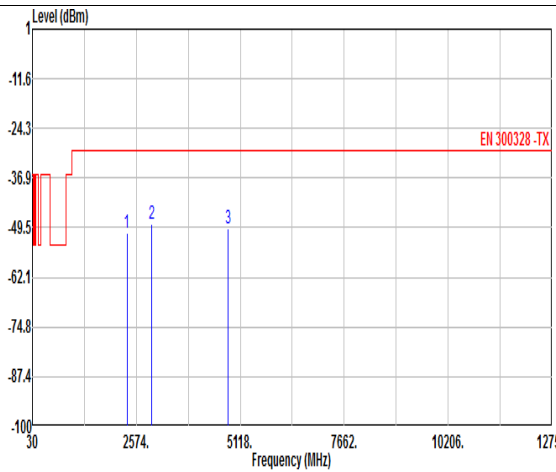Mode	7																																																																																																	
	802.11b DSSS_CH01																																																																																																	
Ant	6																																																																																																	
Pol.	Horizontal				Vertical																																																																																													
Tx																																																																																																		
	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Level</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2303.00</td><td>-49.32</td><td>-19.32</td><td>-30.00</td><td>-68.66</td><td>19.34</td><td></td><td>HORIZONTAL</td></tr><tr><td>2 @</td><td>2833.50</td><td>-46.93</td><td>-16.93</td><td>-30.00</td><td>-68.33</td><td>21.40</td><td></td><td>HORIZONTAL</td></tr><tr><td>3</td><td>4823.89</td><td>-48.18</td><td>-18.18</td><td>-30.00</td><td>-77.33</td><td>29.15</td><td></td><td>HORIZONTAL</td></tr></tbody></table>				Result	Freq	Level	Margin	Limit	Read	Level	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB			1	2303.00	-49.32	-19.32	-30.00	-68.66	19.34		HORIZONTAL	2 @	2833.50	-46.93	-16.93	-30.00	-68.33	21.40		HORIZONTAL	3	4823.89	-48.18	-18.18	-30.00	-77.33	29.15		HORIZONTAL	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Level</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2342.00</td><td>-50.94</td><td>-20.94</td><td>-30.00</td><td>-67.04</td><td>16.10</td><td></td><td>VERTICAL</td></tr><tr><td>2 @</td><td>2944.50</td><td>-48.62</td><td>-18.62</td><td>-30.00</td><td>-66.92</td><td>18.30</td><td></td><td>VERTICAL</td></tr><tr><td>3</td><td>4823.89</td><td>-49.50</td><td>-19.50</td><td>-30.00</td><td>-75.63</td><td>26.13</td><td></td><td>VERTICAL</td></tr></tbody></table>				Result	Freq	Level	Margin	Limit	Read	Level	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB			1	2342.00	-50.94	-20.94	-30.00	-67.04	16.10		VERTICAL	2 @	2944.50	-48.62	-18.62	-30.00	-66.92	18.30		VERTICAL	3	4823.89	-49.50	-19.50	-30.00	-75.63	26.13		VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Level	Factor	Pol/Phase																																																																																									
		MHz	dBm	dB	dBm	dBm	dB																																																																																											
	1	2303.00	-49.32	-19.32	-30.00	-68.66	19.34		HORIZONTAL																																																																																									
2 @	2833.50	-46.93	-16.93	-30.00	-68.33	21.40		HORIZONTAL																																																																																										
3	4823.89	-48.18	-18.18	-30.00	-77.33	29.15		HORIZONTAL																																																																																										
Result	Freq	Level	Margin	Limit	Read	Level	Factor	Pol/Phase																																																																																										
	MHz	dBm	dB	dBm	dBm	dB																																																																																												
1	2342.00	-50.94	-20.94	-30.00	-67.04	16.10		VERTICAL																																																																																										
2 @	2944.50	-48.62	-18.62	-30.00	-66.92	18.30		VERTICAL																																																																																										
3	4823.89	-49.50	-19.50	-30.00	-75.63	26.13		VERTICAL																																																																																										

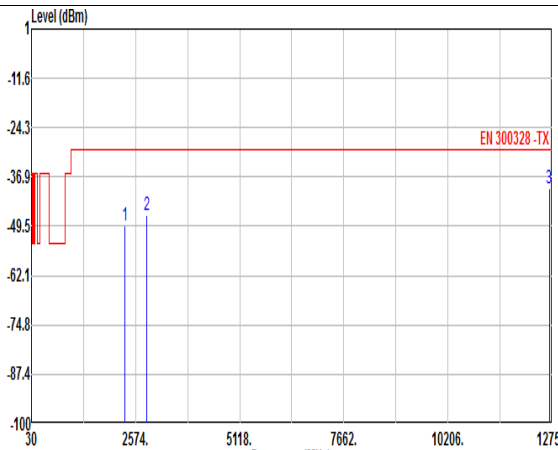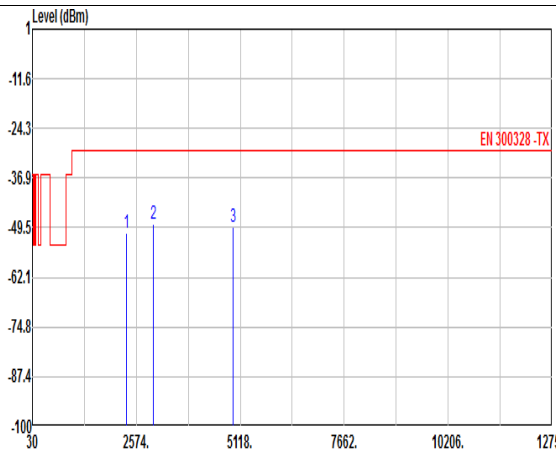Mode	8																																																																																						
	802.11b DSSS_CH03																																																																																						
Ant	6																																																																																						
Pol.	Horizontal				Vertical																																																																																		
Tx																																																																																							
	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2311.50</td><td>-49.16</td><td>-19.16</td><td>-30.00</td><td>-68.53</td><td>19.37</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2847.50</td><td>-46.75</td><td>-16.75</td><td>-30.00</td><td>-68.13</td><td>21.38</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12678.50</td><td>-39.73</td><td>-9.73</td><td>-30.00</td><td>-77.85</td><td>38.12</td><td>HORIZONTAL</td></tr></tbody></table>				Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2311.50	-49.16	-19.16	-30.00	-68.53	19.37	HORIZONTAL	2	2847.50	-46.75	-16.75	-30.00	-68.13	21.38	HORIZONTAL	3 @	12678.50	-39.73	-9.73	-30.00	-77.85	38.12	HORIZONTAL	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2338.00</td><td>-50.99</td><td>-20.99</td><td>-30.00</td><td>-67.07</td><td>16.08</td><td>VERTICAL</td></tr><tr><td>2 @</td><td>2989.50</td><td>-48.58</td><td>-18.58</td><td>-30.00</td><td>-67.03</td><td>18.45</td><td>VERTICAL</td></tr><tr><td>3</td><td>4944.15</td><td>-49.31</td><td>-19.31</td><td>-30.00</td><td>-75.81</td><td>26.50</td><td>VERTICAL</td></tr></tbody></table>			Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2338.00	-50.99	-20.99	-30.00	-67.07	16.08	VERTICAL	2 @	2989.50	-48.58	-18.58	-30.00	-67.03	18.45	VERTICAL	3	4944.15	-49.31	-19.31	-30.00	-75.81	26.50	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																															
		MHz	dBm	dB	dBm	dBm	dB																																																																																
1	2311.50	-49.16	-19.16	-30.00	-68.53	19.37	HORIZONTAL																																																																																
2	2847.50	-46.75	-16.75	-30.00	-68.13	21.38	HORIZONTAL																																																																																
3 @	12678.50	-39.73	-9.73	-30.00	-77.85	38.12	HORIZONTAL																																																																																
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																																
	MHz	dBm	dB	dBm	dBm	dB																																																																																	
1	2338.00	-50.99	-20.99	-30.00	-67.07	16.08	VERTICAL																																																																																
2 @	2989.50	-48.58	-18.58	-30.00	-67.03	18.45	VERTICAL																																																																																
3	4944.15	-49.31	-19.31	-30.00	-75.81	26.50	VERTICAL																																																																																

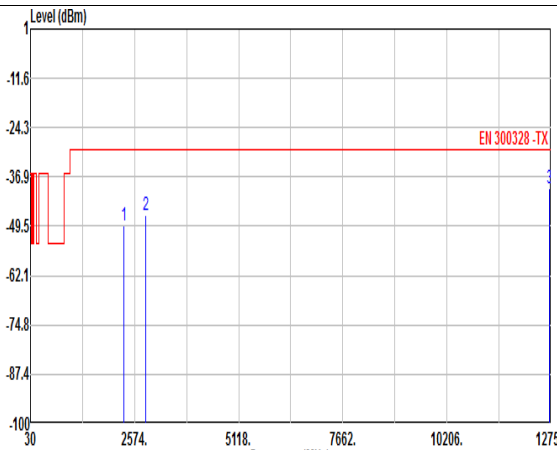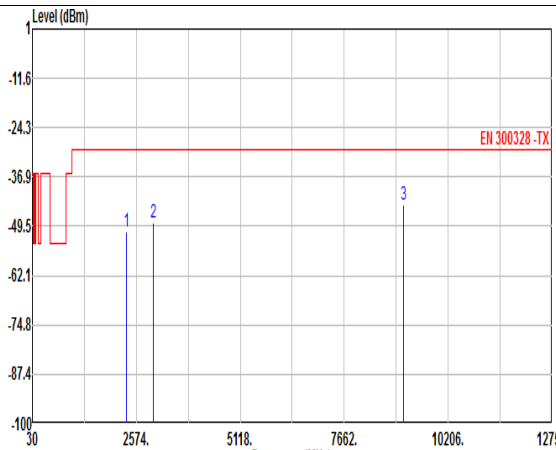Mode	9																																																																																	
	802.11g OFDM_CH01																																																																																	
Ant	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Tx	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2309.00</td><td>-49.35</td><td>-19.35</td><td>-30.00</td><td>-68.71</td><td>19.36</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2844.50</td><td>-46.70</td><td>-16.70</td><td>-30.00</td><td>-68.08</td><td>21.38</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12704.50</td><td>-39.88</td><td>-9.88</td><td>-30.00</td><td>-78.09</td><td>38.21</td><td>HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2309.00	-49.35	-19.35	-30.00	-68.71	19.36	HORIZONTAL	2	2844.50	-46.70	-16.70	-30.00	-68.08	21.38	HORIZONTAL	3 @	12704.50	-39.88	-9.88	-30.00	-78.09	38.21	HORIZONTAL	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2333.50</td><td>-50.81</td><td>-20.81</td><td>-30.00</td><td>-66.87</td><td>16.06</td><td>VERTICAL</td></tr><tr><td>2</td><td>2993.00</td><td>-48.69</td><td>-18.69</td><td>-30.00</td><td>-67.16</td><td>18.47</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>9122.80</td><td>-43.80</td><td>-13.80</td><td>-30.00</td><td>-77.54</td><td>33.74</td><td>VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2333.50	-50.81	-20.81	-30.00	-66.87	16.06	VERTICAL	2	2993.00	-48.69	-18.69	-30.00	-67.16	18.47	VERTICAL	3 @	9122.80	-43.80	-13.80	-30.00	-77.54	33.74	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																										
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2309.00	-49.35	-19.35	-30.00	-68.71	19.36	HORIZONTAL																																																																											
2	2844.50	-46.70	-16.70	-30.00	-68.08	21.38	HORIZONTAL																																																																											
3 @	12704.50	-39.88	-9.88	-30.00	-78.09	38.21	HORIZONTAL																																																																											
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																											
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2333.50	-50.81	-20.81	-30.00	-66.87	16.06	VERTICAL																																																																											
2	2993.00	-48.69	-18.69	-30.00	-67.16	18.47	VERTICAL																																																																											
3 @	9122.80	-43.80	-13.80	-30.00	-77.54	33.74	VERTICAL																																																																											

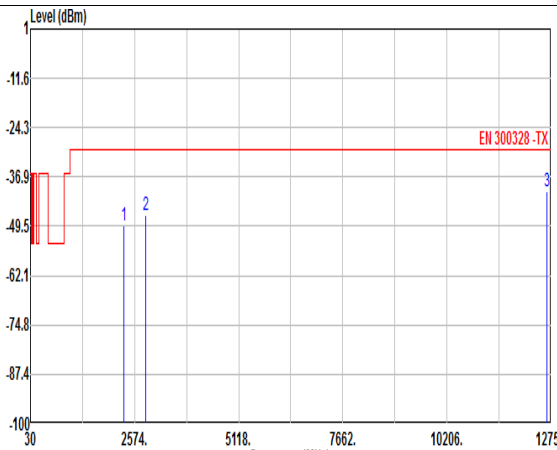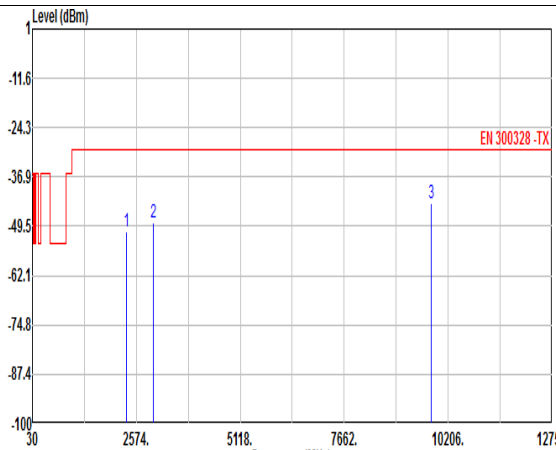Mode	10																																																																																	
	802.11g OFDM_CH13																																																																																	
Ant	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Tx	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2302.50</td><td>-49.28</td><td>-19.28</td><td>-30.00</td><td>-68.62</td><td>19.34</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2836.00</td><td>-46.76</td><td>-16.76</td><td>-30.00</td><td>-68.16</td><td>21.40</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12642.74</td><td>-40.38</td><td>-10.38</td><td>-30.00</td><td>-78.38</td><td>38.00</td><td>HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2302.50	-49.28	-19.28	-30.00	-68.62	19.34	HORIZONTAL	2	2836.00	-46.76	-16.76	-30.00	-68.16	21.40	HORIZONTAL	3 @	12642.74	-40.38	-10.38	-30.00	-78.38	38.00	HORIZONTAL	 Level (dBm) Frequency (MHz) EN 300328-TX <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2340.50</td><td>-51.01</td><td>-21.01</td><td>-30.00</td><td>-67.11</td><td>16.10</td><td>VERTICAL</td></tr><tr><td>2</td><td>2993.50</td><td>-48.64</td><td>-18.64</td><td>-30.00</td><td>-67.11</td><td>18.47</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>9797.75</td><td>-43.73</td><td>-13.73</td><td>-30.00</td><td>-78.12</td><td>34.39</td><td>VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2340.50	-51.01	-21.01	-30.00	-67.11	16.10	VERTICAL	2	2993.50	-48.64	-18.64	-30.00	-67.11	18.47	VERTICAL	3 @	9797.75	-43.73	-13.73	-30.00	-78.12	34.39	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																										
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2302.50	-49.28	-19.28	-30.00	-68.62	19.34	HORIZONTAL																																																																											
2	2836.00	-46.76	-16.76	-30.00	-68.16	21.40	HORIZONTAL																																																																											
3 @	12642.74	-40.38	-10.38	-30.00	-78.38	38.00	HORIZONTAL																																																																											
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																											
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2340.50	-51.01	-21.01	-30.00	-67.11	16.10	VERTICAL																																																																											
2	2993.50	-48.64	-18.64	-30.00	-67.11	18.47	VERTICAL																																																																											
3 @	9797.75	-43.73	-13.73	-30.00	-78.12	34.39	VERTICAL																																																																											

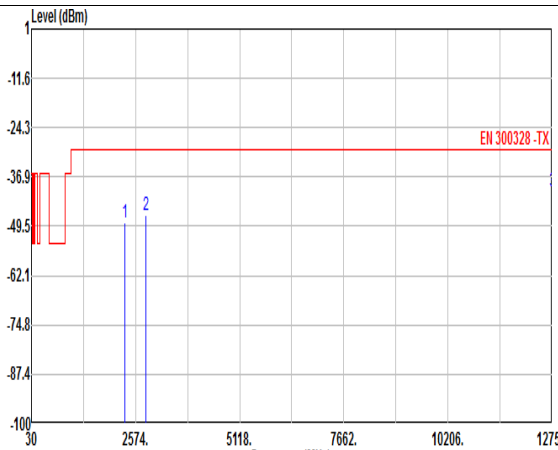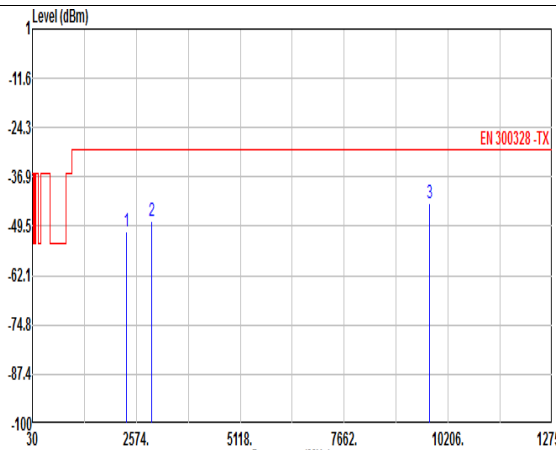Mode	11																																																																																	
	802.11n HT20 OFDM_CH01																																																																																	
Ant	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Tx																																																																																		
	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2306.33</td><td>-48.63</td><td>-18.63</td><td>-30.00</td><td>-67.99</td><td>19.36</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2828.00</td><td>-46.50</td><td>-16.50</td><td>-30.00</td><td>-67.91</td><td>21.41</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12742.96</td><td>-40.45</td><td>-10.45</td><td>-30.00</td><td>-78.80</td><td>38.35</td><td>HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2306.33	-48.63	-18.63	-30.00	-67.99	19.36	HORIZONTAL	2	2828.00	-46.50	-16.50	-30.00	-67.91	21.41	HORIZONTAL	3 @	12742.96	-40.45	-10.45	-30.00	-78.80	38.35	HORIZONTAL	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2331.00</td><td>-50.67</td><td>-20.67</td><td>-30.00</td><td>-66.73</td><td>16.06</td><td>VERTICAL</td></tr><tr><td>2</td><td>2942.67</td><td>-48.30</td><td>-18.30</td><td>-30.00</td><td>-66.59</td><td>18.29</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>9755.50</td><td>-43.66</td><td>-13.66</td><td>-30.00</td><td>-77.99</td><td>34.33</td><td>VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2331.00	-50.67	-20.67	-30.00	-66.73	16.06	VERTICAL	2	2942.67	-48.30	-18.30	-30.00	-66.59	18.29	VERTICAL	3 @	9755.50	-43.66	-13.66	-30.00	-77.99	34.33	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																										
		MHz	dBm	dB	dBm	dBm	dB																																																																											
1	2306.33	-48.63	-18.63	-30.00	-67.99	19.36	HORIZONTAL																																																																											
2	2828.00	-46.50	-16.50	-30.00	-67.91	21.41	HORIZONTAL																																																																											
3 @	12742.96	-40.45	-10.45	-30.00	-78.80	38.35	HORIZONTAL																																																																											
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																											
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2331.00	-50.67	-20.67	-30.00	-66.73	16.06	VERTICAL																																																																											
2	2942.67	-48.30	-18.30	-30.00	-66.59	18.29	VERTICAL																																																																											
3 @	9755.50	-43.66	-13.66	-30.00	-77.99	34.33	VERTICAL																																																																											





Mode	12																																																																							
	802.11n HT20 OFDM_CH13																																																																							
Ant	6																																																																							
Pol.	Horizontal	Vertical																																																																						
Tx	Horizontal Tx Spectrum Plot showing Level (dBm) vs Frequency (MHz). The plot includes a red limit line labeled 'EN 300328-TX' and three blue vertical lines labeled 1, 2, and 3. The y-axis ranges from -100 to -11.6 dBm, and the x-axis ranges from 30 to 12750 MHz. <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th></th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>2312.33</td><td>-49.01</td><td>-19.01</td><td>-30.00</td><td>-68.38</td><td>19.37 HORIZONTAL</td></tr><tr><td>2</td><td>2841.00</td><td>-46.58</td><td>-16.58</td><td>-30.00</td><td>-67.97</td><td>21.39 HORIZONTAL</td></tr><tr><td>3 @</td><td>12684.46</td><td>-40.02</td><td>-10.02</td><td>-30.00</td><td>-78.16</td><td>38.14 HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read			MHz	dBm	dB	dBm	dBm	dB	1	2312.33	-49.01	-19.01	-30.00	-68.38	19.37 HORIZONTAL	2	2841.00	-46.58	-16.58	-30.00	-67.97	21.39 HORIZONTAL	3 @	12684.46	-40.02	-10.02	-30.00	-78.16	38.14 HORIZONTAL	Vertical Tx Spectrum Plot showing Level (dBm) vs Frequency (MHz). The plot includes a red limit line labeled 'EN 300328-TX' and three blue vertical lines labeled 1, 2, and 3. The y-axis ranges from -100 to -11.6 dBm, and the x-axis ranges from 30 to 12750 MHz. <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th></th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>2203.67</td><td>-50.58</td><td>-20.58</td><td>-30.00</td><td>-66.52</td><td>15.94 VERTICAL</td></tr><tr><td>2</td><td>2940.00</td><td>-48.27</td><td>-18.27</td><td>-30.00</td><td>-66.55</td><td>18.28 VERTICAL</td></tr><tr><td>3 @</td><td>9760.38</td><td>-43.81</td><td>-13.81</td><td>-30.00</td><td>-78.14</td><td>34.33 VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read			MHz	dBm	dB	dBm	dBm	dB	1	2203.67	-50.58	-20.58	-30.00	-66.52	15.94 VERTICAL	2	2940.00	-48.27	-18.27	-30.00	-66.55	18.28 VERTICAL	3 @	9760.38	-43.81	-13.81	-30.00	-78.14	34.33 VERTICAL
	Result	Freq	Level	Margin	Limit	Read																																																																		
	MHz	dBm	dB	dBm	dBm	dB																																																																		
1	2312.33	-49.01	-19.01	-30.00	-68.38	19.37 HORIZONTAL																																																																		
2	2841.00	-46.58	-16.58	-30.00	-67.97	21.39 HORIZONTAL																																																																		
3 @	12684.46	-40.02	-10.02	-30.00	-78.16	38.14 HORIZONTAL																																																																		
Result	Freq	Level	Margin	Limit	Read																																																																			
	MHz	dBm	dB	dBm	dBm	dB																																																																		
1	2203.67	-50.58	-20.58	-30.00	-66.52	15.94 VERTICAL																																																																		
2	2940.00	-48.27	-18.27	-30.00	-66.55	18.28 VERTICAL																																																																		
3 @	9760.38	-43.81	-13.81	-30.00	-78.14	34.33 VERTICAL																																																																		







Mode	13																																																																							
	802.11n HT40 OFDM_CH03																																																																							
Ant	6																																																																							
Pol.	Horizontal	Vertical																																																																						
Tx	Horizontal Tx Spectrum Plot showing Level (dBm) vs Frequency (MHz). The plot includes a red limit line labeled 'EN 300328-TX' and three blue vertical lines labeled 1, 2, and 3. The y-axis ranges from -100 to -11.6 dBm, and the x-axis ranges from 30 to 12750 MHz. <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th></th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>2309.50</td><td>-49.29</td><td>-19.29</td><td>-30.00</td><td>-68.66</td><td>19.37 HORIZONTAL</td></tr><tr><td>2</td><td>2794.00</td><td>-46.94</td><td>-16.94</td><td>-30.00</td><td>-68.32</td><td>21.38 HORIZONTAL</td></tr><tr><td>3 @</td><td>12673.08</td><td>-40.13</td><td>-10.13</td><td>-30.00</td><td>-78.24</td><td>38.11 HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read			MHz	dBm	dB	dBm	dBm	dB	1	2309.50	-49.29	-19.29	-30.00	-68.66	19.37 HORIZONTAL	2	2794.00	-46.94	-16.94	-30.00	-68.32	21.38 HORIZONTAL	3 @	12673.08	-40.13	-10.13	-30.00	-78.24	38.11 HORIZONTAL	Vertical Tx Spectrum Plot showing Level (dBm) vs Frequency (MHz). The plot includes a red limit line labeled 'EN 300328-TX' and three blue vertical lines labeled 1, 2, and 3. The y-axis ranges from -100 to -11.6 dBm, and the x-axis ranges from 30 to 12750 MHz. <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th></th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>2338.50</td><td>-50.87</td><td>-20.87</td><td>-30.00</td><td>-66.95</td><td>16.08 VERTICAL</td></tr><tr><td>2</td><td>2986.50</td><td>-48.62</td><td>-18.62</td><td>-30.00</td><td>-67.06</td><td>18.44 VERTICAL</td></tr><tr><td>3 @</td><td>9764.17</td><td>-43.63</td><td>-13.63</td><td>-30.00</td><td>-77.96</td><td>34.33 VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read			MHz	dBm	dB	dBm	dBm	dB	1	2338.50	-50.87	-20.87	-30.00	-66.95	16.08 VERTICAL	2	2986.50	-48.62	-18.62	-30.00	-67.06	18.44 VERTICAL	3 @	9764.17	-43.63	-13.63	-30.00	-77.96	34.33 VERTICAL
	Result	Freq	Level	Margin	Limit	Read																																																																		
	MHz	dBm	dB	dBm	dBm	dB																																																																		
1	2309.50	-49.29	-19.29	-30.00	-68.66	19.37 HORIZONTAL																																																																		
2	2794.00	-46.94	-16.94	-30.00	-68.32	21.38 HORIZONTAL																																																																		
3 @	12673.08	-40.13	-10.13	-30.00	-78.24	38.11 HORIZONTAL																																																																		
Result	Freq	Level	Margin	Limit	Read																																																																			
	MHz	dBm	dB	dBm	dBm	dB																																																																		
1	2338.50	-50.87	-20.87	-30.00	-66.95	16.08 VERTICAL																																																																		
2	2986.50	-48.62	-18.62	-30.00	-67.06	18.44 VERTICAL																																																																		
3 @	9764.17	-43.63	-13.63	-30.00	-77.96	34.33 VERTICAL																																																																		

Mode	14																																																																																	
	802.11n HT40 OFDM_CH11																																																																																	
Ant	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Tx	Horizontal Tx Spectrum Plot showing Level (dBm) vs Frequency (MHz). The plot displays a red limit line for EN 300328-TX and three blue read points labeled 1, 2, and 3. The y-axis ranges from -100 to -11.6 dBm, and the x-axis ranges from 30 to 12750 MHz. <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2307.00</td><td>-49.25</td><td>-19.25</td><td>-30.00</td><td>-68.61</td><td>19.36</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>2862.50</td><td>-46.83</td><td>-16.83</td><td>-30.00</td><td>-68.19</td><td>21.36</td><td>HORIZONTAL</td></tr><tr><td>3 @</td><td>12702.87</td><td>-40.25</td><td>-10.25</td><td>-30.00</td><td>-78.46</td><td>38.21</td><td>HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2307.00	-49.25	-19.25	-30.00	-68.61	19.36	HORIZONTAL	2	2862.50	-46.83	-16.83	-30.00	-68.19	21.36	HORIZONTAL	3 @	12702.87	-40.25	-10.25	-30.00	-78.46	38.21	HORIZONTAL	Vertical Tx Spectrum Plot showing Level (dBm) vs Frequency (MHz). The plot displays a red limit line for EN 300328-TX and three blue read points labeled 1, 2, and 3. The y-axis ranges from -100 to -11.6 dBm, and the x-axis ranges from 30 to 12750 MHz. <table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2335.00</td><td>-50.71</td><td>-20.71</td><td>-30.00</td><td>-66.79</td><td>16.08</td><td>VERTICAL</td></tr><tr><td>2</td><td>2990.50</td><td>-48.63</td><td>-18.63</td><td>-30.00</td><td>-67.09</td><td>18.46</td><td>VERTICAL</td></tr><tr><td>3 @</td><td>9741.42</td><td>-43.90</td><td>-13.90</td><td>-30.00</td><td>-78.18</td><td>34.28</td><td>VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	2335.00	-50.71	-20.71	-30.00	-66.79	16.08	VERTICAL	2	2990.50	-48.63	-18.63	-30.00	-67.09	18.46	VERTICAL	3 @	9741.42	-43.90	-13.90	-30.00	-78.18	34.28	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																										
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2307.00	-49.25	-19.25	-30.00	-68.61	19.36	HORIZONTAL																																																																											
2	2862.50	-46.83	-16.83	-30.00	-68.19	21.36	HORIZONTAL																																																																											
3 @	12702.87	-40.25	-10.25	-30.00	-78.46	38.21	HORIZONTAL																																																																											
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																																											
	MHz	dBm	dB	dBm	dBm	dB																																																																												
1	2335.00	-50.71	-20.71	-30.00	-66.79	16.08	VERTICAL																																																																											
2	2990.50	-48.63	-18.63	-30.00	-67.09	18.46	VERTICAL																																																																											
3 @	9741.42	-43.90	-13.90	-30.00	-78.18	34.28	VERTICAL																																																																											

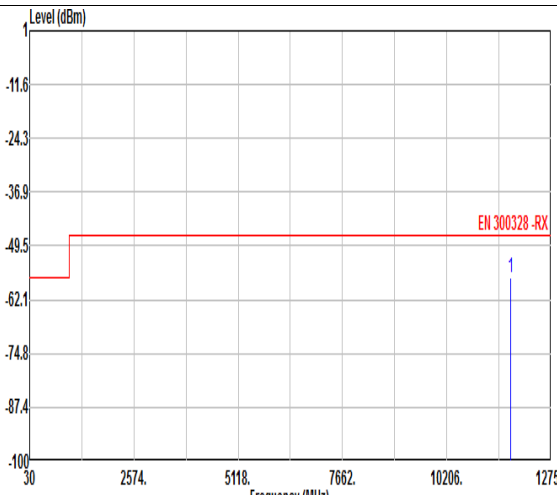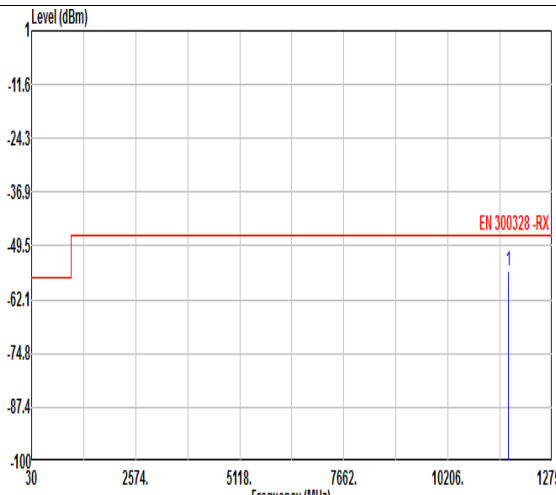

Mode	15																																													
	Bluetooth GFSK_CH00																																													
Ant	6																																													
Pol.	Horizontal					Vertical																																								
Rx																																														
	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th></tr><tr><td>1 @</td><td>11765.56</td><td>-56.95</td><td>-9.95</td><td>-47.00</td><td>-48.75</td></tr></table>					Result	Freq	Level	Margin	Limit	Read		MHz	dBm	dB	dBm	dBm	1 @	11765.56	-56.95	-9.95	-47.00	-48.75	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th></tr><tr><td>1 @</td><td>11683.96</td><td>-55.41</td><td>-8.41</td><td>-47.00</td><td>-47.38</td></tr></table>					Result	Freq	Level	Margin	Limit	Read		MHz	dBm	dB	dBm	dBm	1 @	11683.96	-55.41	-8.41	-47.00	-47.38
	Result	Freq	Level	Margin	Limit	Read																																								
	MHz	dBm	dB	dBm	dBm																																									
1 @	11765.56	-56.95	-9.95	-47.00	-48.75																																									
Result	Freq	Level	Margin	Limit	Read																																									
	MHz	dBm	dB	dBm	dBm																																									
1 @	11683.96	-55.41	-8.41	-47.00	-47.38																																									
HORIZONTAL					VERTICAL																																									

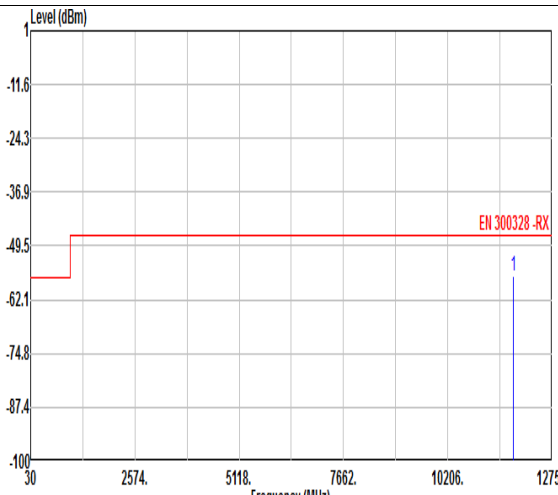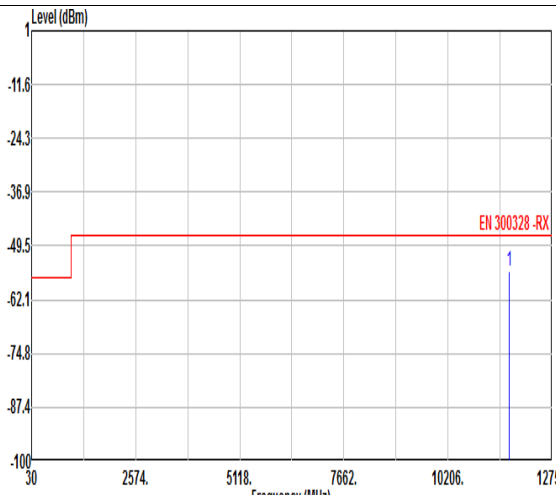Mode	16																																																																						
	Bluetooth LE GFSK_CH39																																																																						
Ant	6																																																																						
Pol.	Horizontal				Vertical																																																																		
Rx																																																																							
	EN 300328 -RX				EN 300328 -RX																																																																		
<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Level</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th><th></th></tr><tr><td>1 @</td><td>11801.46</td><td>-56.65</td><td>-9.65</td><td>-47.00</td><td>-48.37</td><td>-8.28</td><td></td><td>HORIZONTAL</td></tr></table>									Result	Freq	Level	Margin	Limit	Read	Level	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB			1 @	11801.46	-56.65	-9.65	-47.00	-48.37	-8.28		HORIZONTAL	<table><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Level</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th><th></th></tr><tr><td>1 @</td><td>11712.03</td><td>-55.51</td><td>-8.51</td><td>-47.00</td><td>-47.46</td><td>-8.05</td><td></td><td>VERTICAL</td></tr></table>									Result	Freq	Level	Margin	Limit	Read	Level	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB			1 @	11712.03	-55.51	-8.51	-47.00	-47.46	-8.05		VERTICAL
Result	Freq	Level	Margin	Limit	Read	Level	Factor	Pol/Phase																																																															
	MHz	dBm	dB	dBm	dBm	dB																																																																	
1 @	11801.46	-56.65	-9.65	-47.00	-48.37	-8.28		HORIZONTAL																																																															
Result	Freq	Level	Margin	Limit	Read	Level	Factor	Pol/Phase																																																															
	MHz	dBm	dB	dBm	dBm	dB																																																																	
1 @	11712.03	-55.51	-8.51	-47.00	-47.46	-8.05		VERTICAL																																																															

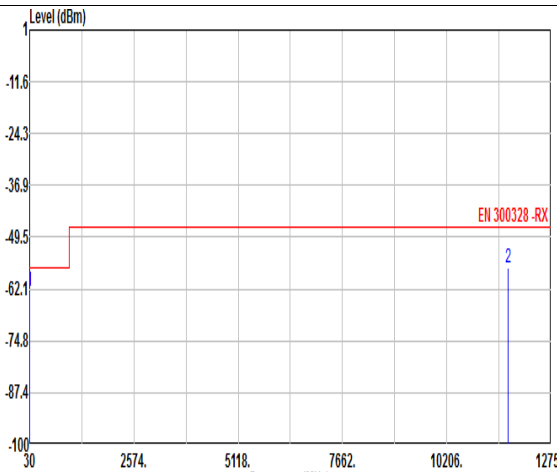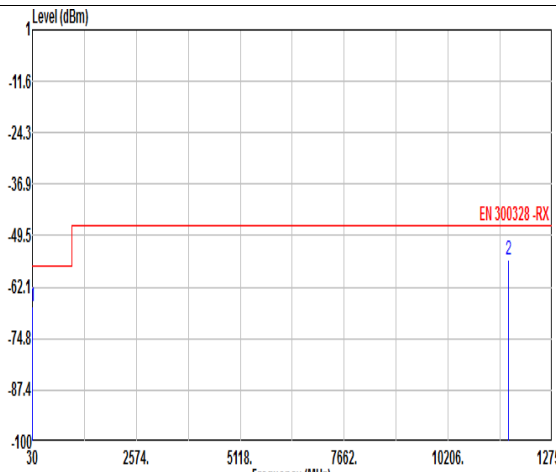Mode	17																																																																	
	802.11b DSSS_CH03																																																																	
Ant	6																																																																	
Pol.	Horizontal	Vertical																																																																
Rx																																																																		
	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 @</td><td>31.94</td><td>-62.83</td><td>-5.83</td><td>-57.00</td><td>-65.92</td><td>3.09</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>11704.19</td><td>-56.99</td><td>-9.99</td><td>-47.00</td><td>-48.95</td><td>-8.04</td><td>HORIZONTAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1 @	31.94	-62.83	-5.83	-57.00	-65.92	3.09	HORIZONTAL	2	11704.19	-56.99	-9.99	-47.00	-48.95	-8.04	HORIZONTAL	<table><thead><tr><th>Result</th><th>Freq</th><th>Level</th><th>Margin</th><th>Limit</th><th>Read</th><th>Factor</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>31.94</td><td>-66.93</td><td>-9.93</td><td>-57.00</td><td>-67.99</td><td>1.06</td><td>VERTICAL</td></tr><tr><td>2 @</td><td>11688.52</td><td>-55.24</td><td>-8.24</td><td>-47.00</td><td>-47.22</td><td>-8.02</td><td>VERTICAL</td></tr></tbody></table>	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase		MHz	dBm	dB	dBm	dBm	dB		1	31.94	-66.93	-9.93	-57.00	-67.99	1.06	VERTICAL	2 @	11688.52	-55.24	-8.24	-47.00	-47.22	-8.02	VERTICAL
	Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																										
	MHz	dBm	dB	dBm	dBm	dB																																																												
1 @	31.94	-62.83	-5.83	-57.00	-65.92	3.09	HORIZONTAL																																																											
2	11704.19	-56.99	-9.99	-47.00	-48.95	-8.04	HORIZONTAL																																																											
Result	Freq	Level	Margin	Limit	Read	Factor	Pol/Phase																																																											
	MHz	dBm	dB	dBm	dBm	dB																																																												
1	31.94	-66.93	-9.93	-57.00	-67.99	1.06	VERTICAL																																																											
2 @	11688.52	-55.24	-8.24	-47.00	-47.22	-8.02	VERTICAL																																																											