

CE Radio Test Report

APPLICANT : Magne AI Global tech limited
EQUIPMENT : MAG1
BRAND NAME : MAQ
MODEL NAME : MA1
STANDARD : ETSI EN 300 330 V2.1.1 (2017-02)
TEST DATE(S) : Mar. 14, 2026 ~ Mar. 19, 2026

The measurements shown in this test report were made in accordance with the procedures given in ETSI EN 300 330 V2.1.1 (2017-02).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**

Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Information	6
1.6 Testing Applied Standards.....	7
1.7 Testing Location Information	8
1.8 Test Software.....	8
1.9 Measurement Uncertainty.....	8
2 Test Configuration of EUT	9
2.1 The Worst Case Modulation Configuration.....	9
2.2 Test Channel Frequencies Configuration	9
2.3 The Worst Case Measurement Configuration	10
2.4 Accessories and Support Equipment	11
2.5 The Worst Test Setup Diagram	11
3 Transmitter Test Result.....	13
3.1 Transmitter H-field Output Levels.....	13
3.2 Operating Frequencies Ranges.....	15
3.3 Modulation Bandwidth	17
3.4 Transmitter radiated spurious domain emission.....	19
3.5 Receiver spurious emissions	31
4 Test Equipment and Calibration Data.....	32
5 Setup Photographs	33



History of this test report

Report No.	Version	Description	Issue Date
ER612311D	R01	Initial issue of report	May 25, 2026

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	4.3.4	Transmitter H-field requirements	Pass	-21.26 dBμA/m@10m
-	4.3.5	Transmitter RF carrier current	N/A	Only for Product Class 3
-	4.3.6	Transmitter radiated E-field	N/A	Only for Product Class 4
-	4.3.7	Transmitter conducted spurious emissions	N/A	Only for Product Class 3
3.2	4.3.1	Permitted range of operating frequencies	Pass	Permitted Range: FL: 13.553 MHz FH: 13.567 MHz
	4.3.2	Operating frequency ranges		
3.3	4.3.3	Modulation bandwidth	Pass	Modulation Bandwidth: 0.695 kHz Device complies with spectral mask – refer to test data
3.4	4.3.8 4.3.9	Transmitter radiated spurious domain emission	Pass	Refer to the test results
-	4.3.10	Transmitter Frequency stability	N/A	Only for channelized systems
3.5	4.4.2	Receiver spurious emissions	N/A	N/A for the transceiver
-	4.4.3	Adjacent channel selectivity	N/A	Only for channelized systems
-	4.4.4	Receiver blocking or desensitization	N/A	Only for channelized systems

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Magne AI Global tech limited

FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.2 Manufacturer

Magne AI Global tech limited

FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	MAG1
Brand Name	MaQ
Model Name	MA1
IMEI /SN Code	Conducted: MGUGLM54300032 Radiation: 016813000001873 for below 30MHz 016813000001816 for above 30MHz
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For other wireless features of this EUT, test report will be issued separately.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Information

1.5.1 RF General Information

RF General Information			
Frequency Range	Modulation	Frequency (MHz)	H-Field Strength (dBμA/m at 10m)
13.553 – 13.567 MHz	ASK	13.56	-21.26

1.5.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☐	Temporary RF connector provided
☒	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
☐	External antenna (dedicated antennas)

1.5.3 Type of EUT

Identify EUT			
EUT Serial Number	N/A		
Presentation of Equipment	☒ Production	☐ Pre-Production	☐ Prototype
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:		
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:		
☐	Other:		

1.5.4 Test Signal Duty Cycle

Duty Cycle Operation Restriction	
The transmitter is used for	The transmitter is operated
☒ Inductive applications	☒ Automatically triggered
☐ Duty cycle fixed mode	☒ Duty cycle random mode
■ Duty cycle mode - NFC-A (ISO 14443-3A)	
Declare transmitter duty cycle / 1 hour =	100%
■ Duty cycle mode - NFC-B (ISO 14443-3B)	
Declare transmitter duty cycle / 1 hour =	100%
■ Duty cycle mode - NFC-F (ISO 18092)	
Declare transmitter duty cycle / 1 hour =	100%
■ Duty cycle mode - NFC-V (ISO 15693)	
Declare transmitter duty cycle / 1 hour =	100%

1.5.5 EUT Operational Condition

Supply Voltage	☒ AC mains	☐ DC	
Type of DC Source	☒ External AC adapter	☐ From Host System	☒ Battery
Operational Voltage	☒ Vnom (3.87V)	☒ Vmax (4.45V)	☒ Vmin (3.5V)
Operational Climatic	☒ Tnom (20°C)	☒ Tmax (55°C)	☒ Tmin (-10°C)

1.6 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ETSI EN 300 330 V2.1.1 (2017-02)



1.7 Testing Location Information

Sporton International Inc.(Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Sporton International Inc. (KunShan)				
Address: No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215300 People's Republic of China				
Tel: +86-512-57900158				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-KS	Smile Wang	Temp: 21~22℃ Humidity: 41~43%	Mar. 19, 2026
Radiated Emission (9kHz~30MHz)	03CH07-KS	Fang	Temp: 21~22℃ Humidity: 41~42%	Mar. 15, 2026
Radiated Emission (30MHz~1GHz)	05CH02-KS	Warm Wang	Temp: 21~23℃ Humidity: 41~43%	Mar. 14, 2026

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH07-KS	AUDIX	E3	210616
3.	05CH02-KS	AUDIX	E3	210616

1.9 Measurement Uncertainty

Emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
Radio Frequency		± 0.38 ppm
RF Power, radiated		±2 dB
Unwanted Emissions	9 kHz – 30 MHz	±3.30 dB
Unwanted Emissions	30 MHz– 1000 MHz	±2.54 dB
Temperature		±0.86 °C
Humidity		±2.2 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing	
Mode	Field Strength (dB μ A/m at 10m)
NFC	-21.26

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Mode	Test Frequencies (MHz)
NFC	13.56

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Transmitter Carrier Output Levels Permitted Range of Operating Frequencies Operating frequency range of the modulation bandwidth
Test Condition	Conducted measurement Test fixture for extreme conditions
Mode	NFC


The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Spurious and Out of Band Emissions Receiver Spurious Emissions		
Test Condition	Radiated measurement Receivers used in combination with permanently co-located transmitters continuously transmitting. Co-located is defined as < 3 m, then receiver spurious radiation do not apply to receivers used in combination with permanently co-located transmitters continuously transmitting.		
User Position	☐ EUT will be placed in fixed position.		
	☐ EUT will be placed in mobile position and operating multiple positions.		
	☒ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.		
Pretest Mode	☒ 1. EUT Built in NFC A type		
	☒ 2. EUT Built in NFC B type		
	☒ 3. EUT Built in NFC F type		
	☒ 4. EUT Built in NFC V type		
	F type configuration was pretested and found to be the worst case and measured during the test.		
Operating Mode	☒ 1. Adapter mode		
	☐ 2. USB mode		
	Adapter mode configuration was pretested and found to be the worst case and measured during the test.		
Mode	NFC		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	Y Plane		


2.4 Accessories and Support Equipment

Support Equipment - RF Conducted			
No.	Equipment	Brand Name	Model Name
1	NFC Card	N/A	N/A

Support Equipment - RF Radiated emission			
No.	Equipment	Brand Name	Model Name
1	NFC Card	N/A	N/A

2.5 The Worst Test Setup Diagram

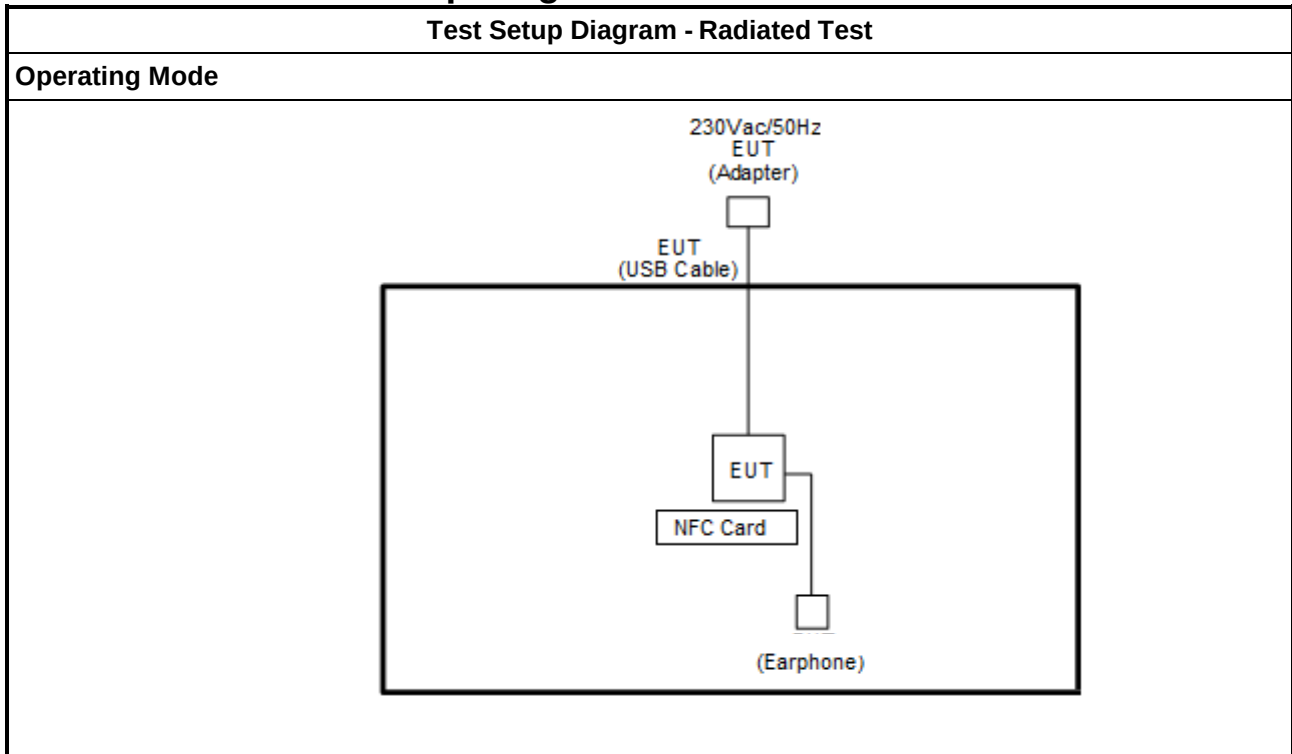

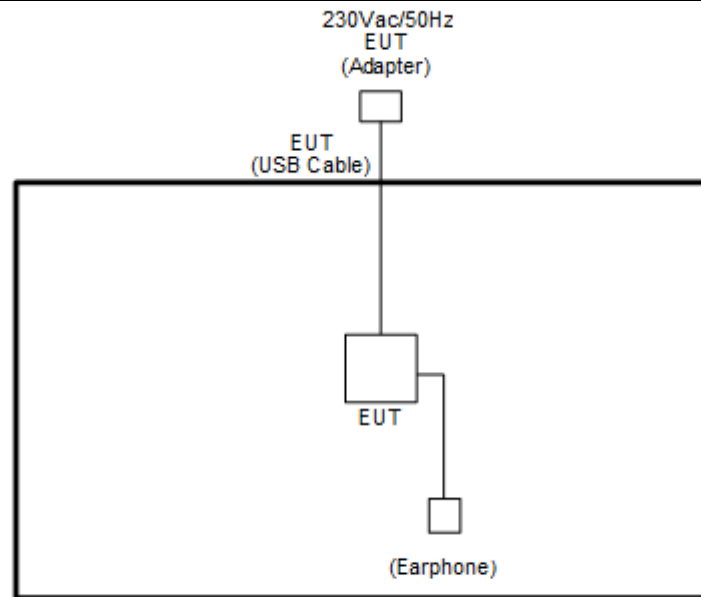Standby Mode

3 Transmitter Test Result

3.1 Transmitter H-field Output Levels

3.1.1 Transmitter H-field Output Levels Limit

Transmitter H-field Output Levels Limit
42 dB μ A/m at 10m (RFID application)
Note: The Spectrum mask limit of EN300 330 Annex I shall be complied


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
■ The measurements shall be performed at both normal environmental conditions and at the extremes of the operating temperature range. ■ Refer as ETSI EN 300 330, clause 6.2.4 for H-field measurement.
□ EUT had been measured at standard distance [10 m]. □ EUT had been measured at another distance [1 m]. In this case, the measured value at actual test distance shall be extrapolated to 10 m according to ANSI C63.10 clause 5.3.2 and the results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade). ■ EUT had been measured at another distance [3 m]. According to EN 300 330 Annex H2 H3m = H10m+ C3. ■ For extremes conditions, the EUT with test fixture shall then be related to the field strength measured in radiated condition. The compensation calculation will be used to calculate the absolute level of the extremes conditions □ $E = 20 \times \log [(30 \times P)^{0.5} / d] + 120$; E=E-field [dB$\mu$V/m]; P=EIRP Power [W]; d= test distance [m]

3.1.4 Test Setup

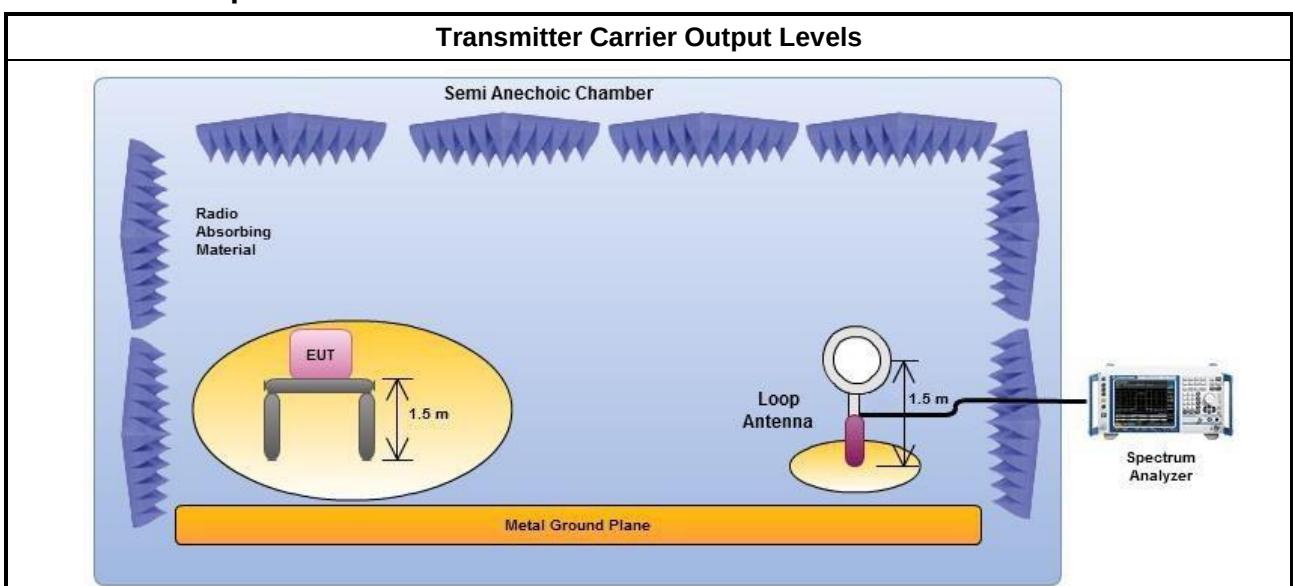

3.1.5 Test Result of Transmitter H-field Output Levels

Transmitter H-field Output Levels Result						
Condition	Mode	Freq. (MHz)	E-field (dBμV/m at 3m)	E-field (dBμV/m at 10m)	H-field (dBμA/m at 10m)	H-field Limit (dBμA/m at 10m)
TnomVnom	NFC	13.56	53.21	30.11	-21.39	42
TminVmin	NFC	13.56	53.34	30.24	-21.26	42
TmaxVmin	NFC	13.56	52.98	29.88	-21.62	42
TminVmax	NFC	13.56	53.3	30.2	-21.30	42
TmaxVmax	NFC	13.56	52.97	29.87	-21.63	42
Test Result: Complied						
Remark: 1. Test is performed at 3m distance 2. E-field(10m)=E-field(3m) – EN300 330 Annex H.2 Distance factor 3. H-field(dBμA/m)=E-field limit(dBμV/m) - 51.5dB						

3.1.6 Test Results of Spectrum Mask

Spectrum Mask								
Emission Frequency (MHz)	Polarization	Level (dBμV/m @3m)	Distance Factor (dB)	E-Field (dBμV/m @10m)	E-Field Limit (dBμV/m @10m)	Level Type	Margin (dB)	Result
6.630	H	45.43	27.66	17.77	31.5	Peak	-13.73	Pass
15.595	H	34.15	21	13.15	31.5	Peak	-18.35	Pass
6.632	V	46.7	27.66	19.04	31.5	Peak	-12.46	Pass
16.290	V	33.92	20.36	13.56	31.5	Peak	-17.94	Pass
Remark: 1. Test is performed at 3m distance 2. E-field(10m)=E-field(3m) - EN300 330 Annex H.2 Distance factor 3. E-field limit(dBμV/m)=H field limit(dBμA/m) + 51.5dB								

3.2 Operating Frequencies Ranges

3.2.1 Operating Frequencies Ranges Limit

Operating Frequencies Ranges Limit
The permitted range of operating frequency for intentional emissions shall be from 9 kHz to 30 MHz for NFC authorized band as 13.553 – 13.567 MHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
■ Refer as ETSI EN 300 330, clause 6.2.2 for permitted range of operating frequencies	
	■ Occupied bandwidth and operating frequencies (F_L and F_H) fall in NFC authorized band.
	■ Operating frequencies (F_L and F_H) below spurious limit and operating frequencies (F_L and F_H) fall in NFC authorized band.
	■ Outside the permitted range of operating frequencies the unintentional emissions shall be reduced to the limits EN300 330 clause 4.3.2.3

3.2.4 Test Setup

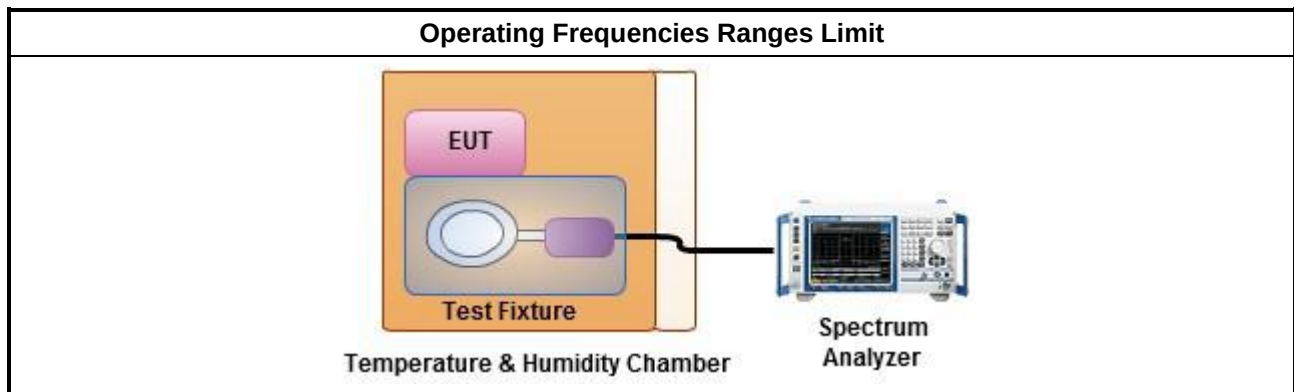

3.2.5 Test Result of Permitted Range of Operating Frequencies Ranges

Operating Frequencies Ranges							
Condition	Mode	Freq. (MHz)	Threshold Level	FL (MHz)	FH (MHz)	FL Limit (MHz)	FH Limit (MHz)
TnomVnom	NFC	13.56	OBW	13.559551	13.56042	13.55300	13.56700
TminVmin	NFC	13.56	OBW	13.559551	13.56042	13.55300	13.56700
TmaxVmin	NFC	13.56	OBW	13.559551	13.56042	13.55300	13.56700
TminVmax	NFC	13.56	OBW	13.559551	13.56042	13.55300	13.56700
TmaxVmax	NFC	13.56	OBW	13.559551	13.56042	13.55300	13.56700
Test Results: Complied							

3.3 Modulation Bandwidth

3.3.1 Modulation Bandwidth Limit

Modulation Bandwidth Limit
Permitted Frequency Range of the Modulation Bandwidth = 14 kHz for NFC (13.553 – 13.567 MHz).


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method
■ Refer as ETSI EN 300 330, clause 6.2.3 for permitted range of operating frequencies
■ 15 dB below the carrier of modulation bandwidth shall be less than limits.
□ Spurious limit threshold of modulation bandwidth shall be less than limits.
□ 99% band power threshold of modulation bandwidth shall be less than limits.
■ The permitted modulation bandwidth shall be within the transmitter emission boundary of the spectrum mask.
■ For extremes conditions, the EUT with test fixture shall then be related to the field strength measured in radiated condition. The calculation will be used to calculate the absolute level of the extremes conditions.

3.3.4 Test Setup

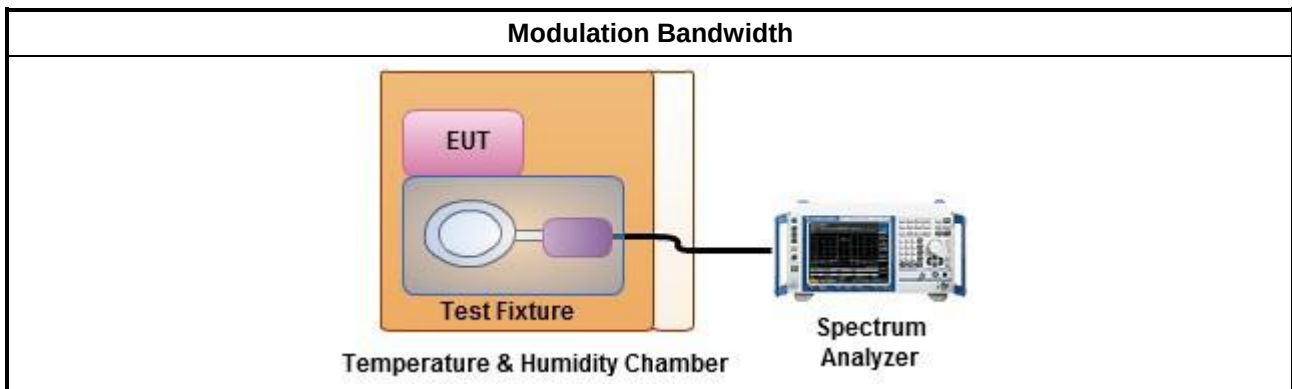

3.3.5 Test Result of Modulation Bandwidth

Modulation Bandwidth					
Condition	Mode	Freq. (MHz)	99% Modulation Bandwidth (kHz)	15dBc Modulation Bandwidth (kHz)	Modulation Bandwidth (kHz) Limit
Tnom/Vnom	NFC	13.56	0.695	0.695	14
Tmin/Vmax	NFC	13.56	0.781	0.695	14
Tmin/Vmin	NFC	13.56	0.781	0.695	14
Tmax/Vmax	NFC	13.56	0.695	0.695	14
Tmax/Vmin	NFC	13.56	0.738	0.695	14
Result			Complied		

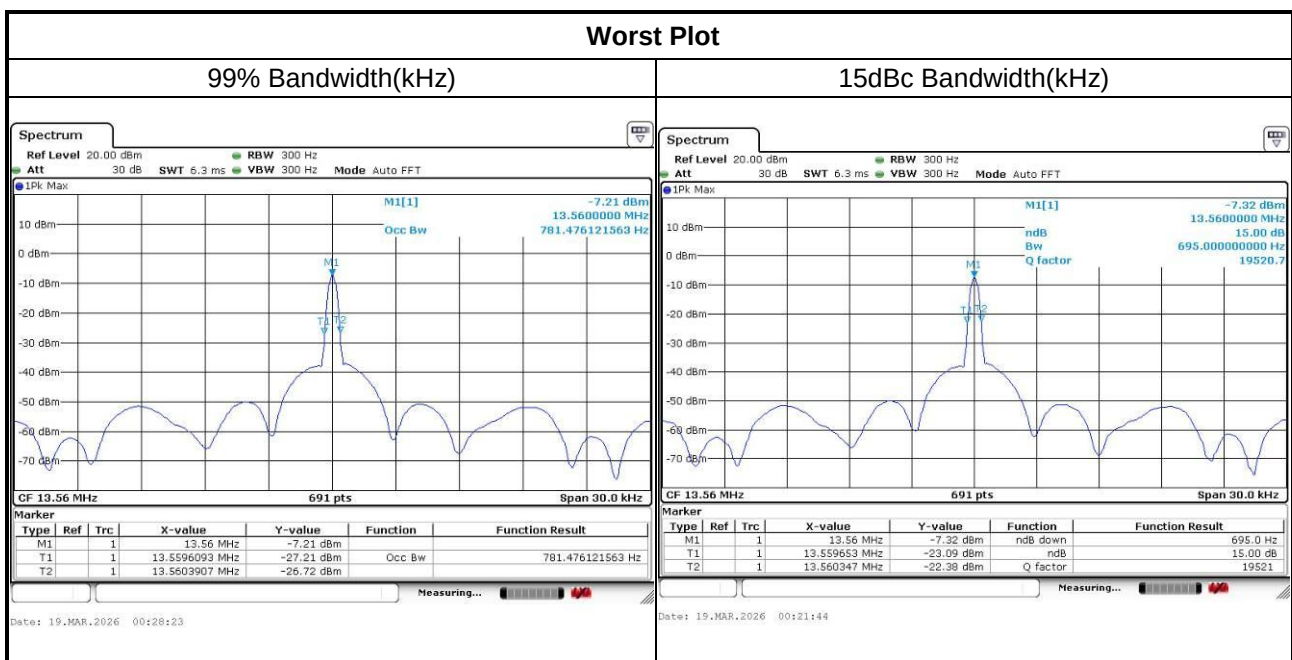

3.4 Transmitter radiated spurious domain emission

3.4.1 Transmitter radiated spurious domain emission Limit

Transmitter radiated spurious domain emission limit (9 kHz - 30 MHz) H-field dBμA/m at 10 m – EN 300 330		
Frequency State	Frequency 9 kHz ≤ f < 10 MHz	Frequency 10 MHz ≤ f < 30 MHz
Operating	27 dBμA/m at 9 kHz descending 3 dB/oct	-3.5 dBμA/m
Standby	5.5 dBμA/m at 9 kHz descending 3 dB/oct	-25 dBμA/m

Transmitter radiated spurious domain emission limit (30 MHz - 1 GHz)		
Frequency State	47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies below 1000 MHz
Operating	4 nW (-54 dBm)	250 nW (-36 dBm)
Standby	2 nW (-57 dBm)	2 nW (-57 dBm)

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
■ Refer as ETSI EN 300 330, clause 6.2.8 , clause 6.2.9 for radiated measurement	
	□ If an unmodulated carrier cannot be obtained.
	■ If EUT modulated by the normal test signal.
	■ If standby mode is available.
	□ If receivers used in combination with permanently co-located transmitters continuously transmitting. Co-located is defined as < 3 m, then receiver spurious radiation do not apply to receivers used in combination with permanently co-located transmitters continuously transmitting.


3.4.4 Test Setup

Transmitter Spurious and Out of Band Emissions (9 kHz - 30 MHz)

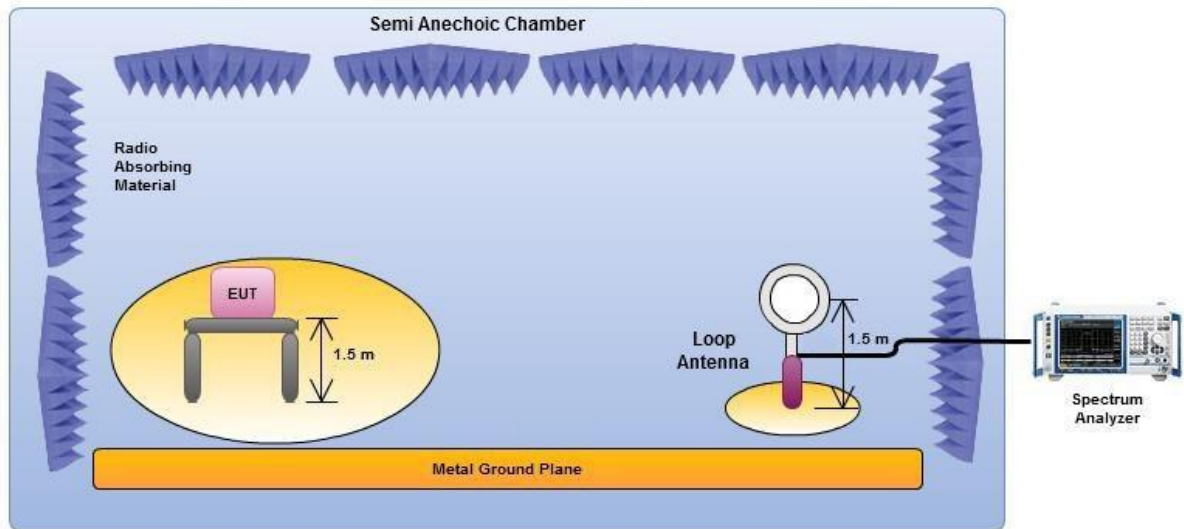

There are comparison data between OATS (the ground plan is non-metal material) and semi-Anechoic chamber, and the result are very similar.

Transmitter Spurious and Out of Band Emissions (30 MHz - 1 GHz)

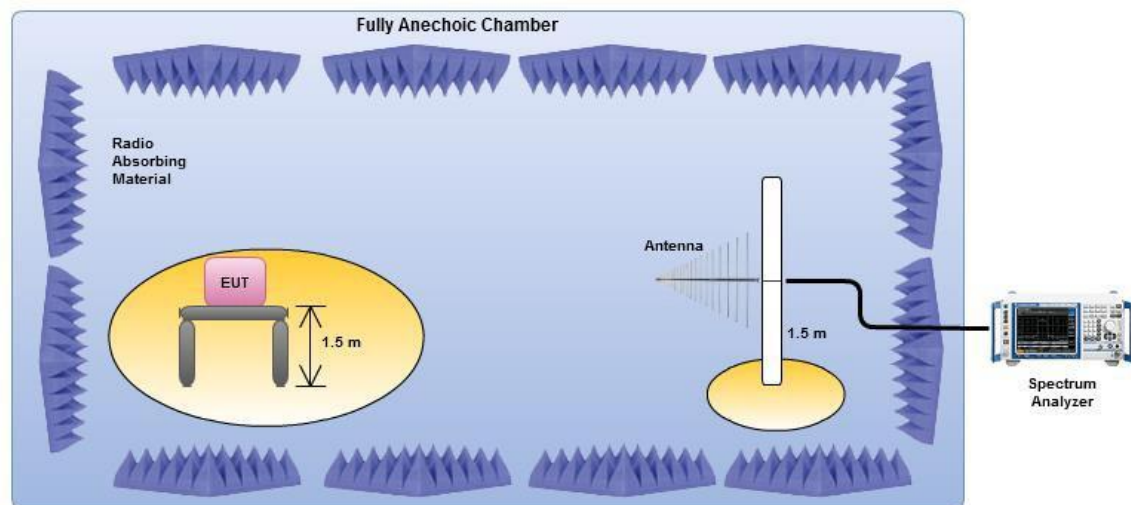

A measuring distance of at least 3 m shall be used for measurements at frequencies up to 1 GHz. For frequencies above 1 GHz, any suitable measuring far field distance may be used, depending on the test system noise floor for detecting spurious emission signals. The equipment size (excluding the antenna) shall be less than 20 % of the measuring distance. The height of the equipment or of the substitution antenna shall be 1.5 m.

3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


Transmitter spurious emissions for 9K-30MHz								
Test Mode: NFC Operating Mode								
Emission Frequency (MHz)	Polarization	Level (dBμV/m @3m)	Distance Factor (dB)	E-Field (dBμV/m @10m)	E-Field Limit (dBμV/m @10m)	Level Type	Margin (dB)	Result
0.0974	H	44.28	31.3	12.98	68.19	Peak	-55.21	Pass
0.4858	H	64.69	31.3	33.39	61.24	Peak	-27.85	Pass
0.9746	H	59.81	31.3	28.51	58.22	Peak	-29.71	Pass
0.0974	V	44.17	31.3	12.87	68.19	Peak	-55.32	Pass
0.4858	V	63.94	31.3	32.64	61.24	Peak	-28.60	Pass
1.6570	V	56.68	31.3	25.38	55.93	Peak	-30.55	Pass
Remark: 1. Test is performed at 3m distance 2. E-field(10m)=E-field(3m) - EN300 330 Annex H.2 Distance factor 3. E-field limit(dBμV/m)=H field limit(dBμA/m) + 51.5dB								

Transmitter Radiated Unwanted Emissions (9 kHz –30 MHz)

Mode	NFC	Test Freq.	13.56 MHz
Operating Mode		Polarization	Horizontal

Remark:

The test data shown in the plot is at 3m distance, and the limit shown in the plot is 10m limit, the final results should be converted to 10m then compared with 10m limit as the table above.

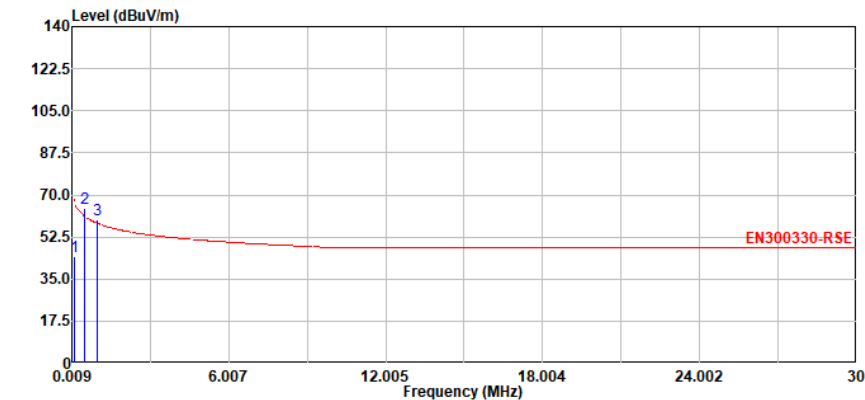

Site : 03CH07-KS
Condition: EN300330-RSE 3m Loop HFH2-Z2E SN 101125 Horizontal


	Freq	Level	Limit	Over	Read	Ant	Cable	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	
1	0.10	44.28	68.19	-23.91	24.31	19.88	0.09	---	---	Peak
2	0.49	64.69	61.24	3.45	44.83	19.77	0.09	---	---	Peak
3	0.97	59.81	58.22	1.59	39.93	19.79	0.09	---	---	Peak

Transmitter Radiated Unwanted Emissions (9 kHz –30 MHz)

Mode	NFC	Test Freq.	13.56 MHz
Operating Mode		Polarization	Vertical

Remark:


The test data shown in the plot is at 3m distance, and the limit shown in the plot is 10m limit, the final results should be converted to 10m then compared with 10m limit as the table above.

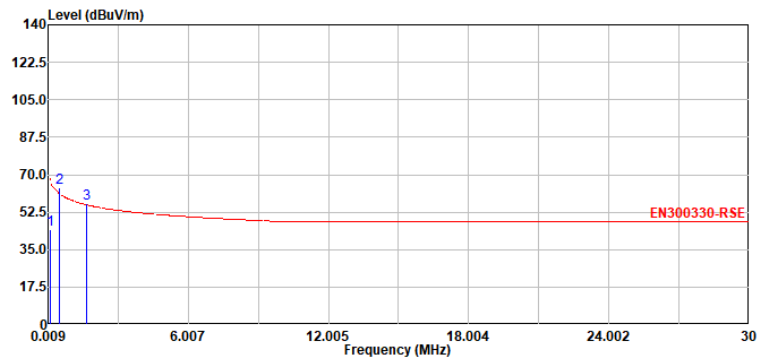

Site : 03CH07-KS
Condition: EN300330-RSE 3m Loop HFH2-Z2E SN 101125 Vertical


	Freq	Level	Limit	Over	Read	Ant	Cable	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	
1	0.10	44.17	68.19	-24.02	24.20	19.88	0.09	---	---	Peak
2	0.49	63.94	61.24	2.70	44.08	19.77	0.09	---	---	Peak
3	1.66	56.68	55.93	0.75	36.74	19.84	0.10	---	---	Peak

3.4.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)

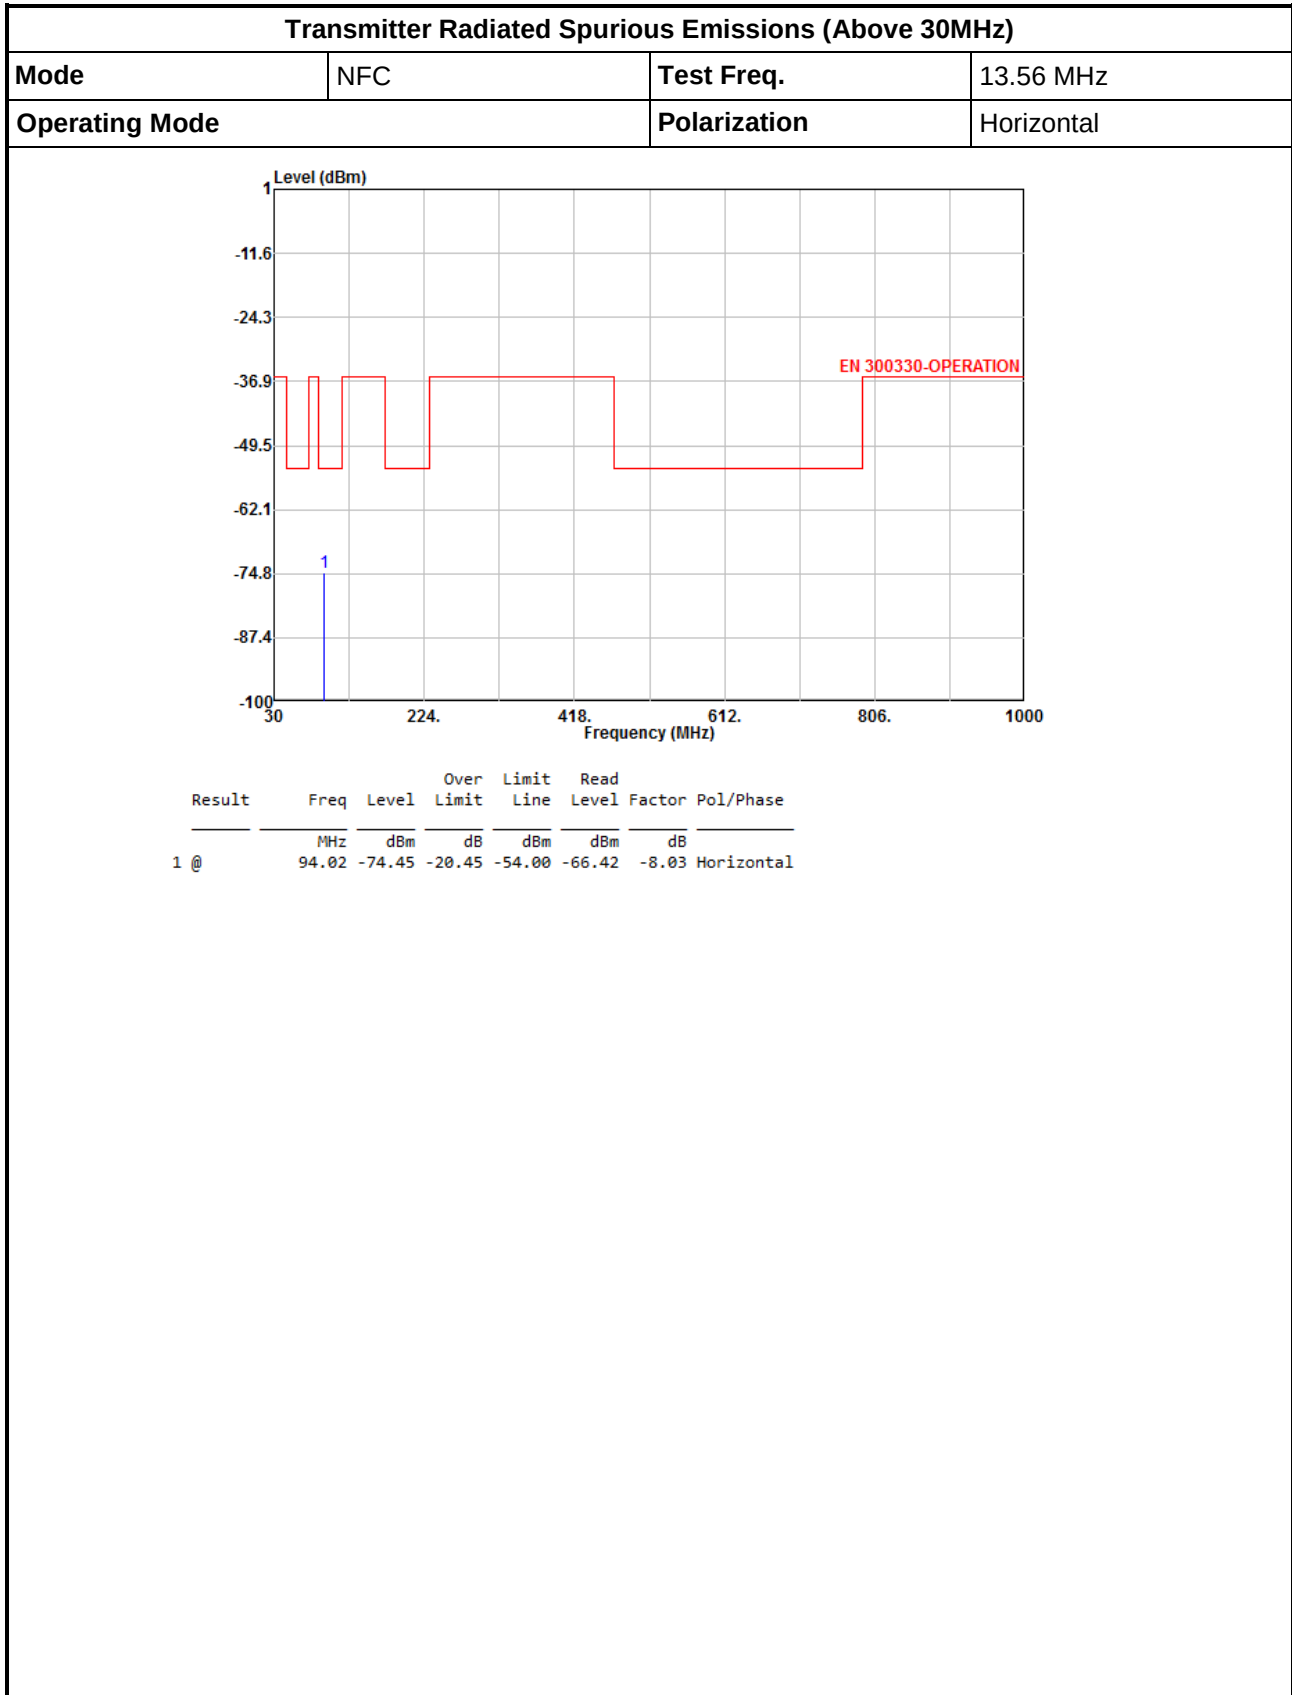

Transmitter Radiated Spurious Emissions (Above 30MHz)

Mode	NFC	Test Freq.	13.56 MHz
Operating Mode	Polarization Vertical		

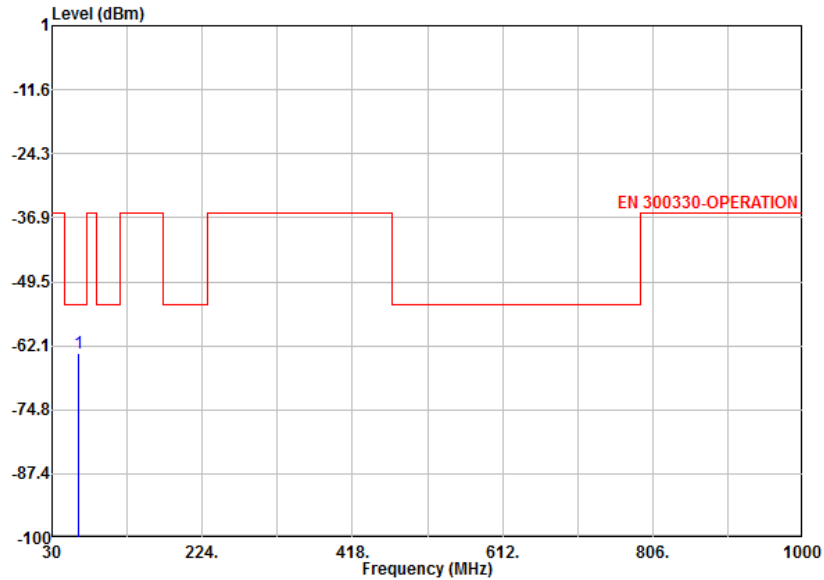

Result	Freq	Level	Over	Limit	Read	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1 @	63.95	-63.55	-9.55	-54.00	-56.13	-7.42	Vertical

3.4.7 Radiated Unwanted Emissions – Standby (Below 30MHz)


Radiated Unwanted Emissions for 9K-30MHz								
Test Mode: NFC Standby Mode								
Emission Frequency (MHz)	Polarization	Level (dBμV/m @3m)	Distance Factor (dB)	E-Field (dBμV/m @10m)	E-Field Limit (dBμV/m @10m)	Level Type	Margin (dB)	Result
0.0650	H	49.05	31.3	17.75	48.45	Peak	-30.70	Pass
0.4858	H	61.42	31.3	30.12	39.74	Peak	-9.62	Pass
4.0940	H	46.13	29.15	16.98	30.51	Peak	-13.53	Pass
0.0110	V	56.63	31.3	25.33	56.11	Peak	-30.78	Pass
0.4858	V	61.51	31.3	30.21	39.74	Peak	-9.53	Pass
5.8510	V	44.22	28.01	16.21	28.97	Peak	-12.76	Pass
Remark: 1. Test is performed at 3m distance 2. E-field(10m)=E-field(3m) – EN 300330 Annex H.2 Distance factor 3. E-field limit(dBμV/m)=H field limit(dBμA/m) + 51.5dB								

Radiated Unwanted Emissions (9 kHz –30 MHz)

Mode	NFC	Test Freq.	13.56 MHz
Standby Mode		Polarization	Horizontal

Remark:

The test data shown in the plot is at 3m distance, and the limit shown in the plot is 10m limit, the final results should be converted to 10m then compared with 10m limit as the table above.

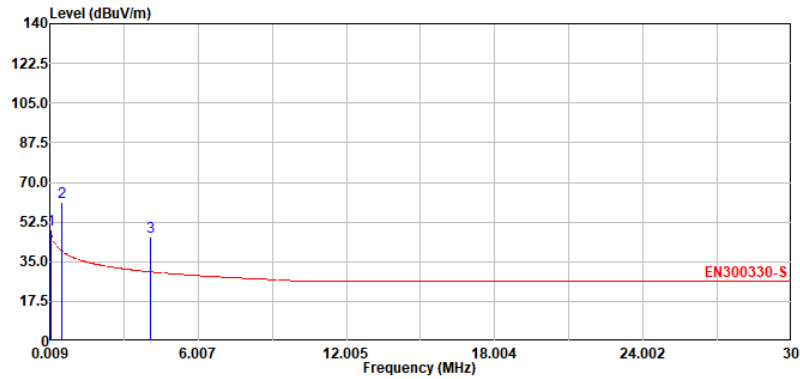

Site : 03CH07-KS
Condition: EN300330-S 3m Loop HFH2-Z2E SN 101125 Horizontal


	Freq	Level	Limit	Over	Read	Ant	Cable	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	
1	0.06	49.05	48.45	0.60	29.01	19.95	0.09	---	---	Peak
2	0.49	61.42	39.74	21.68	41.56	19.77	0.09	---	---	Peak
3	4.09	46.13	30.51	15.62	26.23	19.76	0.14	---	---	Peak

Radiated Unwanted Emissions (9 kHz –30 MHz)

Mode	NFC	Test Freq.	13.56 MHz
Standby Mode		Polarization	Vertical


Remark:

The test data shown in the plot is at 3m distance, and the limit shown in the plot is 10m limit, the final results should be converted to 10m then compared with 10m limit as the table above.

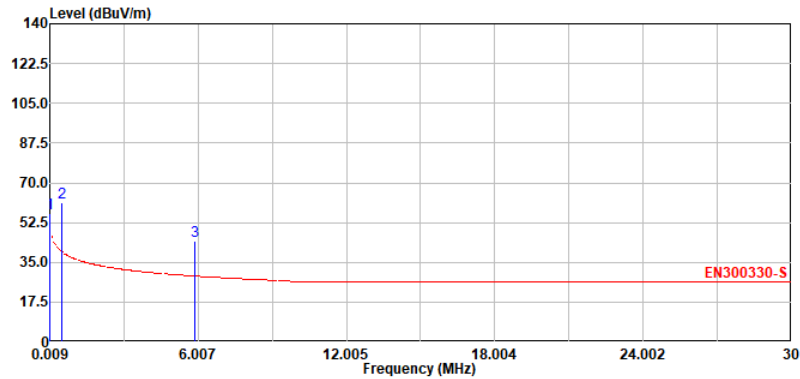


Site : 03CH07-KS
Condition: EN300330-S 3m Loop HFH2-Z2E SN 101125 Vertical

	Freq	Level	Limit	Over	Read	Ant	Cable	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	
1	0.01	56.63	56.11	0.52	36.79	19.75	0.09	---	---	Peak
2	0.49	61.51	39.74	21.77	41.65	19.77	0.09	---	---	Peak
3	5.85	44.22	28.97	15.25	24.33	19.73	0.16	---	---	Peak

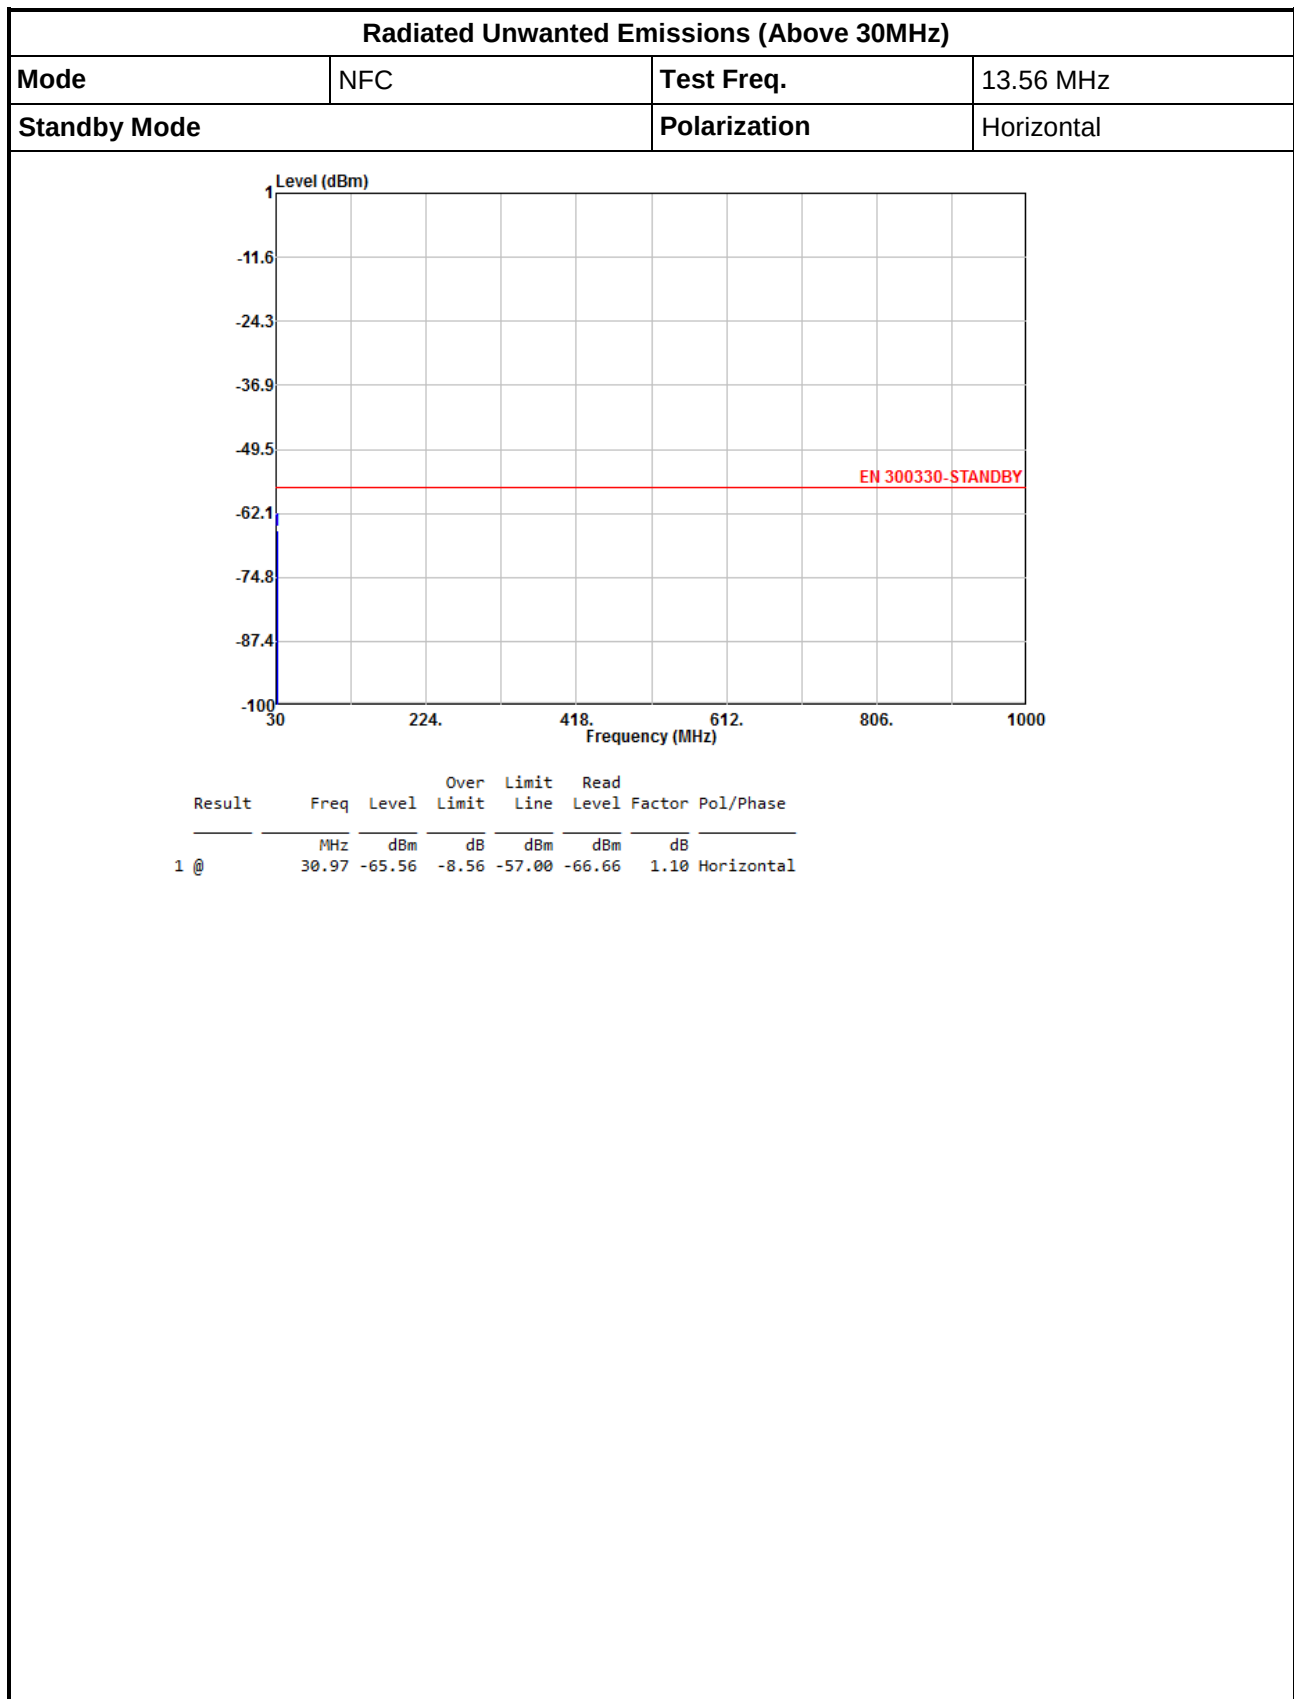3.4.8 Radiated Unwanted Emissions – Standby (Above 30MHz)


Radiated Unwanted Emissions (Above 30MHz)

Mode	NFC	Test Freq.	13.56 MHz
Standby Mode		Polarization	Vertical

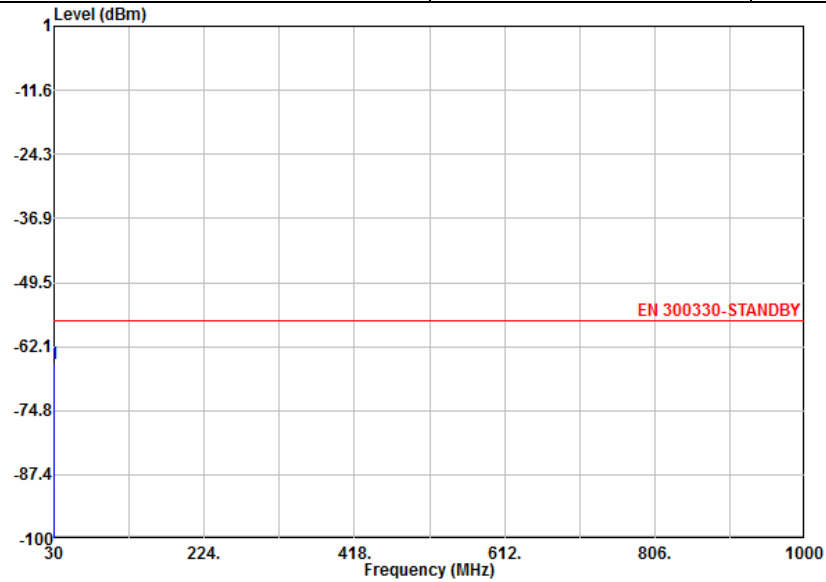

Result	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1 @	30.00	-65.51	-8.51	-57.00	-64.56	-0.95	Vertical

3.5 Receiver spurious emissions

These requirements do not apply to receivers used in combination with permanently co-located transmitters continuously transmitting. In these cases the receivers will be tested together with the transmitter in operating mode. (See clause 3.3)

3.5.1 Receiver spurious radiation limits

Frequency State	Frequency $9\text{ kHz} \leq f < 10\text{ MHz}$	Frequency $10\text{ MHz} \leq f < 30\text{ MHz}$
Receiver	5.5 dB μ A/m at 9 kHz descending 3 dB/oct	-25 dB μ A/m

The spurious components above 30 MHz measured values shall not exceed 2 nW.

3.5.2 Test Result

N/A for the transceiver




4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Mar. 19, 2026	Jul. 06, 2026	Conducted (TH01-KS)
DC Power Supply	GW INSTEK	PLR36-10	GET220683	Max 20A, 36V	Jan. 02, 2026	Mar. 19, 2026	Jan. 01, 2027	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 02, 2025	Mar. 19, 2026	Jul. 01, 2026	Conducted (TH01-KS)
MXE EMI Receiver	Keysight	N9038A	MY57290151	3Hz~8.4GHz	Jul. 02, 2025	Mar. 15, 2026	Jul. 01, 2026	Radiation (03CH07-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Mar. 15, 2026	Aug. 09, 2026	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Mar. 15, 2026	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Mar. 15, 2026	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Mar. 15, 2026	NCR	Radiation (03CH07-KS)
Signal and spectrum analyzer	Rohde & Schwarz	FSV3044	101177	10Hz-44GHz	Jul. 03, 2025	Mar. 14, 2026	Jul. 02, 2026	Radiation (05CH02-KS)
Log-periodic antenna	R&S	HL562	100446	30MHz-3GHz	Jan. 21, 2026	Mar. 14, 2026	Jan. 20, 2027	Radiation (05CH02-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2026	Mar. 14, 2026	Jan. 01, 2027	Radiation (05CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)


NCR: No Calibration Required

5 Setup Photographs

Radiation Emission
From 9kHz~30MHz

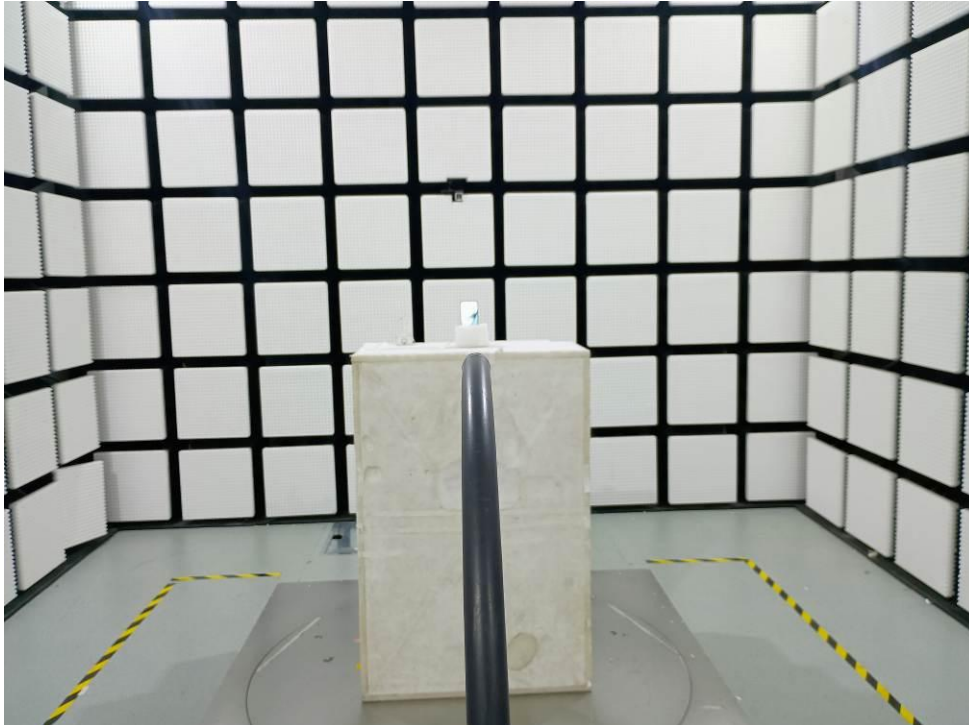

Above 30MHz

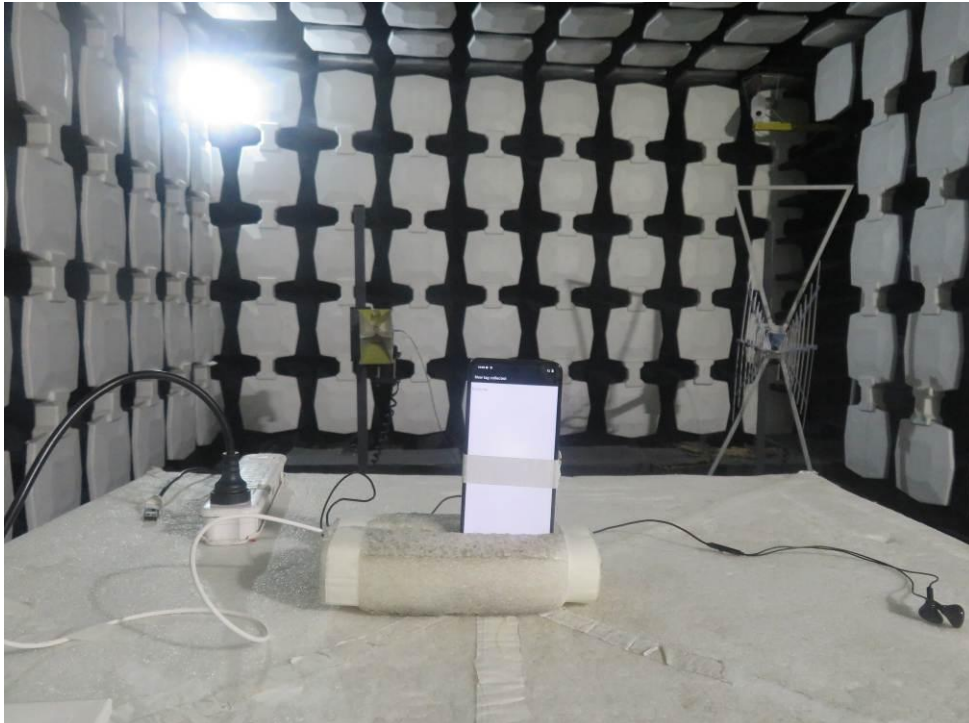

————THE END————