Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/25

01_GSM900_GPRS 2 Tx slots_Left Cheek_0mm_Ch37

Communication System: UID 0, EGSM (0); Frequency: 897.4 MHz;Duty Cycle: 1:4.15
Medium: HSL_900_260225 Medium parameters used: f = 897.4 MHz; σ = 0.95 S/m; ε_r = 42.203; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.191 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.414 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.206 W/kg
SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.142 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 55.7%
Maximum value of SAR (measured) = 0.189 W/kg

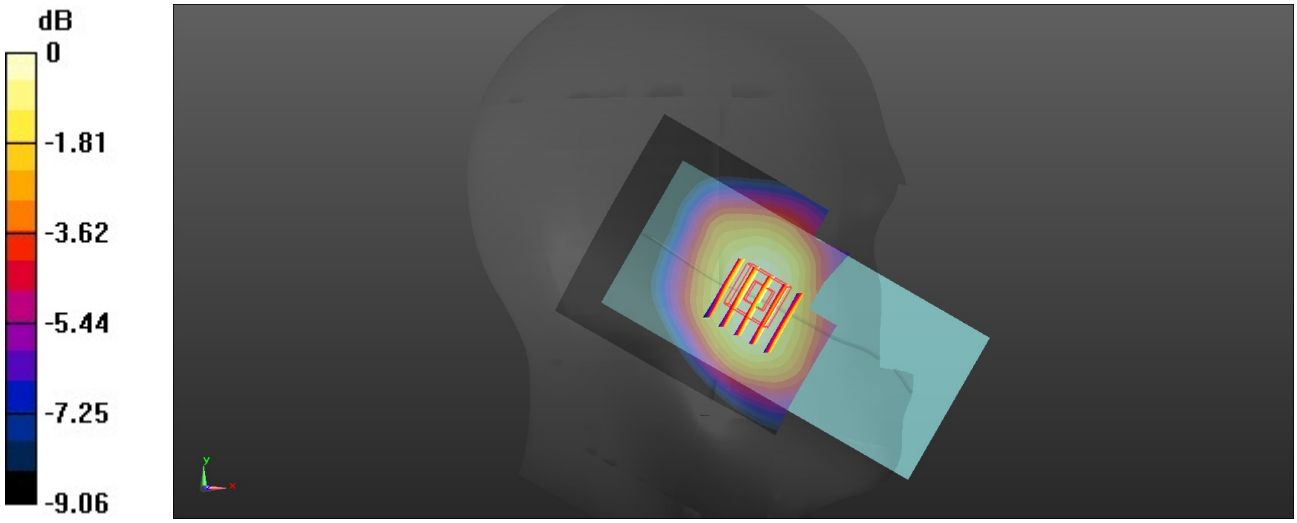

0 dB = 0.189 W/kg = -7.24 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/26

02_GSM1800_GPRS 3 Tx slots_Right Cheek_0mm_Ch698

Communication System: UID 0, DCS (0); Frequency: 1747.4 MHz;Duty Cycle: 1:2.77
Medium: HSL_1800_260226 Medium parameters used: f = 1747.4 MHz; σ = 1.368 S/m; ε_r = 40.703; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0851 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.529 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.101 W/kg
SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.041 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 71.4%
Maximum value of SAR (measured) = 0.0798 W/kg

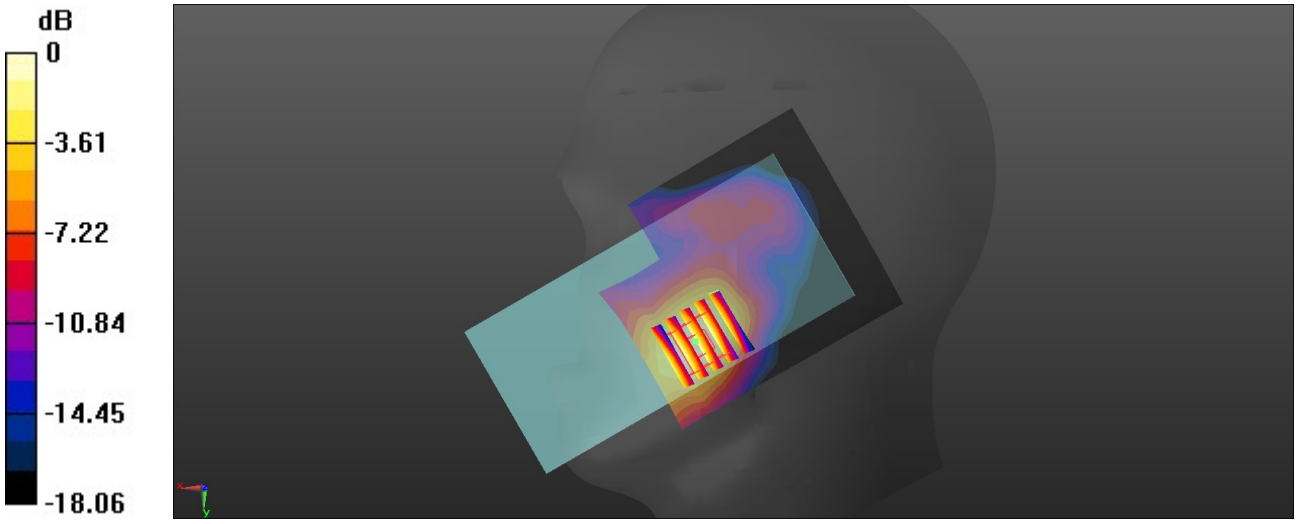

0 dB = 0.0798 W/kg = -10.98 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/27

03_WCDMA I_RMC 12.2Kbps_Right Cheek_0mm_Ch9750

Communication System: UID 0, WCDMA (0); Frequency: 1950 MHz;Duty Cycle: 1:1
Medium: HSL_2000_260227 Medium parameters used: f = 1950 MHz; σ = 1.384 S/m; ε_r = 39.419; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1950 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.132 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.991 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.165 W/kg
SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.069 W/kg
Smallest distance from peaks to all points 3 dB below = 14.6 mm
Ratio of SAR at M2 to SAR at M1 = 72%
Maximum value of SAR (measured) = 0.126 W/kg

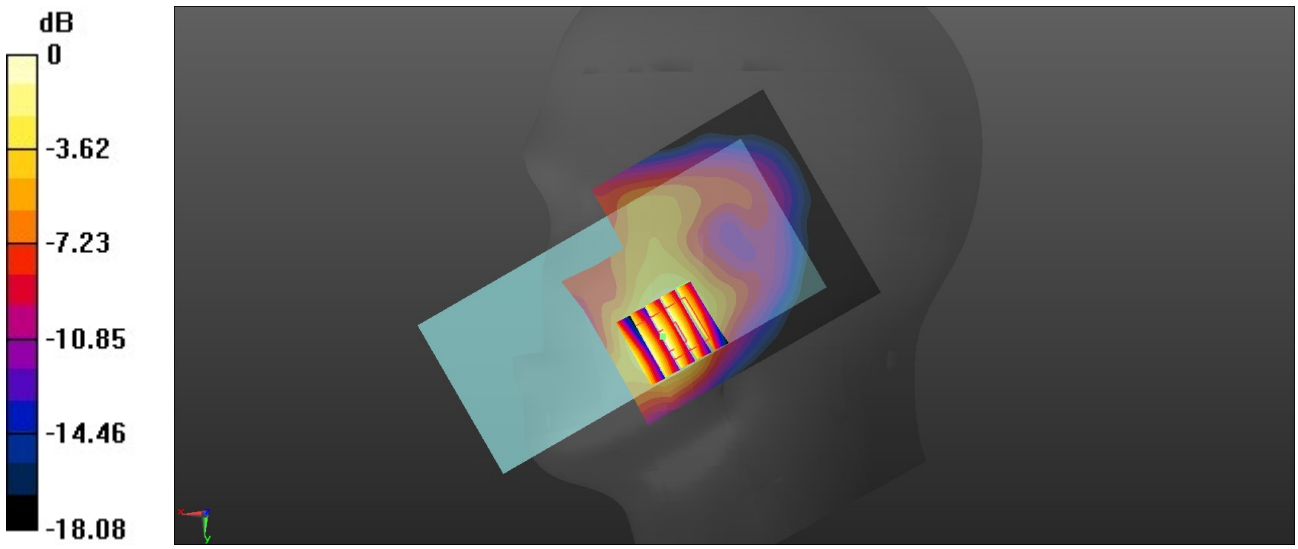

0 dB = 0.126 W/kg = -9.00 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/24

04_WCDMA V_RMC 12.2Kbps_Left Cheek_0mm_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1
Medium: HSL_835_260224 Medium parameters used: f = 836.4 MHz; σ = 0.925 S/m; ε_r = 42.619; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 836.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.147 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.490 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.157 W/kg
SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.110 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 56.8%
Maximum value of SAR (measured) = 0.147 W/kg

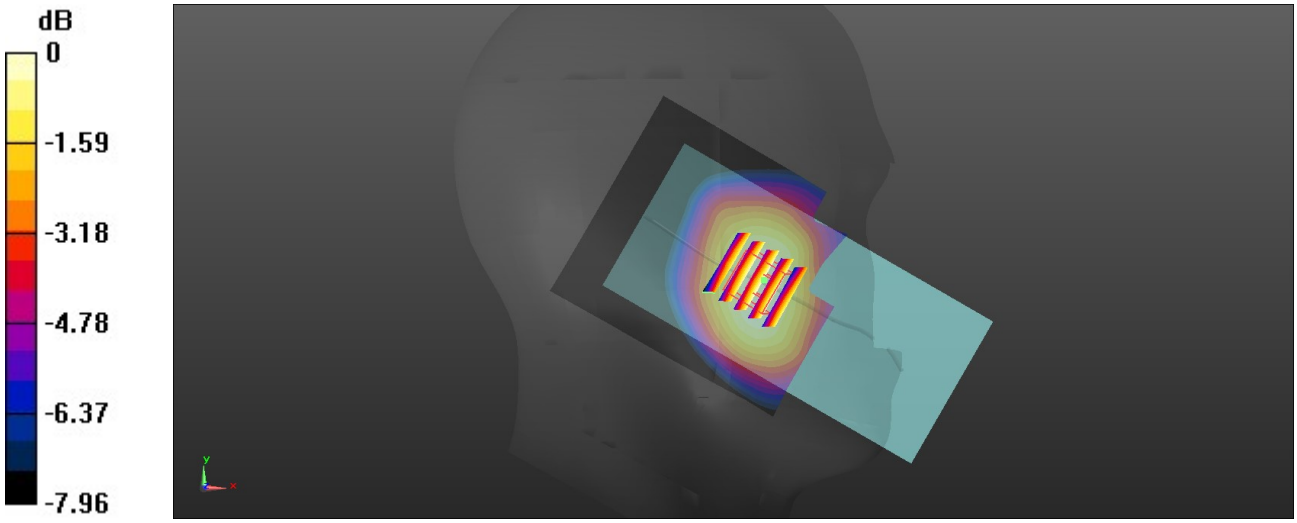

0 dB = 0.147 W/kg = -8.33 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/25

05_WCDMA VIII_RMC 12.2Kbps_Left Cheek_0mm_Ch2788

Communication System: UID 0, WCDMA (0); Frequency: 897.6 MHz;Duty Cycle: 1:1
Medium: HSL_900_260225 Medium parameters used: f = 898 MHz; σ = 0.95 S/m; ε_r = 42.273; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.6 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.155 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.724 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.252 W/kg
SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.079 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 55.8%
Maximum value of SAR (measured) = 0.133 W/kg

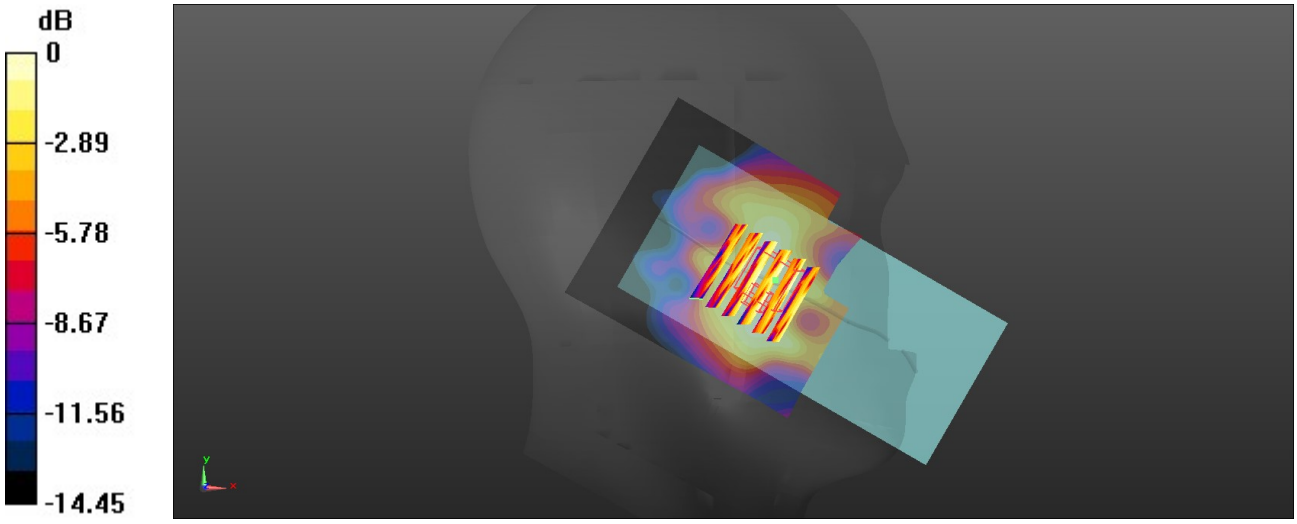

0 dB = 0.133 W/kg = -8.76 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/27

06_LTE Band 1_20M_QPSK_1_0_Right Cheek_0mm_Ch18300

Communication System: UID 0, LTE-FDD (0); Frequency: 1950 MHz;Duty Cycle: 1:1
Medium: HSL_2000_260227 Medium parameters used: f = 1950 MHz; σ = 1.384 S/m; ε_r = 39.419; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1950 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0684 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.487 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.0890 W/kg
SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.034 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 69.6%
Maximum value of SAR (measured) = 0.0645 W/kg

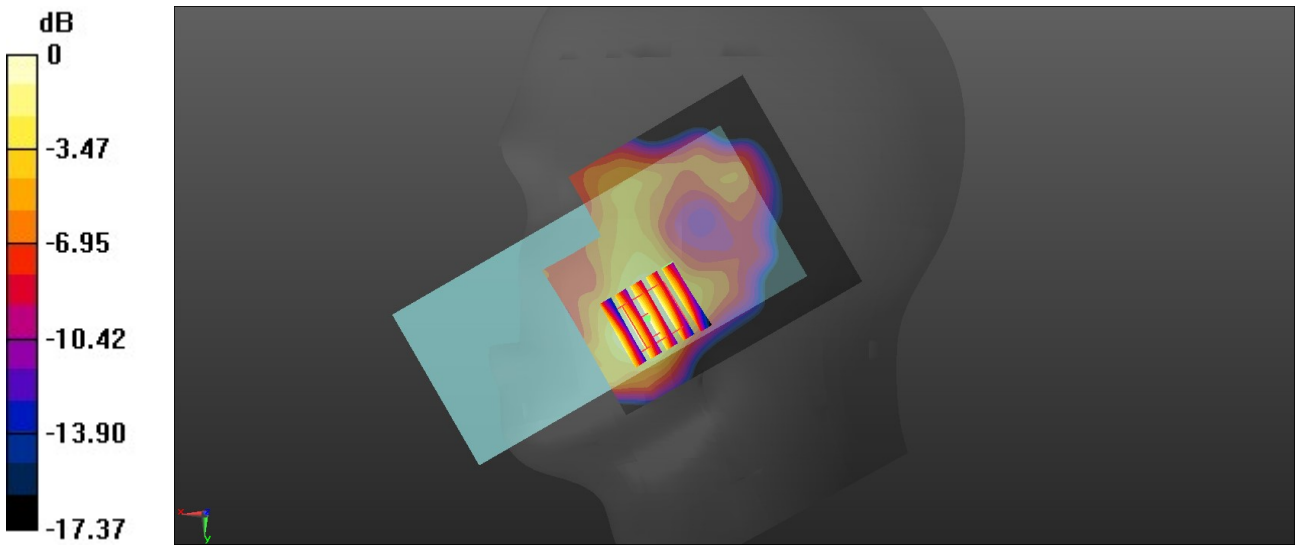

0 dB = 0.0645 W/kg = -11.90 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/26

07_LTE Band 3_20M_QPSK_1_0_Right Cheek_0mm_Ch19575

Communication System: UID 0, LTE-FDD (0); Frequency: 1747.5 MHz;Duty Cycle: 1:1
Medium: HSL_1800_260226 Medium parameters used: f = 1747.5 MHz; σ = 1.368 S/m; ε_r = 40.702; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0696 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.304 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.116 W/kg
SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.023 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 71.1%
Maximum value of SAR (measured) = 0.0581 W/kg

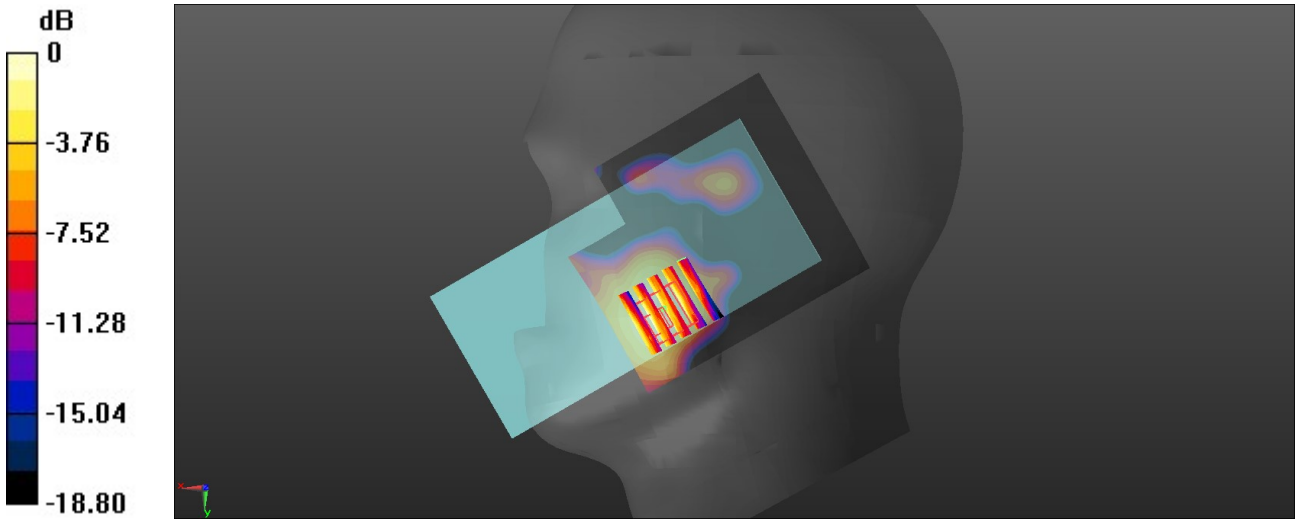

0 dB = 0.0581 W/kg = -12.36 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/24

08_LTE Band 5_10M_QPSK_1_0_Left Cheek_0mm_Ch20525

Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium: HSL_835_260224 Medium parameters used: f = 836.5 MHz; σ = 0.924 S/m; ε_r = 42.595; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 836.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.115 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.786 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.127 W/kg
SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.083 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 43.6%
Maximum value of SAR (measured) = 0.117 W/kg

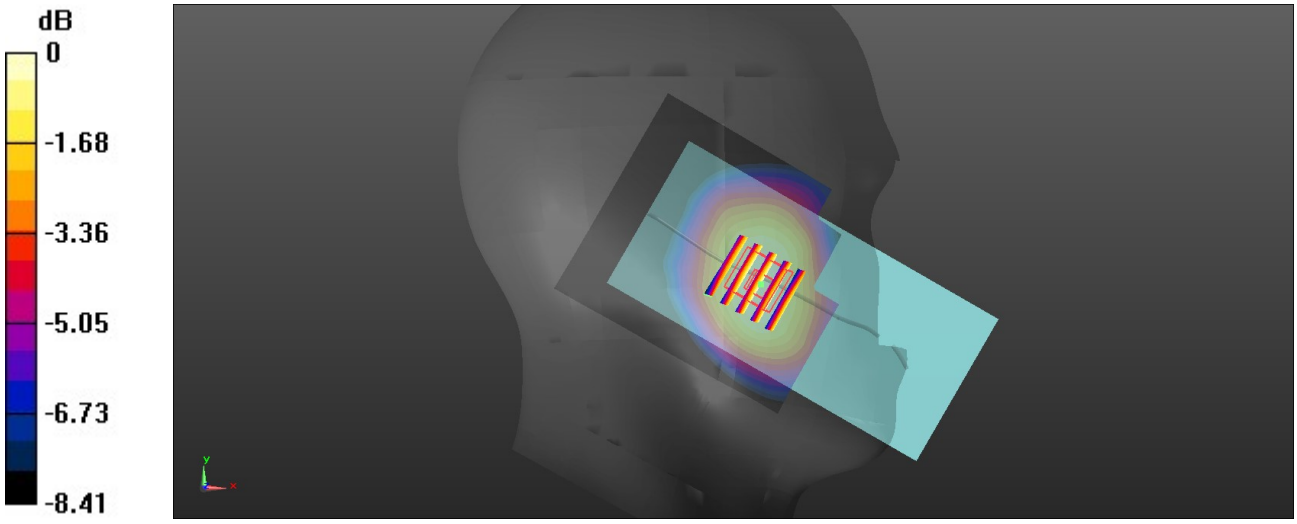

0 dB = 0.117 W/kg = -9.32 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/1

09_LTE Band 7_20M_QPSK_1_0_Left Cheek_0mm_Ch21100

Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL_2600_260301 Medium parameters use: f = 2535 MHz; σ = 1.873 S/m; ε_r = 38.986; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2535 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.115 W/kg

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.201 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.308 W/kg
SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.059 W/kg
Smallest distance from peaks to all points 3 dB below = 8.3 mm
Ratio of SAR at M2 to SAR at M1 = 55.6%
Maximum value of SAR (measured) = 0.144 W/kg

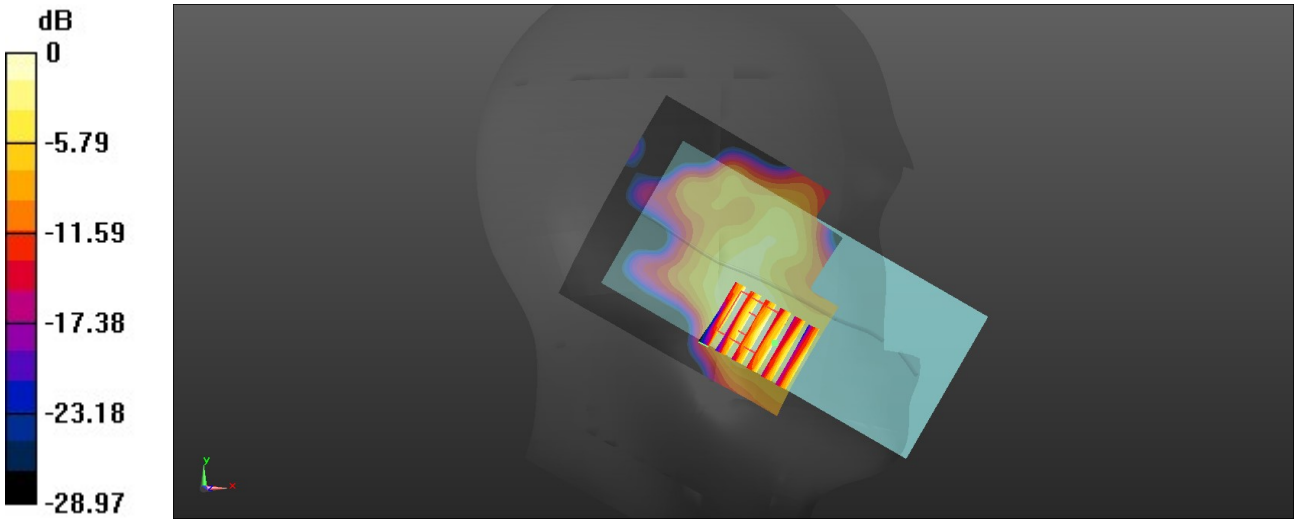

0 dB = 0.144 W/kg = -8.42 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/25

10_LTE Band 8_10M_QPSK_1_0_Left Cheek_0mm_Ch21625

Communication System: UID 0, LTE-FDD (0); Frequency: 897.5 MHz;Duty Cycle: 1:1
Medium: HSL_900_260225 Medium parameters used: f = 897.5 MHz; σ = 0.95 S/m; ε_r = 42.215; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0885 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.784 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.0970 W/kg
SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.063 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 53.2%
Maximum value of SAR (measured) = 0.0886 W/kg

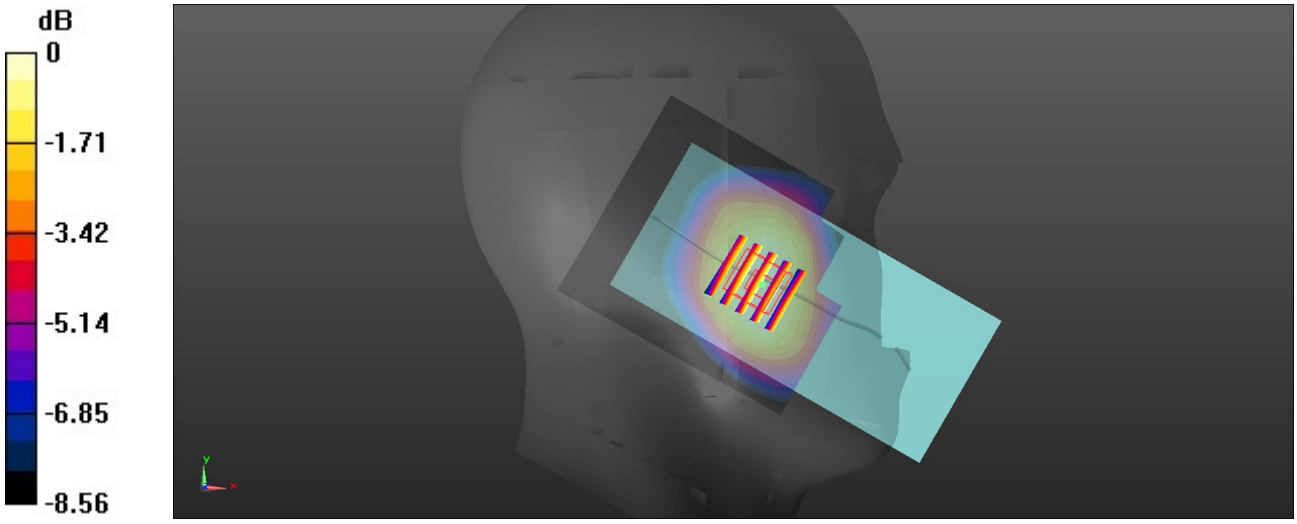

0 dB = 0.0886 W/kg = -10.53 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/24

11_LTE Band 20_20M_QPSK_1_0_Left Cheek_0mm_Ch24300

Communication System: UID 0, LTE-FDD (0); Frequency: 847 MHz;Duty Cycle: 1:1
Medium: HSL_835_260224 Medium parameters used: f = 847 MHz; σ = 0.921 S/m; ε_r = 42.221; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 847 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.120 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.911 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.129 W/kg
SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.086 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 55.2%
Maximum value of SAR (measured) = 0.119 W/kg

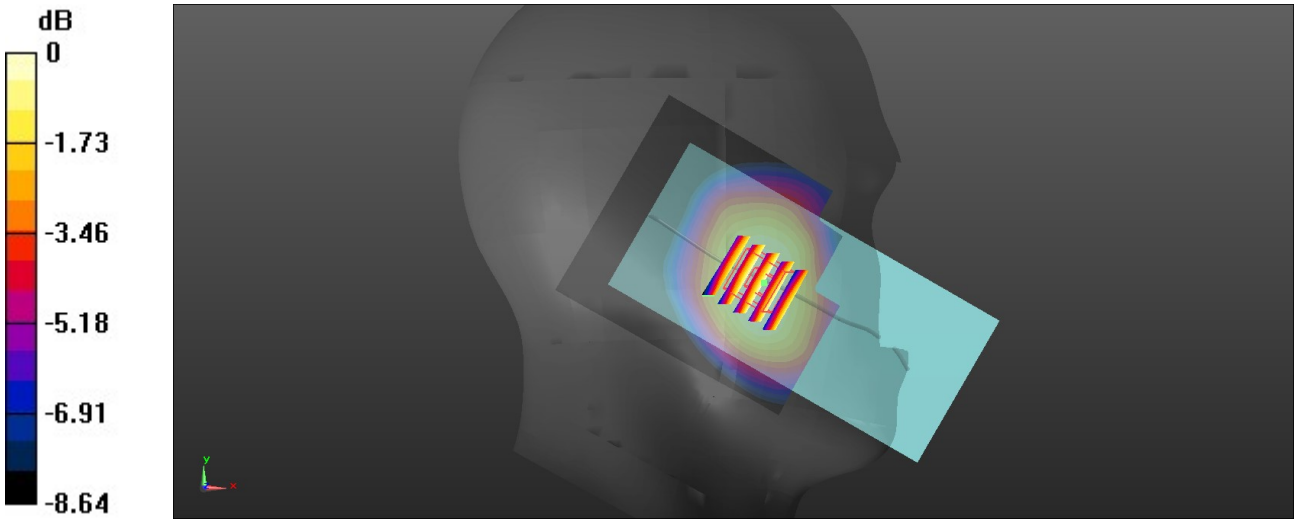

0 dB = 0.119 W/kg = -9.24 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/24

12_LTE Band 26_15M_QPSK_1_0_Left Cheek_0mm_Ch26865

Communication System: UID 0, LTE-FDD (0); Frequency: 831.5 MHz;Duty Cycle: 1:1
Medium: HSL_835_260224 Medium parameters used: f = 831.5 MHz; σ = 0.921 S/m; ε_r = 42.425; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 831.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0967 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.499 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.105 W/kg
SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.070 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 55.1%
Maximum value of SAR (measured) = 0.0966 W/kg

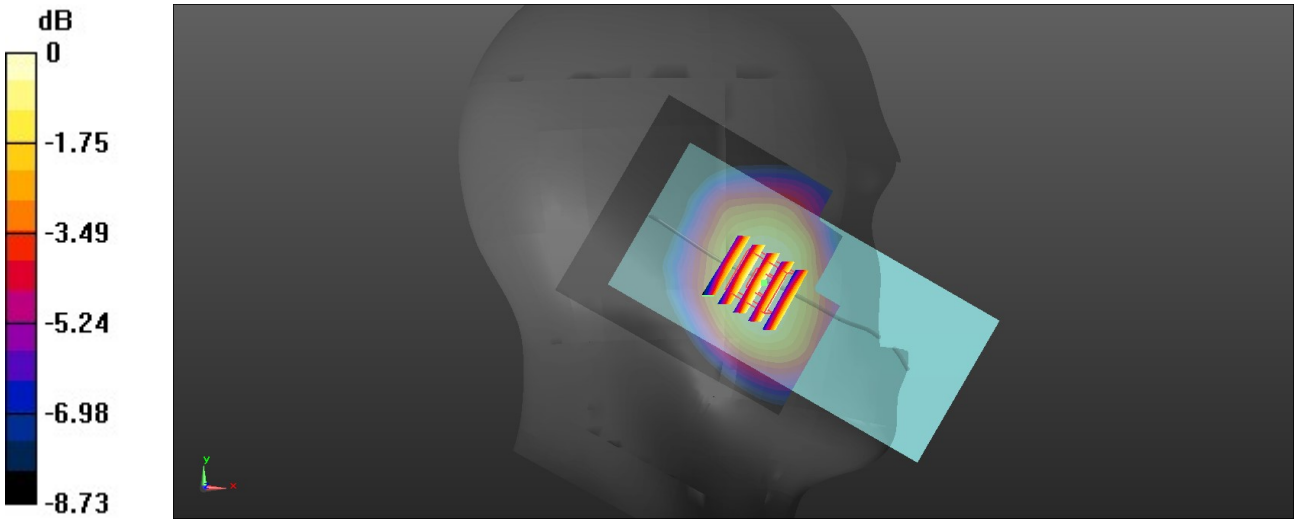

0 dB = 0.0966 W/kg = -10.15 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/23

13_LTE Band 28_20M_QPSK_1_0_Right Cheek_0mm_Ch27460

Communication System: UID 0, LTE-FDD (0); Frequency: 728 MHz;Duty Cycle: 1:1
Medium: HSL_750_260223 Medium parameters used: f = 728 MHz; σ = 0.875 S/m; ε_r = 42.929; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(6.14, 6.21, 6.05) @ 728 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0709 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.586 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.0780 W/kg
SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.053 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 43.9%
Maximum value of SAR (measured) = 0.0717 W/kg

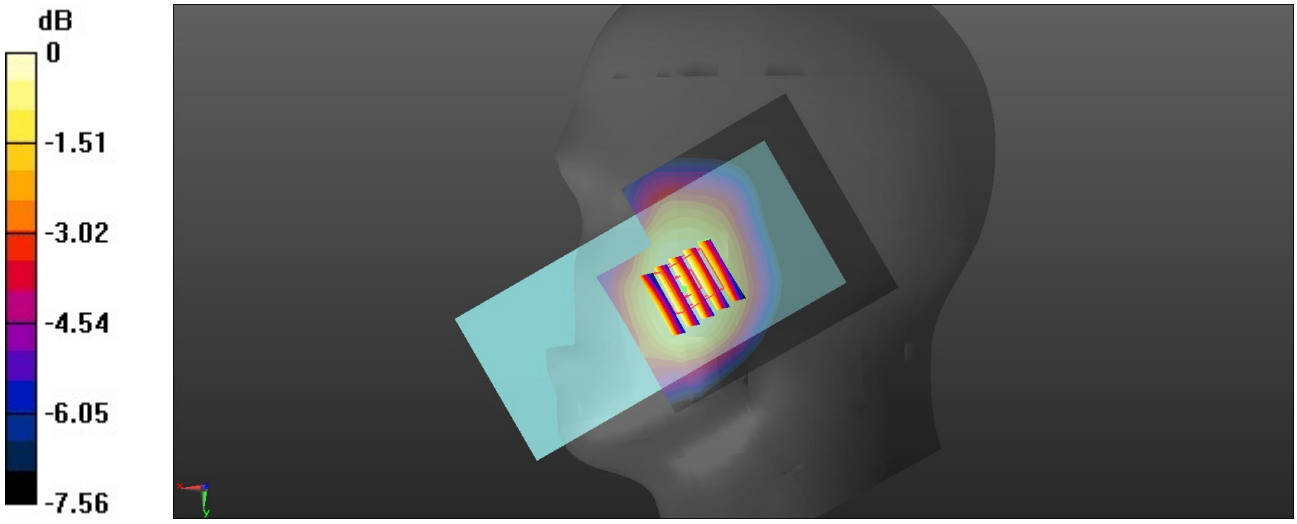

0 dB = 0.0717 W/kg = -11.44 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/28

14_LTE Band 40_20M_QPSK_1_0_Left Cheek_0mm_Ch39150

Communication System: UID 0, LTE-TDD (0); Frequency: 2350 MHz;Duty Cycle: 1:1.59
Medium: HSL_2300_260228 Medium parameters used: f = 2350 MHz; σ = 1.678 S/m; ε_r = 39.407; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.63, 4.68, 4.56) @ 2350 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0968 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.563 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.126 W/kg
SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.044 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 61.3%
Maximum value of SAR (measured) = 0.0911 W/kg

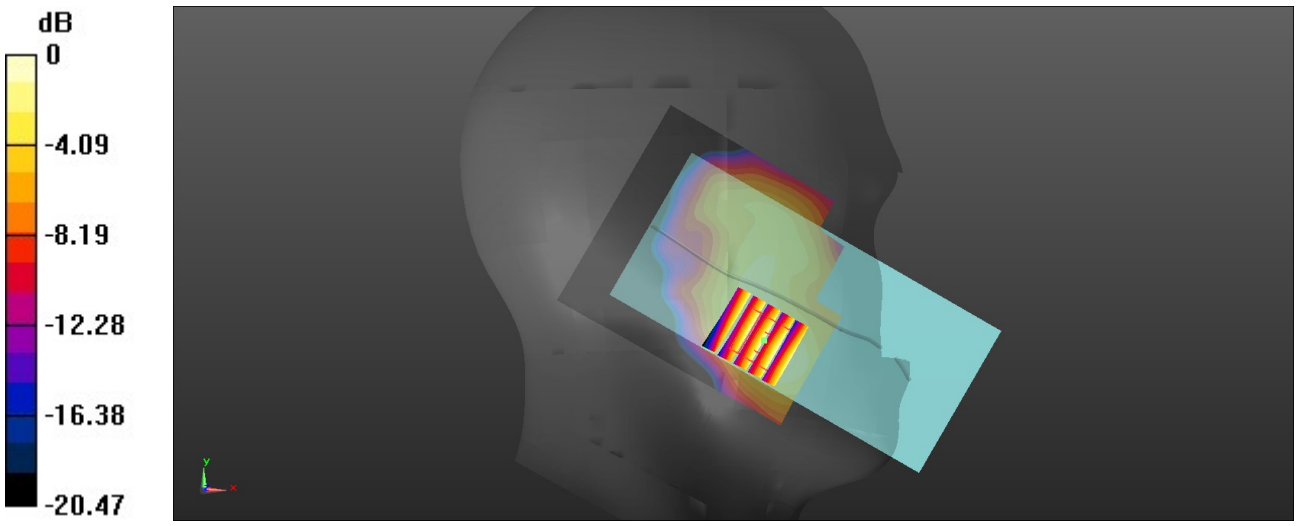

0 dB = 0.0911 W/kg = -10.40 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/1

15_LTE Band 41_20M_QPSK_1_0_Left Cheek_0mm_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz;Duty Cycle: 1:1.59
Medium: HSL_2600_260301 Medium parameters used: f = 2593 MHz; σ = 1.913 S/m; ε_r = 38.565; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2593 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0879 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.126 W/kg
SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.038 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 57.4%
Maximum value of SAR (measured) = 0.0843 W/kg

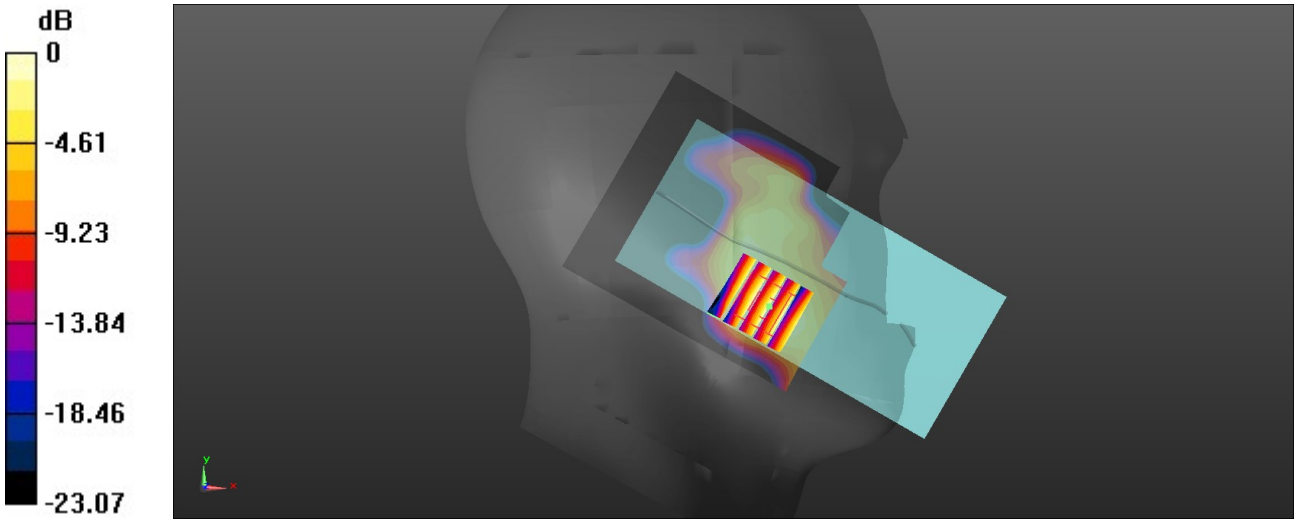

0 dB = 0.0843 W/kg = -10.74 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/10

16_LTE Band 42_20M_QPSK_1_0_Left Cheek_0mm_Ch42590

Communication System: UID 0, LTE-TDD (0); Frequency: 3500 MHz;Duty Cycle: 1:1.59
Medium: HSL_3500_260310 Medium parameters used: f = 3500 MHz; σ = 2.984 S/m; ε_r = 37.772; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(5.62, 6.07, 5.74) @ 3500 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (111x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.964 W/kg

Zoom Scan (10x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.356 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.215 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 74.6%
Maximum value of SAR (measured) = 0.948 W/kg

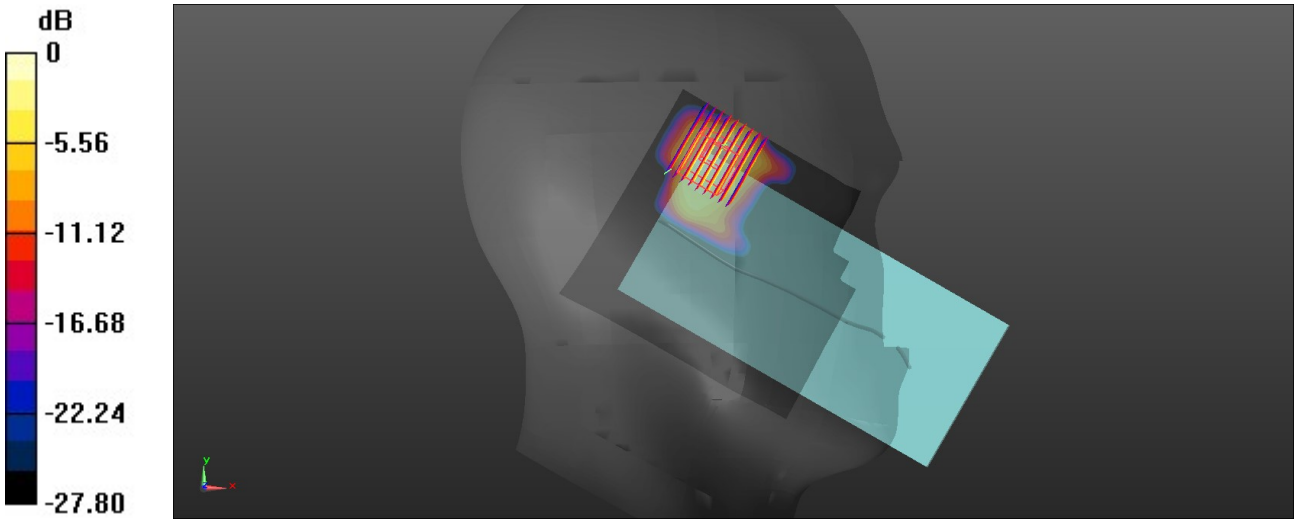

0 dB = 0.948 W/kg = -0.23 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/27

17_FR1 n1_50M_BPSK_135_67_Left Cheek_0mm_Ch390000

Communication System: UID 0, 5G NR (0); Frequency: 1950 MHz;Duty Cycle: 1:1
Medium: HSL_2000_260227 Medium parameters used: f = 1950 MHz; σ = 1.384 S/m; ε_r = 39.419; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1950 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0791 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.518 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.100 W/kg
SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.042 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 69.8%
Maximum value of SAR (measured) = 0.0774 W/kg

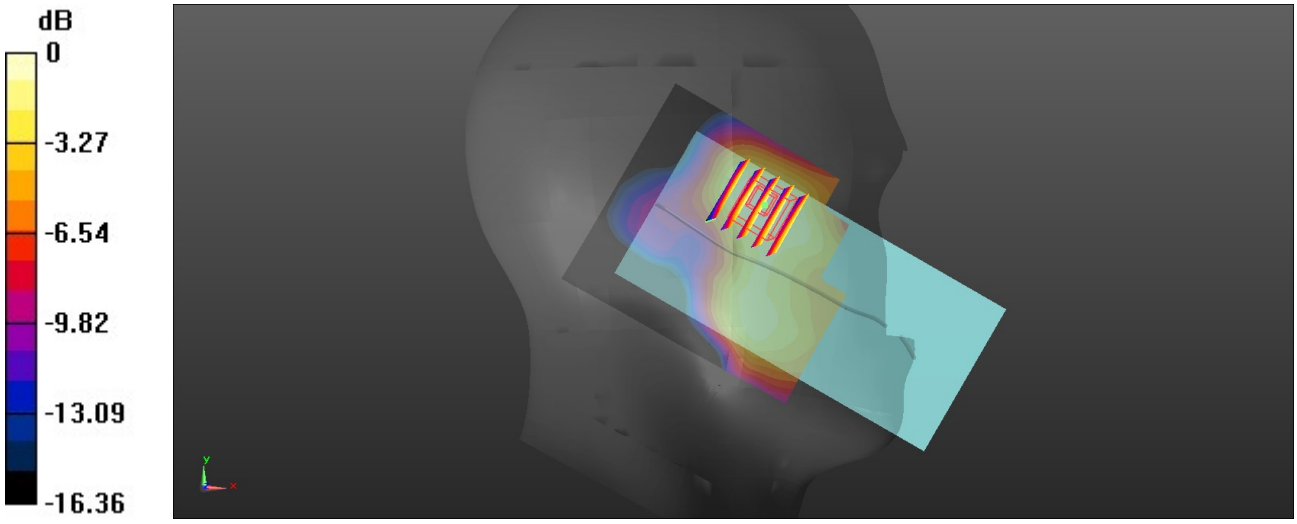

0 dB = 0.0774 W/kg = -11.11 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/26

18_FR1 n3_50M_BPSK_135_67_Left Cheek_0mm_Ch349500

Communication System: UID 0, 5G NR (0); Frequency: 1747.5 MHz;Duty Cycle: 1:1
Medium: HSL_1800_260226 Medium parameters used: f = 1747.5 MHz; σ = 1.368 S/m; ε_r = 40.702; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0734 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.339 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.0940 W/kg
SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.039 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 70.1%
Maximum value of SAR (measured) = 0.0715 W/kg

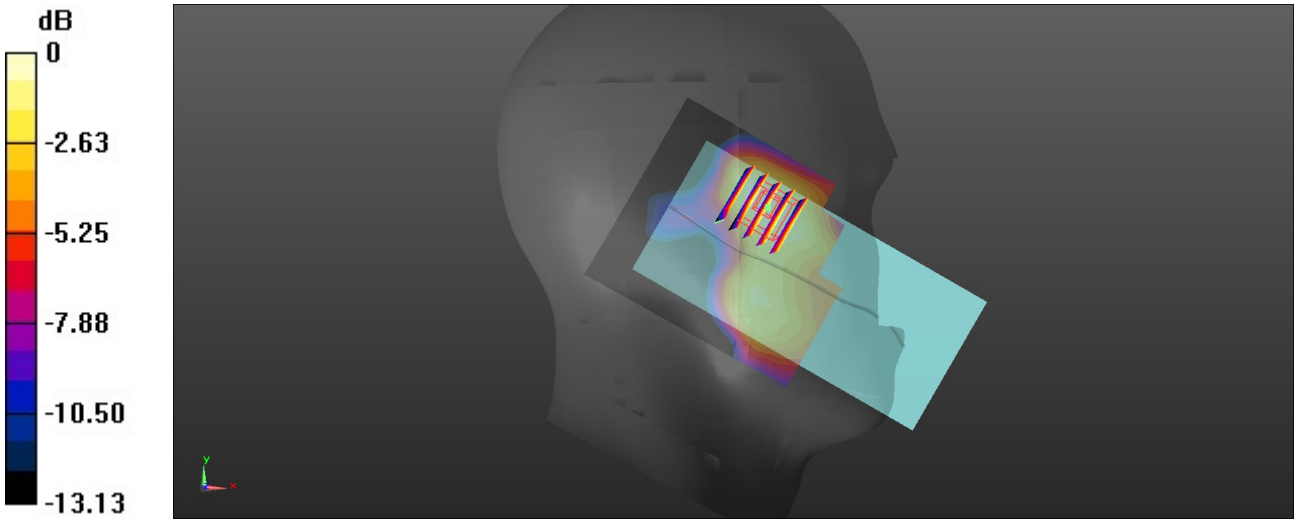

0 dB = 0.0715 W/kg = -11.46 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/24

19_FR1 n5_20M_BPSK_50_25_Left Cheek_0mm_Ch167300

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium: HSL_835_260224 Medium parameters used: f = 836.5 MHz; σ = 0.924 S/m; ε_r = 42.595; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 836.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.144 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.880 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.157 W/kg
SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.103 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 53.6%
Maximum value of SAR (measured) = 0.144 W/kg

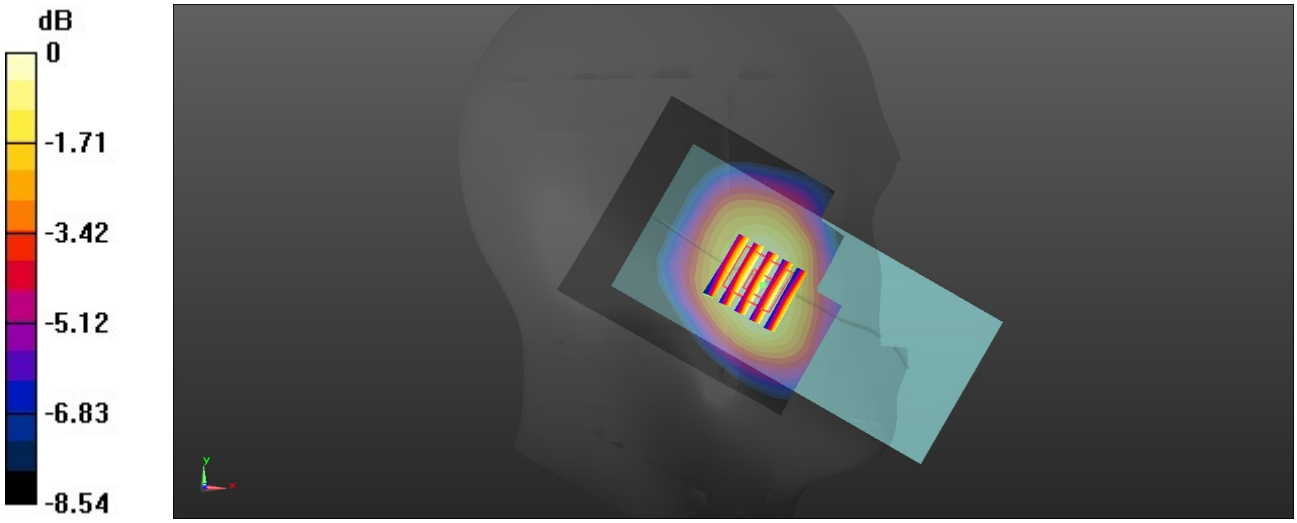

0 dB = 0.144 W/kg = -8.42 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/1

20_FR1 n7_50M_BPSK_135_67_Left Cheek_0mm_Ch507000

Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL_2600_260301 Medium parameters used: f = 2535 MHz; σ = 1.873 S/m; ε_r = 38.986; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2535 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.168 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.364 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.230 W/kg
SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.072 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 59.7%
Maximum value of SAR (measured) = 0.154 W/kg

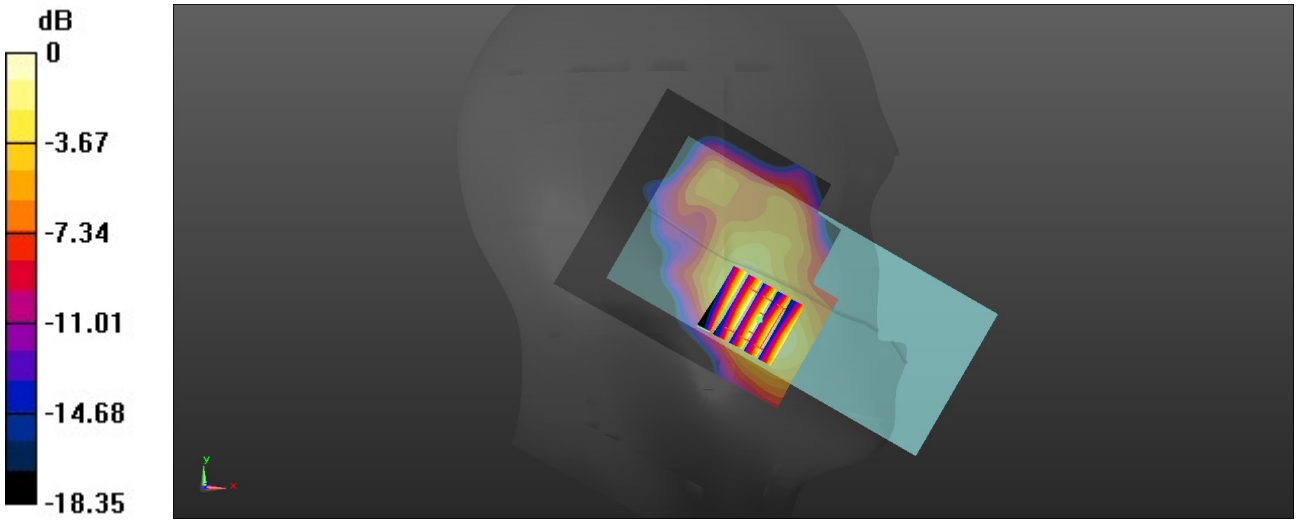

0 dB = 0.154 W/kg = -8.12 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/25

21_FR1 n8_20M_BPSK_50_25_Left Cheek_0mm_Ch179500

Communication System: UID 0, 5G NR (0); Frequency: 897.5 MHz;Duty Cycle: 1:1
Medium: HSL_900_260225 Medium parameters used: f = 897.5 MHz; σ = 0.95 S/m; ε_r = 42.215; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.148 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.216 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.159 W/kg
SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.105 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 54.1%
Maximum value of SAR (measured) = 0.147 W/kg

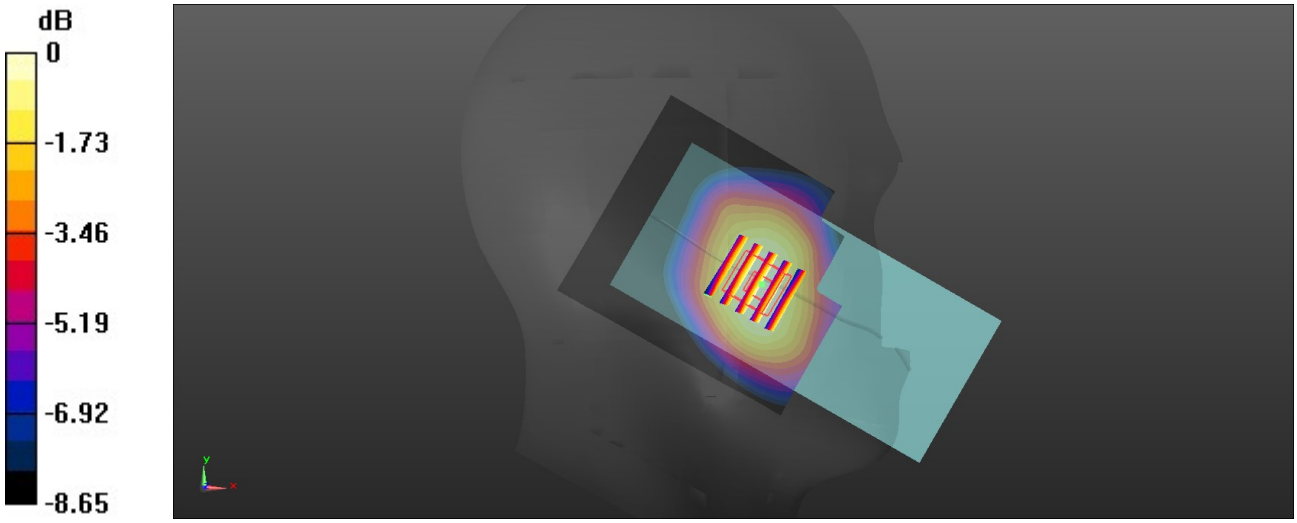

0 dB = 0.147 W/kg = -8.33 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/24

22_FR1 n20_20M_BPSK_50_25_Left Cheek_0mm_Ch169400

Communication System: UID 0, 5G NR (0); Frequency: 847 MHz;Duty Cycle: 1:1
Medium: HSL_835_260224 Medium parameters used: f = 847 MHz; σ = 0.921 S/m; ε_r = 42.221; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 847 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.294 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.842 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.357 W/kg
SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.123 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 53.6%
Maximum value of SAR (measured) = 0.325 W/kg

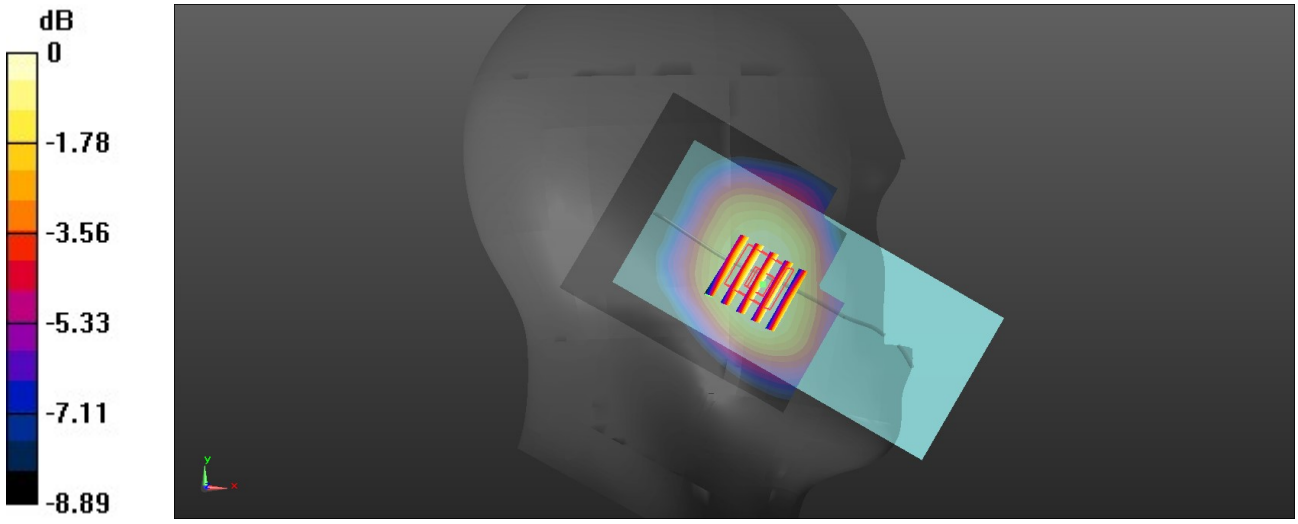

0 dB = 0.325 W/kg = -5.39 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/23

23_FR1 n28_30M_BPSK_80_40_Left Cheek_0mm_Ch145100

Communication System: UID 0, 5G NR (0); Frequency: 725.5 MHz;Duty Cycle: 1:1
Medium: HSL_750_260223 Medium parameters used: f = 725.5 MHz; σ = 0.884 S/m; ε_r = 43.012; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(6.14, 6.21, 6.05) @ 725.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.264 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.768 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.146 W/kg
SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.115 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 53.4%
Maximum value of SAR (measured) = 0.264 W/kg

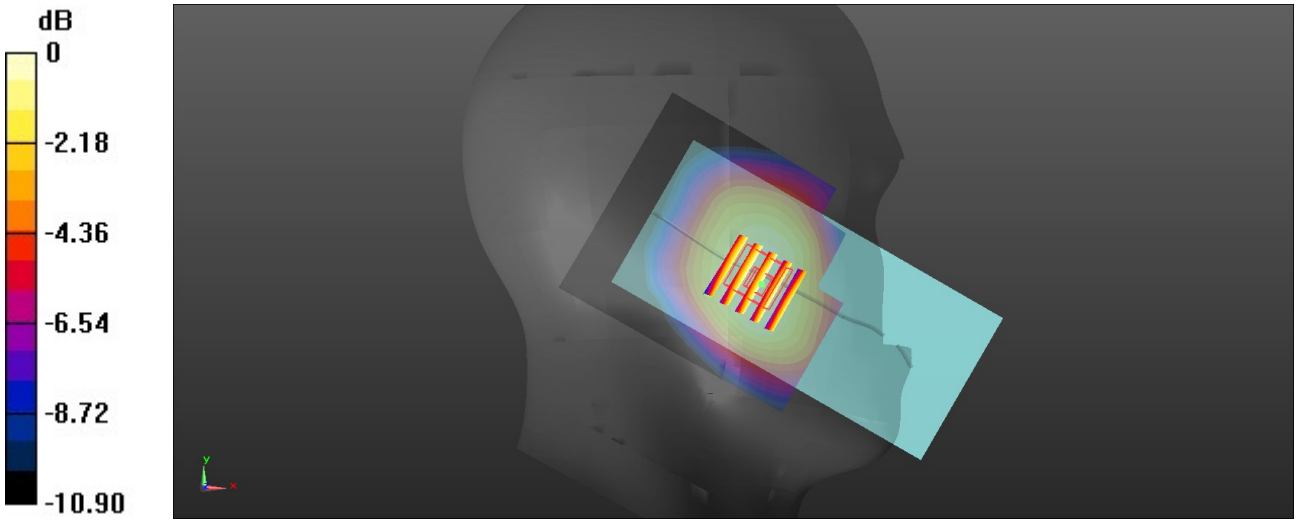

0 dB = 0.264 W/kg = -6.73 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/28

24_FR1 n40_100M_BPSK_135_67_Left Cheek_0mm_Ch470000

Communication System: UID 0, 5G NR (0); Frequency: 2350 MHz;Duty Cycle: 1:1
Medium: HSL_2300_260228 Medium parameters used: f = 2350 MHz; σ = 1.678 S/m; ε_r = 39.407; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.63, 4.68, 4.56) @ 2350 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.197 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.416 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.270 W/kg
SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.096 W/kg
Smallest distance from peaks to all points 3 dB below = 13.9 mm
Ratio of SAR at M2 to SAR at M1 = 62%
Maximum value of SAR (measured) = 0.197 W/kg

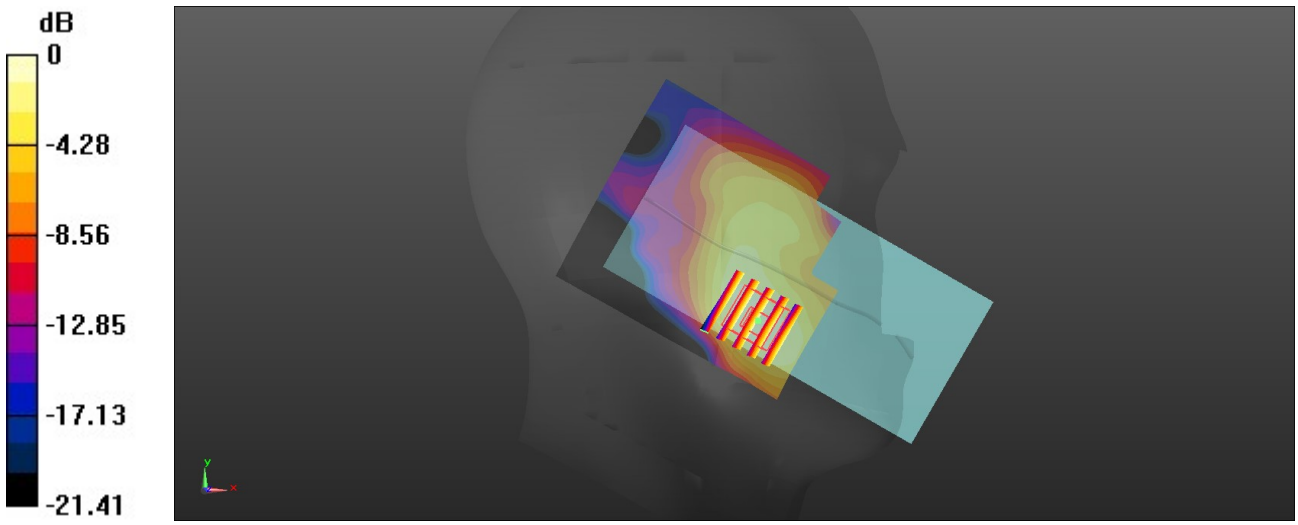

0 dB = 0.197 W/kg = -7.06 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/1

25_FR1 n41_HPUE_100M_BPSK_135_67_Left Cheek_0mm_Ch518598

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz;Duty Cycle: 1:1
Medium: HSL_2600_260301 Medium parameters used: f = 2592.99 MHz; σ = 1.913 S/m; ε_r = 38.564; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2592.99 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.70 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.41 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 4.03 W/kg
SAR(1 g) = 1.91 W/kg; SAR(10 g) = 0.923 W/kg
Smallest distance from peaks to all points 3 dB below = 8.7 mm
Ratio of SAR at M2 to SAR at M1 = 53.6%
Maximum value of SAR (measured) = 2.32 W/kg

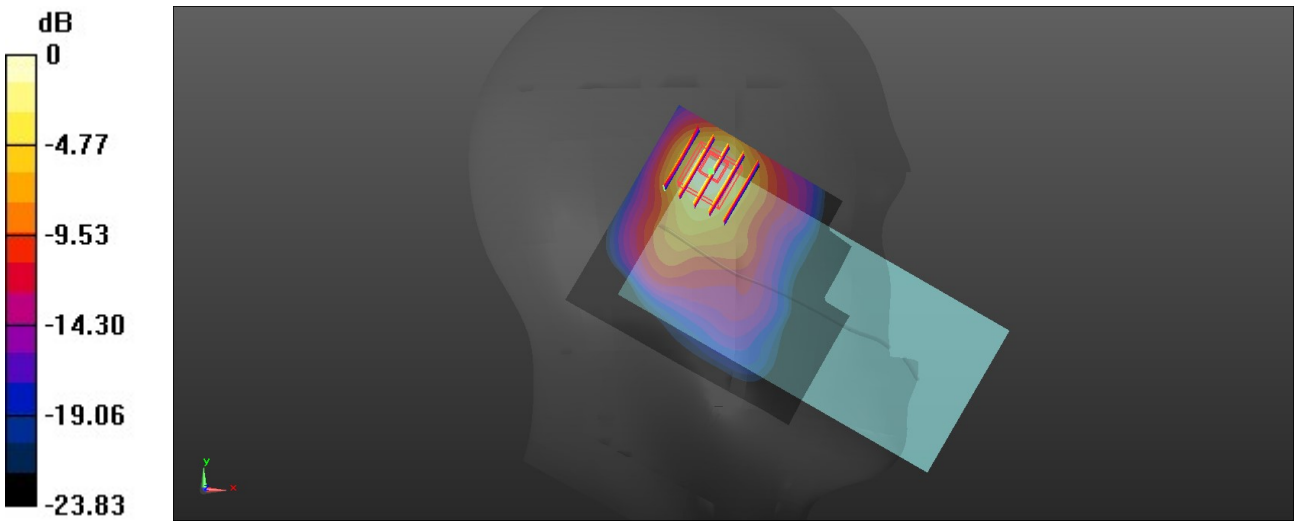

0 dB = 2.32 W/kg = 3.65 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/11

26_FR1 n77_HPUE_100M_BPSK_135_67_Left Cheek_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz;Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (111x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.86 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 7.350 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 3.64 W/kg
SAR(1 g) = 1.46 W/kg; SAR(10 g) = 0.582 W/kg
Smallest distance from peaks to all points 3 dB below = 6.8 mm
Ratio of SAR at M2 to SAR at M1 = 77.5%
Maximum value of SAR (measured) = 2.82 W/kg

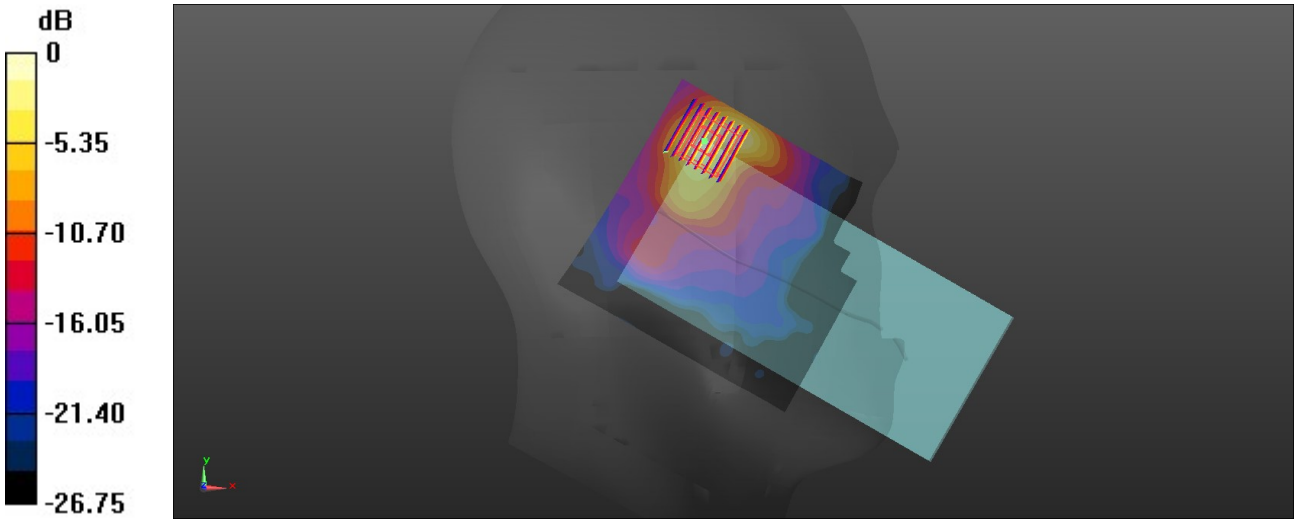

0 dB = 2.82 W/kg = 4.50 dBW/kg

Date: 2026-03-08

27_FR1 n79_HPUE_100M_BPSK_135RB_67Offset_Left Cheek_0mm_Ch730000

Communication System: 5G NR
AntennaCfg:SISO; Frequency: 4950.000 MHz; Duty Cycle: 1:1
Medium: HSL_4900_260308 Medium parameters used: f= 4950.000 MHz; σ= 4.25 S/m; ε_r =36.3
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7764; ConvF(6.44, 6.26, 6.38); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.19 W/kg; SAR (10g) = 0.430 W/kg;

Zoom Scan (25.0 mm x 25.0 mm x 25.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.01 dB
SAR (1g) = 1.56 W/kg; SAR (10g) = 0.446 W/kg
Smallest distance from peaks to all points 3 dB below = 4.6 mm
Ratio of SAR at M2 to SAR at M1 = 70.4 %

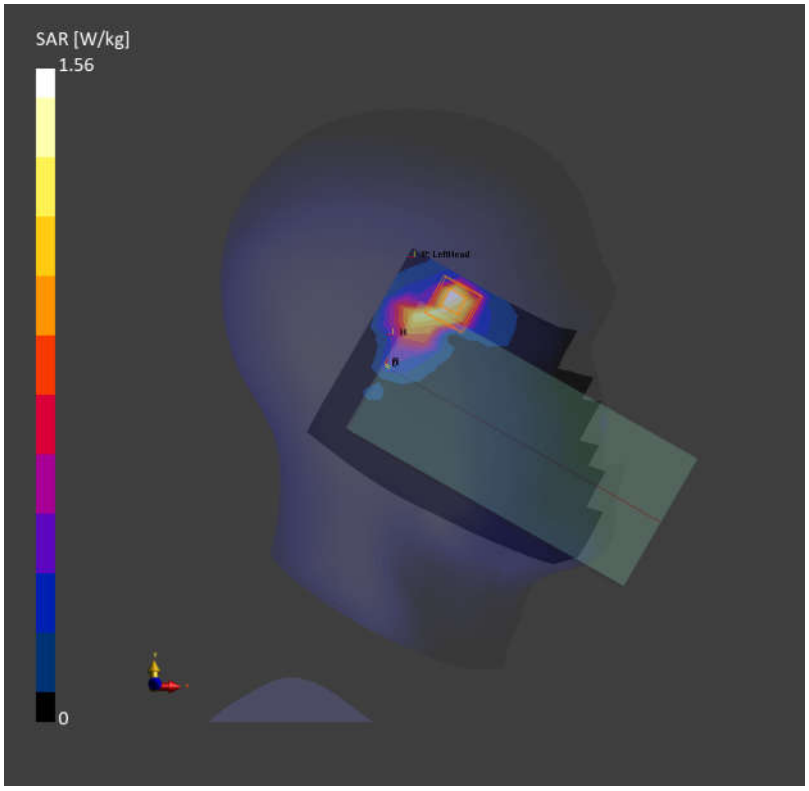

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

28_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz;Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.95 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.616 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 1.97 W/kg
SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.554 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 59%
Maximum value of SAR (measured) = 1.57 W/kg

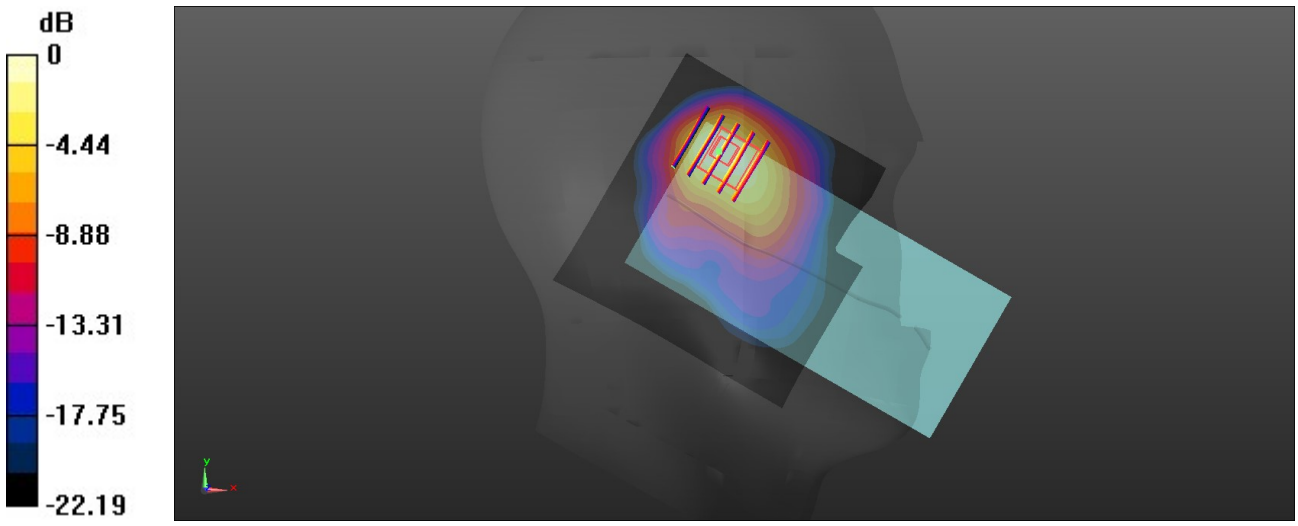

0 dB = 1.57 W/kg = 1.96 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/14

29_WLAN5GHz_802.11n-HT20 MCS0_Left Tilted_0mm_Ch64

Communication System: UID 0, WLAN5GHz (0); Frequency: 5320 MHz;Duty Cycle: 1:1.051
Medium: HSL_5250_260314 Medium parameters used: f = 5320 MHz; σ = 4.753 S/m; ε_r = 36.369; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9) @ 5250 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.682 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.735 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.21 W/kg
SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.083 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 63.2%
Maximum value of SAR (measured) = 0.709 W/kg

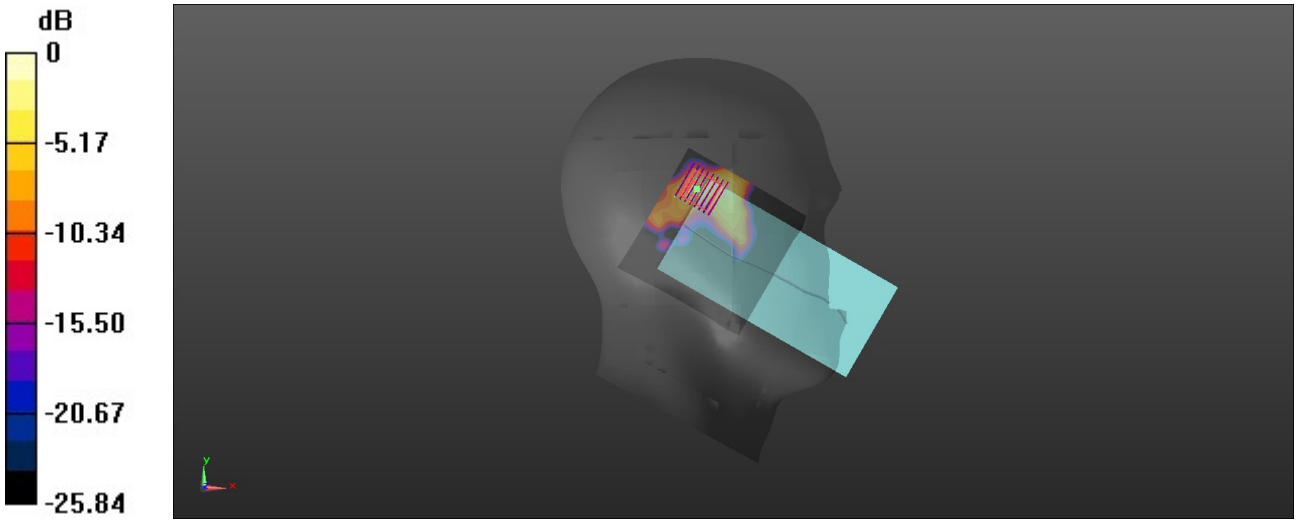

0 dB = 0.709 W/kg = -1.49 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

30_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz;Duty Cycle: 1:1.287
Medium: HSL_2450_260308 Medium parameters used: f = 2441 MHz; σ = 1.785 S/m; ε_r = 39.298; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2441 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0911 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.831 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.118 W/kg
SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.030 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 59.9%
Maximum value of SAR (measured) = 0.0705 W/kg

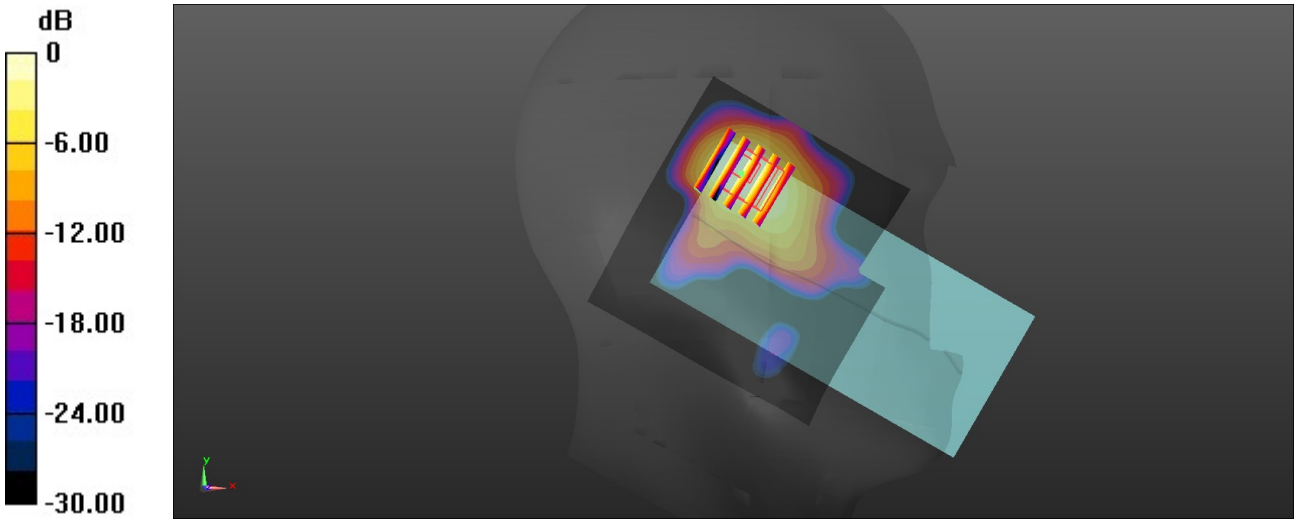

0 dB = 0.0705 W/kg = -11.52 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/4

31_GSM900_GPRS 2 Tx slots_Back_5mm_Ch37

Communication System: UID 0, EGSM (0); Frequency: 897.4 MHz;Duty Cycle: 1:4.15
Medium: HSL_900_260304 Medium parameters used: f = 897.4 MHz; σ = 0.949 S/m; ε_r = 42.156; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.20 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.78 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.64 W/kg
SAR(1 g) = 0.992 W/kg; SAR(10 g) = 0.593 W/kg
Smallest distance from peaks to all points 3 dB below = 11.6 mm
Ratio of SAR at M2 to SAR at M1 = 60.9%
Maximum value of SAR (measured) = 1.19 W/kg

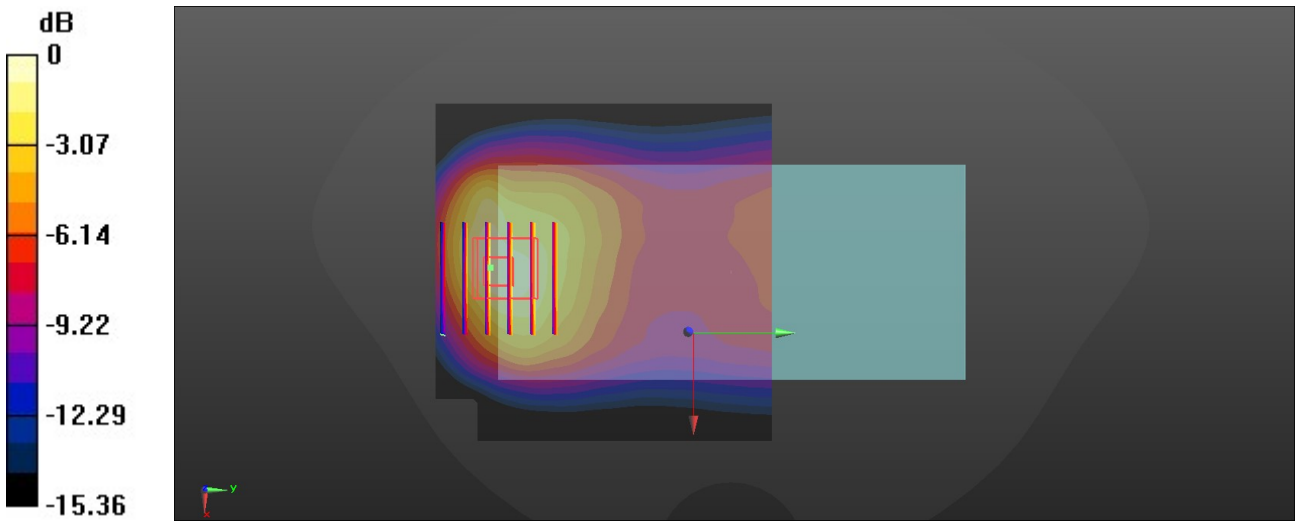

0 dB = 1.19 W/kg = 0.76 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/5

32_GSM1800_GPRS 3 Tx slots_Bottom Side_5mm_Ch698

Communication System: UID 0, DCS (0); Frequency: 1747.4 MHz;Duty Cycle: 1:2.77
Medium: HSL_1800_260305 Medium parameters used: f = 1747.4 MHz; σ = 1.368 S/m; ε_r = 40.643; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.73 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 43.62 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 4.69 W/kg
SAR(1 g) = 2.31 W/kg; SAR(10 g) = 1.2 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 56.4%
Maximum value of SAR (measured) = 3.32 W/kg

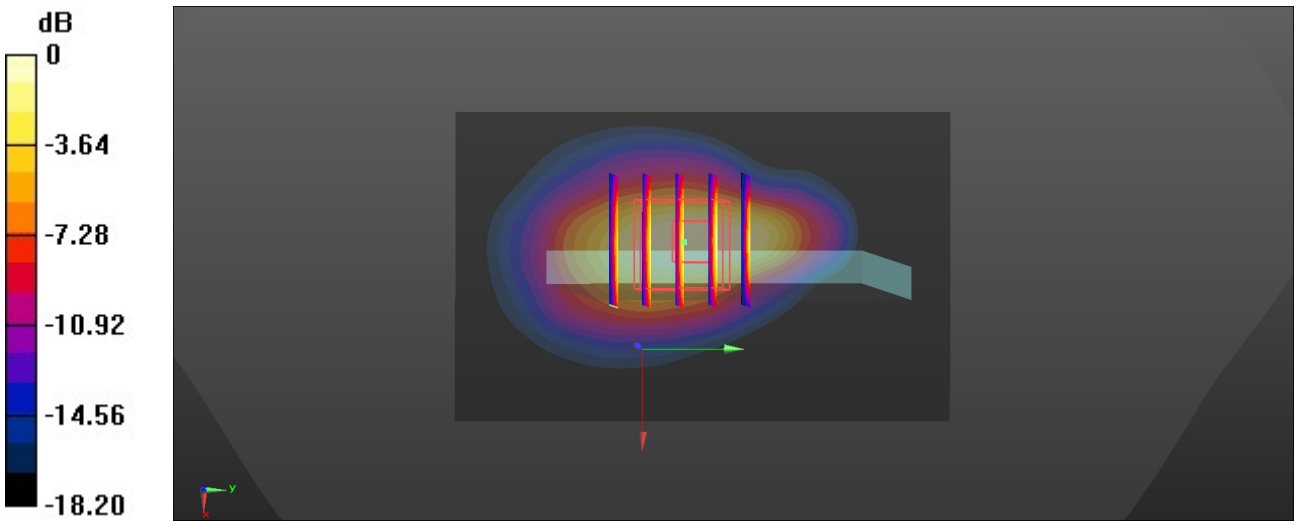

0 dB = 3.32 W/kg = 5.21 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/6

33_WCDMA I_RMC 12.2Kbps_Bottom Side_5mm_Ch9612

Communication System: UID 0, WCDMA (0); Frequency: 1922.4 MHz;Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1922.4 MHz; σ = 1.359 S/m; ε_r = 39.474; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1922.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.71 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 45.00 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 7.97 W/kg
SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.01 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 55.8%
Maximum value of SAR (measured) = 3.18 W/kg

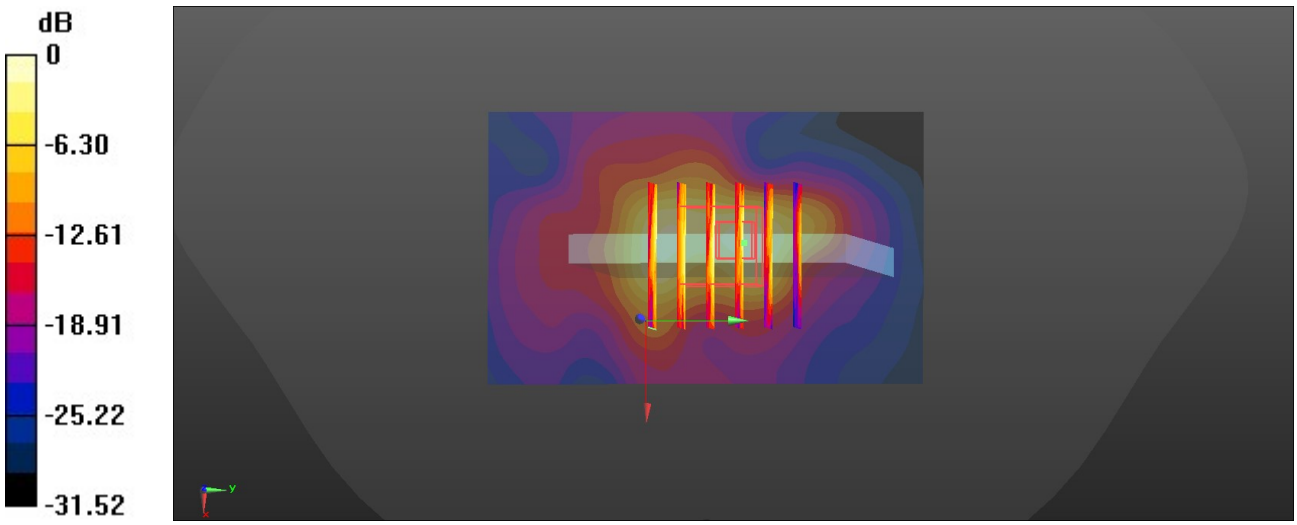

0 dB = 3.18 W/kg = 5.02 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

34_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 836.4 MHz; σ = 0.924 S/m; ε_r = 42.619; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 836.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.444 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.43 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.255 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 62.3%
Maximum value of SAR (measured) = 0.714 W/kg

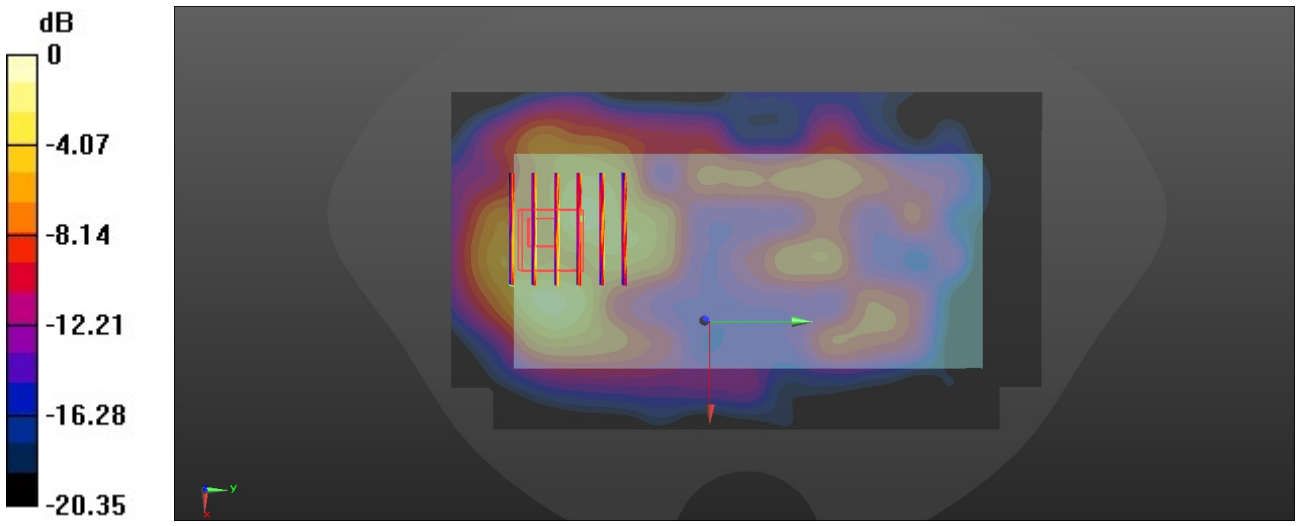

0 dB = 0.714 W/kg = -1.46 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/4

35_WCDMA VIII_RMC 12.2Kbps_Back_5mm_Ch2788

Communication System: UID 0, WCDMA (0); Frequency: 897.6 MHz;Duty Cycle: 1:1
Medium: HSL_900_260304 Medium parameters used: f = 898 MHz; σ = 0.946 S/m; ε_r = 42.284; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.6 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.972 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.439 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.307 W/kg
Smallest distance from peaks to all points 3 dB below = 10.4 mm
Ratio of SAR at M2 to SAR at M1 = 57.2%
Maximum value of SAR (measured) = 0.853 W/kg

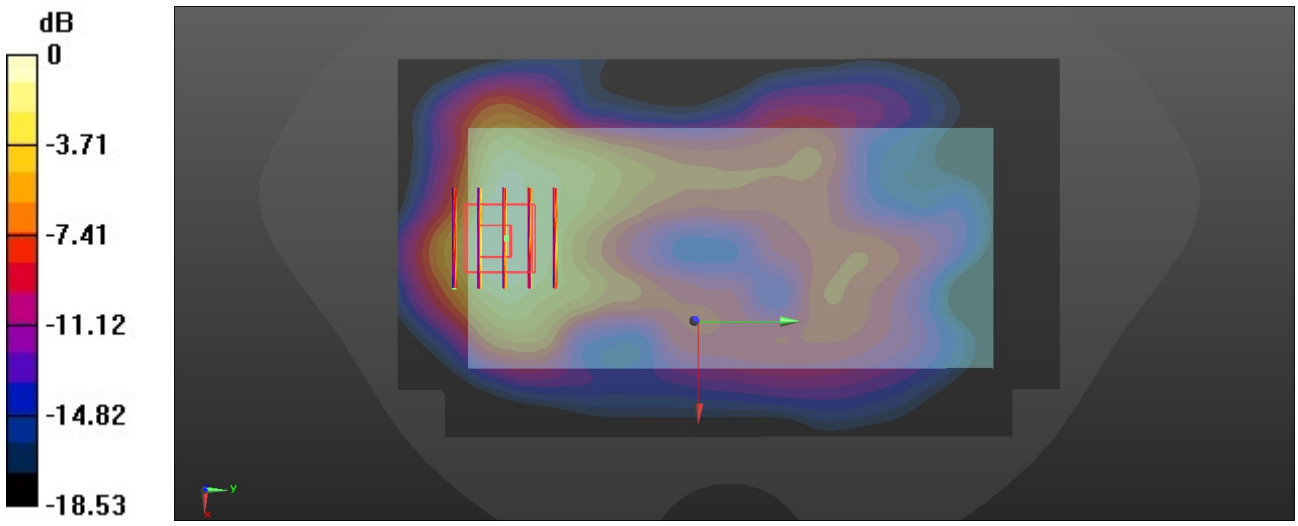

0 dB = 0.853 W/kg = -0.69 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/6

36_LTE Band 1_20M_QPSK_1_0_Bottom Side_5mm_Ch18500

Communication System: UID 0, LTE-FDD (0); Frequency: 1970 MHz;Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1970 MHz; σ = 1.398 S/m; ε_r = 39.384; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1970 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.42 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 53.74 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 3.58 W/kg
SAR(1 g) = 1.9 W/kg; SAR(10 g) = 0.972 W/kg
Smallest distance from peaks to all points 3 dB below = 9.3 mm
Ratio of SAR at M2 to SAR at M1 = 54.6%
Maximum value of SAR (measured) = 2.43 W/kg

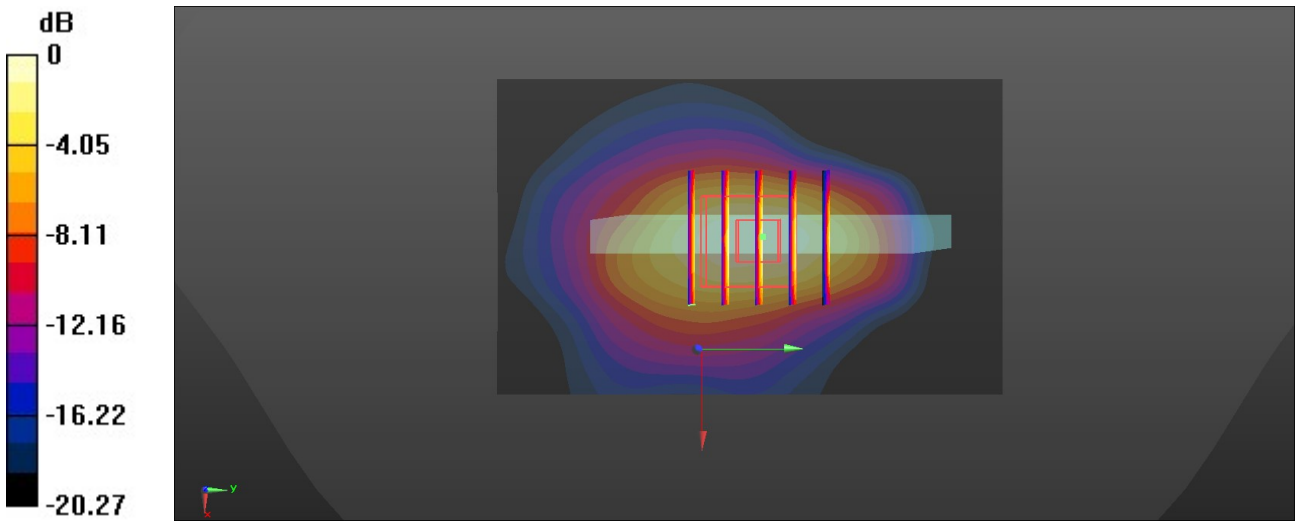

0 dB = 2.43 W/kg = 3.86 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/5

37_LTE Band 3_20M_QPSK_1_0_Bottom Side_5mm_Ch19575

Communication System: UID 0, LTE-FDD (0); Frequency: 1747.5 MHz;Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1747.5 MHz; σ = 1.368 S/m; ε_r = 40.645; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.91 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 58.59 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 2.31 W/kg
SAR(1 g) = 1.45 W/kg; SAR(10 g) = 0.699 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 57.2%
Maximum value of SAR (measured) = 1.89 W/kg

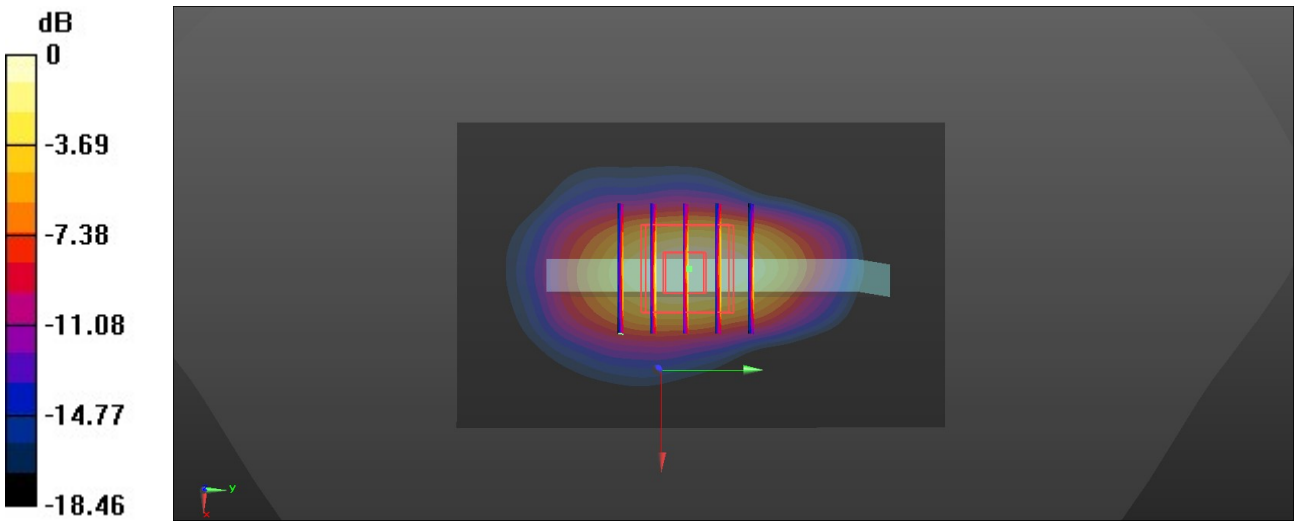

0 dB = 1.19 W/kg = 2.72 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

38_LTE Band 5_10M_QPSK_1_0_Back_5mm_Ch20525

Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 836.5 MHz; σ = 0.924 S/m; ε_r = 42.577; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 836.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.40 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.932 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 3.25 W/kg
SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.573 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 36.8%
Maximum value of SAR (measured) = 1.70 W/kg

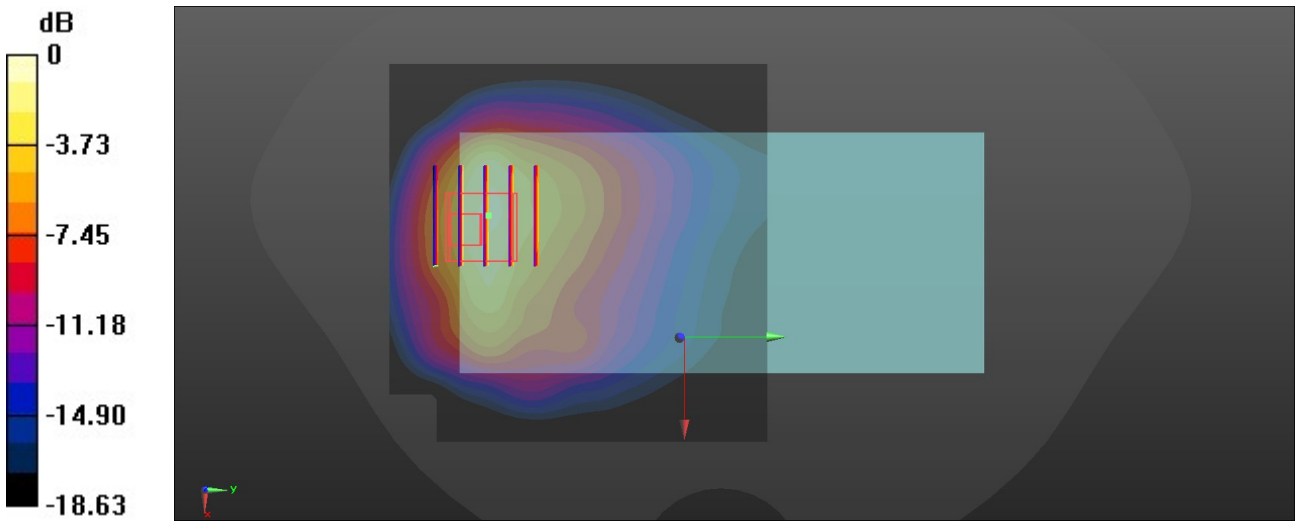

0 dB = 1.70 W/kg = 2.30 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

39_LTE Band 7_20M_QPSK_1_0_Bottom Side_5mm_Ch21100

Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL_2600_260308 Medium parameters used: f = 2535 MHz; σ = 1.871 S/m; ε_r = 39.025; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2535 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.37 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 27.09 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 2.35 W/kg
SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.537 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 53.7%
Maximum value of SAR (measured) = 1.61 W/kg

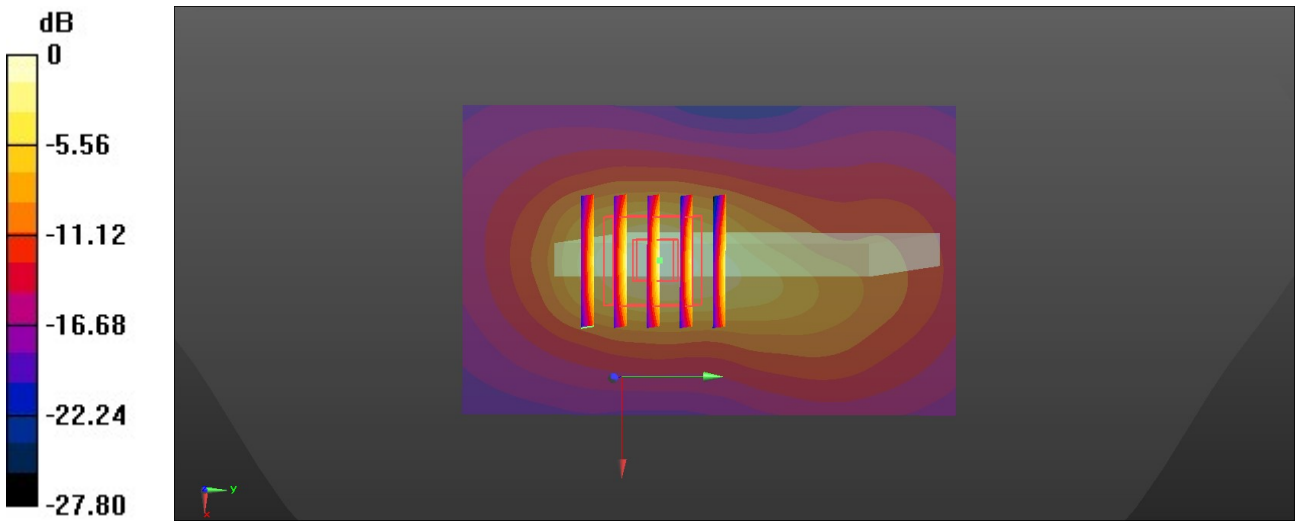

0 dB = 1.61 W/kg = 2.07 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/4

40_LTE Band 8_10M_QPSK_1_0_Back_5mm_Ch21625

Communication System: UID 0, LTE-FDD (0); Frequency: 897.5 MHz;Duty Cycle: 1:1
Medium: HSL_900_260304 Medium parameters used: f = 897.5 MHz; σ = 0.948 S/m; ε_r = 42.177; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.93 W/kg

Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.354 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 5.01 W/kg
SAR(1 g) = 1.59 W/kg; SAR(10 g) = 0.712 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 58.2%
Maximum value of SAR (measured) = 2.45 W/kg

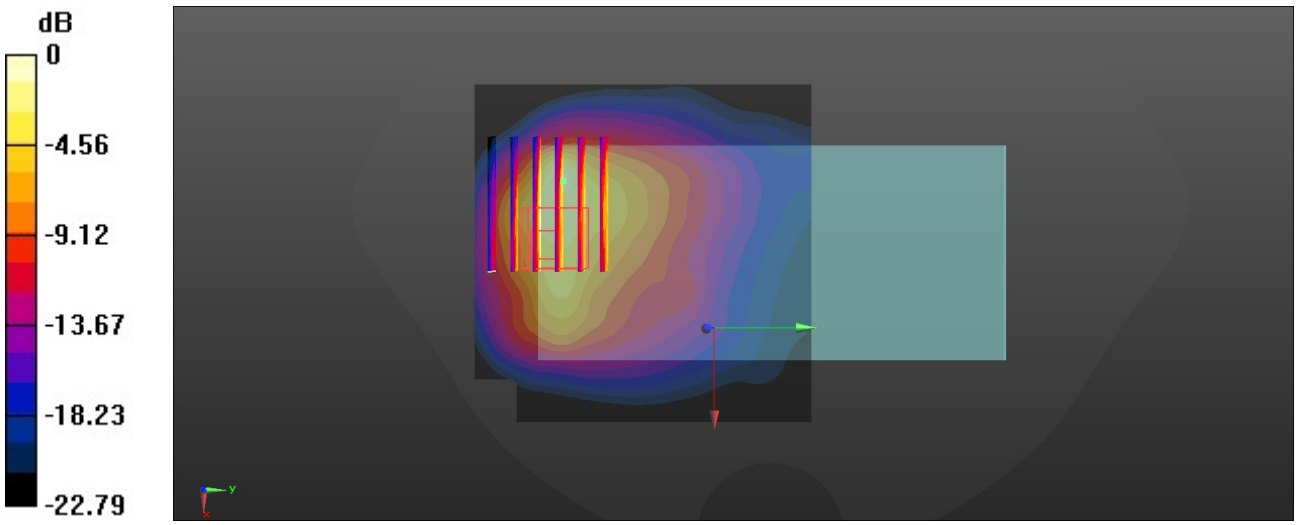

0 dB = 2.45 W/kg = 3.89 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

41_LTE Band 20_20M_QPSK_1_0_Back_5mm_Ch24300

Communication System: UID 0, LTE-FDD (0); Frequency: 847 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 847 MHz; σ = 0.925 S/m; ε_r = 42.168; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 847 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.753 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.72 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.349 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 61.9%
Maximum value of SAR (measured) = 0.700 W/kg

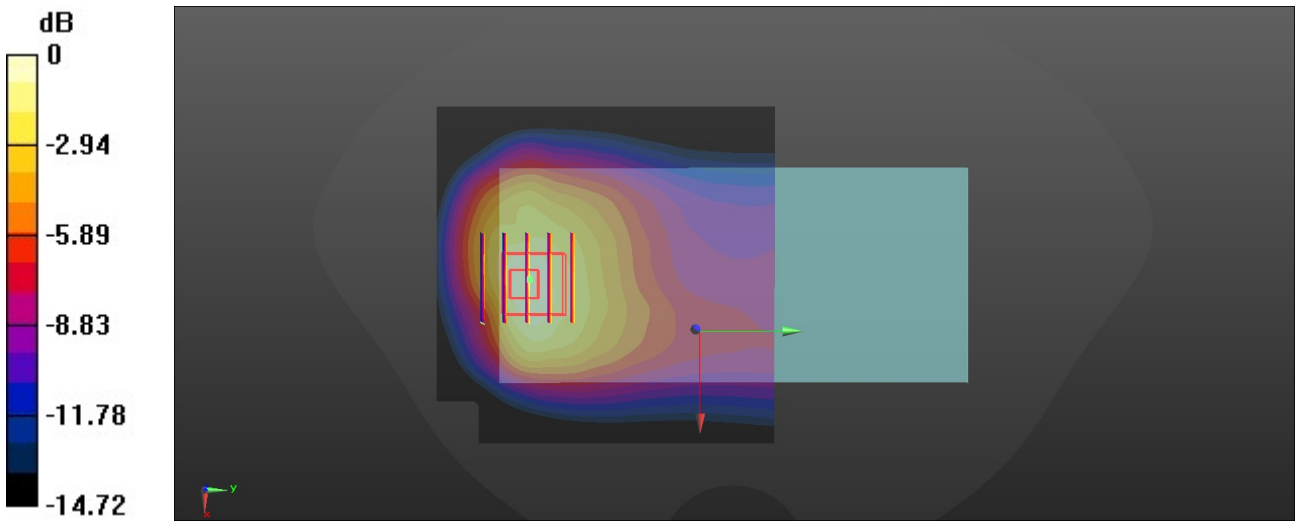

0 dB = 0.700 W/kg = -1.55 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

42_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26765

Communication System: UID 0, LTE-FDD (0); Frequency: 821.5 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 821.5 MHz; σ = 0.922 S/m; ε_r = 42.639; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 831.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.65 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.483 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 4.35 W/kg
SAR(1 g) = 1.52 W/kg; SAR(10 g) = 0.812 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 37.6%
Maximum value of SAR (measured) = 2.48 W/kg

Zoom Scan (6x6x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.483 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 4.58 W/kg
SAR(1 g) = 1.42 W/kg; SAR(10 g) = 0.775 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 37.7%
Maximum value of SAR (measured) = 2.49 W/kg

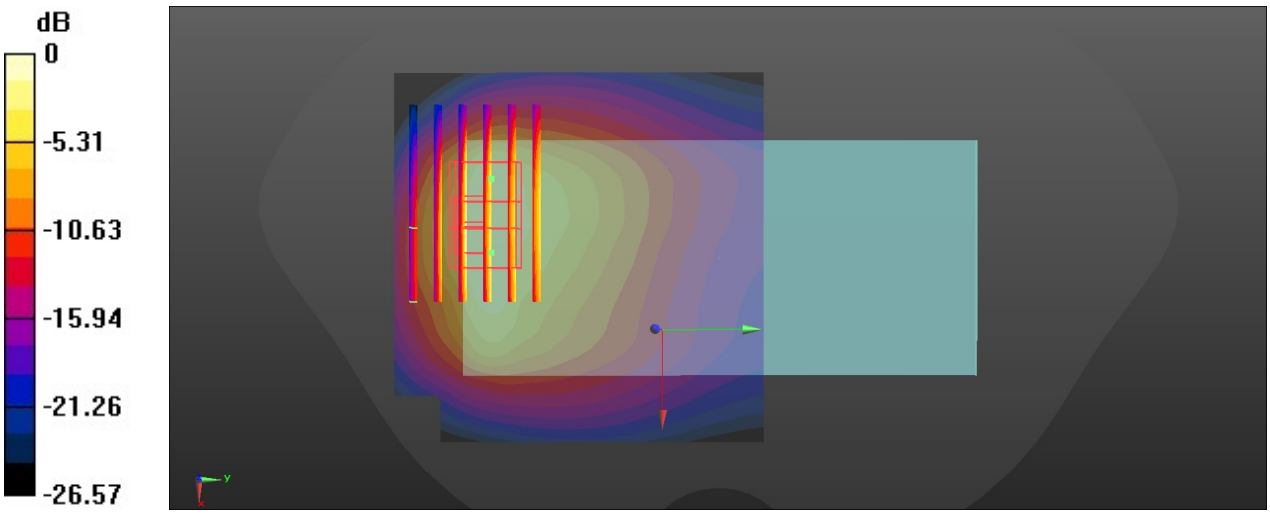

0 dB = 2.49 W/kg = 3.96 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/2

43_LTE Band 28_20M_QPSK_1_0_Back_5mm_Ch27460

Communication System: UID 0, LTE-FDD (0); Frequency: 728 MHz;Duty Cycle: 1:1
Medium: HSL_750_260302 Medium parameters used: f = 728 MHz; σ = 0.876 S/m; ε_r = 42.889; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(6.14, 6.21, 6.05) @ 728 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.683 W/kg

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.10 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.823 W/kg
SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.228 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 49.8%
Maximum value of SAR (measured) = 0.485 W/kg

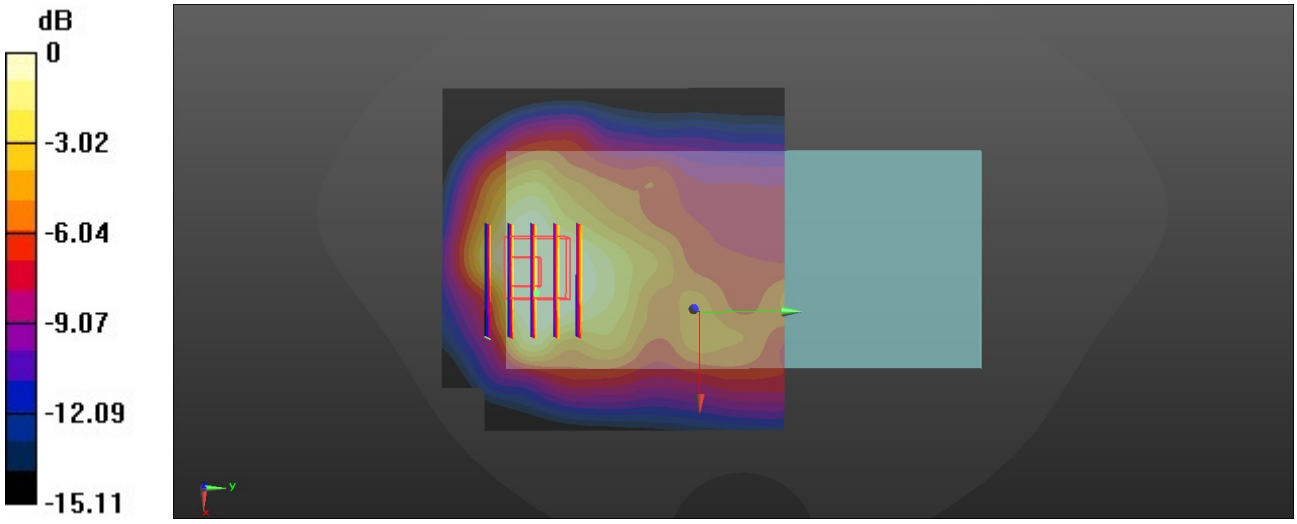

0 dB = 0.485 W/kg = -3.14 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/7

44_LTE Band 40_20M_QPSK_1_0_Bottom Side_5mm_Ch38750

Communication System: UID 0, LTE-TDD (0); Frequency: 2310 MHz;Duty Cycle: 1:1.59
Medium: HSL_2300_260307 Medium parameters used: f = 2310 MHz; σ = 1.617 S/m; ε_r = 39.555; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.63, 4.68, 4.56) @ 2310 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.92 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 41.80 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 4.26 W/kg
SAR(1 g) = 2.12 W/kg; SAR(10 g) = 0.960 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 52.1%
Maximum value of SAR (measured) = 2.87 W/kg

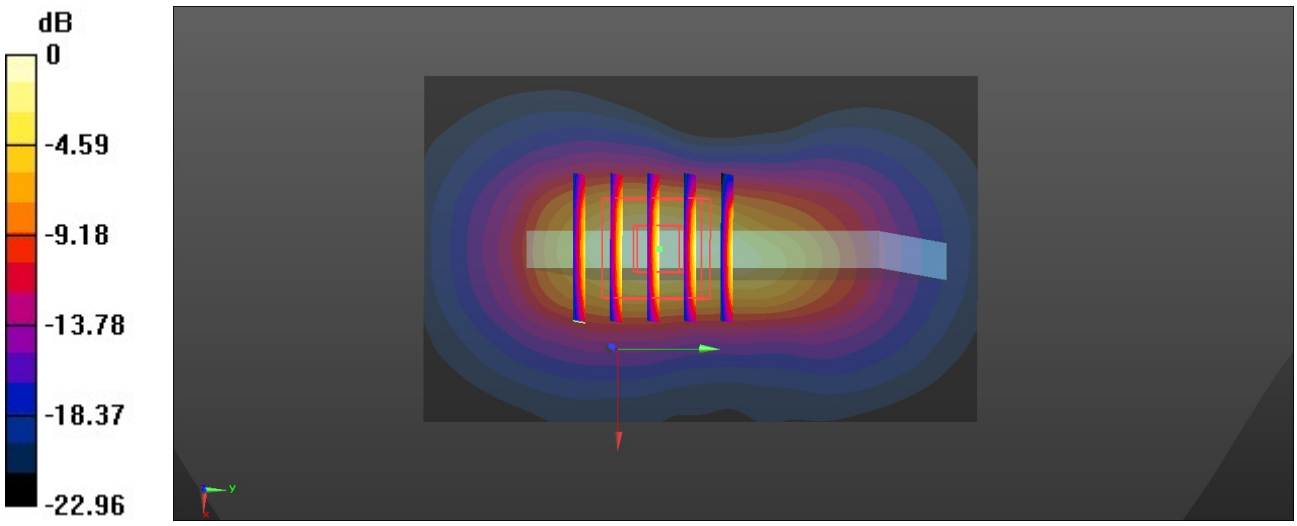

0 dB = 2.87 W/kg = 4.58 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

45_LTE Band 41_20M_QPSK_1_0_Back_5mm_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz;Duty Cycle: 1:1.59
Medium: HSL_2600_260308 Medium parameters used: f = 2593 MHz; σ = 1.915 S/m; ε_r = 38.585; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2593 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.594 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.586 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.224 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 46%
Maximum value of SAR (measured) = 0.696 W/kg

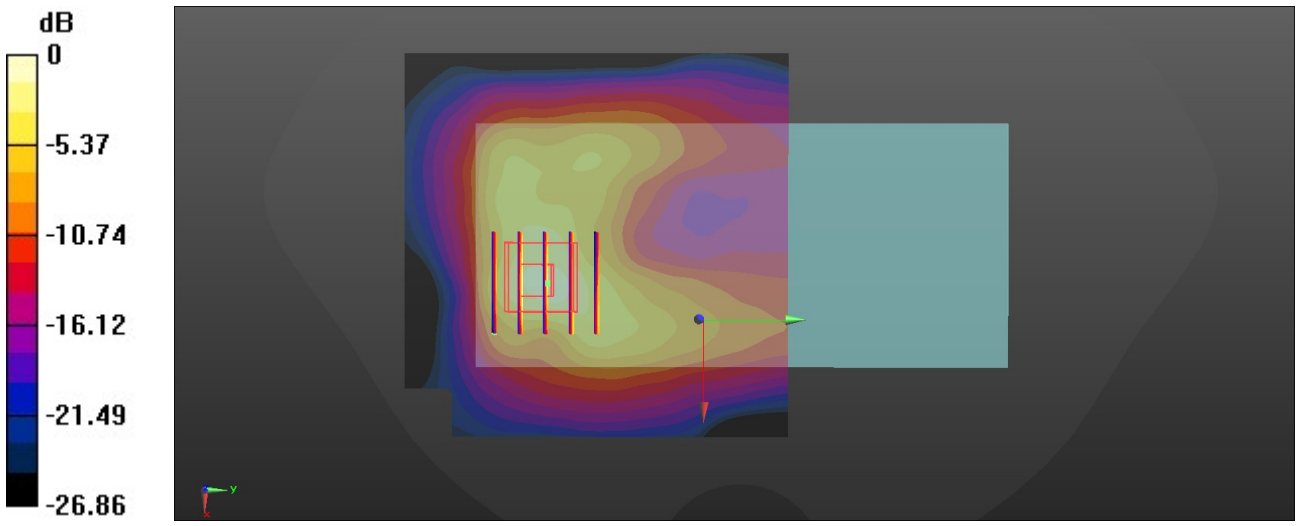

0 dB = 0.696 W/kg = -1.57 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/10

46_LTE Band 42_20M_QPSK_1_0_Back_5mm_Ch42590

Communication System: UID 0, LTE-TDD (0); Frequency: 3500 MHz;Duty Cycle: 1:1.59
Medium: HSL_3500_260310 Medium parameters used: f = 3500 MHz; σ = 2.984 S/m; ε_r = 37.772; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(5.62, 6.07, 5.74) @ 3500 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.61 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.554 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.99 W/kg
SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.234 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 71.2%
Maximum value of SAR (measured) = 1.35 W/kg

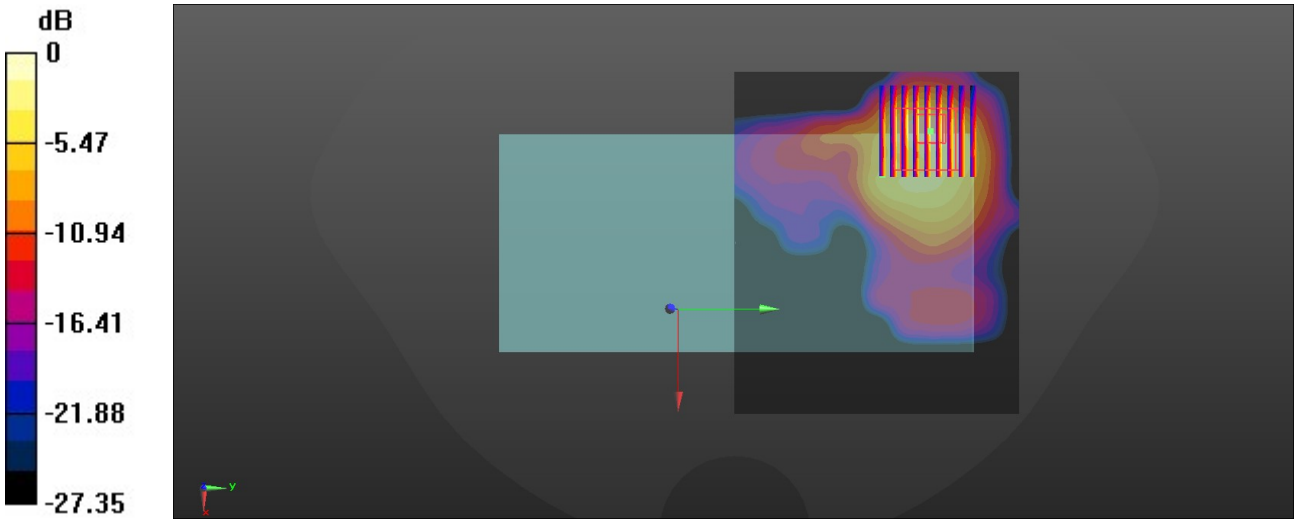

0 dB = 1.35 W/kg = 1.30 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/6

47_FR1 n1_50M_BPSK_135_67_Bottom Side_5mm_Ch389000

Communication System: UID 0, 5G NR (0); Frequency: 1945 MHz;Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1945 MHz; σ = 1.394 S/m; ε_r = 39.348; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1945 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.51 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 47.41 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 4.55 W/kg
SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.14 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 56%
Maximum value of SAR (measured) = 3.13 W/kg

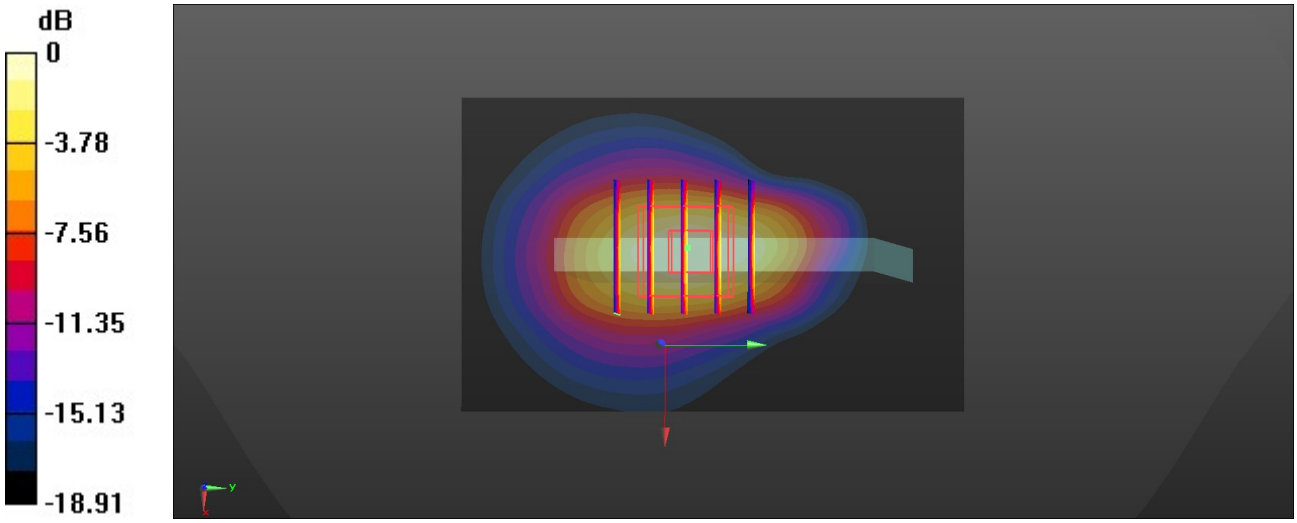

0 dB = 3.13 W/kg = 4.96 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/5

48_FR1 n3_50M_BPSK_135_67_Bottom Side_5mm_Ch352000

Communication System: UID 0, 5G NR (0); Frequency: 1760 MHz;Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1760 MHz; σ = 1.382 S/m; ε_r = 40.702; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1760 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.60 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 48.65 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 4.46 W/kg
SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.07 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 58.2%
Maximum value of SAR (measured) = 3.14 W/kg

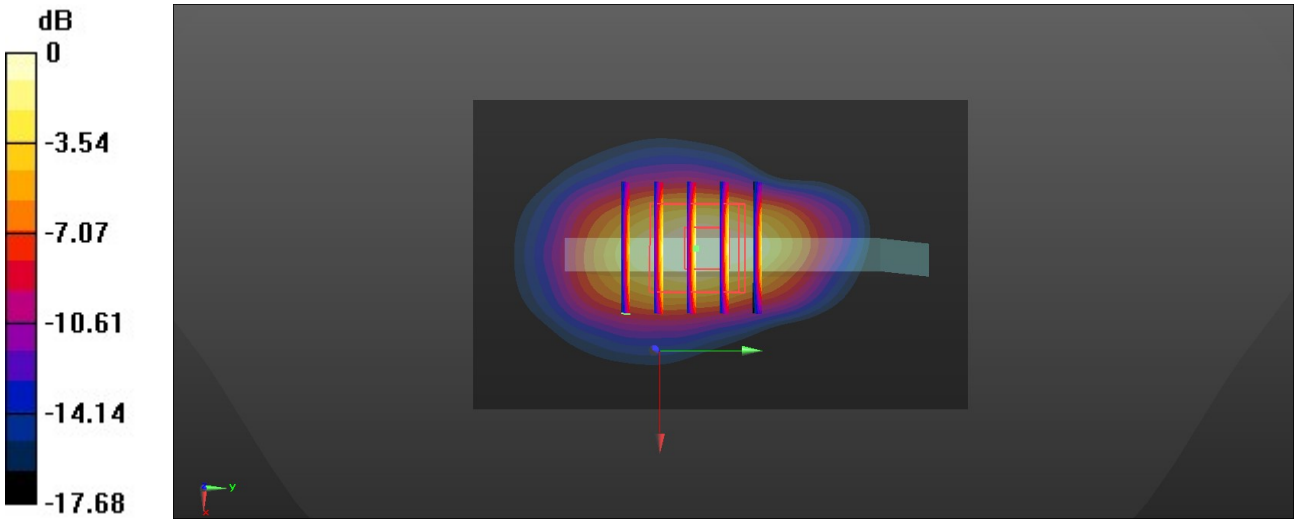

0 dB = 3.14 W/kg = 4.97 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

49_FR1 n5_20M_BPSK_50_25_Back_5mm_Ch167300

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 836.5 MHz; σ = 0.924 S/m; ε_r = 42.577; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 836.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.871 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.22 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.14 W/kg
SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.401 W/kg
Smallest distance from peaks to all points 3 dB below = 12.9 mm
Ratio of SAR at M2 to SAR at M1 = 60.7%
Maximum value of SAR (measured) = 0.815 W/kg

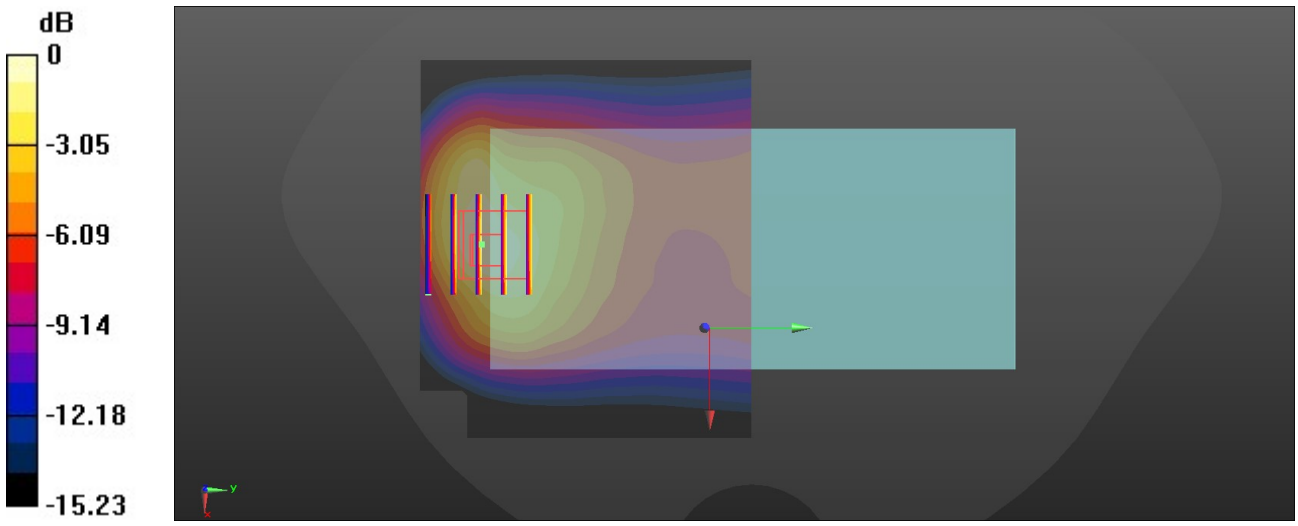

0 dB = 0.815 W/kg = -0.89 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

50_FR1 n7_50M_BPSK_135_67_Back_5mm_Ch507000

Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL_2600_260308 Medium parameters used: f = 2535 MHz; σ = 1.871 S/m; ε_r = 39.025; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2535 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.57 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.617 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 3.02 W/kg
SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.532 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 45.6%
Maximum value of SAR (measured) = 1.78 W/kg

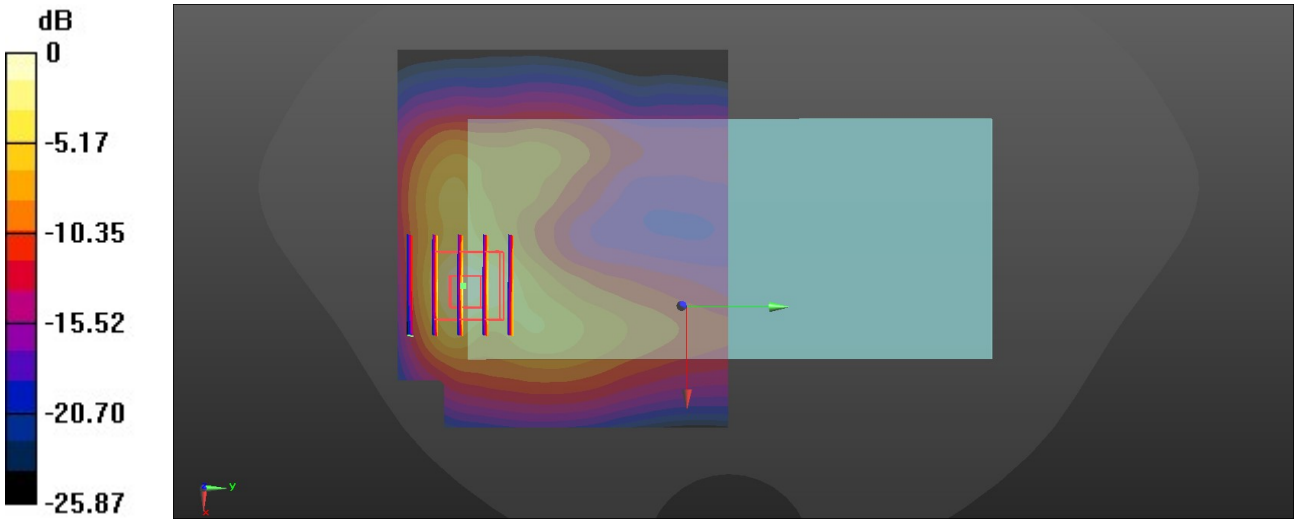

0 dB = 1.78 W/kg = 2.50 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/4

51_FR1 n8_20M_BPSK_50_25_Back_5mm_Ch179500

Communication System: UID 0, 5G NR (0); Frequency: 897.5 MHz;Duty Cycle: 1:1
Medium: HSL_900_260304 Medium parameters used: f = 897.5 MHz; σ = 0.948 S/m; ε_r = 42.177; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.90 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.806 W/kg; SAR(10 g) = 0.476 W/kg
Smallest distance from peaks to all points 3 dB below = 13.2 mm
Ratio of SAR at M2 to SAR at M1 = 60.9%
Maximum value of SAR (measured) = 0.981 W/kg

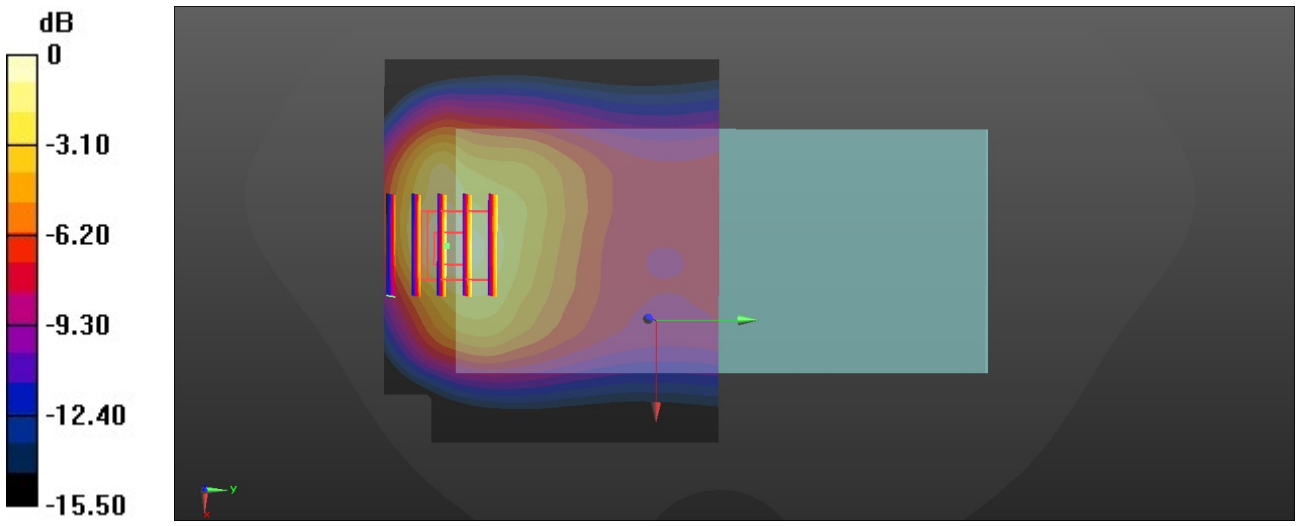

0 dB = 0.981 W/kg = -0.08 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/2/24

52_FR1 n20_20M_BPSK_50_25_Back_5mm_Ch169400

Communication System: UID 0, 5G NR (0); Frequency: 847 MHz;Duty Cycle: 1:1
Medium: HSL_835_260224 Medium parameters used: f = 847 MHz; σ = 0.921 S/m; ε_r = 42.221; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 847 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.689 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.18 W/kg
SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.401 W/kg
Smallest distance from peaks to all points 3 dB below = 9.3 mm
Ratio of SAR at M2 to SAR at M1 = 53%
Maximum value of SAR (measured) = 0.822 W/kg

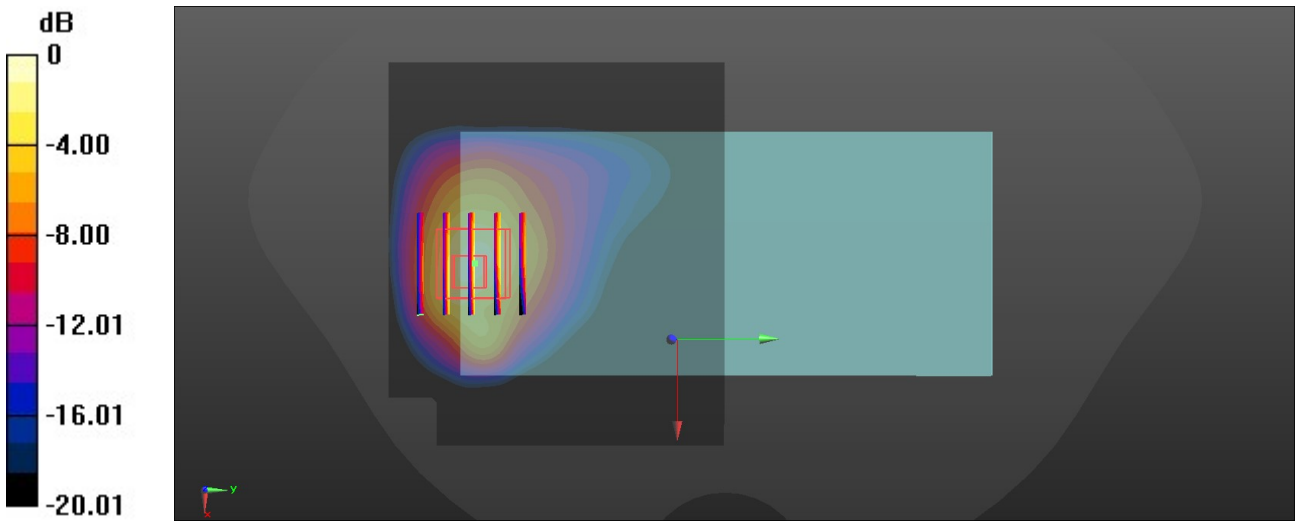

0 dB = 0.822 W/kg = 0.25 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/2

53_FR1 n28_30M_BPSK_80_40_Back_5mm_Ch145100

Communication System: UID 0, 5G NR (0); Frequency: 725.5 MHz;Duty Cycle: 1:1
Medium: HSL_750_260302 Medium parameters used: f = 725.5 MHz; σ = 0.884 S/m; ε_r = 42.917; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(6.14, 6.21, 6.05) @ 725.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.583 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.45 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.911 W/kg
SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.271 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 55.5%
Maximum value of SAR (measured) = 0.559 W/kg

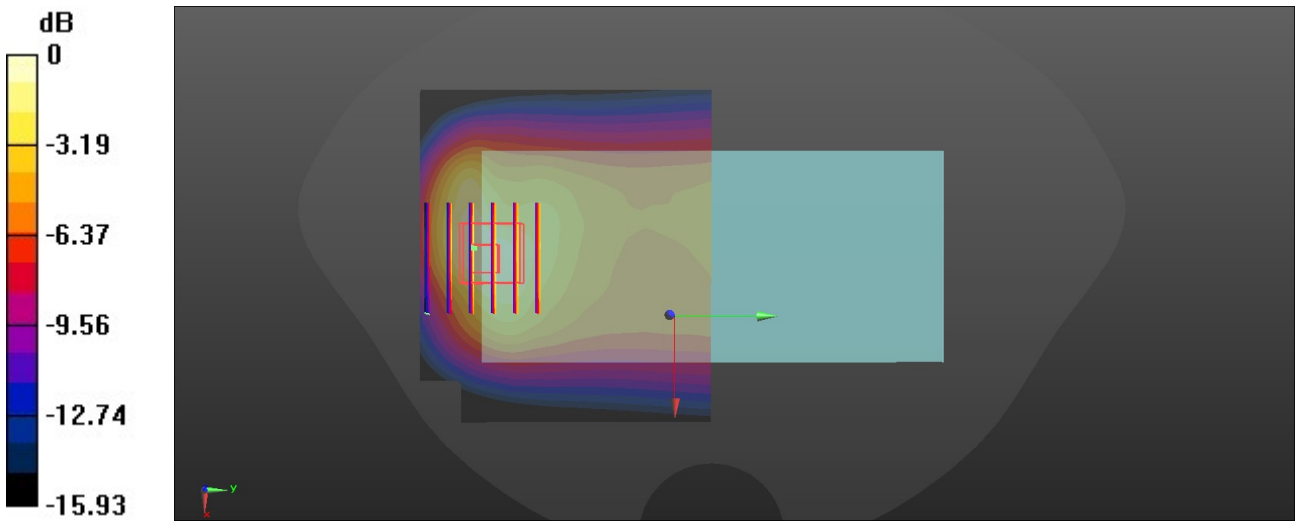

0 dB = 0.559 W/kg = -2.53 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/7

54_FR1 n40_100M_BPSK_135_67_Bottom Side_5mm_Ch470000

Communication System: UID 0, 5G NR (0); Frequency: 2350 MHz;Duty Cycle: 1:1
Medium: HSL_2300_260307 Medium parameters used: f = 2350 MHz; σ = 1.663 S/m; ε_r = 39.357; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.63, 4.68, 4.56) @ 2350 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.22 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 40.49 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 5.49 W/kg
SAR(1 g) = 2.73 W/kg; SAR(10 g) = 1.21 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 53.5%
Maximum value of SAR (measured) = 3.65 W/kg

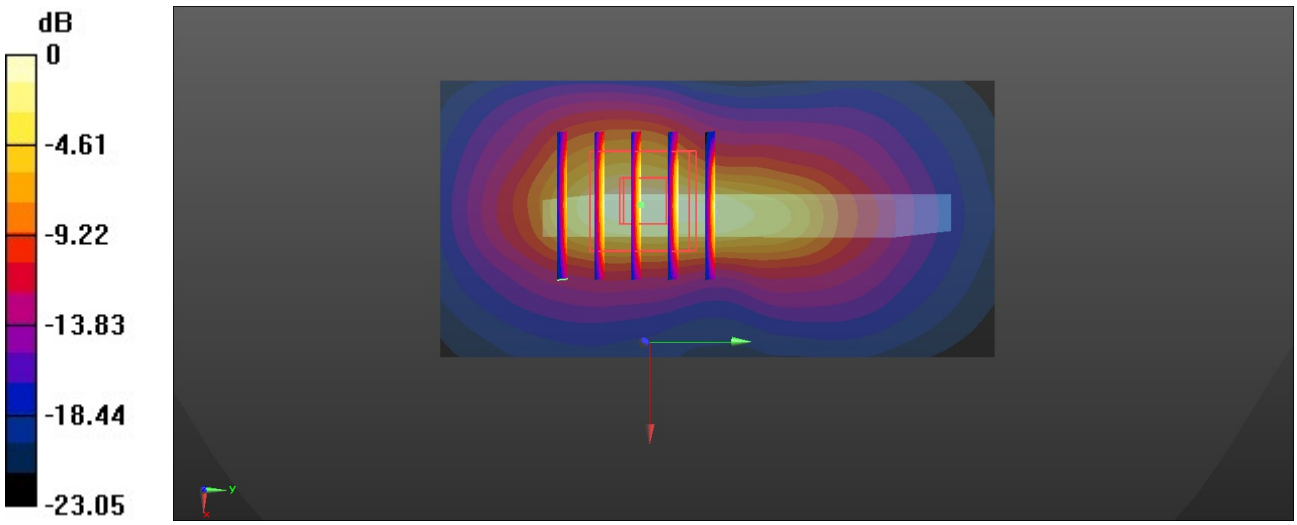

0 dB = 3.65 W/kg = 5.62 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

55_FR1 n41_HPUE_100M_BPSK_135_67_Back_5mm_Ch528000

Communication System: UID 0, 5G NR (0); Frequency: 2640 MHz;Duty Cycle: 1:1
Medium: HSL_2600_260308 Medium parameters used: f = 2640 MHz; σ = 2.001 S/m; ε_r = 38.721; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2640 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 6.13 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.081 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 5.80 W/kg
SAR(1 g) = 2.64 W/kg; SAR(10 g) = 1.1 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 46.9%
Maximum value of SAR (measured) = 4.57 W/kg

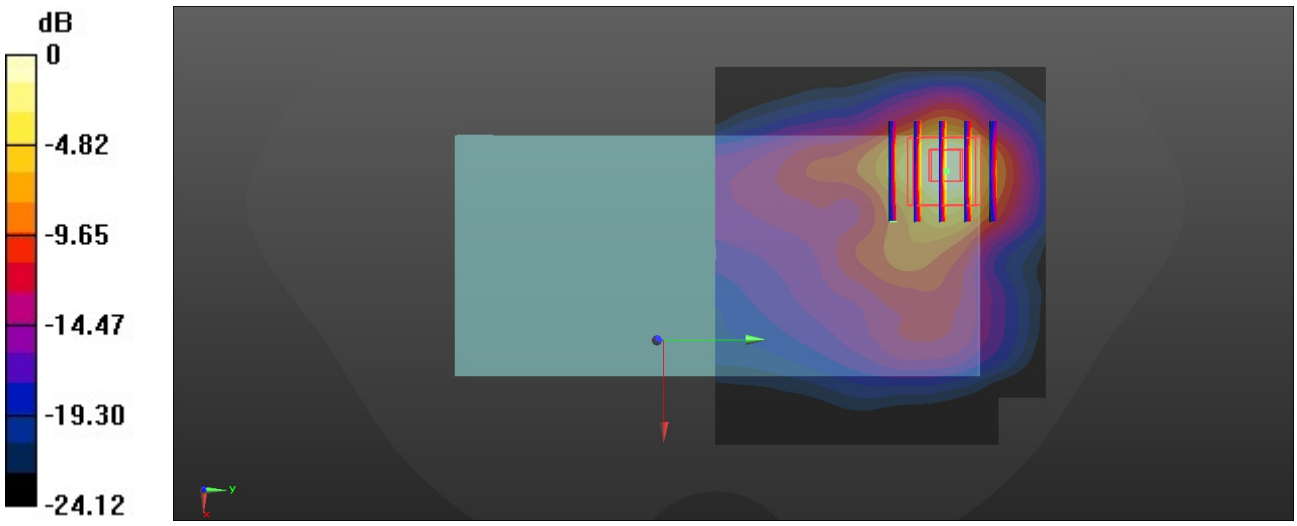

0 dB = 4.57 W/kg = 6.60 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/11

56_FR1 n77_HPUE_100M_BPSK_135_67_Back_5mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz;Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 6.95 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 4.171 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 9.94 W/kg
SAR(1 g) = 3.05 W/kg; SAR(10 g) = 1.06 W/kg
Smallest distance from peaks to all points 3 dB below = 5.6 mm
Ratio of SAR at M2 to SAR at M1 = 71%
Maximum value of SAR (measured) = 6.73 W/kg

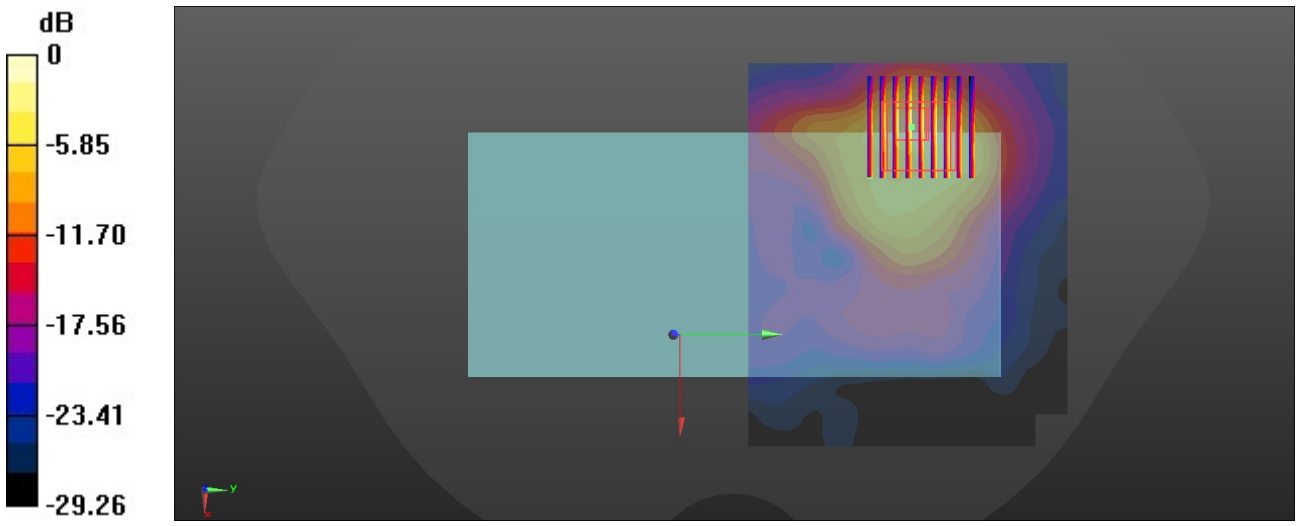

0 dB = 6.73 W/kg = 8.28 dBW/kg

Date: 2026-03-08

57_FR1 n79_HPUE_100M_BPSK_135RB_67Offset_Right Side_5mm_Ch730000

Communication System: 5G NR
AntennaCfg:SISO; Frequency: 4950.000 MHz; Duty Cycle: 1:1
Medium: HSL_4900_260308 Medium parameters used: f= 4950.000 MHz; σ= 4.25 S/m; ε_r =36.3
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7764; ConvF(6.44, 6.26, 6.38); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 3.00 W/kg; SAR (10g) = 0.795 W/kg;

Zoom Scan (25.0 mm x 25.0 mm x 25.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 4.06 W/kg; SAR (10g) = 0.962 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 62.4 %

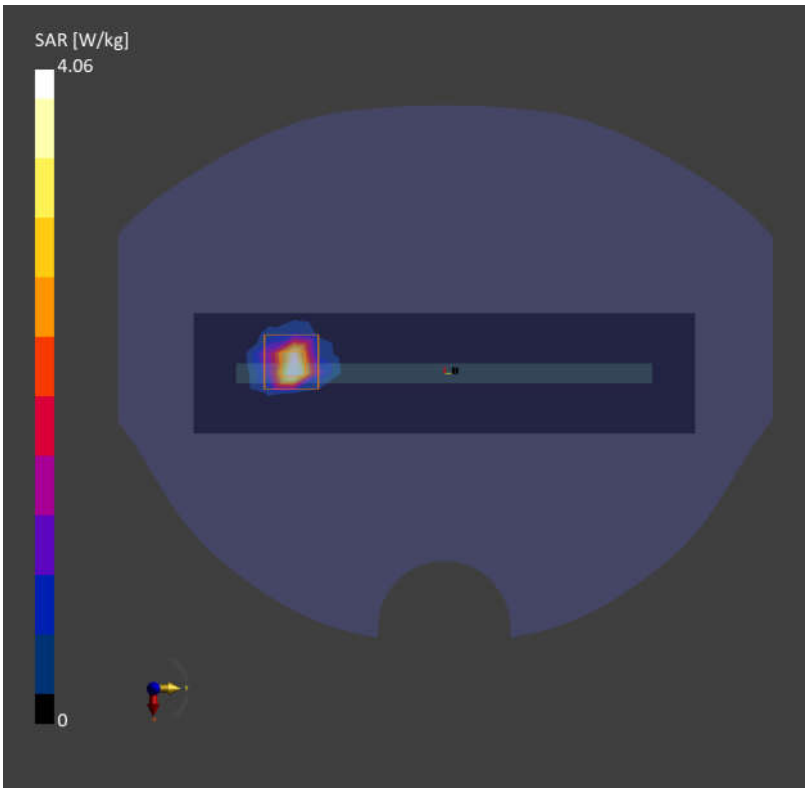

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

58_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz;Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.99 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.403 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 2.27 W/kg
SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.467 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 51.6%
Maximum value of SAR (measured) = 1.81 W/kg

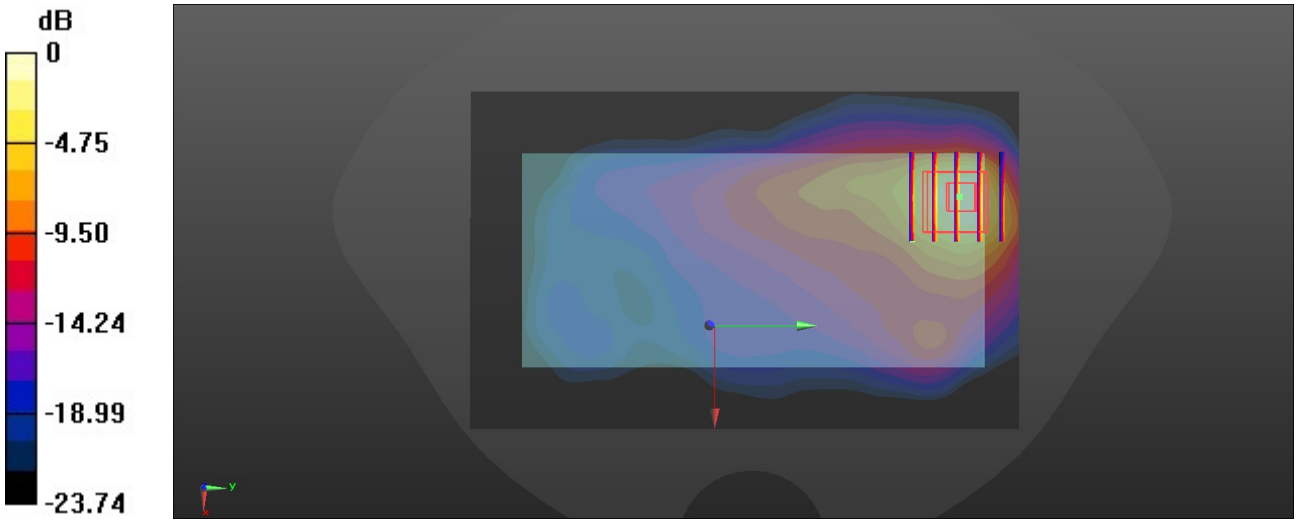

0 dB = 1.81 W/kg = 2.58 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/14

59_WLAN5GHz_802.11n-HT20 MCS0_Top Side_5mm_Ch64

Communication System: UID 0, WLAN5GHz (0); Frequency: 5320 MHz;Duty Cycle: 1:1.051
Medium: HSL_5250_260314 Medium parameters used: f = 5320 MHz; σ = 4.753 S/m; ε_r = 36.369; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9) @ 5250 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.36 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 6.878 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 4.39 W/kg
SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.183 W/kg
Smallest distance from peaks to all points 3 dB below = 4.7 mm
Ratio of SAR at M2 to SAR at M1 = 61%
Maximum value of SAR (measured) = 2.42 W/kg

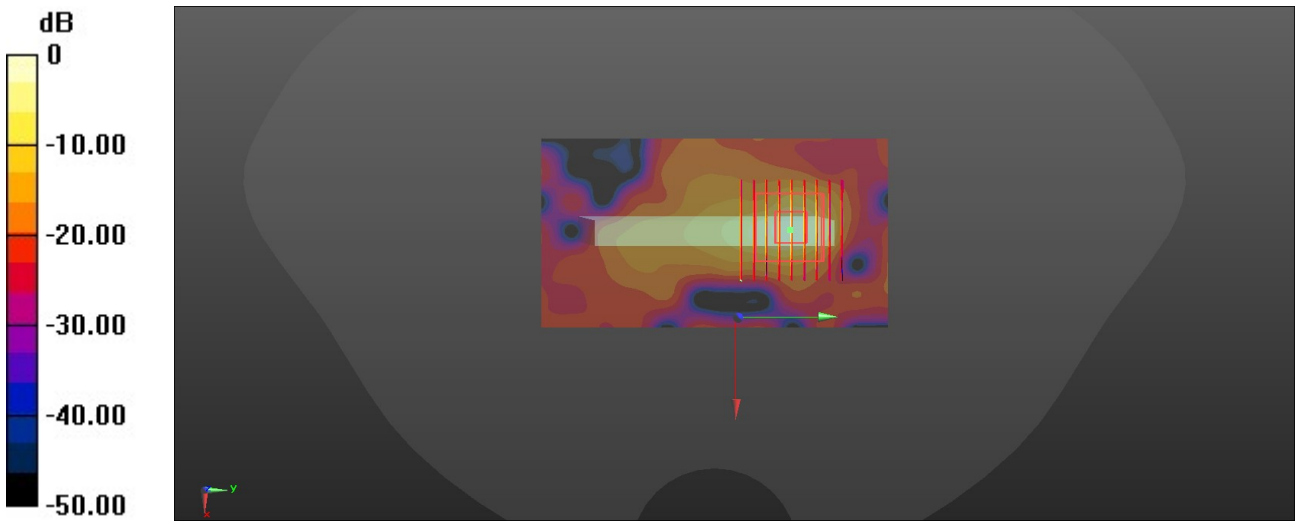

0 dB = 2.42 W/kg = 3.84 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

60_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz;Duty Cycle: 1:1.287
Medium: HSL_2450_260308 Medium parameters used: f = 2441 MHz; σ = 1.785 S/m; ε_r = 39.298; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2441 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.178 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.8310 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.190 W/kg
SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.041 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 48.6%
Maximum value of SAR (measured) = 0.101 W/kg

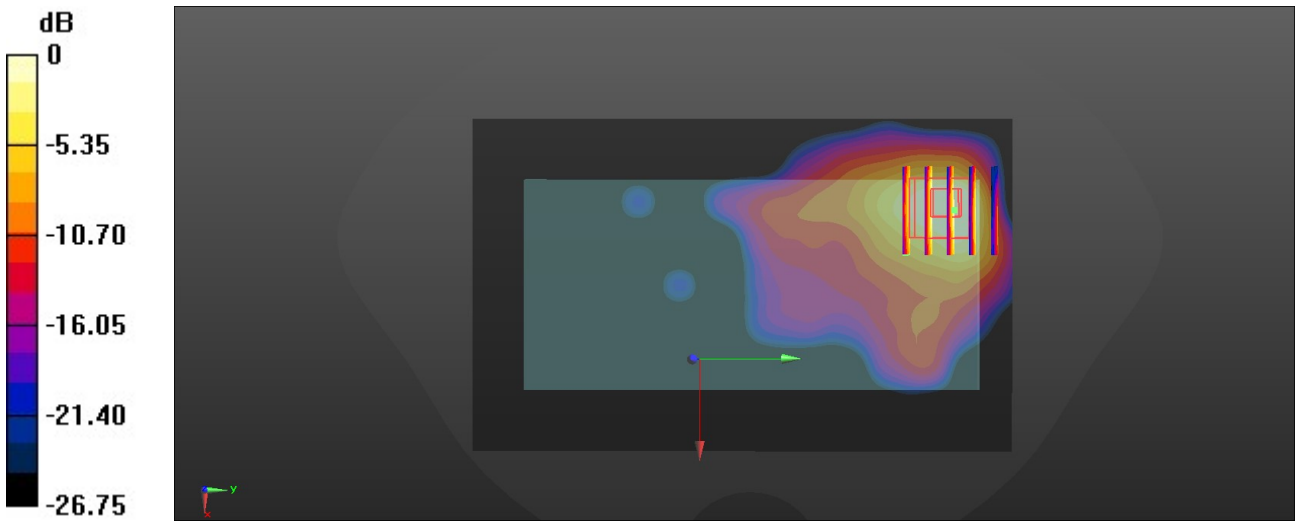

0 dB = 0.101 W/kg = -9.96 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/4

61_GSM900_GPRS 2 Tx slots_Bottom Side_0mm_Ch37

Communication System: UID 0, EGSM (0); Frequency: 897.4 MHz;Duty Cycle: 1:4.15
Medium: HSL_900_260304 Medium parameters used: f = 897.4 MHz; σ = 0.949 S/m; ε_r = 42.156; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.74 W/kg

Zoom Scan (5x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 63.50 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 11.6 W/kg
SAR(1 g) = 3.83 W/kg; SAR(10 g) = 1.76 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 34%
Maximum value of SAR (measured) = 6.19 W/kg

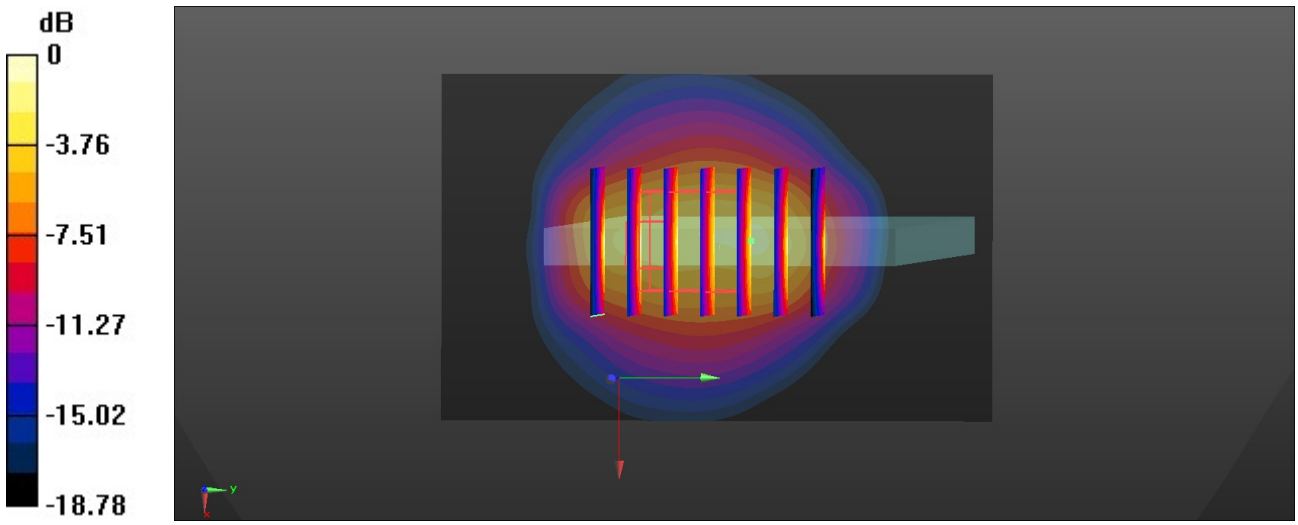

0 dB = 6.19 W/kg = 7.92 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/5

62_GSM1800_GPRS 3 Tx slots_Bottom Side_0mm_Ch698

Communication System: UID 0, DCS (0); Frequency: 1747.4 MHz;Duty Cycle: 1:2.77
Medium: HSL_1800_260305 Medium parameters used: f = 1747.4 MHz; σ = 1.368 S/m; ε_r = 40.643; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 6.86 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 66.99 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 9.53 W/kg
SAR(1 g) = 4.81 W/kg; SAR(10 g) = 2.3 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 50.4%
Maximum value of SAR (measured) = 6.44 W/kg

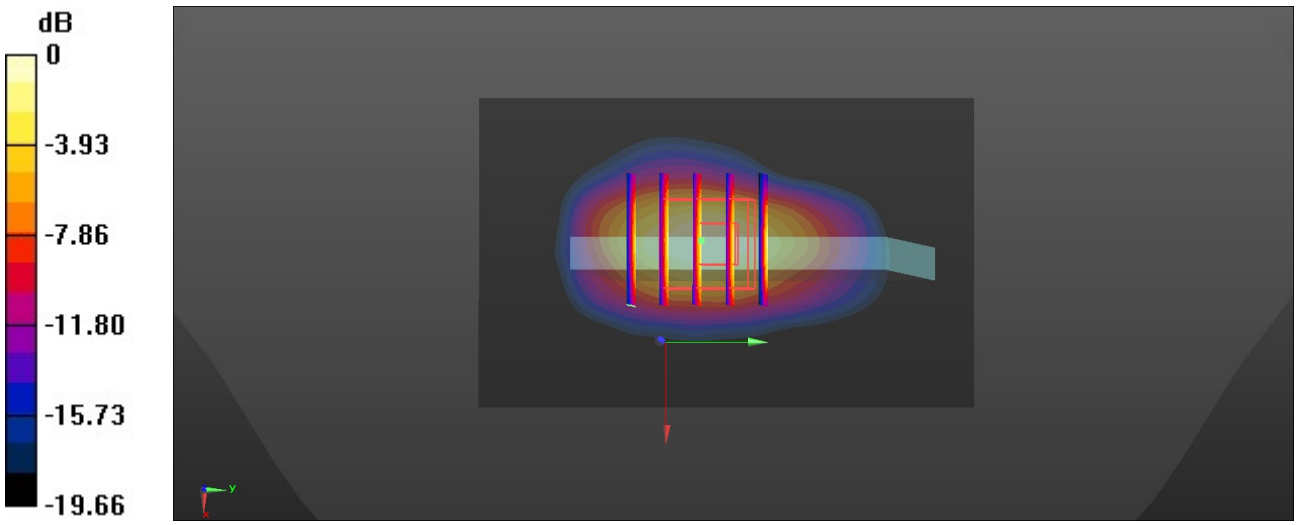

0 dB = 6.44 W/kg = 8.09 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/6

63_WCDMA I_RMC 12.2Kbps_Bottom Side_0mm_Ch9750

Communication System: UID 0, WCDMA (0); Frequency: 1950 MHz;Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1950 MHz; σ = 1.402 S/m; ε_r = 39.419; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1950 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 7.56 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 56.01 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 9.40 W/kg
SAR(1 g) = 4.65 W/kg; SAR(10 g) = 2.22 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 50.6%
Maximum value of SAR (measured) = 6.15 W/kg

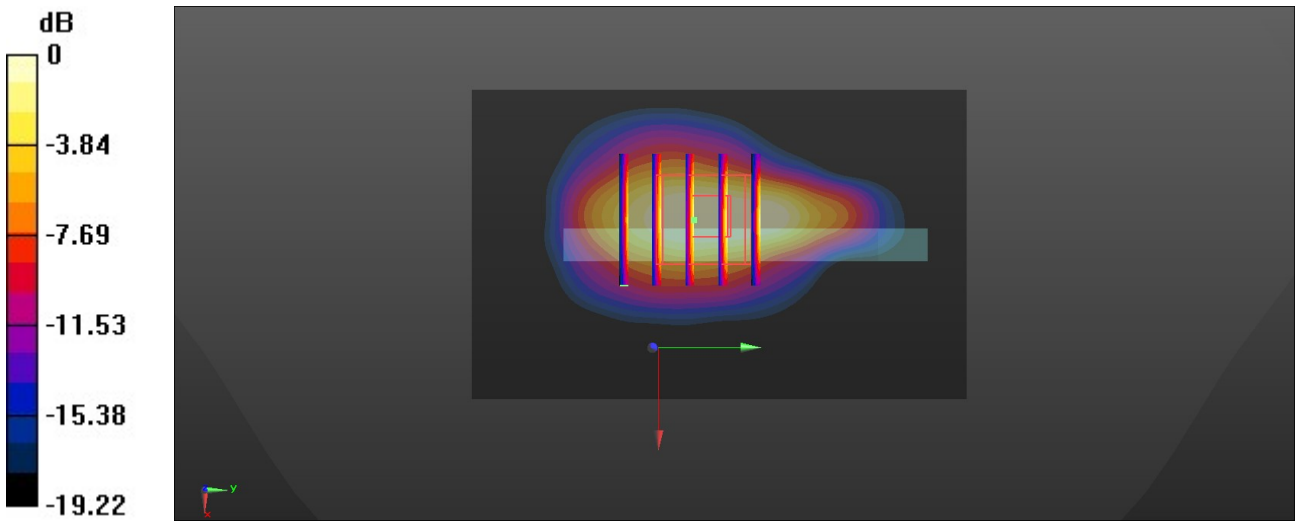

0 dB = 6.15 W/kg = 7.89 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

64_WCDMA V_RMC 12.2Kbps_Bottom Side_0mm_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 836.4 MHz; σ = 0.924 S/m; ε_r = 42.619; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 836.4 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.28 W/kg

Zoom Scan (6x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 46.22 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 10.1 W/kg
SAR(1 g) = 2.61 W/kg; SAR(10 g) = 1.05 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 34.2%
Maximum value of SAR (measured) = 4.27 W/kg

Zoom Scan (6x8x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 46.22 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 8.15 W/kg
SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.03 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 40%
Maximum value of SAR (measured) = 3.17 W/kg

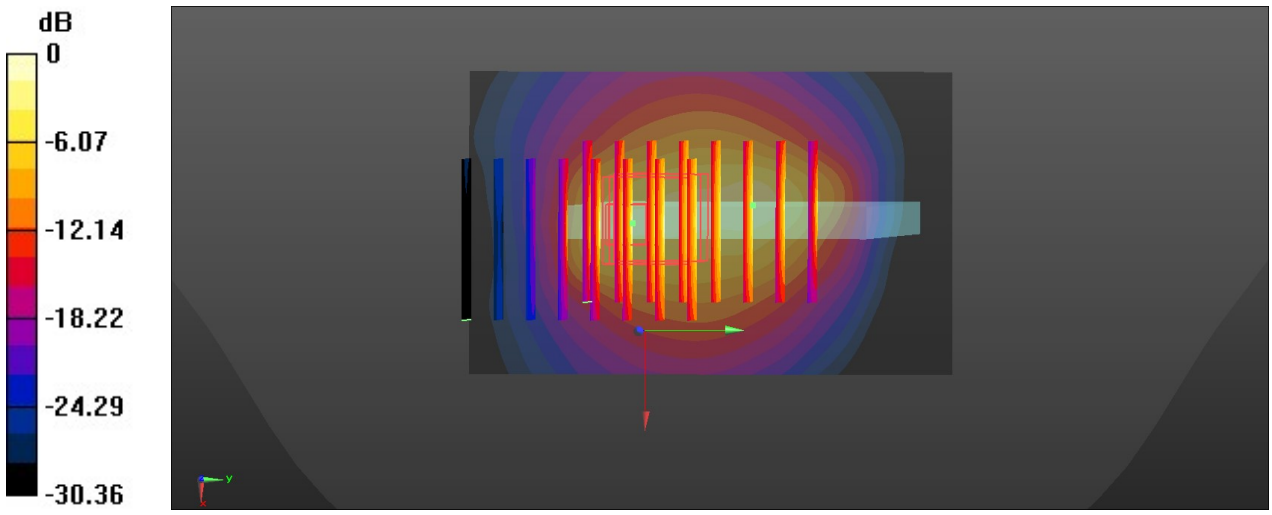

0 dB = 3.17 W/kg = 5.30 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/4

65_WCDMA VIII_RMC 12.2Kbps_Bottom Side_0mm_Ch2788

Communication System: UID 0, WCDMA (0); Frequency: 897.6 MHz;Duty Cycle: 1:1
Medium: HSL_900_260304 Medium parameters used: f = 898 MHz; σ = 0.946 S/m; ε_r = 42.284; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.6 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.13 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 48.60 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 5.07 W/kg
SAR(1 g) = 1.9 W/kg; SAR(10 g) = 0.853 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 40.5%
Maximum value of SAR (measured) = 3.39 W/kg

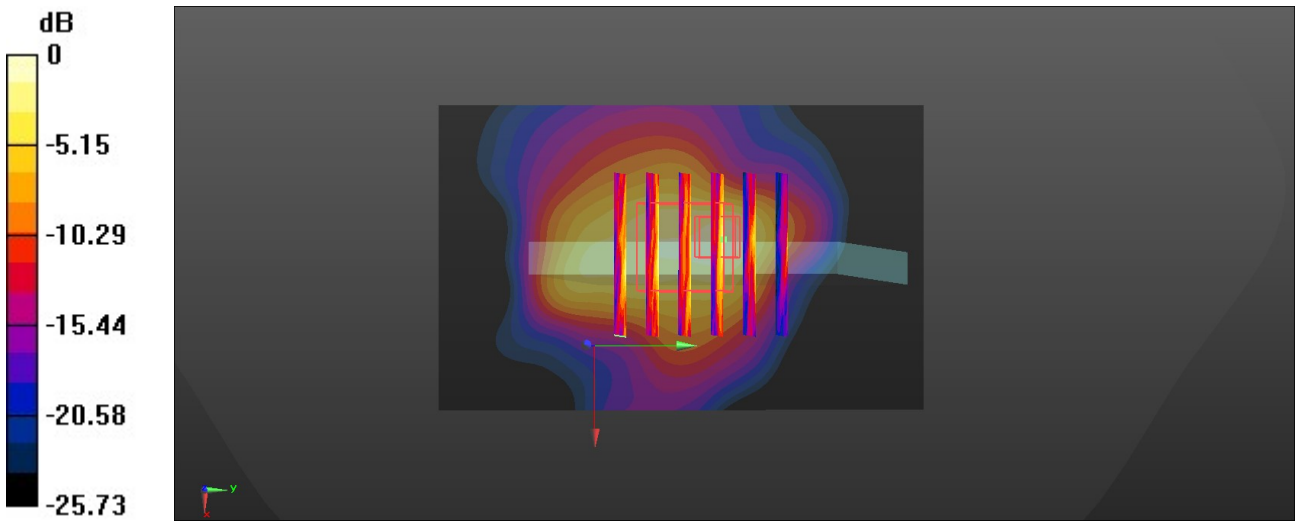

0 dB = 3.39 W/kg = 5.30 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/6

66_LTE Band 1_20M_QPSK_1_0_Bottom Side_0mm_Ch18300

Communication System: UID 0, LTE-FDD (0); Frequency: 1950 MHz;Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1950 MHz; σ = 1.402 S/m; ε_r = 39.419; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1950 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 8.59 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 51.11 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 10.2 W/kg
SAR(1 g) = 4.19 W/kg; SAR(10 g) = 2.01 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 44%
Maximum value of SAR (measured) = 8.30 W/kg

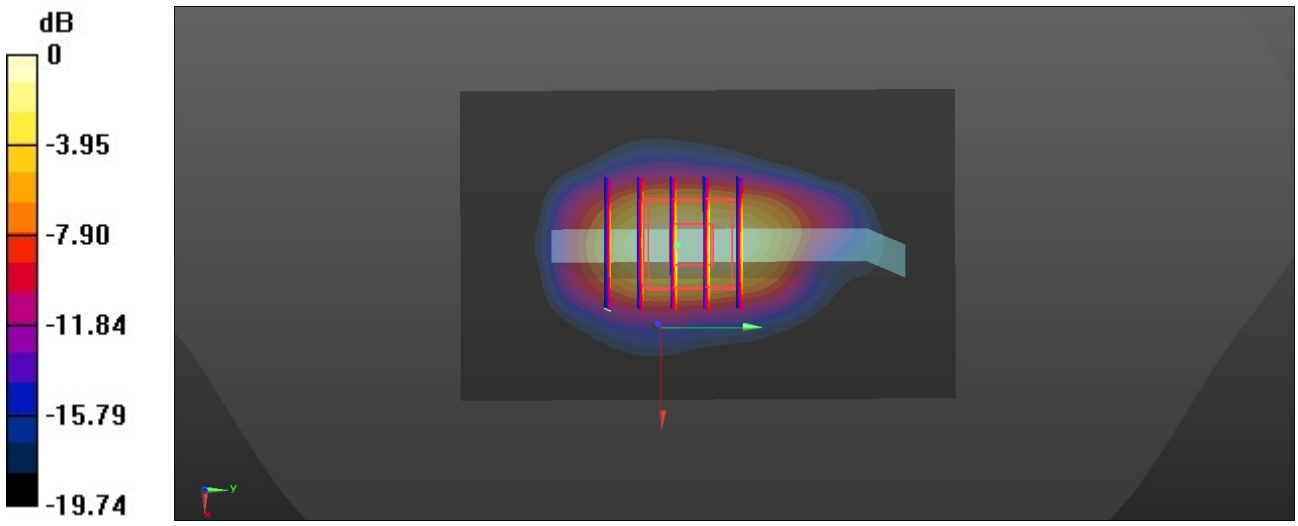

0 dB = 9.30 W/kg = 9.68 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/5

67_LTE Band 3_20M_QPSK_1_0_Back_0mm_Ch19300

Communication System: UID 0, LTE-FDD (0); Frequency: 1720 MHz;Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1720 MHz; σ = 1.348 S/m; ε_r = 40.795; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1720 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 8.81 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.272 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 11.3 W/kg
SAR(1 g) = 5.28 W/kg; SAR(10 g) = 2.06 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 44.9%
Maximum value of SAR (measured) = 8.76 W/kg

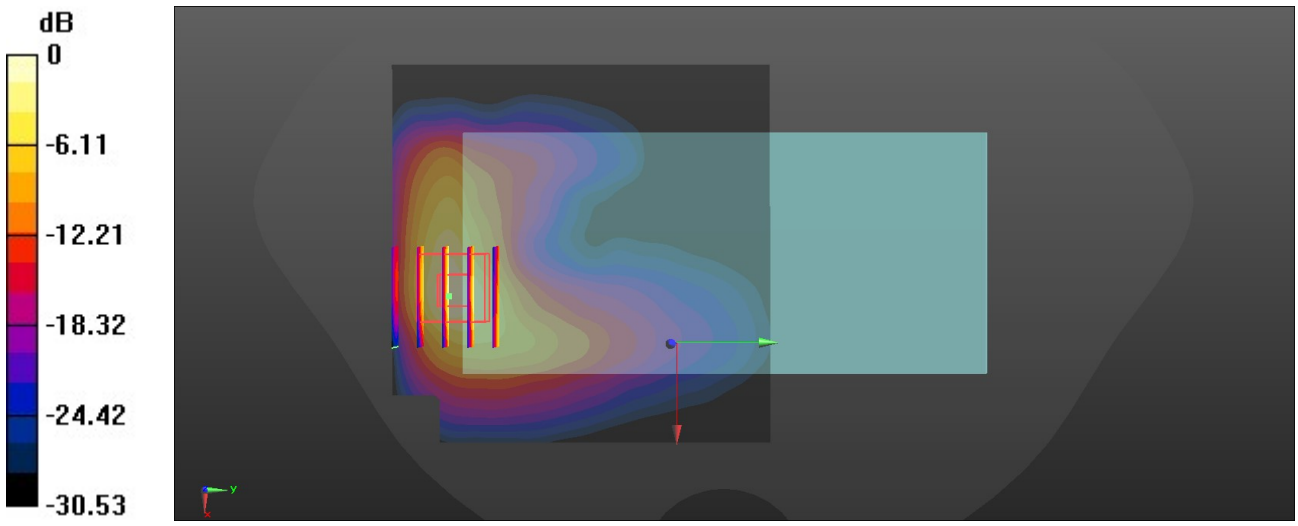

0 dB = 8.76 W/kg = 8.60 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

68_LTE Band 5_10M_QPSK_1_0_Bottom Side_0mm_Ch20525

Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 836.5 MHz; σ = 0.924 S/m; ε_r = 42.577; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 836.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.57 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 55.31 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 8.42 W/kg
SAR(1 g) = 2.5 W/kg; SAR(10 g) = 1.03 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 50.4%
Maximum value of SAR (measured) = 5.22 W/kg

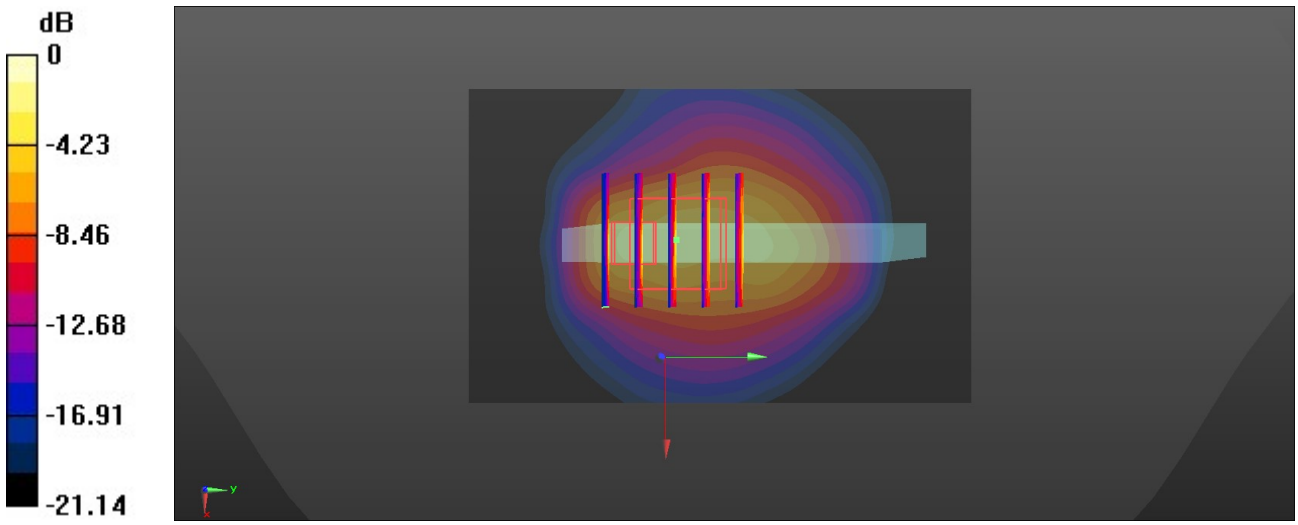

0 dB = 5.22 W/kg = 7.18 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

69_LTE Band 7_20M_QPSK_1_0_Back_0mm_Ch20850

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz;Duty Cycle: 1:1
Medium: HSL_2600_260308 Medium parameters used: f = 2510 MHz; σ = 1.831 S/m; ε_r = 39.16; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2510 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 8.23 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.536 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 19.7 W/kg
SAR(1 g) = 6.46 W/kg; SAR(10 g) = 2.26 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 45.9%
Maximum value of SAR (measured) = 9.18 W/kg

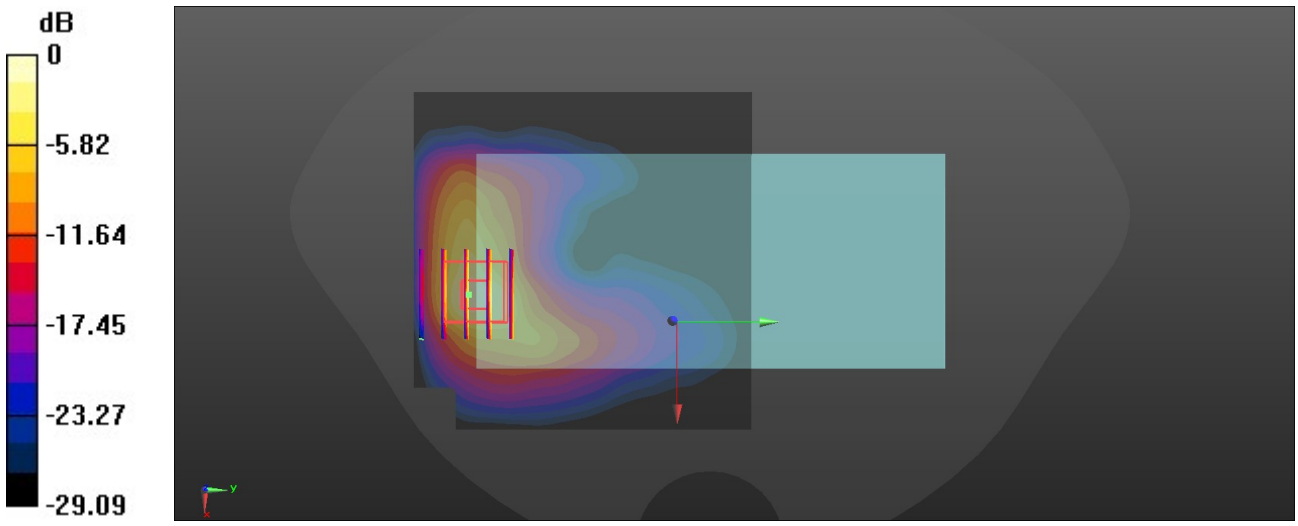

0 dB = 9.18 W/kg = 9.63 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/4

70_LTE Band 8_10M_QPSK_1_0_Bottom Side_0mm_Ch21625

Communication System: UID 0, LTE-FDD (0); Frequency: 897.5 MHz;Duty Cycle: 1:1
Medium: HSL_900_260304 Medium parameters used: f = 897.5 MHz; σ = 0.948 S/m; ε_r = 42.177; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.72 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 43.25 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 4.44 W/kg
SAR(1 g) = 1.6 W/kg; SAR(10 g) = 0.785 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 40.2%
Maximum value of SAR (measured) = 2.31 W/kg

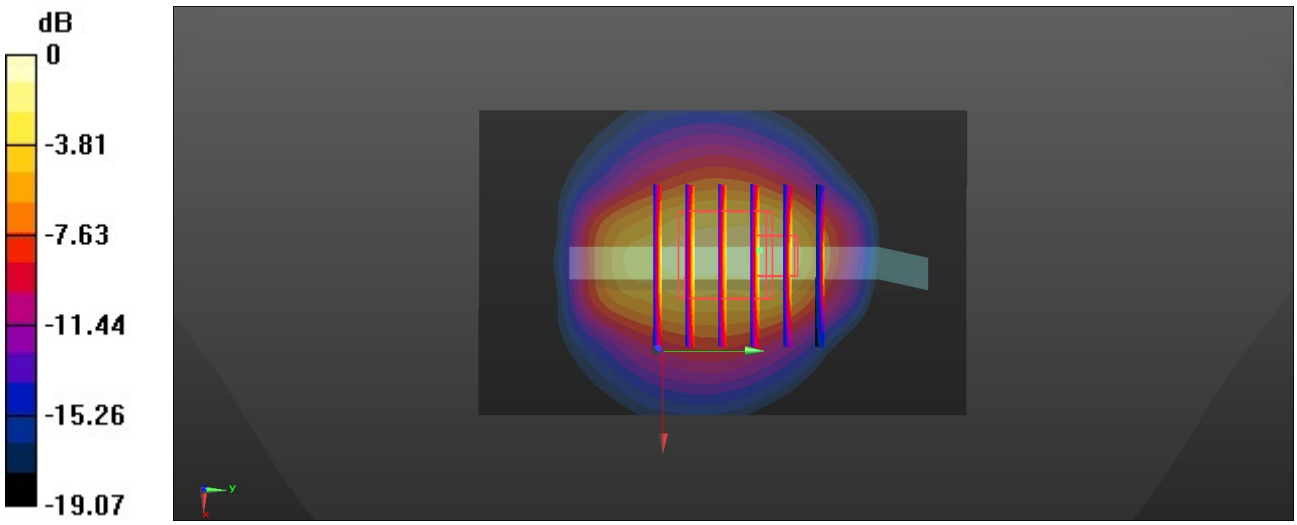

0 dB = 2.31 W/kg = 3.64 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

71_LTE Band 20_20M_QPSK_1_0_Bottom Side_0mm_Ch24300

Communication System: UID 0, LTE-FDD (0); Frequency: 847 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 847 MHz; σ = 0.925 S/m; ε_r = 42.168; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 847 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.67 W/kg

Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 45.30 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 7.30 W/kg
SAR(1 g) = 2.1 W/kg; SAR(10 g) = 0.888 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 33.6%
Maximum value of SAR (measured) = 3.38 W/kg

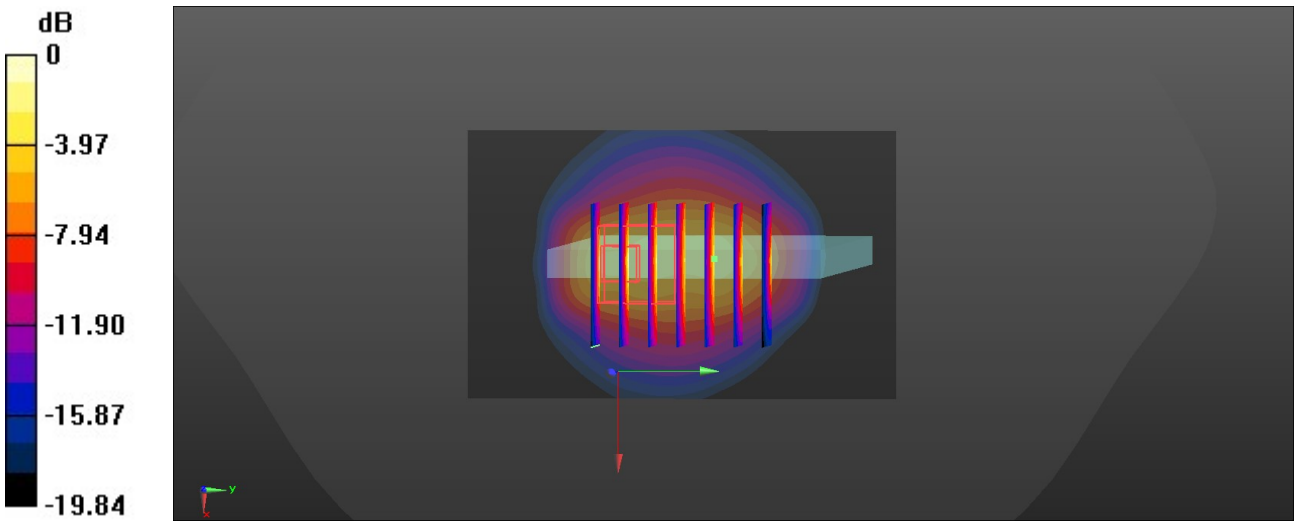

0 dB = 3.38 W/kg = 5.29 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

72_LTE Band 26_15M_QPSK_1_0_Bottom Side_0mm_Ch26865

Communication System: UID 0, LTE-FDD (0); Frequency: 831.5 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 831.5 MHz; σ = 0.923 S/m; ε_r = 42.501; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 831.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.27 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 53.10 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 10.7 W/kg
SAR(1 g) = 2.96 W/kg; SAR(10 g) = 1.22 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 31.6%
Maximum value of SAR (measured) = 4.75 W/kg

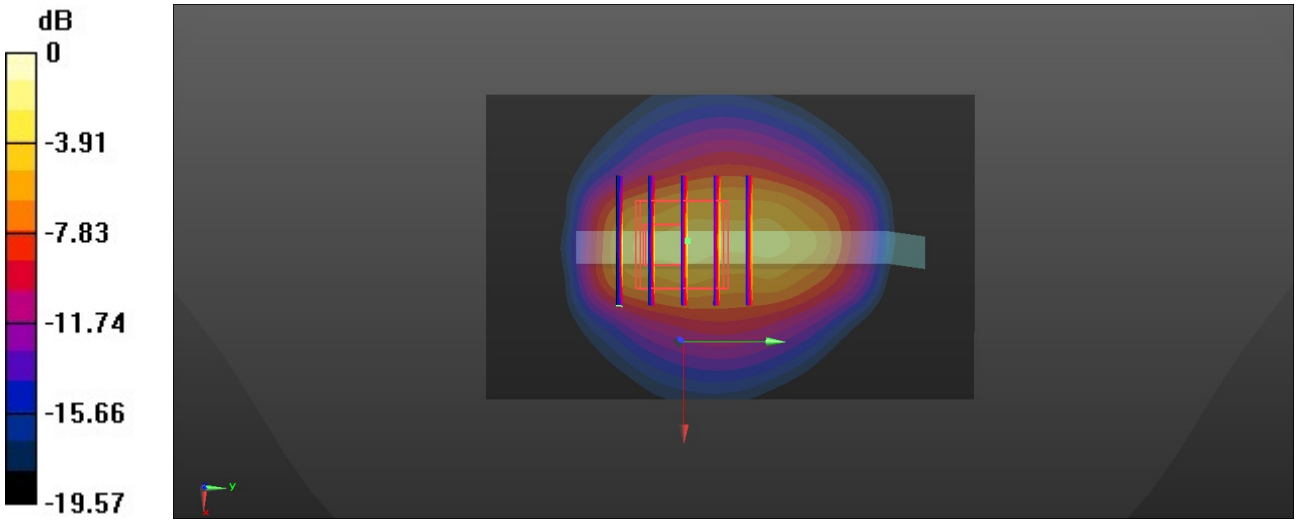

0 dB = 4.75 W/kg = 6.77 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/2

73_LTE Band 28_20M_QPSK_1_0_Bottom Side_0mm_Ch27460

Communication System: UID 0, LTE-FDD (0); Frequency: 728 MHz;Duty Cycle: 1:1
Medium: HSL_750_260302 Medium parameters used: f = 728 MHz; σ = 0.876 S/m; ε_r = 42.889; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(6.14, 6.21, 6.05) @ 728 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.79 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 34.02 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 11.2 W/kg
SAR(1 g) = 2.48 W/kg; SAR(10 g) = 0.860 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 55.7%
Maximum value of SAR (measured) = 4.27 W/kg

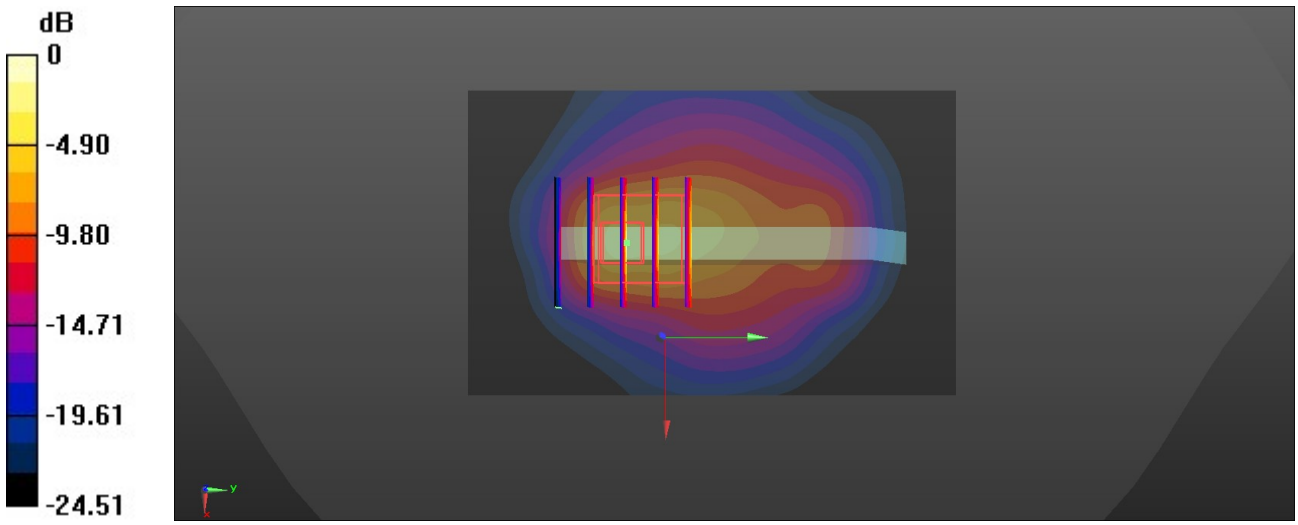

0 dB = 4.27 W/kg = 6.30 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/7

74_LTE Band 40_20M_QPSK_1_0_Back_0mm_Ch39150

Communication System: UID 0, LTE-TDD (0); Frequency: 2350 MHz;Duty Cycle: 1:1.59
Medium: HSL_2300_260307 Medium parameters used: f = 2350 MHz; σ = 1.663 S/m; ε_r = 39.357; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.63, 4.68, 4.56) @ 2350 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 6.96 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.760 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 14.1 W/kg
SAR(1 g) = 5.27 W/kg; SAR(10 g) = 2.09 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 39.7%
Maximum value of SAR (measured) = 7.24 W/kg

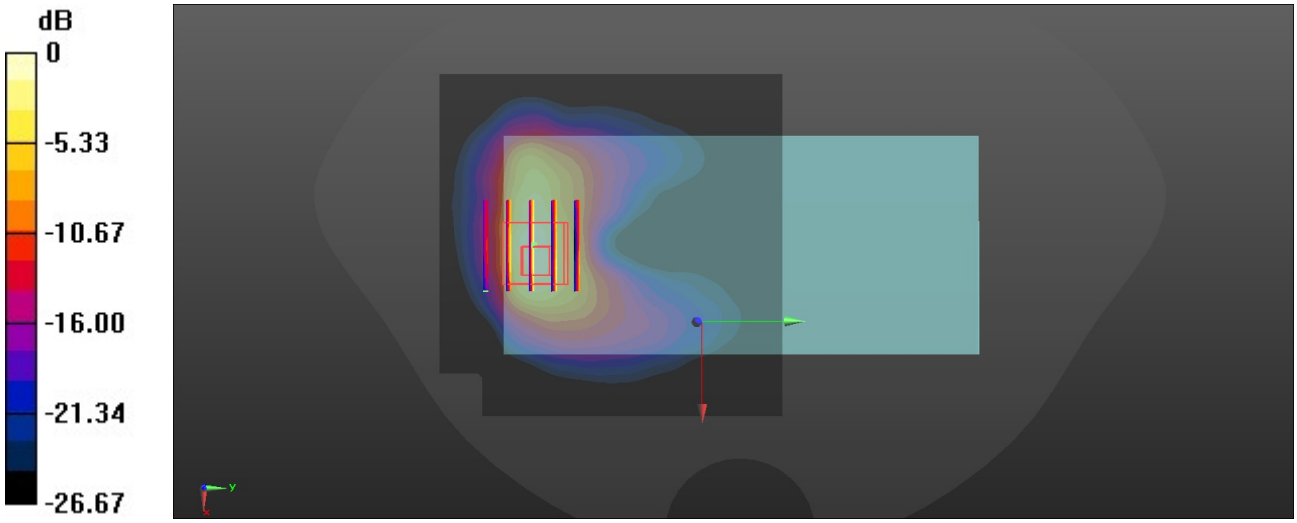

0 dB = 7.24 W/kg = 8.60 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

75_LTE Band 41_20M_QPSK_1_0_Back_0mm_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz;Duty Cycle: 1:1.59
Medium: HSL_2600_260308 Medium parameters used: f = 2593 MHz; σ = 1.915 S/m; ε_r = 38.585; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2593 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 4.99 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.010 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 12.7 W/kg
SAR(1 g) = 4.15 W/kg; SAR(10 g) = 1.57 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 40%
Maximum value of SAR (measured) = 6.28 W/kg

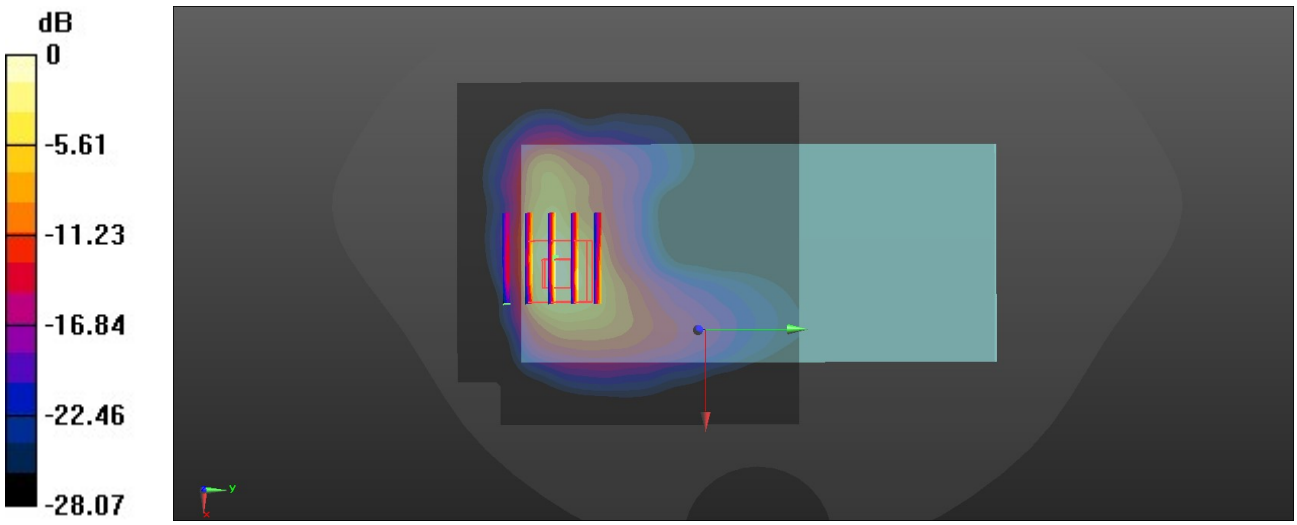

0 dB = 6.28 W/kg = 7.98 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/10

76_LTE Band 42_20M_QPSK_1_0_Back_0mm_Ch42590

Communication System: UID 0, LTE-TDD (0); Frequency: 3500 MHz;Duty Cycle: 1:1.59
Medium: HSL_3500_260310 Medium parameters used: f = 3500 MHz; σ = 2.984 S/m; ε_r = 37.772; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(5.62, 6.07, 5.74) @ 3500 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 3.01 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.544 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 4.49 W/kg
SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.451 W/kg
Smallest distance from peaks to all points 3 dB below = 4.9 mm
Ratio of SAR at M2 to SAR at M1 = 70.5%
Maximum value of SAR (measured) = 3.03 W/kg

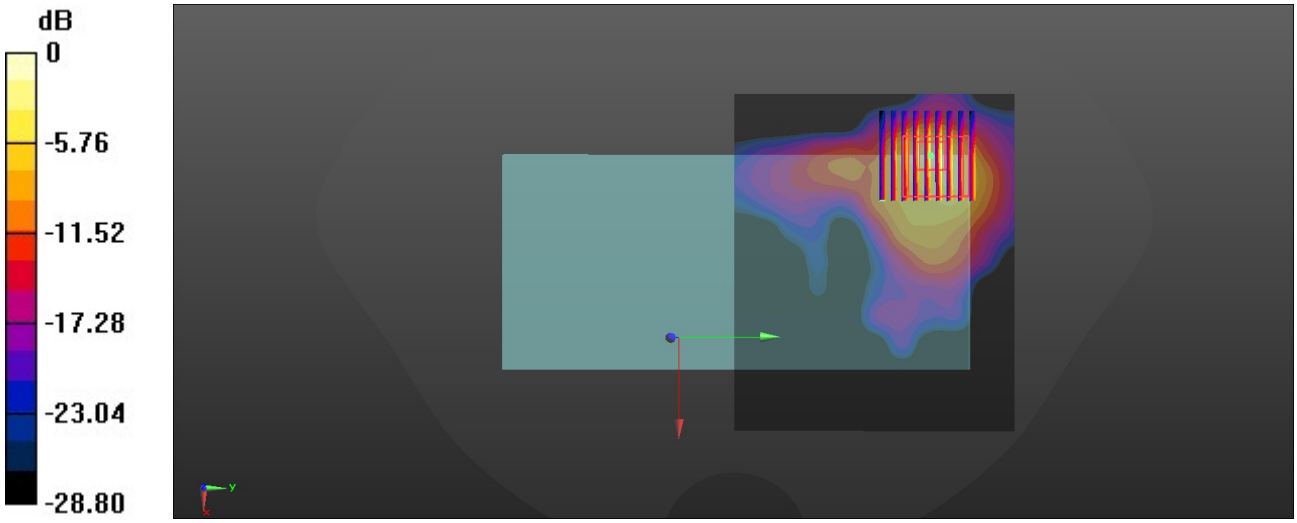

0 dB = 3.03 W/kg = 4.81 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/6

77_FR1 n1_50M_BPSK_135_67_Bottom Side_0mm_Ch389000

Communication System: UID 0, 5G NR (0); Frequency: 1945 MHz;Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1945 MHz; σ = 1.394 S/m; ε_r = 39.348; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1945 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 9.99 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 74.85 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 13.0 W/kg
SAR(1 g) = 5.95 W/kg; SAR(10 g) = 2.41 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 46.7%
Maximum value of SAR (measured) = 8.53 W/kg

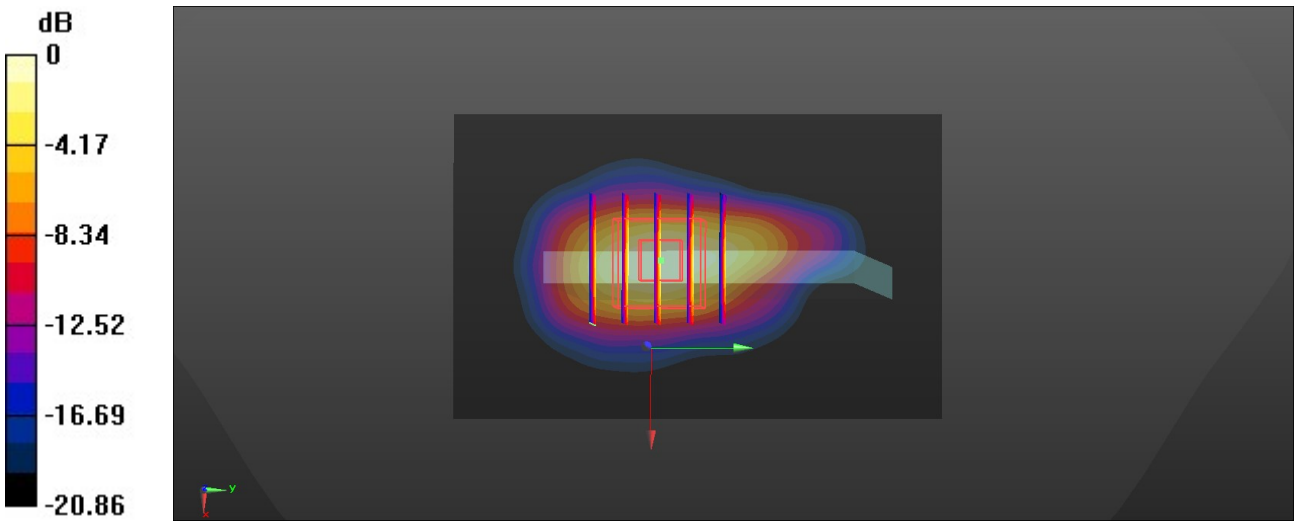

0 dB = 8.53 W/kg = 9.31 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/5

78_FR1 n3_50M_BPSK_135_67_Back_0mm_Ch352000

Communication System: UID 0, 5G NR (0); Frequency: 1760 MHz;Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1760 MHz; σ = 1.382 S/m; ε_r = 40.702; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1760 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 6.86 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.505 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 12.3 W/kg
SAR(1 g) = 4.83 W/kg; SAR(10 g) = 2.31 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 41.1%
Maximum value of SAR (measured) = 7.12 W/kg

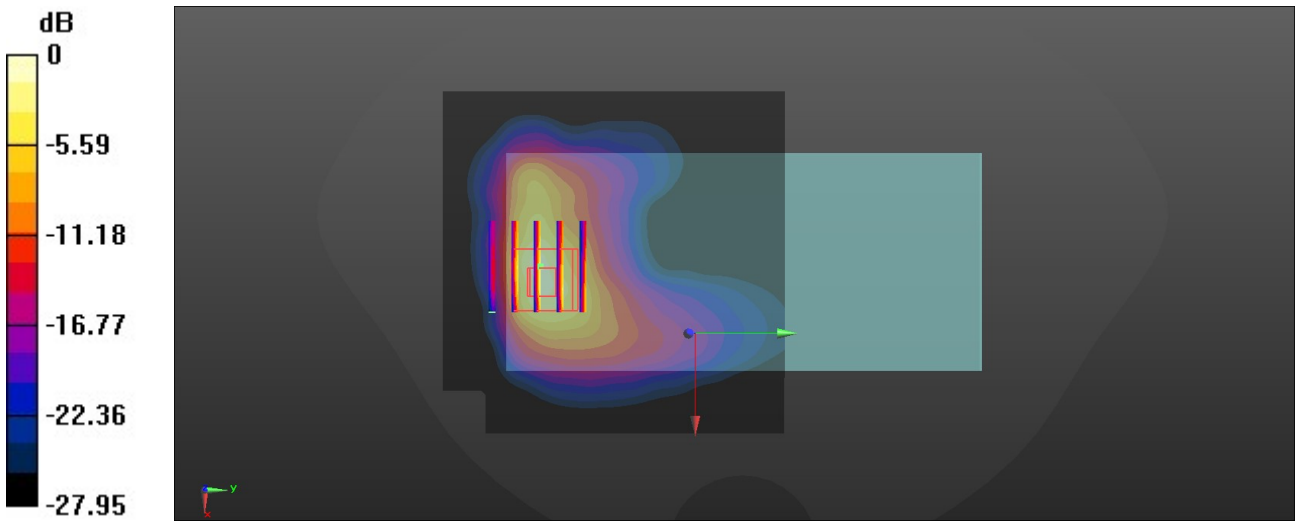

0 dB = 7.12 W/kg = 8.17 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

79_FR1 n5_20M_BPSK_50_25_Bottom Side_0mm_Ch167300

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 836.5 MHz; σ = 0.924 S/m; ε_r = 42.577; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 836.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.95 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 46.08 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 9.42 W/kg
SAR(1 g) = 2.64 W/kg; SAR(10 g) = 1.17 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 40.5%
Maximum value of SAR (measured) = 3.36 W/kg

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 46.08 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 4.18 W/kg
SAR(1 g) = 1.85 W/kg; SAR(10 g) = 1.01 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 48.3%
Maximum value of SAR (measured) = 2.77 W/kg

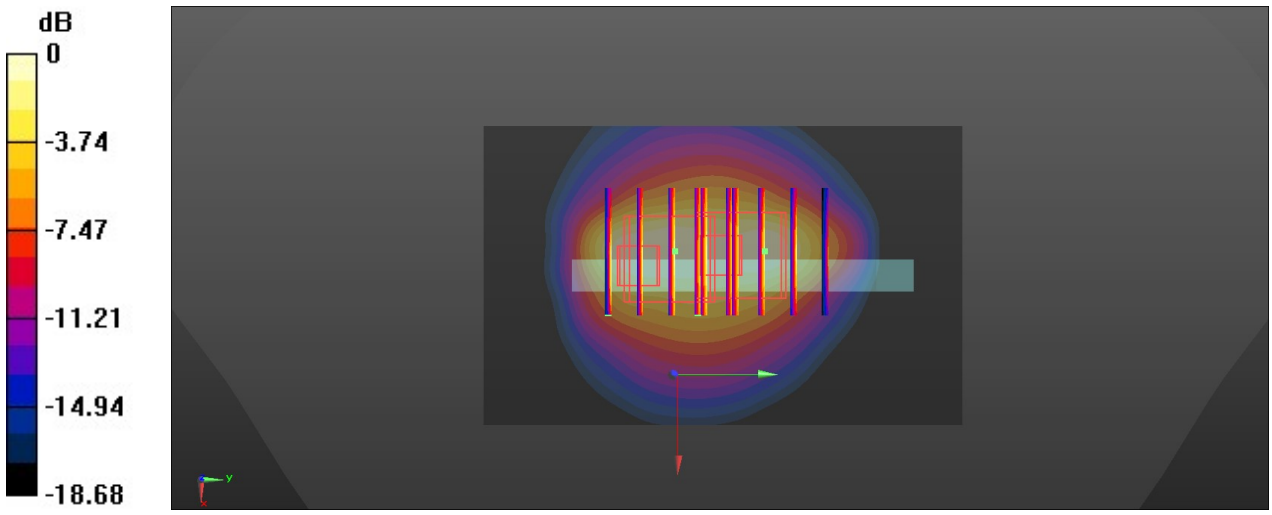

0 dB = 2.77 W/kg = 4.42 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

80_FR1 n7_50M_BPSK_135_67_Back_0mm_Ch505000

Communication System: UID 0, 5G NR (0); Frequency: 2525 MHz;Duty Cycle: 1:1
Medium: HSL_2600_260308 Medium parameters used: f = 2525 MHz; σ = 1.87 S/m; ε_r = 39.107; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2525 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 6.84 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.615 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 15.2 W/kg
SAR(1 g) = 5.76 W/kg; SAR(10 g) = 2.09 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 42.4%
Maximum value of SAR (measured) = 7.74 W/kg

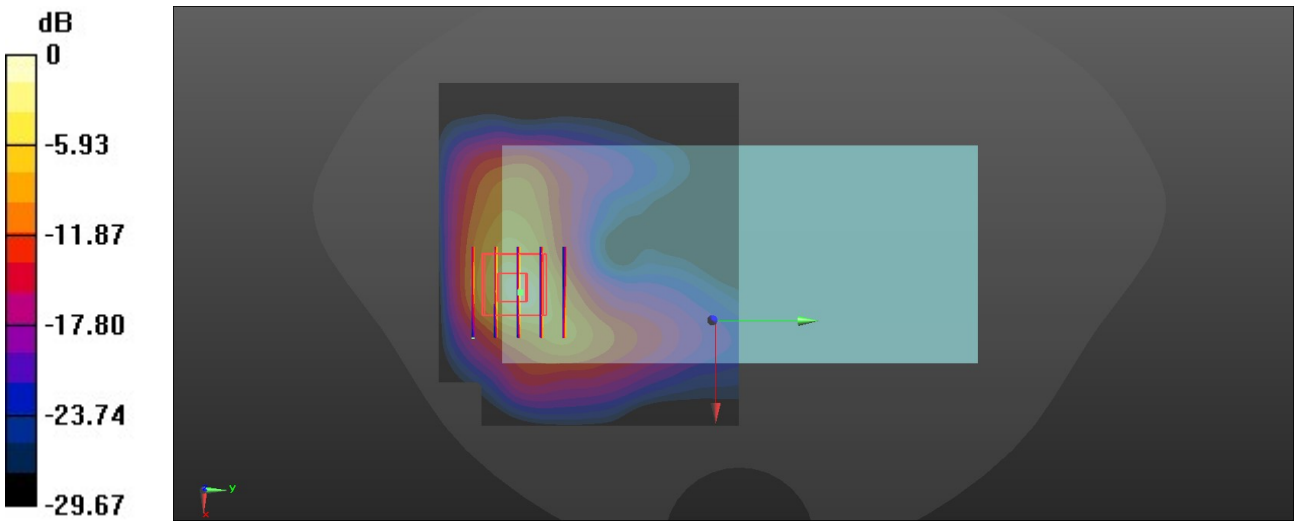

0 dB = 7.74 W/kg = 8.89 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/4

81_FR1 n8_20M_BPSK_50_25_Bottom Side_0mm_Ch179500

Communication System: UID 0, 5G NR (0); Frequency: 897.5 MHz;Duty Cycle: 1:1
Medium: HSL_900_260304 Medium parameters used: f = 897.5 MHz; σ = 0.948 S/m; ε_r = 42.177; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 897.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.38 W/kg

Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 46.12 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 5.75 W/kg
SAR(1 g) = 2.22 W/kg; SAR(10 g) = 1.1 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 44.3%
Maximum value of SAR (measured) = 3.02 W/kg

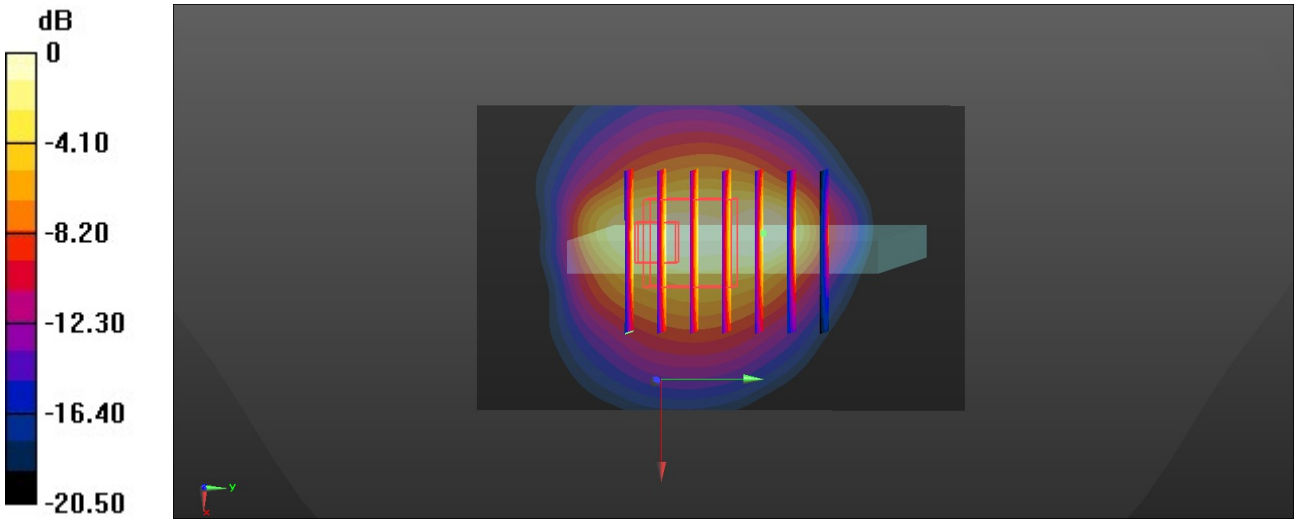

0 dB = 3.02 W/kg = 4.80 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/3

82_FR1 n20_20M_BPSK_50_25_Bottom Side_0mm_Ch169400

Communication System: UID 0, 5G NR (0); Frequency: 847 MHz;Duty Cycle: 1:1
Medium: HSL_835_260303 Medium parameters used: f = 847 MHz; σ = 0.925 S/m; ε_r = 42.168; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(5.88, 5.95, 5.79) @ 847 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.96 W/kg

Zoom Scan (6x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 47.29 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 9.18 W/kg
SAR(1 g) = 2.55 W/kg; SAR(10 g) = 1.16 W/kg
Smallest distance from peaks to all points 3 dB below = 8.7 mm
Ratio of SAR at M2 to SAR at M1 = 42.8%
Maximum value of SAR (measured) = 3.84 W/kg

Zoom Scan (6x8x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 47.29 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 8.12 W/kg
SAR(1 g) = 2.04 W/kg; SAR(10 g) = 1.03 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 34.8%
Maximum value of SAR (measured) = 3.08 W/kg

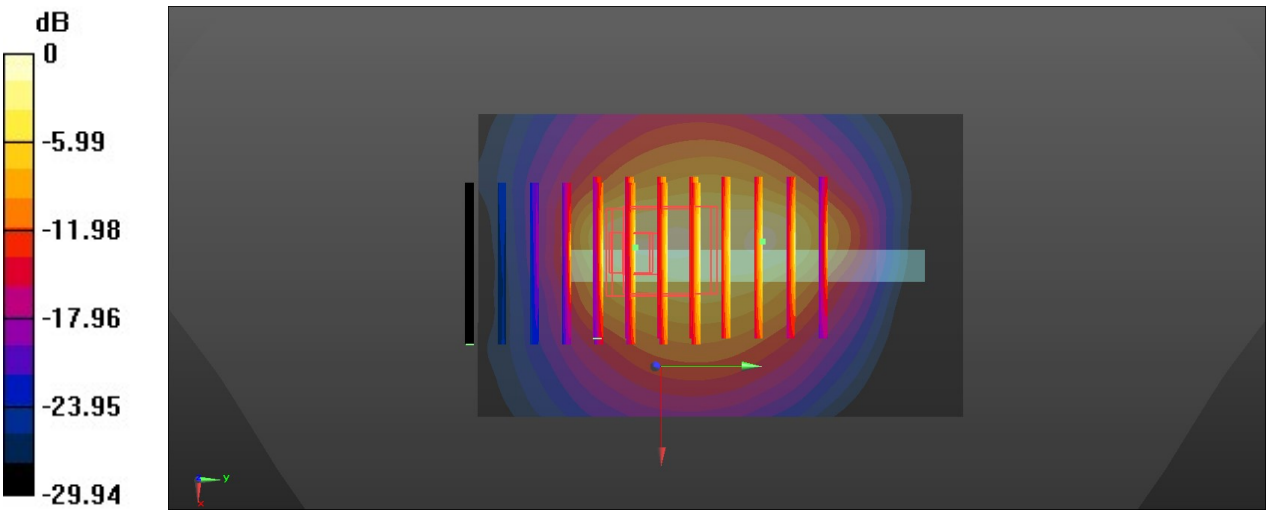

0 dB = 3.08 W/kg = 5.11 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/2

83_FR1 n28_30M_BPSK_80_40_Bottom Side_0mm_Ch145100

Communication System: UID 0, 5G NR (0); Frequency: 725.5 MHz;Duty Cycle: 1:1
Medium: HSL_750_260302 Medium parameters used: f = 725.5 MHz; σ = 0.884 S/m; ε_r = 42.917; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(6.14, 6.21, 6.05) @ 725.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.94 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.50 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 8.25 W/kg
SAR(1 g) = 2.03 W/kg; SAR(10 g) = 0.742 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 50.2%
Maximum value of SAR (measured) = 3.06 W/kg

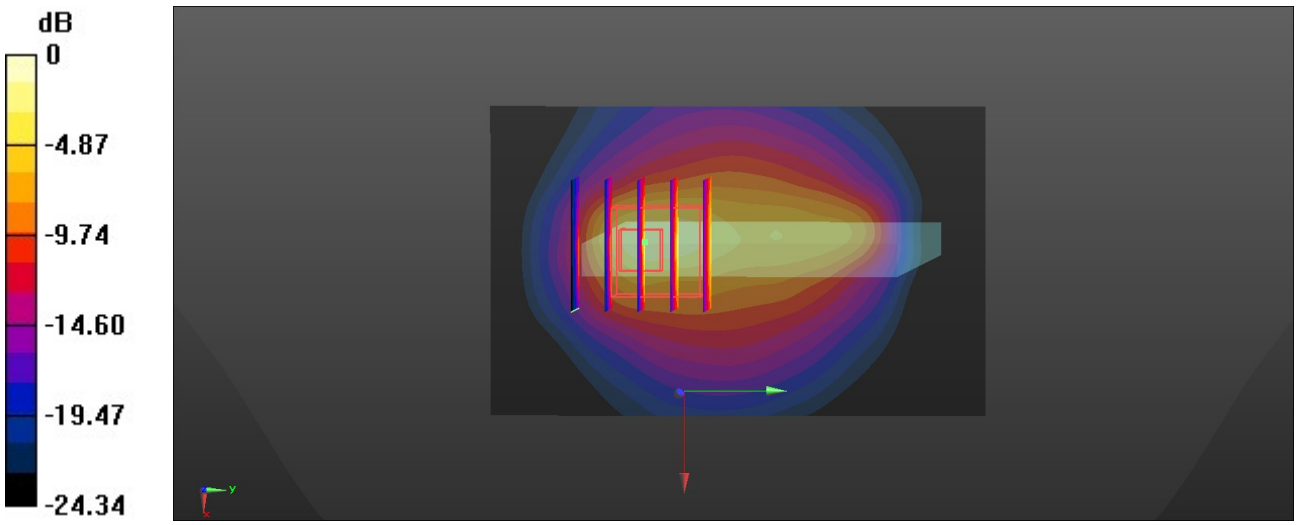

0 dB = 3.06 W/kg = 4.86 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/7

84_FR1 n40_100M_BPSK_135_67_Back_0mm_Ch470000

Communication System: UID 0, 5G NR (0); Frequency: 2350 MHz;Duty Cycle: 1:1
Medium: HSL_2300_260307 Medium parameters used: f = 2350 MHz; σ = 1.663 S/m; ε_r = 39.357; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.63, 4.68, 4.56) @ 2350 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 7.67 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 18.1 W/kg
SAR(1 g) = 6.53 W/kg; SAR(10 g) = 2.45 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 58.3%
Maximum value of SAR (measured) = 8.20 W/kg

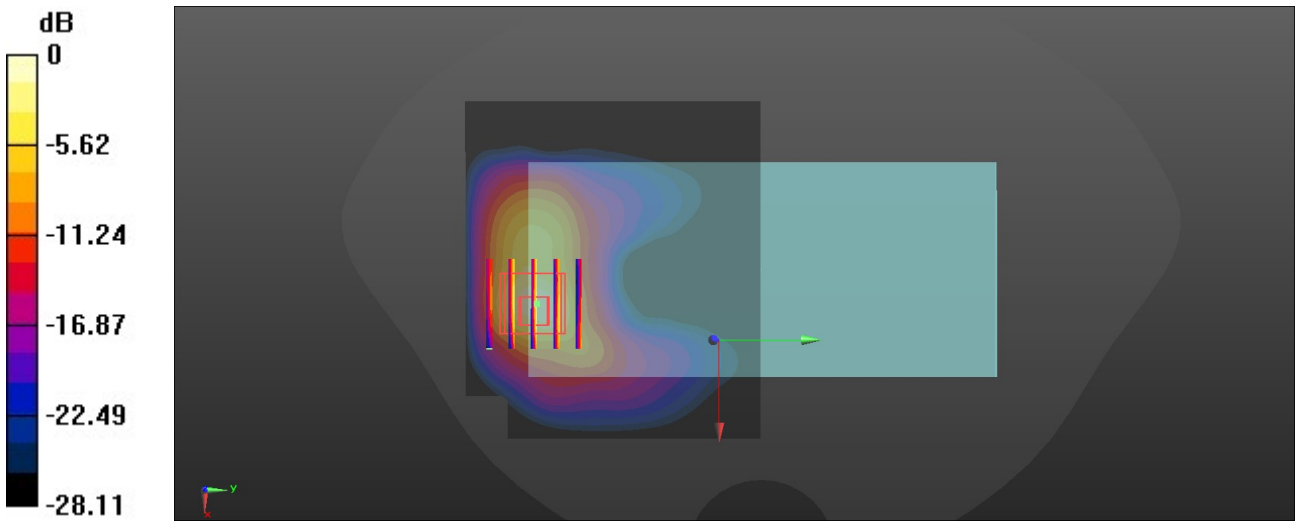

0 dB = 8.20 W/kg = 9.14 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

85_FR1 n41_HPUE_100M_BPSK_135_67_Back_0mm_Ch528000

Communication System: UID 0, 5G NR (0); Frequency: 2640 MHz;Duty Cycle: 1:1
Medium: HSL_2600_260308 Medium parameters used: f = 2640 MHz; σ = 2.001 S/m; ε_r = 38.721; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.9 ℃

DASY5 Configuration:
- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2640 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 15.1 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.170 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 17.1 W/kg
SAR(1 g) = 6.89 W/kg; SAR(10 g) = 2.67 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 40.4%
Maximum value of SAR (measured) = 13.2 W/kg

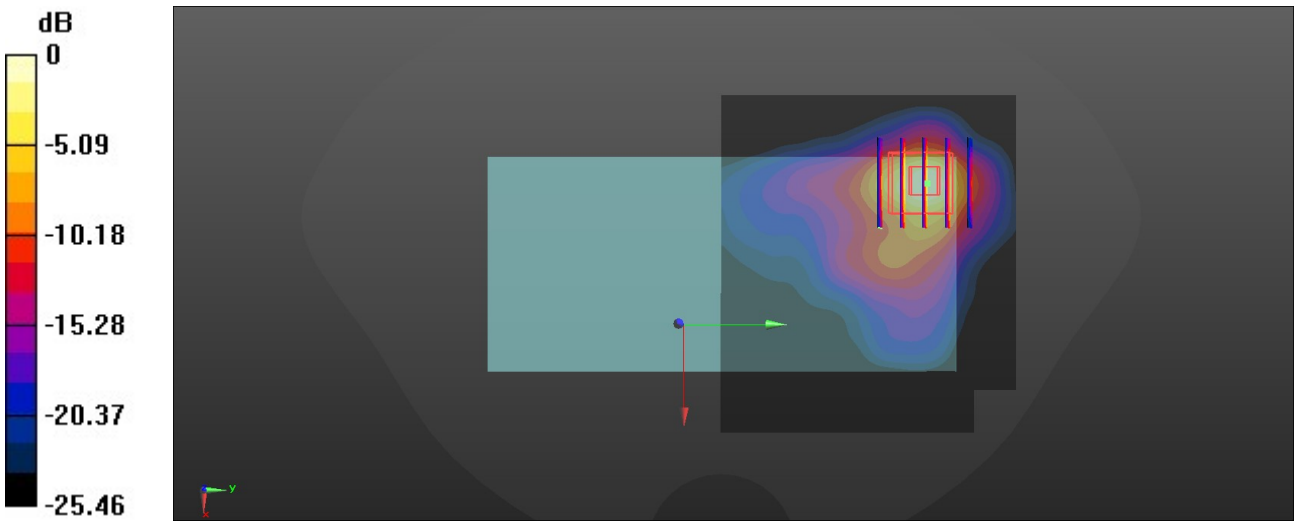

0 dB = 13.2 W/kg = 11.21 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/11

86_FR1 n77_HPUE_100M_BPSK_135_67_Right Side_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz;Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 17.6 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 4.270 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 44.3 W/kg
SAR(1 g) = 9.8 W/kg; SAR(10 g) = 2.41 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 65.1%
Maximum value of SAR (measured) = 24.5 W/kg

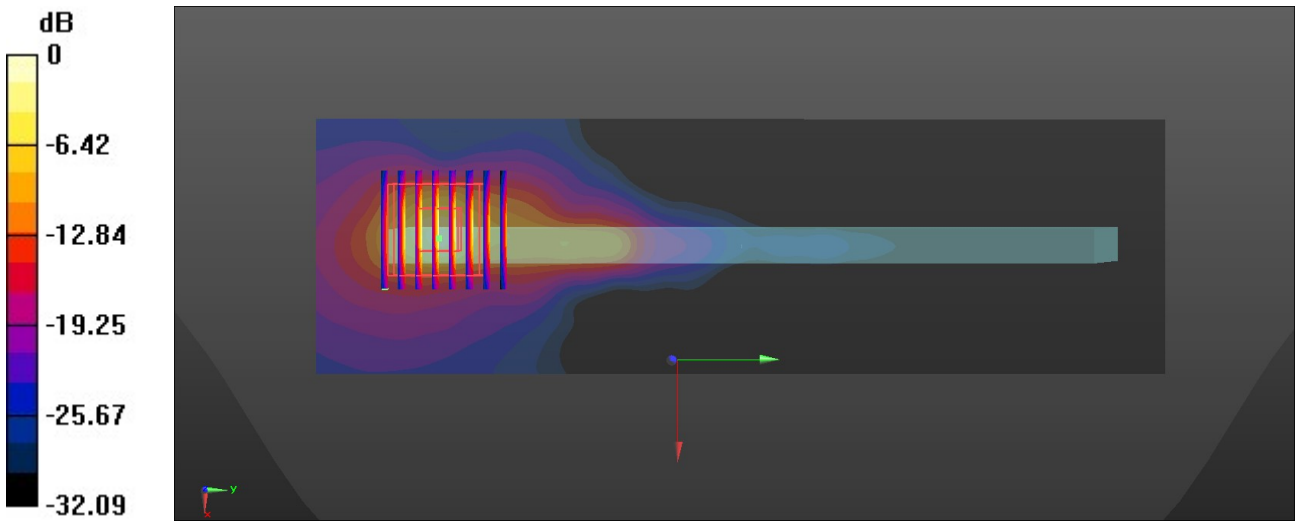

0 dB = 24.5 W/kg = 13.89 dBW/kg

Date: 2026-03-08

87_FR1 n79_HPUE_100M_BPSK_135RB_67Offset_Right Side_0mm_Ch730000

Communication System: 5G NR
AntennaCfg:SISO; Frequency: 4950.000 MHz; Duty Cycle: 1:1
Medium: HSL_4900_260308 Medium parameters used: f= 4950.000 MHz; σ= 4.25 S/m; ε_r =36.3
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7764; ConvF(6.44, 6.26, 6.38); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 9.51 W/kg; SAR (10g) = 2.12 W/kg;

Zoom Scan (25.0 mm x 25.0 mm x 25.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 16.2 W/kg; SAR (10g) = 2.87 W/kg
Smallest distance from peaks to all points 3 dB below = 4.5 mm
Ratio of SAR at M2 to SAR at M1 = 66.7 %

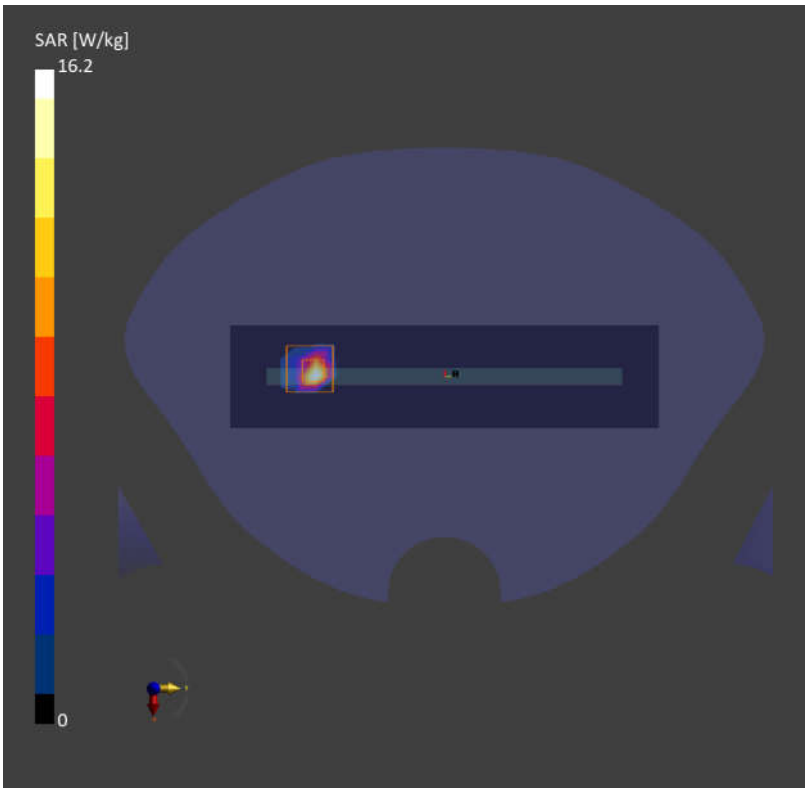

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

88_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz;Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 5.33 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.171 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 6.02 W/kg
SAR(1 g) = 2.57 W/kg; SAR(10 g) = 1.11 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 40%
Maximum value of SAR (measured) = 4.70 W/kg

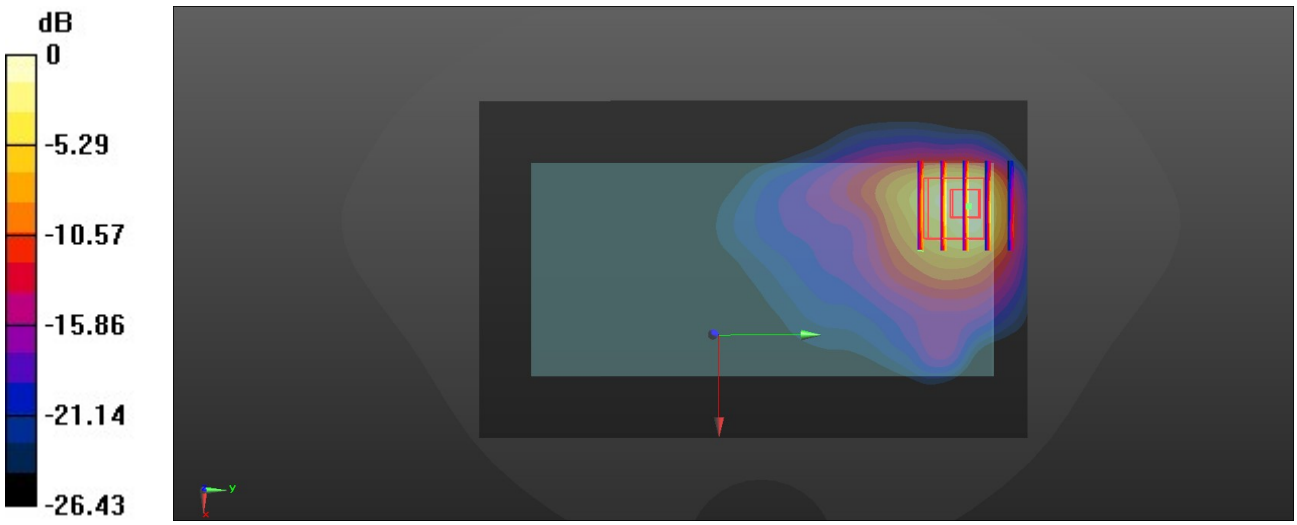

0 dB = 4.70 W/kg = 6.72 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/14

89_WLAN5GHz_802.11n-HT20 MCS0_Top Side_0mm_Ch140

Communication System: UID 0, WLAN5GHz (0); Frequency: 5700 MHz;Duty Cycle: 1:1.051
Medium: HSL_5600_260314 Medium parameters used: f = 5700 MHz; σ = 5.102 S/m; ε_r = 35.81; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(4.39, 4.74, 4.48) @ 5600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 4.90 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 7.456 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 34.9 W/kg
SAR(1 g) = 3.06 W/kg; SAR(10 g) = 0.475 W/kg
Smallest distance from peaks to all points 3 dB below = 5.9 mm
Ratio of SAR at M2 to SAR at M1 = 48.8%
Maximum value of SAR (measured) = 11.8 W/kg

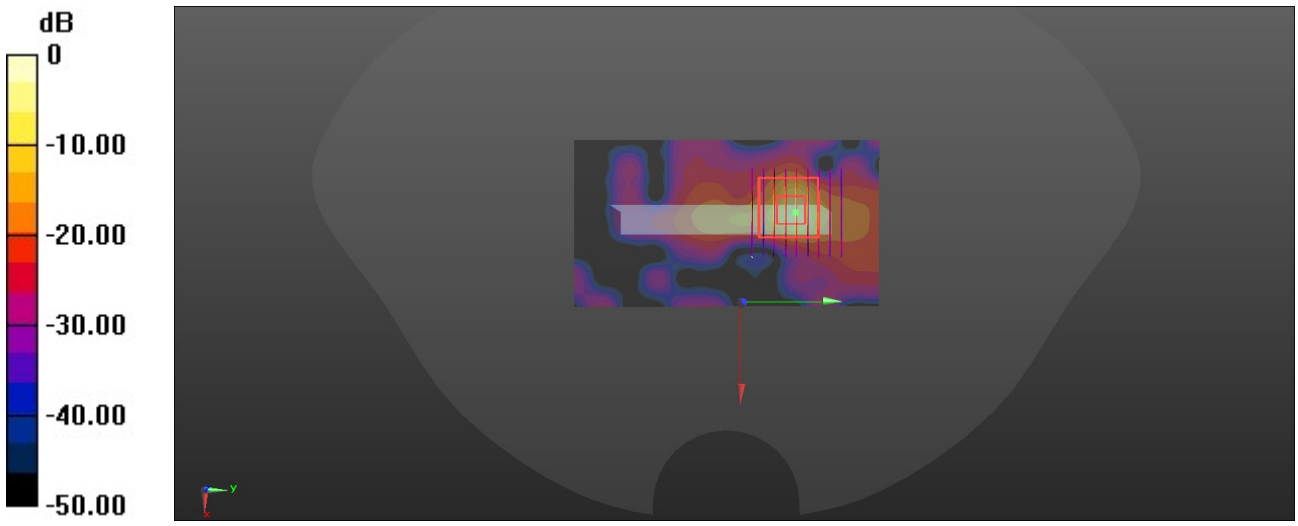

0 dB = 11.8 W/kg = 10.72 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2026/3/8

90_Bluetooth_1Mbps_Back_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz;Duty Cycle: 1:1.287
Medium: HSL_2450_260308 Medium parameters used: f = 2441 MHz; σ = 1.785 S/m; ε_r = 39.298; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2441 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.302 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.2280 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.322 W/kg
SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.061 W/kg
Smallest distance from peaks to all points 3 dB below = 8.5 mm
Ratio of SAR at M2 to SAR at M1 = 43.9%
Maximum value of SAR (measured) = 0.178 W/kg

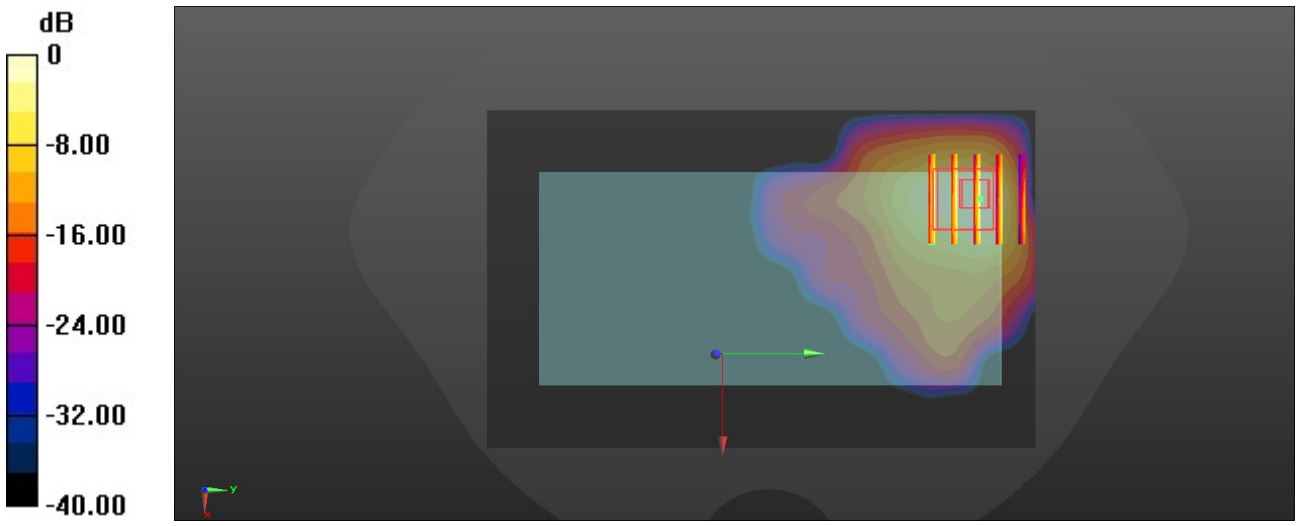

0 dB = 0.178 W/kg = -7.50 dBW/kg

Date: 2026-04-13

91_NFC_ASK_Back_0mm

Communication System: CW; Frequency: 13.600 MHz; Duty Cycle: 1:1
Medium: HSL_13_260413 Medium parameters used: f= 13.000 MHz; σ= 0.744 S/m; ε_r = 56.2
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(17.74, 18.15, 17.41); Calibrated: 2026-02-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2135; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.025 W/kg; SAR (10g) = 0.017 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.031 W/kg; SAR (10g) = 0.011 W/kg
Smallest distance from peaks to all points 3 dB below = 9.3 mm
Ratio of SAR at M2 to SAR at M1 = 65.4 %

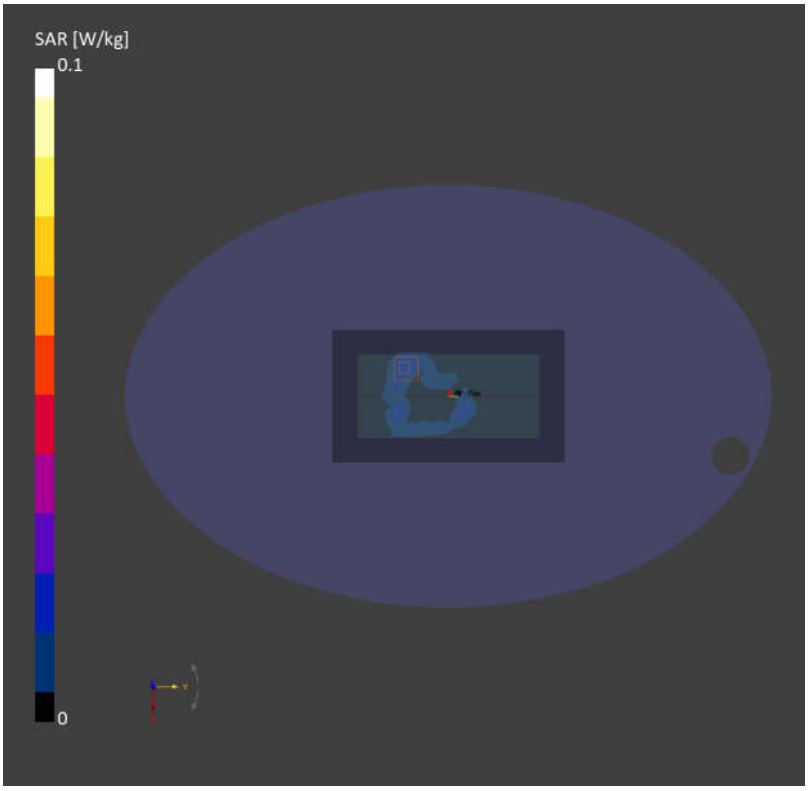

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 1_LTE Band 1_20M_QPSK_1_0_Back_5mm_Ch18300

Communication System: UID 0, LTE-FDD (0); Frequency: 1950 MHz; Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1950 MHz; σ = 1.402 S/m; ε_r = 39.419; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1950 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_5mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 2.97 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (interpolated) = 4.08 W/kg

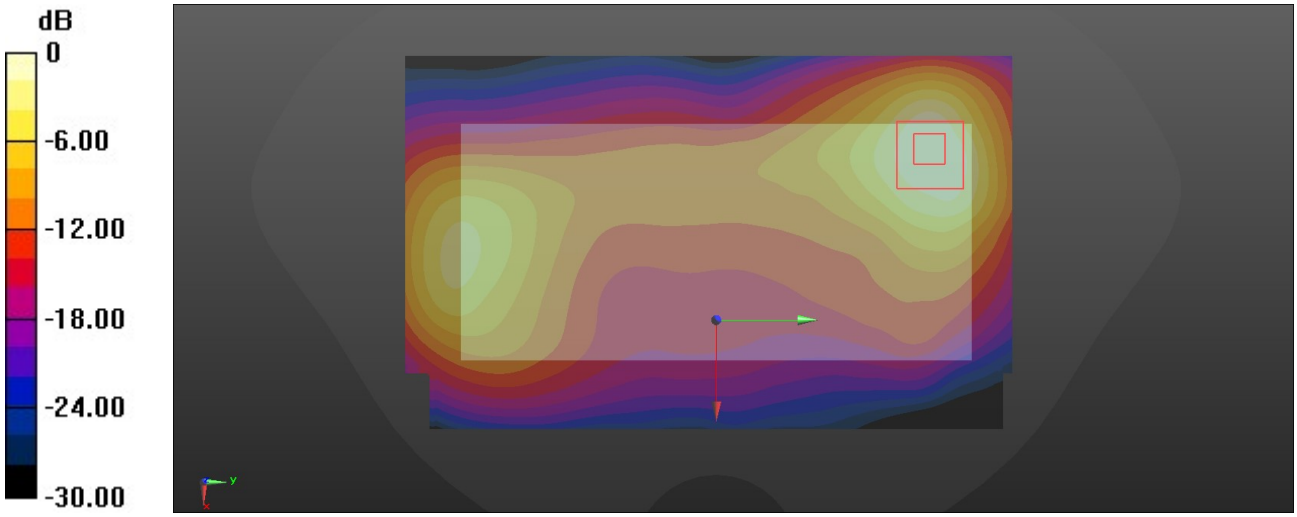

0 dB = 4.08 W/kg = 6.11 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 2_LTE Band 1_20M_QPSK_1_0_Back_5mm_Ch18300

Communication System: UID 0, LTE-FDD (0); Frequency: 1950 MHz; Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1950 MHz; σ = 1.402 S/m; ε_r = 39.419; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1950 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_5mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN5GHz_802.11n-HT20 MCS0_Back_5mm_Ch140

Communication System: UID 0, WLAN5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.051
Medium: HSL_5600_260314 Medium parameters used: f = 5700 MHz; σ = 5.102 S/m; ε_r = 35.810; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(4.39, 4.74, 4.48) @ 5600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.287
Medium: HSL_2450_260308 Medium parameters used: f = 2441 MHz; σ = 1.785 S/m; ε_r = 39.298; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2441 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 2.63 W/kg; SAR(10 g) = 1.31 W/kg

Maximum value of SAR (interpolated) = 3.81 W/kg

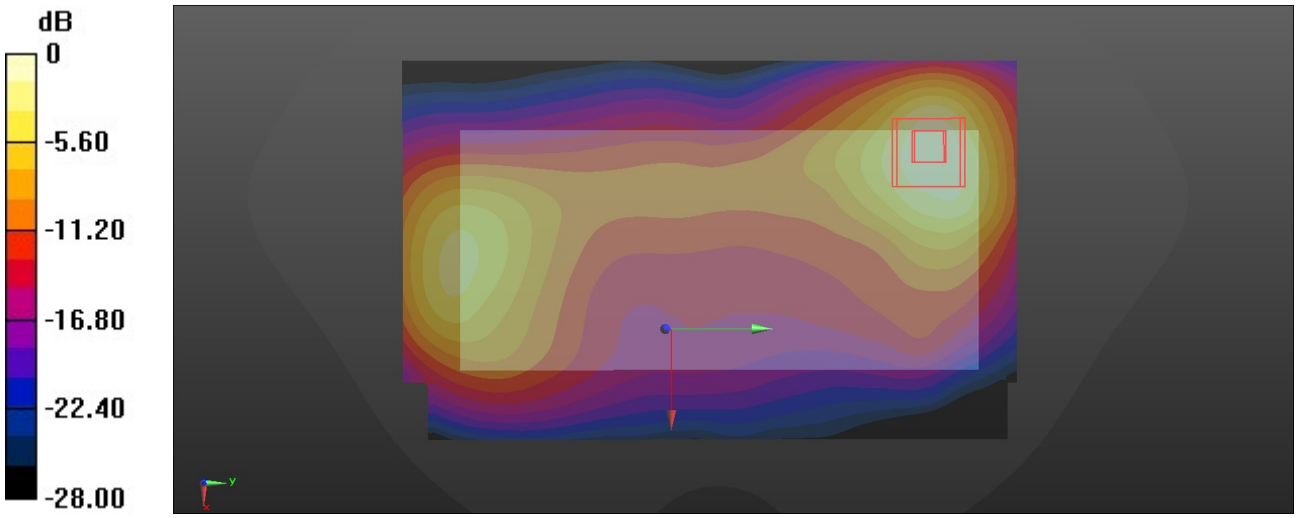

0 dB = 3.81 W/kg = 5.83 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 3_LTE Band 3_20M_QPSK_1_0_Back_5mm_Ch19575

Communication System: UID 0, LTE-FDD (0); Frequency: 1747.5 MHz; Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1747.5 MHz; σ = 1.368 S/m; ε_r = 40.645; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_5mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 2.96 W/kg; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (interpolated) = 4.06 W/kg

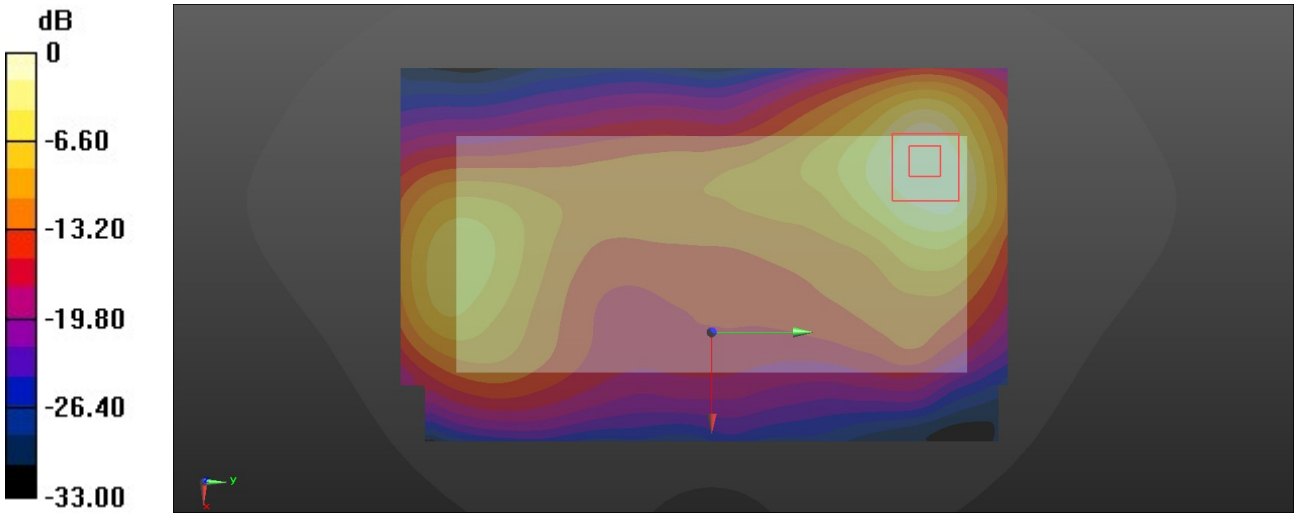

0 dB = 4.06 W/kg = 6.09 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 4_LTE Band 3_20M_QPSK_1_0_Back_5mm_Ch19575

Communication System: UID 0, LTE-FDD (0); Frequency: 1747.5 MHz; Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1747.5 MHz; σ = 1.368 S/m; ε_r = 40.645; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_5mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN5GHz_802.11n-HT20 MCS0_Back_5mm_Ch140

Communication System: UID 0, WLAN5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.051
Medium: HSL_5600_260314 Medium parameters used: f = 5700 MHz; σ = 5.102 S/m; ε_r = 35.810; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(4.39, 4.74, 4.48) @ 5600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.287
Medium: HSL_2450_260308 Medium parameters used: f = 2441 MHz; σ = 1.785 S/m; ε_r = 39.298; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2441 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.26 W/kg

Maximum value of SAR (interpolated) = 3.73 W/kg

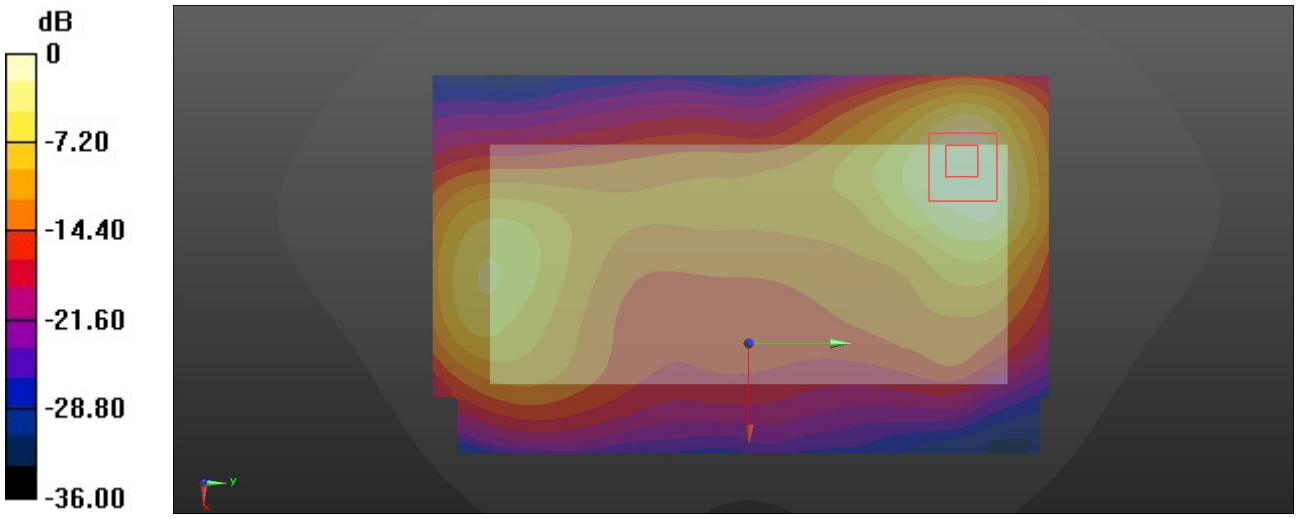

0 dB = 3.73 W/kg = 5.81 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab \

Case 5_LTE Band 41_20M_QPSK_1_0_Back_5mm_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_260308 Medium parameters used: f = 2593 MHz; σ = 1.915 S/m; ε_r = 38.585; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2593 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_5mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 2.91 W/kg; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (interpolated) = 4.01 W/kg

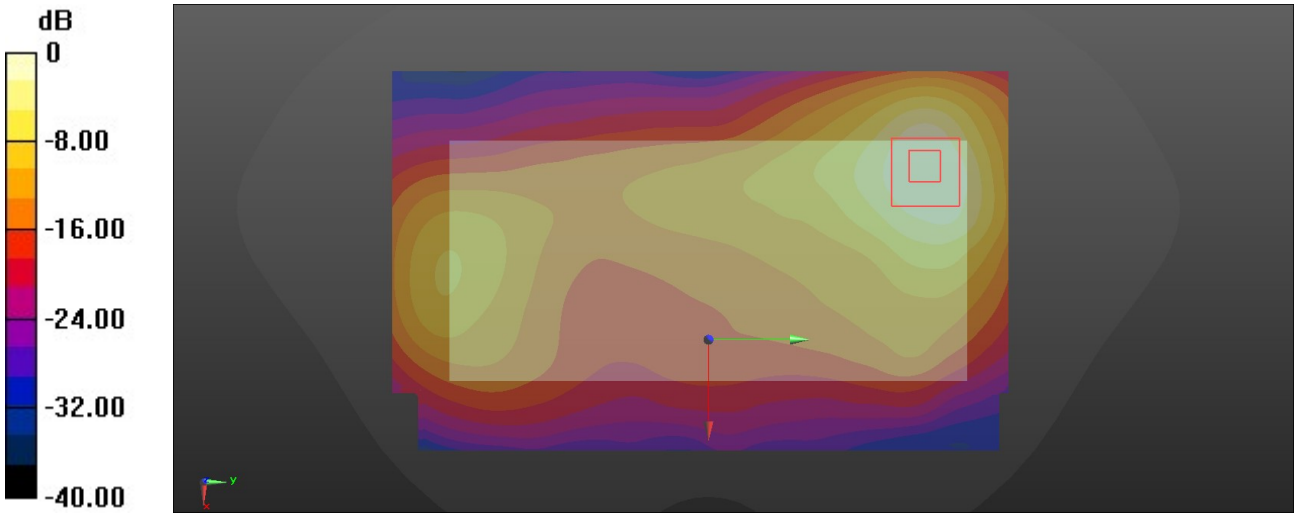

0 dB = 4.01 W/kg = 5.99 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 6_LTE Band 7_20M_QPSK_1_0_Back_0mm_Ch20850

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: HSL_2600_260308 Medium parameters used: f = 2510 MHz; σ = 1.831 S/m; ε_r = 39.16; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2510 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 6.08 W/kg; SAR(10 g) = 3.16 W/kg

Maximum value of SAR (interpolated) = 7.70 W/kg

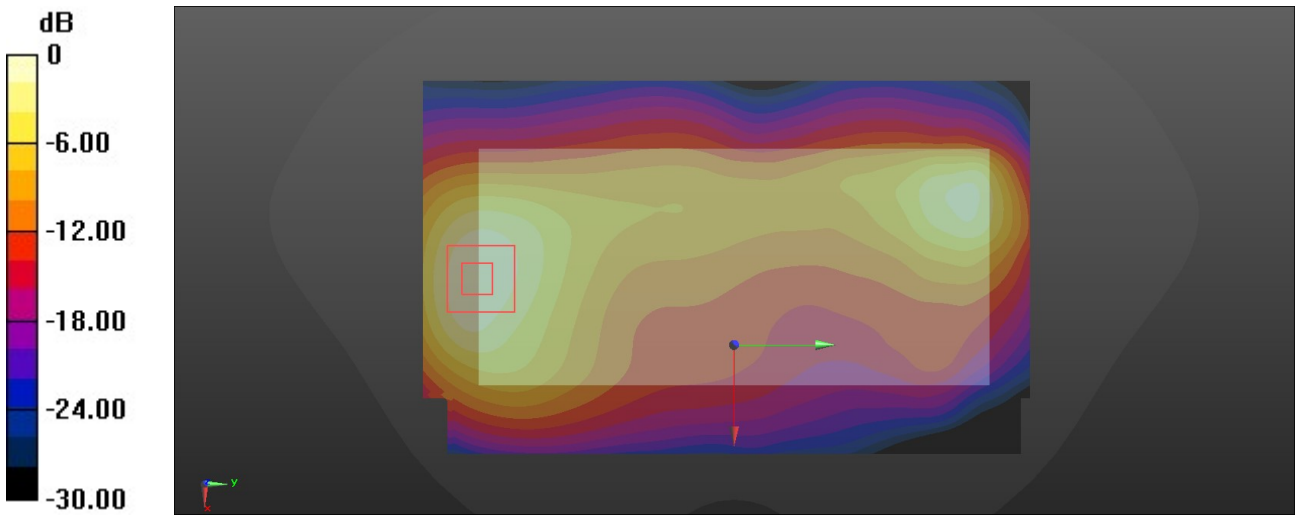

0 dB = 7.70 W/kg = 8.86 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 7_FR1 n41_HPUE_100M_BPSK_135_67_Back_0mm_Ch528000

Communication System: UID 0, 5G NR (0); Frequency: 2640 MHz; Duty Cycle: 1:1
Medium: HSL_2600_260308 Medium parameters used: f = 2640 MHz; σ = 2.001 S/m; ε_r = 38.721; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2640 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 6.66 W/kg; SAR(10 g) = 3.41 W/kg

Maximum value of SAR (interpolated) = 9.01 W/kg

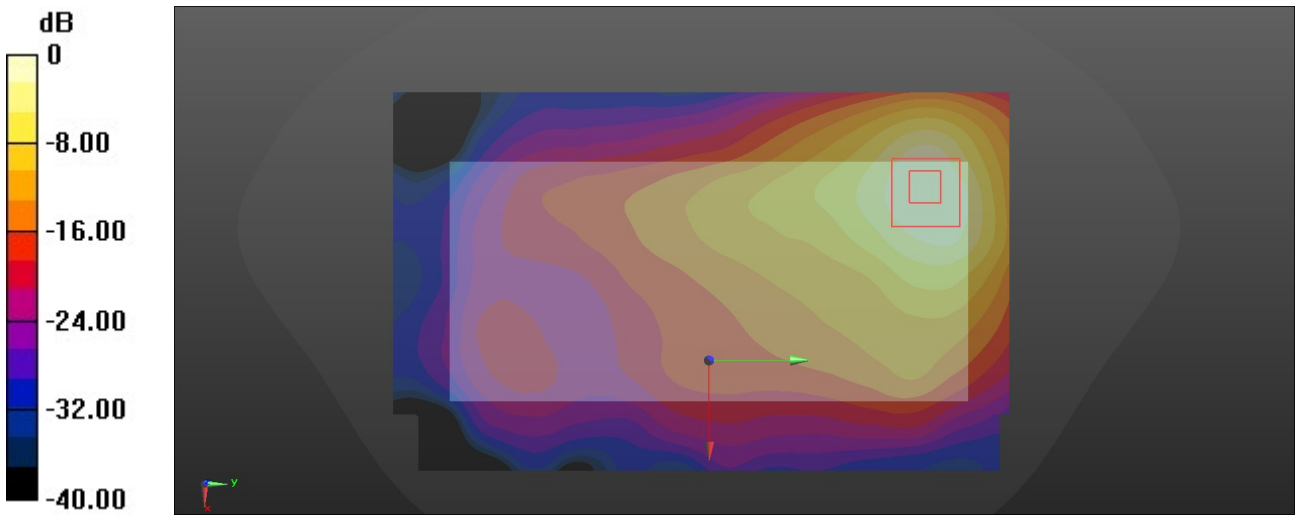

0 dB = 9.01 W/kg = 9.55 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 8_LTE Band 1_20M_QPSK_1_0_Front_0mm_Ch18300

Communication System: UID 0, LTE-FDD (0); Frequency: 1950 MHz; Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1950 MHz; σ = 1.402 S/m; ε_r = 39.419; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1950 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Front_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Front_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.47, 4.52, 4.41) @ 2442 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 4.29 W/kg; SAR(10 g) = 1.98 W/kg

Maximum value of SAR (interpolated) = 6.15 W/kg

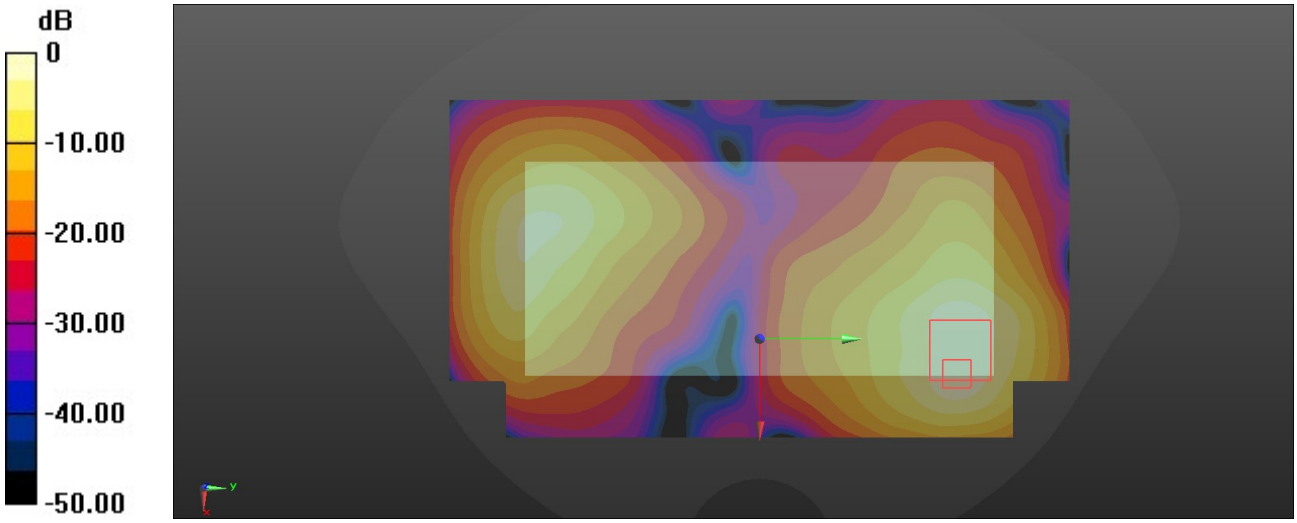

0 dB = 6.15 W/kg = 7.89 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 9_LTE Band 1_20M_QPSK_1_0_Back_0mm_Ch18500

Communication System: UID 0, LTE-FDD (0); Frequency: 1970 MHz; Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1970 MHz; σ = 1.398 S/m; ε_r = 39.384; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1970 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 5.6 W/kg; SAR(10 g) = 2.73 W/kg

Maximum value of SAR (interpolated) = 8.22 W/kg

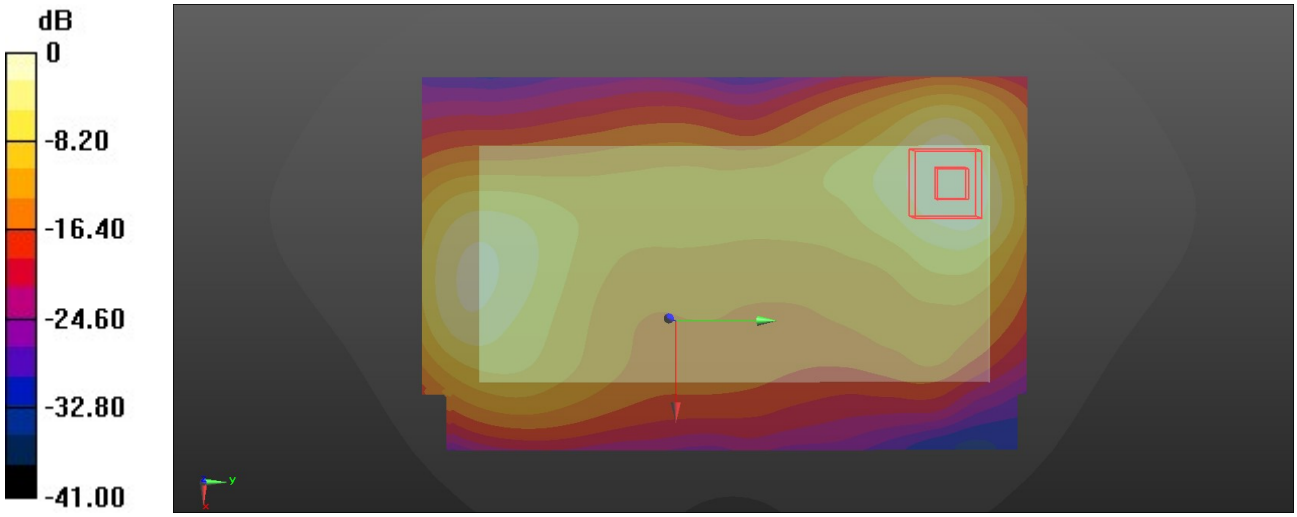

0 dB = 8.22 W/kg = 9.15 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 10_LTE Band 1_20M_QPSK_1_0_Back_0mm_Ch18500

Communication System: UID 0, LTE-FDD (0); Frequency: 1970 MHz; Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1970 MHz; σ = 1.398 S/m; ε_r = 39.384; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1970 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN5GHz_802.11n-HT20 MCS0_Back_0mm_Ch140

Communication System: UID 0, WLAN5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.051
Medium: HSL_5600_260314 Medium parameters used: f = 5700 MHz; σ = 5.102 S/m; ε_r = 35.810; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(4.39, 4.74, 4.48) @ 5600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Bluetooth_1Mbps_Back_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.287
Medium: HSL_2450_260308 Medium parameters used: f = 2441 MHz; σ = 1.785 S/m; ε_r = 39.298; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2441 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 4.31 W/kg; SAR(10 g) = 2.39 W/kg

Maximum value of SAR (interpolated) = 6.14 W/kg

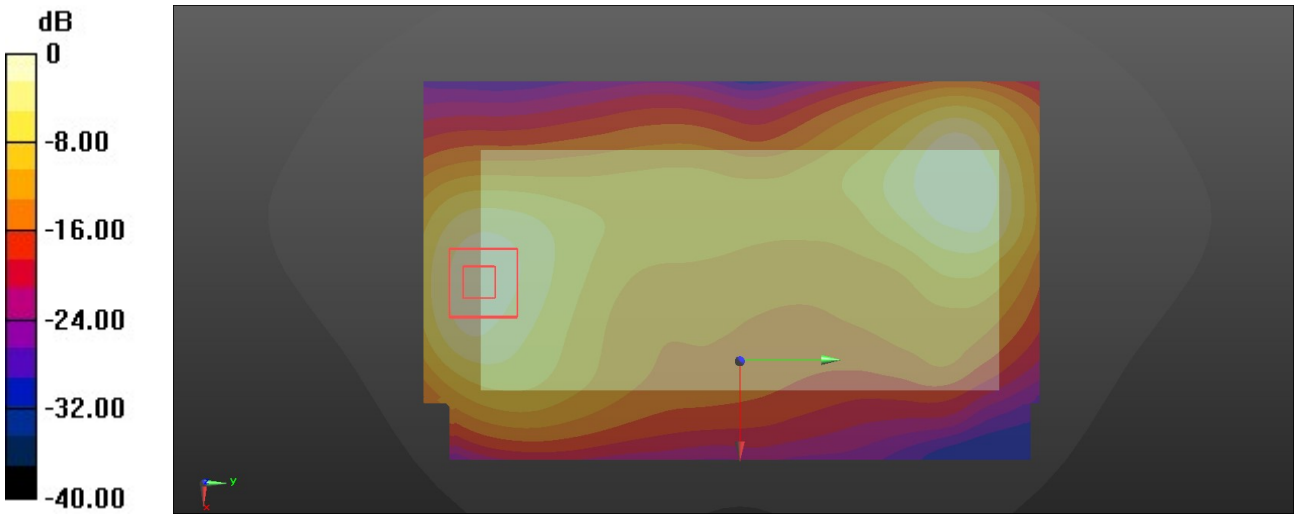

0 dB = 6.14 W/kg = 7.83 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 11_LTE Band 1_20M_QPSK_1_0_Back_0mm_Ch18500

Communication System: UID 0, LTE-FDD (0); Frequency: 1970 MHz; Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1970 MHz; σ = 1.398 S/m; ε_r = 39.384; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1970 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n79_HPUE_100M_BPSK_135_67_Back_0mm_Ch730000

Communication System: UID 0, 5G NR (0); Frequency: 4950 MHz; Duty Cycle: 1:1
Medium: HSL_4900_2600308 Medium parameters used: f = 4950 MHz; σ = 4.25 S/m; ε_r = 36.3; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7764; ConvF(6.44, 6.26, 6.38) @ 4950 MHz; Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2025/7/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 4.34 W/kg; SAR(10 g) = 2.39 W/kg

Maximum value of SAR (interpolated) = 6.67 W/kg

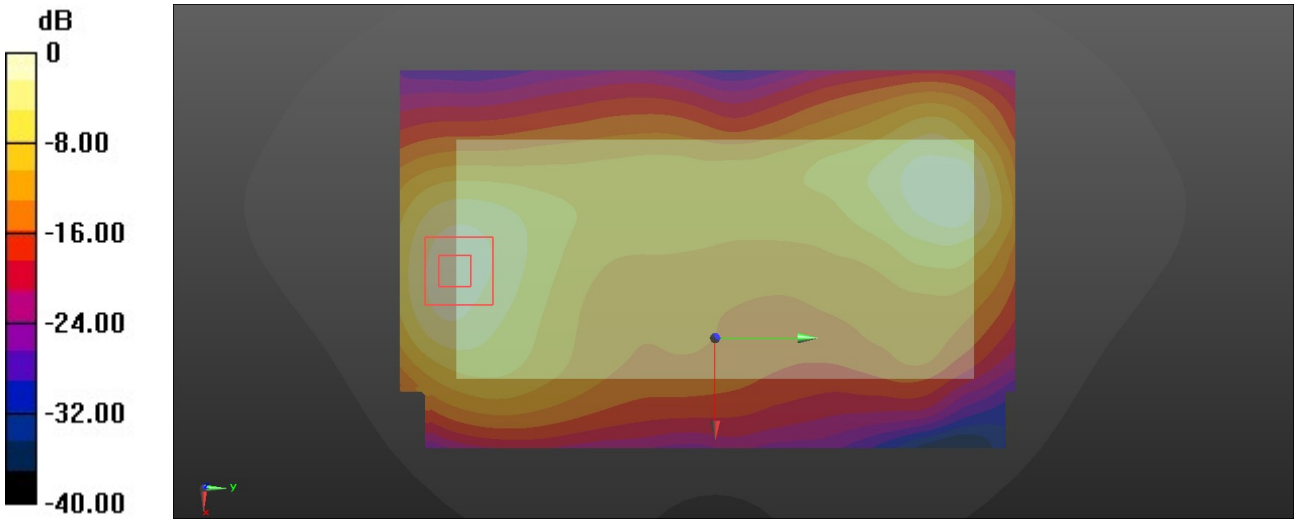

0 dB = 6.67 W/kg = 8.24 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 12_LTE Band 1_20M_QPSK_1_0_Right Side_0mm_Ch18300

Communication System: UID 0, LTE-FDD (0); Frequency: 1950 MHz; Duty Cycle: 1:1
Medium: HSL_2000_260306 Medium parameters used: f = 1950 MHz; σ = 1.402 S/m; ε_r = 39.419; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.89, 4.94, 4.82) @ 1950 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n79_HPUE_100M_BPSK_135_67_Right Side_0mm_Ch730000

Communication System: UID 0, 5G NR (0); Frequency: 4950 MHz; Duty Cycle: 1:1
Medium: HSL_4900_260308 Medium parameters used: f = 4950 MHz; σ = 4.25 S/m; ε_r = 36.3; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7764; ConvF(6.44, 6.26, 6.38) @ 4950 MHz; Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2025/7/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Right Side_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 13.4 W/kg; SAR(10 g) = 3.71 W/kg

Maximum value of SAR (interpolated) = 22.5 W/kg

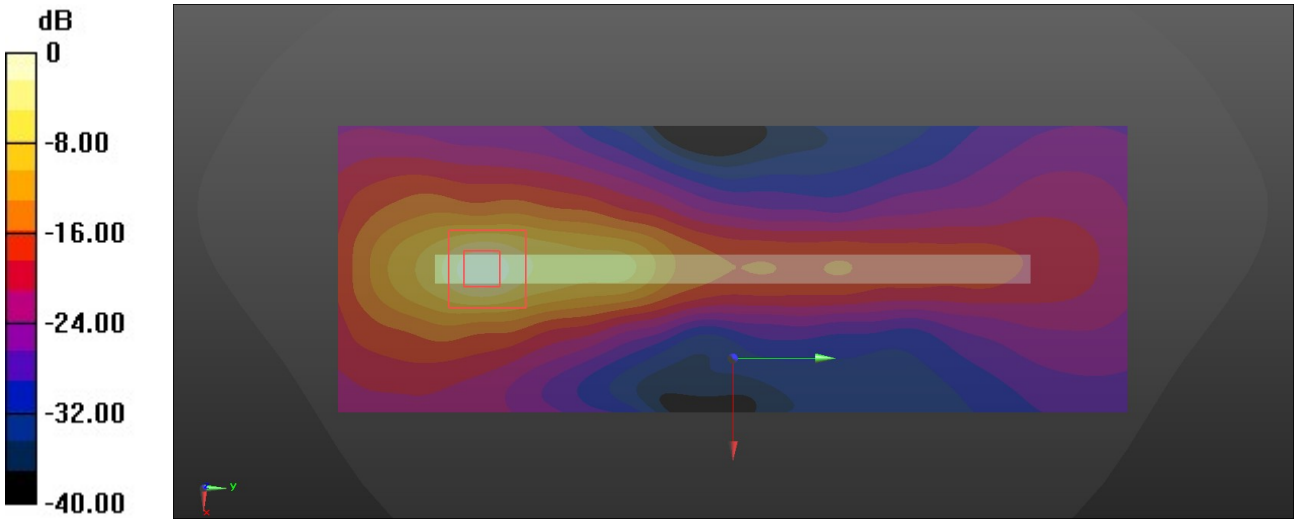

0 dB = 22.5 W/kg = 13.52 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 13_LTE Band 3_20M_QPSK_1_0_Front_0mm_Ch19575

Communication System: UID 0, LTE-FDD (0); Frequency: 1747.5 MHz; Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1747.5 MHz; σ = 1.368 S/m; ε_r = 40.645; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Front_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Front_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.47, 4.52, 4.41) @ 2442 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 4.27 W/kg; SAR(10 g) = 1.98 W/kg

Maximum value of SAR (interpolated) = 6.10 W/kg

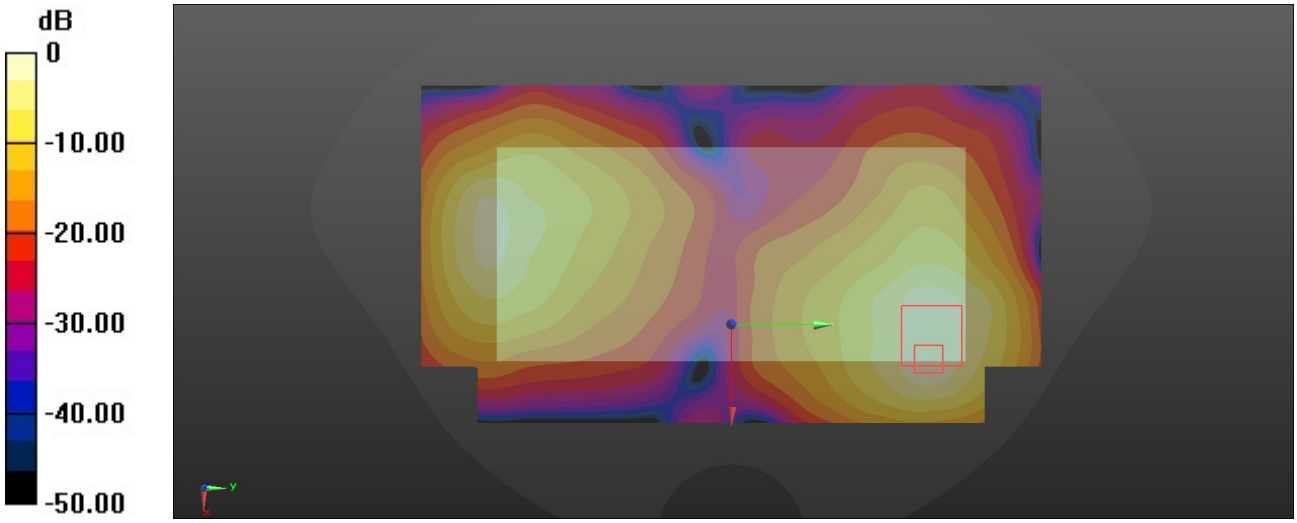

0 dB = 6.10 W/kg = 7.85 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 14_LTE Band 3_20M_QPSK_1_0_Back_0mm_Ch19300

Communication System: UID 0, LTE-FDD (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1720 MHz; σ = 1.348 S/m; ε_r = 40.795; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1720 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 5.61 W/kg; SAR(10 g) = 2.73 W/kg

Maximum value of SAR (interpolated) = 8.23 W/kg

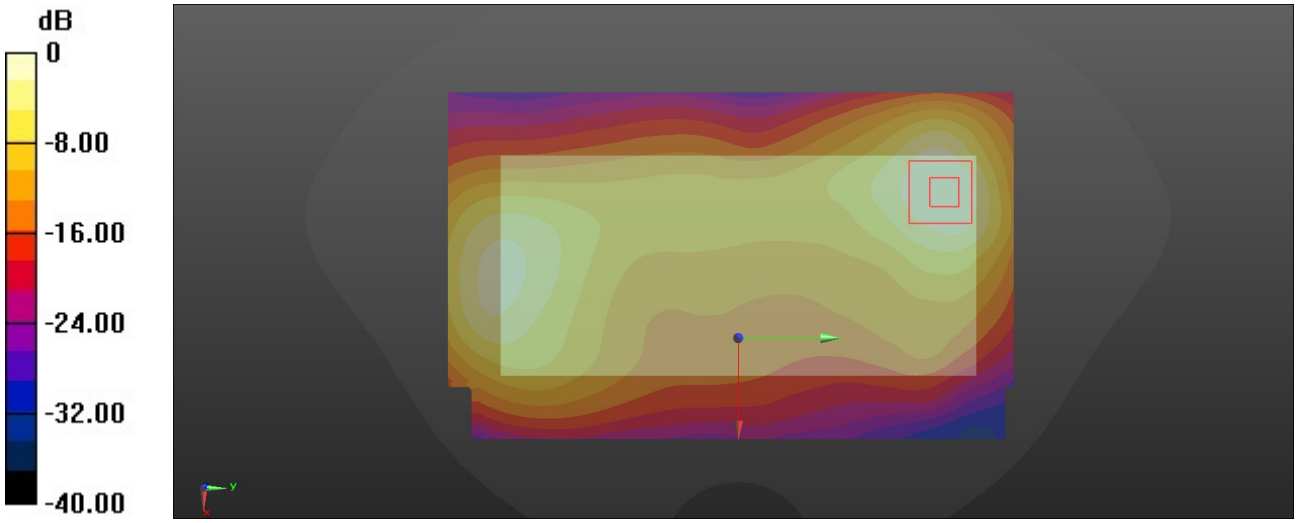

0 dB = 8.23 W/kg = 9.15 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 15_LTE Band 3_20M_QPSK_1_0_Back_0mm_Ch19300

Communication System: UID 0, LTE-FDD (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1720 MHz; σ = 1.348 S/m; ε_r = 40.795; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1720 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN5GHz_802.11n-HT20 MCS0_Back_0mm_Ch140

Communication System: UID 0, WLAN5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.051
Medium: HSL_5600_260314 Medium parameters used: f = 5700 MHz; σ = 5.102 S/m; ε_r = 35.810; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(4.39, 4.74, 4.48) @ 5600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Bluetooth_1Mbps_Back_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.287
Medium: HSL_2450_260308 Medium parameters used: f = 2441 MHz; σ = 1.785 S/m; ε_r = 39.298; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2441 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 4.7 W/kg; SAR(10 g) = 2.82 W/kg

Maximum value of SAR (interpolated) = 6.03 W/kg

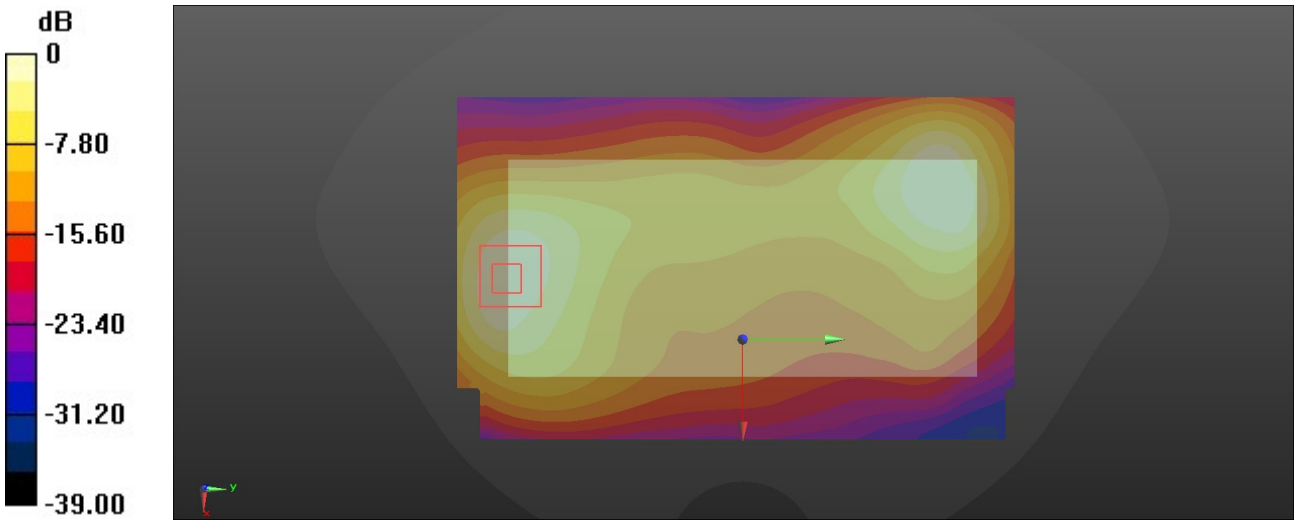

0 dB = 6.14 W/kg = 7.83 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 16_LTE Band 3_20M_QPSK_1_0_Back_0mm_Ch19300

Communication System: UID 0, LTE-FDD (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1720 MHz; σ = 1.348 S/m; ε_r = 40.795; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1720 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n79_HPUE_100M_BPSK_135_67_Back_0mm_Ch730000

Communication System: UID 0, 5G NR (0); Frequency: 4950 MHz; Duty Cycle: 1:1
Medium: HSL_4900_260308 Medium parameters used: f = 4950 MHz; σ = 4.25 S/m; ε_r = 36.3; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7764; ConvF(6.44, 6.26, 6.38) @ 4950 MHz; Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2025/7/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 4.81 W/kg; SAR(10 g) = 2.72 W/kg

Maximum value of SAR (interpolated) = 6.68 W/kg

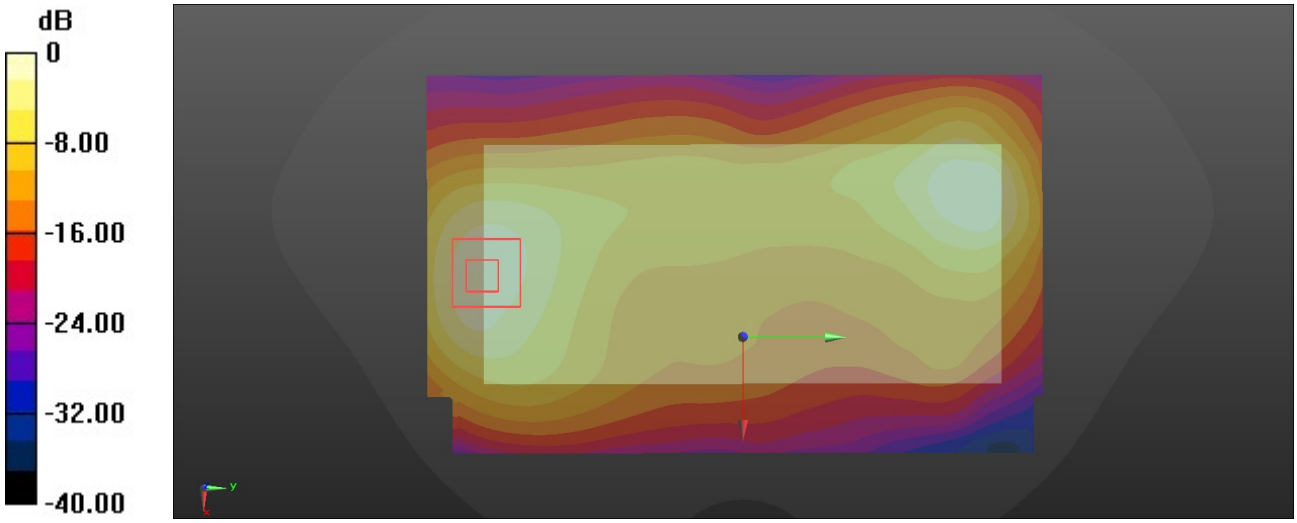

0 dB = 6.68 W/kg = 8.25 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 17_LTE Band 3_20M_QPSK_1_0_Right Side_0mm_Ch19575

Communication System: UID 0, LTE-FDD (0); Frequency: 1747.5 MHz; Duty Cycle: 1:1
Medium: HSL_1800_260305 Medium parameters used: f = 1747.5 MHz; σ = 1.368 S/m; ε_r = 40.645; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(5.1, 5.15, 5.02) @ 1747.5 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n79_HPUE_100M_BPSK_135_67_Right Side_0mm_Ch730000

Communication System: UID 0, 5G NR (0); Frequency: 4950 MHz; Duty Cycle: 1:1
Medium: HSL_4900_260308 Medium parameters used: f = 4950 MHz; σ = 4.25 S/m; ε_r = 36.3; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7764; ConvF(6.44, 6.26, 6.38) @ 4950 MHz; Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2025/7/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Right Side_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 13.4 W/kg; SAR(10 g) = 3.71 W/kg

Maximum value of SAR (interpolated) = 22.5 W/kg

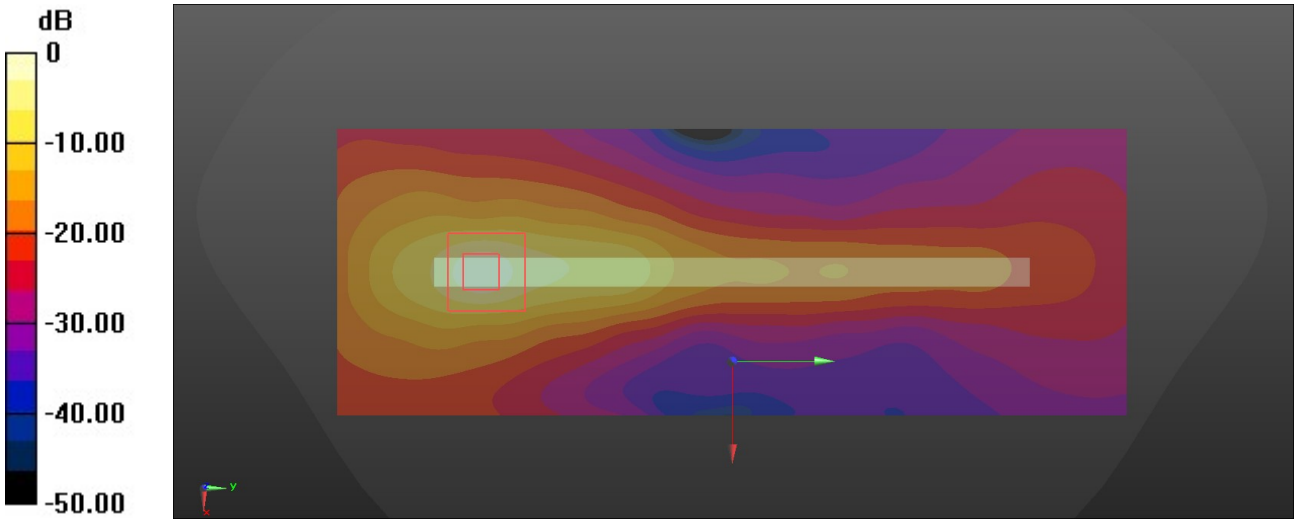

0 dB = 22.5 W/kg = 13.52 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 18_LTE Band 41_20M_QPSK_1_0_Back_0mm_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_260308 Medium parameters used: f = 2593 MHz; σ = 1.915 S/m; ε_r = 38.585; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2593 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch7

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2442 MHz; Duty Cycle: 1:1.007
Medium: HSL_2450_260308 Medium parameters used: f = 2442 MHz; σ = 1.786 S/m; ε_r = 39.119; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2442 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 5.55 W/kg; SAR(10 g) = 2.61 W/kg

Maximum value of SAR (interpolated) = 8.17 W/kg

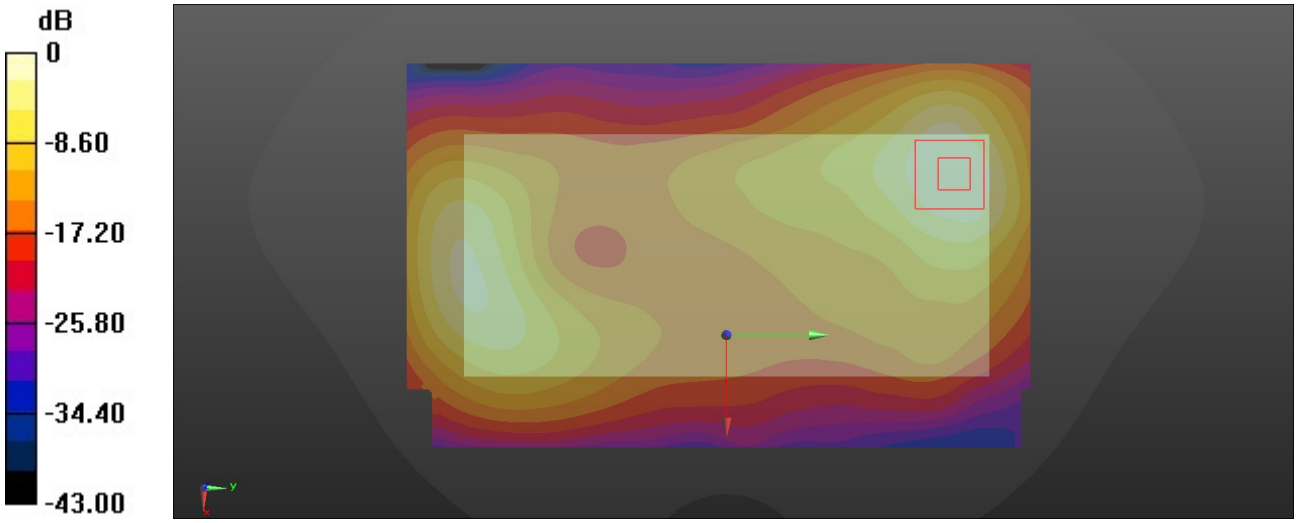

0 dB = 8.17 W/kg = 9.12 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Case 19_LTE Band 41_20M_QPSK_1_0_Back_0mm_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_260308 Medium parameters used: f = 2593 MHz; σ = 1.915 S/m; ε_r = 38.585; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: ES3DV3 - SN3169; ConvF(4.52, 4.57, 4.45) @ 2593 MHz; Calibrated: 2025/5/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

FR1 n77_HPUE_100M_BPSK_135_67_Back_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700_260311 Medium parameters used: f = 3750 MHz; σ = 3.21 S/m; ε_r = 37.449; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69) @ 3750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

WLAN5GHz_802.11n-HT20 MCS0_Back_0mm_Ch140

Communication System: UID 0, WLAN5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.051
Medium: HSL_5600_260314 Medium parameters used: f = 5700 MHz; σ = 5.102 S/m; ε_r = 35.810; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(4.39, 4.74, 4.48) @ 5600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Bluetooth_1Mbps_Back_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.287
Medium: HSL_2450_260308 Medium parameters used: f = 2441 MHz; σ = 1.785 S/m; ε_r = 39.298; ρ = 1000 kg/m^3
Phantom section: Flat Section

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2441 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4)

Combined Scans: SAR(1 g) = 4.4 W/kg; SAR(10 g) = 2.04 W/kg

Maximum value of SAR (interpolated) = 6.25 W/kg

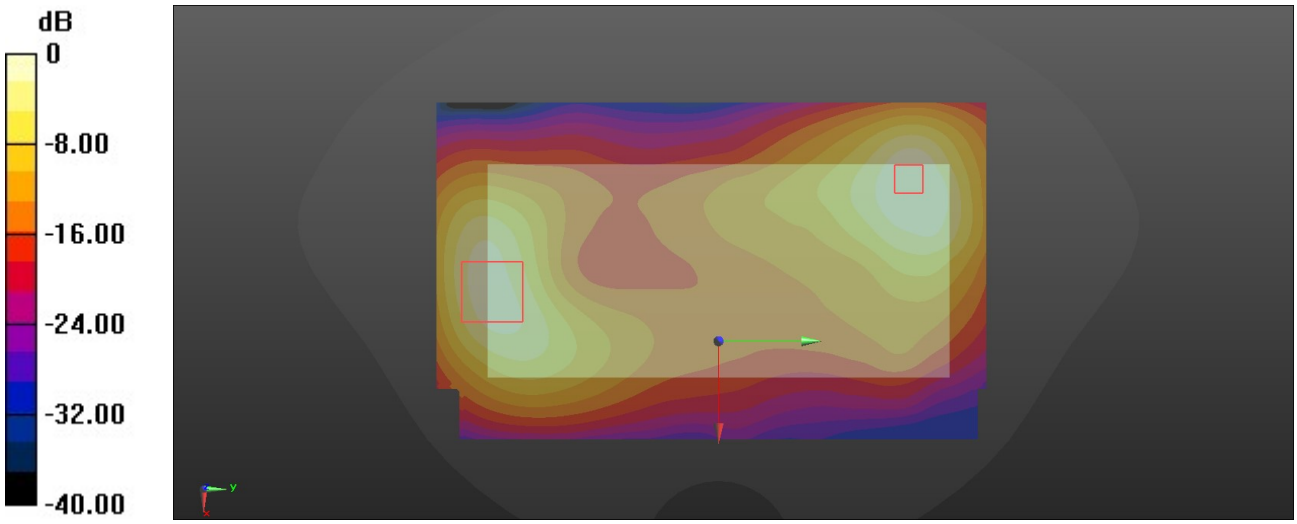

0 dB = 6.25 W/kg = 7.96 dBW/kg