

[Store](#) ▾[Community](#)[Forum](#)[Wiki](#)[Blog](#)[Learn](#)[\\$USD](#)[← Sensors](#)

Light & Imaging Sensors

[ESP32-S3 AI Camera Module \(SKU: DFR1154\)](#)[MS-A075V RGB-D TOF Camera Module \(SKU: SEN0583\)](#)[AI Binocular Face, Palm Vein & QR Code Recognition Sensor \(SKU: SEN0677\)](#)[HUSKYLENS GC2093 Microscope Imaging Module \(SKU: SEN0683\)](#)[RS485 Photosynthetically Active Radiation \(PAR\) Sensor \(400-700nm\) \(SKU: SEN0641\)](#)[Gravity: Analog Ambient Light Sensor \(SKU: DFR0026\)](#)[RS485 Photoelectric Solar Radiation Sensor](#)[Home](#) [wiki](#) / [Sensors](#) / [Light & Imaging Sensors](#) / [SEN0364](#)

Gravity: AS7341 Visible Light Sensor

[Buy now](#)

SKU: SEN0364

Gravity: AS7341

Visible Light

Sensor employs

the new

generation of

AS7341 spectral

sensor IC

(400-1100nm)(SKU: SEN0640)

RS485 Waterproof Ambient Light Sensor
(0-200,000 Lux)(SKU: SEN0644)

B_LUX_V30B Ambient Light Sensor(SKU:
SEN0390)

Gravity: AS7341 Visible Light Sensor(SKU:
SEN0364)

Gravity: TCS34725 RGB Color Sensor(SKU:
SEN0012)

launched by the well-known AMS company. The sensor features eight channels for the visible light, one channel for near-IR, and one channel without a filter. Also it integrates a dedicated channel to detect ambient light flicker. Besides that, this sensor comes with 6 independent 16-bit ADC channels for data processing in parallel. The two on-board extra-bright LEDs can supply light in dark

environment.

DOWNLOADABLE RESOURCES

 Dimension  Schematics

 Datasheet


Docs

Tech
Specs

Projects


Certifications


Specification

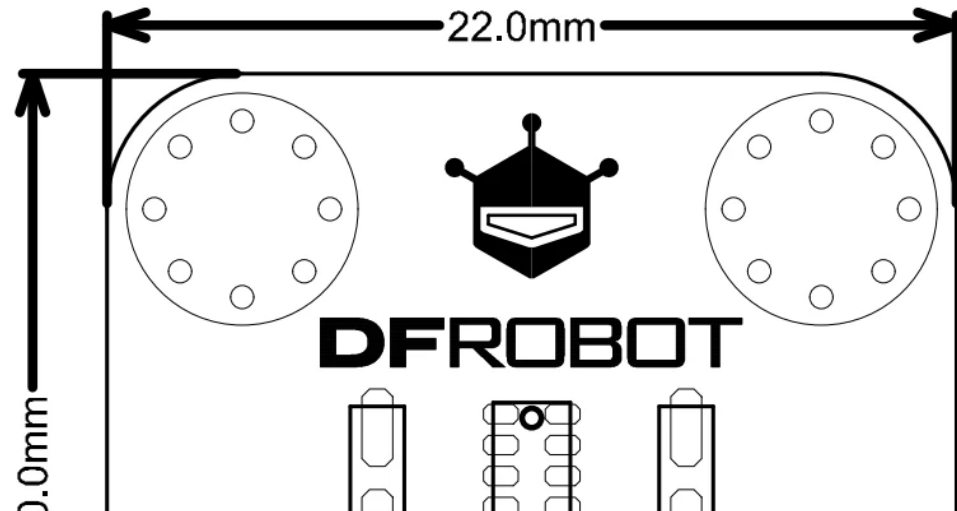


AS7341 Visible Light Sensor V1.0	
Power Supply	3.3V~5V
Visible Light Detection Range	F1(405-425nm), F2(435-455nm), F3(470-490nm), F4(505-525nm), F5(545-565nm), F6(580-600nm), F7(620-640nm), F8(670-690nm)
Operating Current(LED Off)	<5mA
LED Driving Current	Class 1-20 (4-42mA)
I2C Address	0x39
Operating Temperature Range	-30°C~85°C
Operating Humidity Range	5%RH~85%RH
Dimension	22×20mm/0.87×0.79"

Pinout

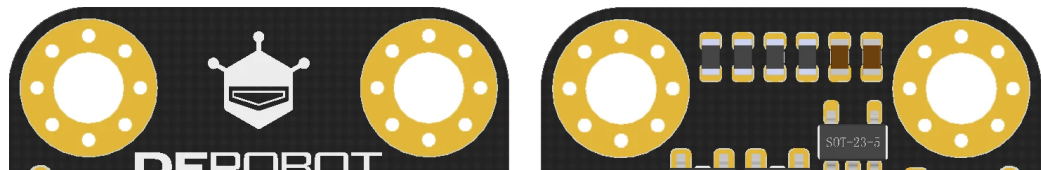

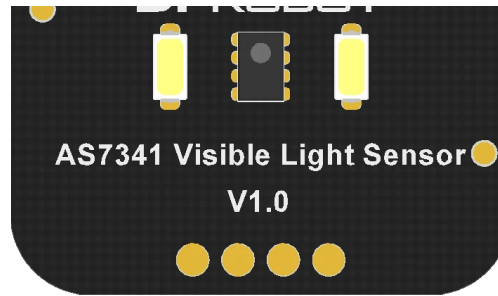

TOP

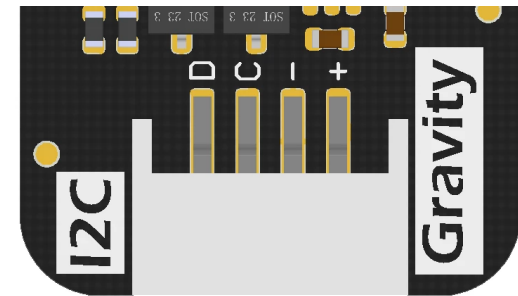

BOTTOM

Num	Silkscreen	Description
1	+	Positive
2	-	Negative
3	SCL	I2C Clock line
4	SDA	I2C Data line

Was this article helpful?



Information

[About Us](#)

[Warranty](#)

[Terms & Conditions](#)

[Shipping](#)

[Payment](#)

[FAQ](#)

Customer Service

[DFRobot Distributors](#)

[Contact Us](#)

[Site Map](#)

My Account

[Affiliates](#)

[Specials](#)



Sign up for exclusive offers!

Your email address



Like us on



Copyright © 2025 DFRobot. All rights reserved.