


Lesson Overview

Messy cables block airflow, cause overheating, and make troubleshooting difficult. TESDA NC II requires proper cable routing inside the system unit and proper placement of peripherals outside the unit.

Key Principles of Good Cable Management

- **Keep cables away from fans and air vents.**
- **Avoid tight bends** that damage wires.
- **Group and tie cables** using zip ties or Velcro straps.
- **Separate power cables** from data/network cables to reduce interference.

Ensure each cable is in its correct port (HDMI, USB, SATA, Ethernet).

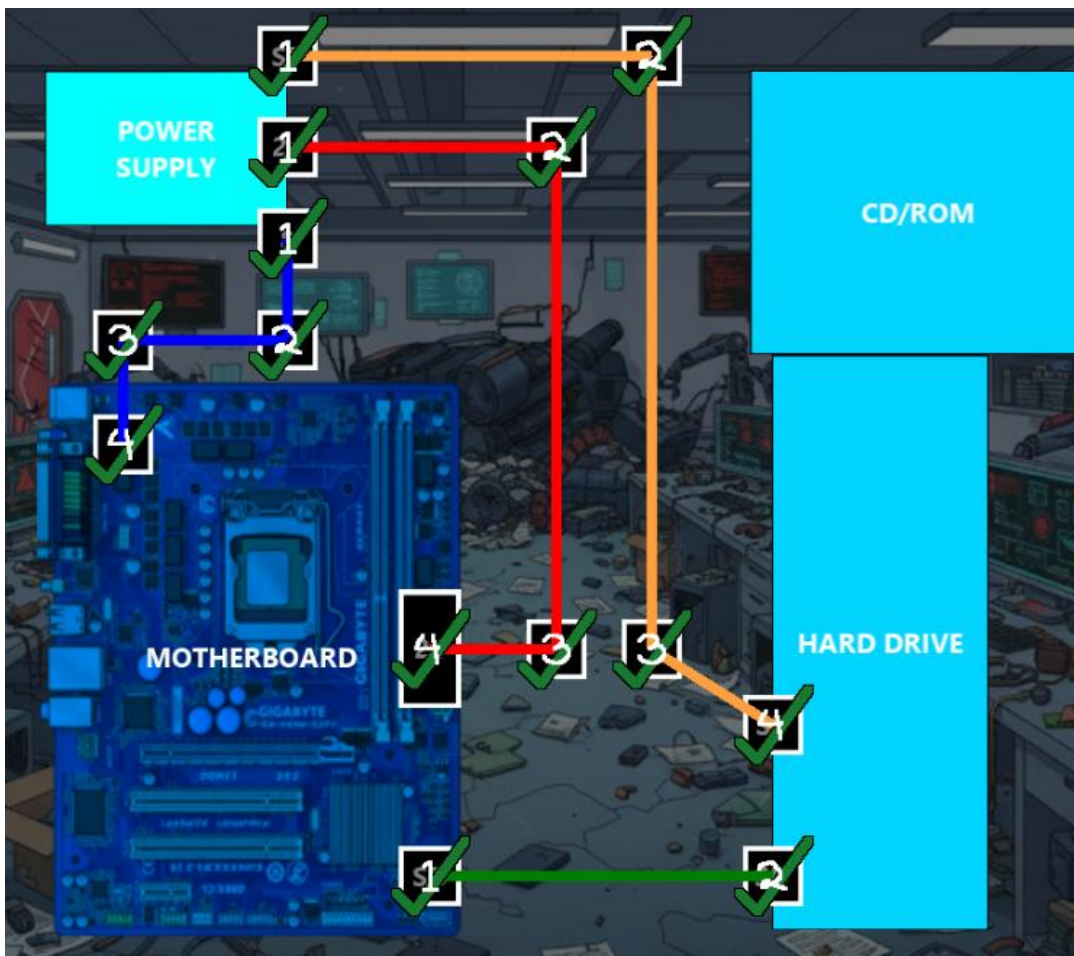

FOR MORE READINGS:

Technical Education and Skills Development Authority. (2019). *Computer Systems Servicing NC II training regulations*. TESDA. [TR Computer Systems Servicing NC II .pdf](#)