


Use of PETase for PET Degradation in a Bioreactor to Improve Effectivity of Recycling

Jessie Taubert
Advisor: Dr. Crowthers



Poster Board

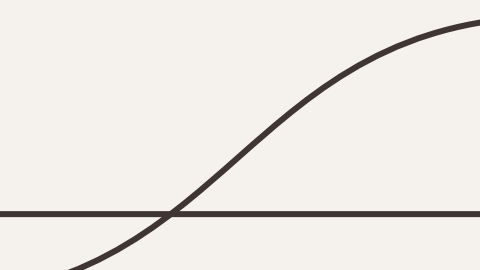


Use of PETase for PET Degradation in a Bioreactor to Improve Effectivity of Recycling

Jessie Taubert
Advisor: Dr. Crowthers



Graphical Abstract



With this technology, an input of PET plastic will result in an output of its building blocks, which can be remade into the plastic to create a more effective recycling system.

Background

Plastic Pollution

Plastic pollution is growing at an unsustainable rate, and these polymers do not naturally decay well. PET is one common type of polymer that is used in bottles and clothing.



Recycling

No real effective method of recycling is being implemented, which is detrimental in a consumer-based society, and currently it is more financially beneficial for manufacturers to make new plastic rather than reusing plastic. In under-developed countries, economies are not stable enough to support waste-management systems. Existing ways of disposing of plastic harm the environment.



Enzymes

Ideonella sakaiensis 201-F6 has developed an enzyme that aids in the process of breaking down PET and PEF for carbon and energy. Recent studies have looked at modifying this enzyme to better function for industrial use.




Engineering Need

As industries continue to mass produce plastic, it is becoming more apparent that there is no effective way to recycle plastic and address plastic pollution.


Engineering Goal

Engineer a device to effectively degrade plastic.

Results & Analysis



- Mass increased by 0.02 for PET and 0.008 for PLA, and decreased by 0.017 for ABS.
- p-values of 0.98 for PET and PLA, 0.99 for ABS → not significant.
- Final mass was measured to not disrupt the biofilm, so it also measured the mass of the bacteria.
- The increase in mass was likely the bacteria adapting to use the plastic as a carbon source.
- Carbon dioxide levels increased for PET and PLA filament groups by an average of 6 ppm, but not for the ABS filament group.
- p-values of 0.91 for all plastics.
- All groups became more basic and then the pH began to decrease.
- The pH of PET was 8.31 112 hours in, and at 168 hours it had decreased to 7.55, however, a similar trend was seen in all groups.



Conclusion

- Using bacteria to degrade plastic was not achieved at this time.
- For the first hypothesis that the mass would decrease, it was found that this was not supported since the p values were between 0.98 and 0.99.
- For the second hypothesis that the carbon dioxide would increase, this was also not significantly supported, with p values of 0.91 for all three groups.
- For the last hypothesis that the pH would decrease, this was not supported based on the p-values of 0.78, 0.72, and 0.66 for PET, ABS, and PLA respectively.
- Plastic pollution is growing uncontrollably, however, the use of bacteria may allow for a new approach to tackle this issue if a process can be developed.

METHODS

The procedure by Odoabasić was followed to make the YSV media and culture the bacteria.

MEDIA

200 mL of the YSV minimal carbon media was placed in a mason jar.

FILAMENT

3 types of plastic filament - PET, PLA, and ABS - were sterilized with ethanol and placed in separate jars with a stir bar.



INCUBATOR

An incubator was used to culture *E. coli* K12. The stir plate was placed in the incubator with the four jars on it and taped shut.

MEASUREMENTS

Mass was measured before and after, and CO₂ and pH readings were taken at regular intervals.



Impact

- A bacteria-oriented recycling process would benefit waste management in both rural and urban areas.
- Discarded plastic could actively be reused in the industry rather than relying on new plastic, thus reducing pollution.
- More land would be open for vegetation as plastic landfills would no longer be needed.
- A process could be developed to separate the ethylene glycol and terephthalic acid from the rest of the solution and media to be able to reuse these substances for plastic.
- In the future, more research could be done to optimize the media for the growth of plastic-degrading bacteria.

Table of contents

01

Abstract

What is this project about?

02

Background

What has led up to this point?

03

Methods

What was the procedure?

04

Results & Analysis

What does the data signify?

05

Conclusions

Where does this leave the project?




01

Abstract

What is this project about?

Scope

Engineering Need

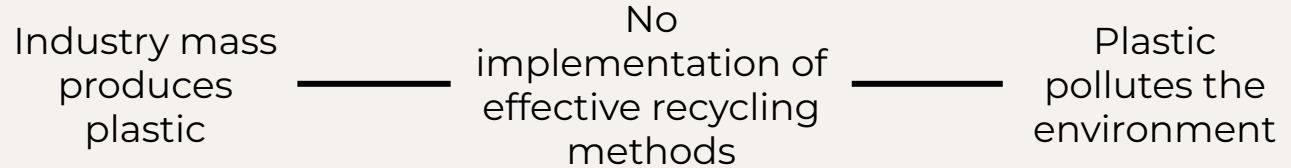


Engineering Goal

- ★ Design a device to effectively degrade plastic


Hypotheses

It would be evident that the goal was accomplished if:


- CO₂ levels increased
 - Cellular respiration would be occurring
- pH decreased
 - Released carbon would produce carbonic acid
- Mass decreased
 - Plastic was being degraded

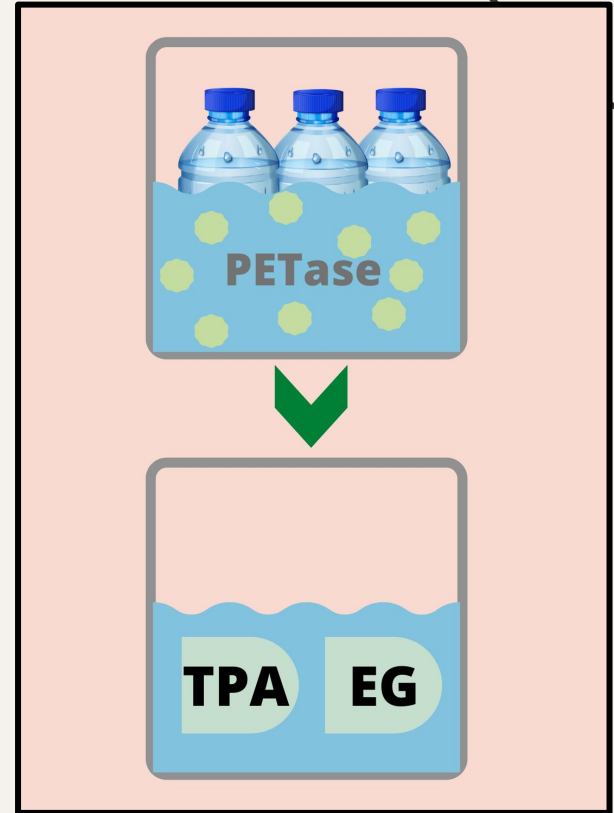

Graphical Abstract

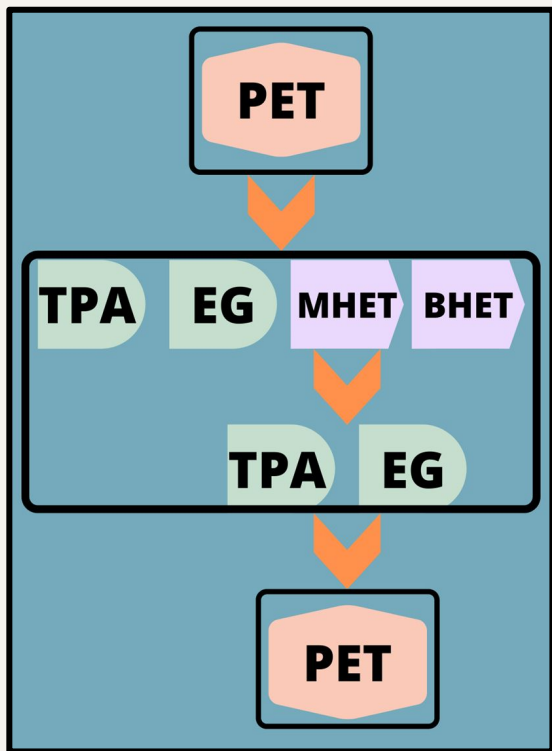


Input
PET




Output
monomers

Reuse
monomers




Remake PET

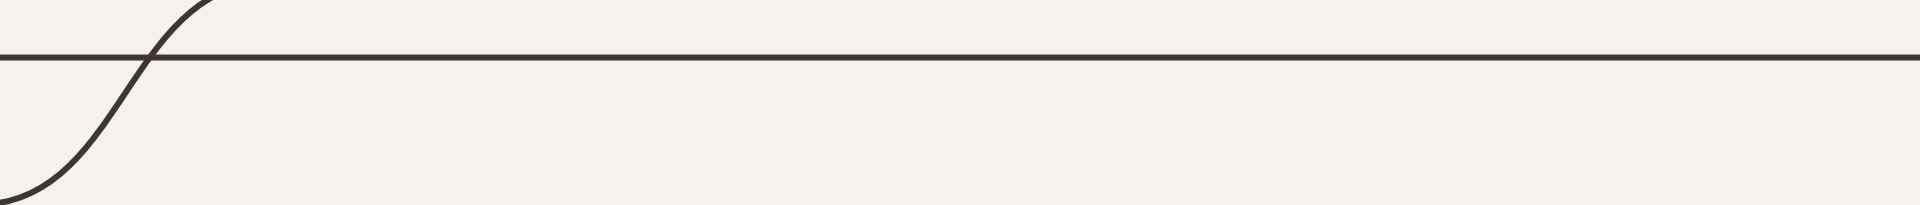

02


Background

What has led to this point?

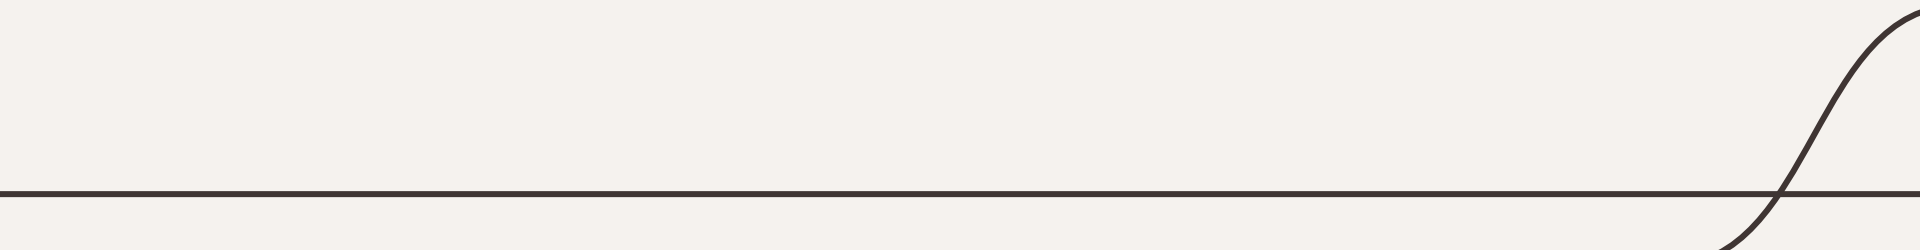

Pollution

- Unsustainable usage
- Non-biodegradable
- PET & PEF
 - Clothing
 - Bottles

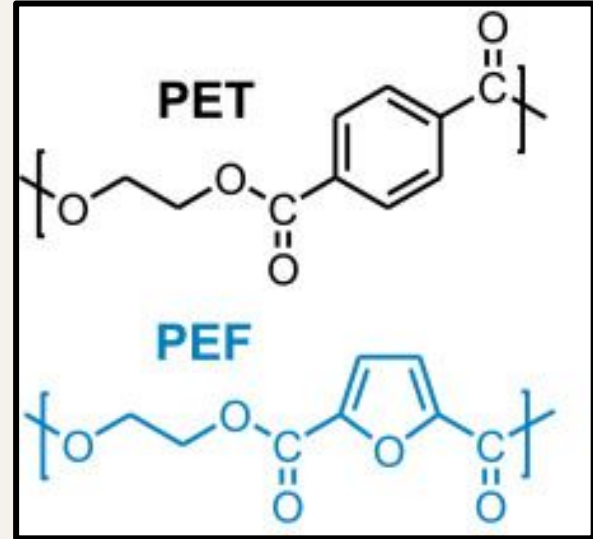

(Carlos Morales-Huerta et al., 2016)

Recycling

- Ineffective
 - 9% ends up recycled
- Industry → new > reuse
- Developing countries
- Burning & leaving in landfill
 - toxic

Background

Plastic Pollution

Plastic pollution is growing at an unsustainable rate, and these polymers do not naturally decay well. PET is one common type of polymer that is used in bottles and clothing.



Recycling

No real effective method of recycling is being implemented, which is detrimental in a consumer-based society, and currently it is more financially beneficial for manufacturers to make new plastic rather than reusing plastic. In under-developed countries, economies are not stable enough to support waste-management systems. Existing ways of disposing of plastic harm the environment.



Enzymes


Ideonella sakaiensis 201-F6 has developed an enzyme that aids in the process of breaking down PET and PEF for carbon and energy. Recent studies have looked at modifying this enzyme to better function for industrial use.




PETase


- *Ideonella sakaiensis* 201-F6
- Modifications of enzyme

PET & PEF

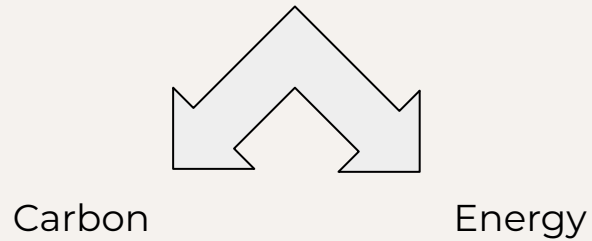

Can bacteria be selected to
develop an enzyme similar to
Ideonella sakaiensis 201-F6?

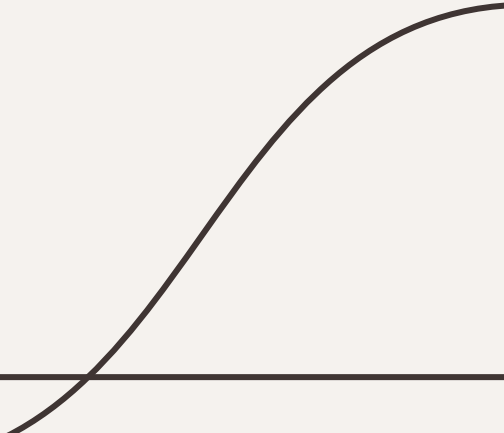

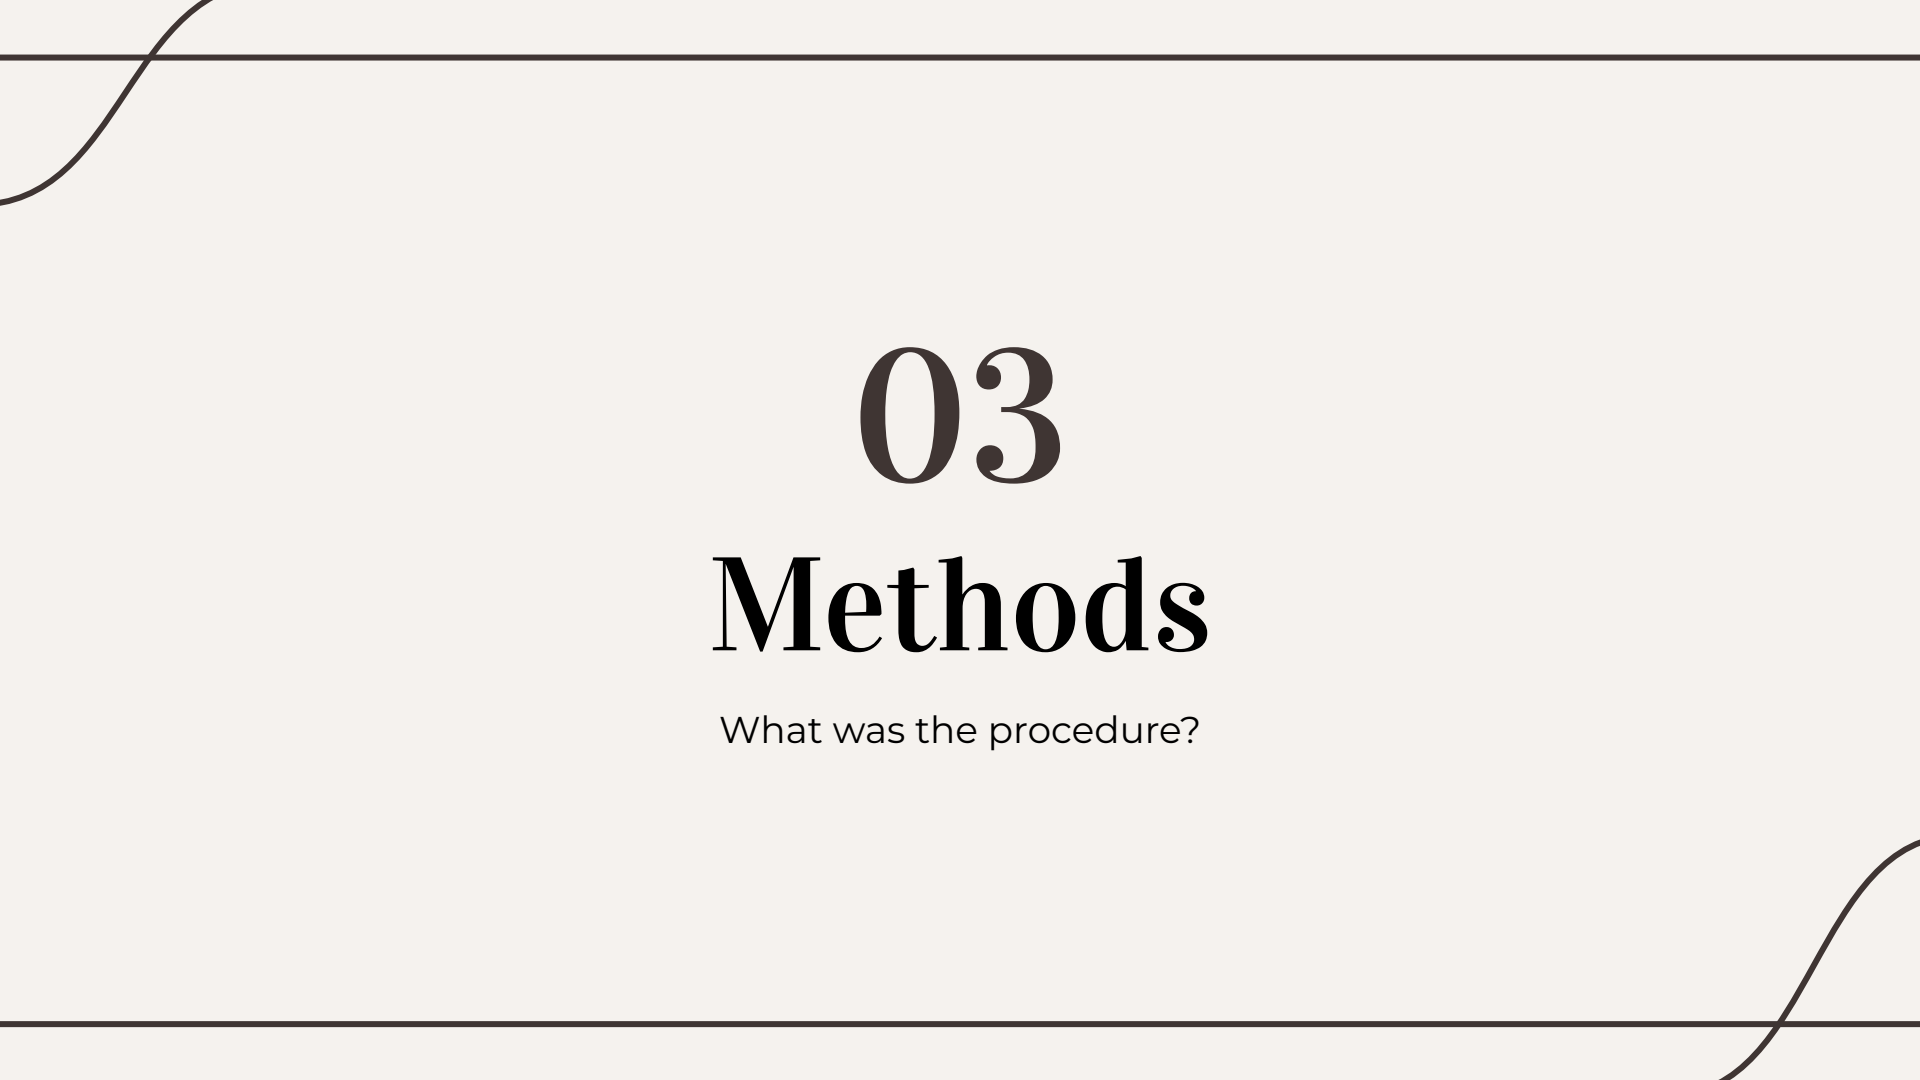

03

Methods

What was the procedure?

METHODS

The procedure by Odobašić was followed to make the YSV media and culture the bacteria.




MEDIA

200 mL of the YSV minimal carbon media was placed in a mason jar.



FILAMENT

3 types of plastic filament - PET, PLA, and ABS - were sterilized with ethanol and placed in separate jars with a stir bar.



Polylactic acid (PLA)
Acrylonitrile Butadiene Styrene (ABS)




INCUBATOR

An incubator was used to culture E. coli K12. The stir plate was placed in the incubator with the four jars on it and taped shut.



MEASUREMENTS

Mass was measured before and after, and CO₂ and pH readings were taken at regular intervals.






04

Results & Analysis

What does the data signify?

Results - CO₂

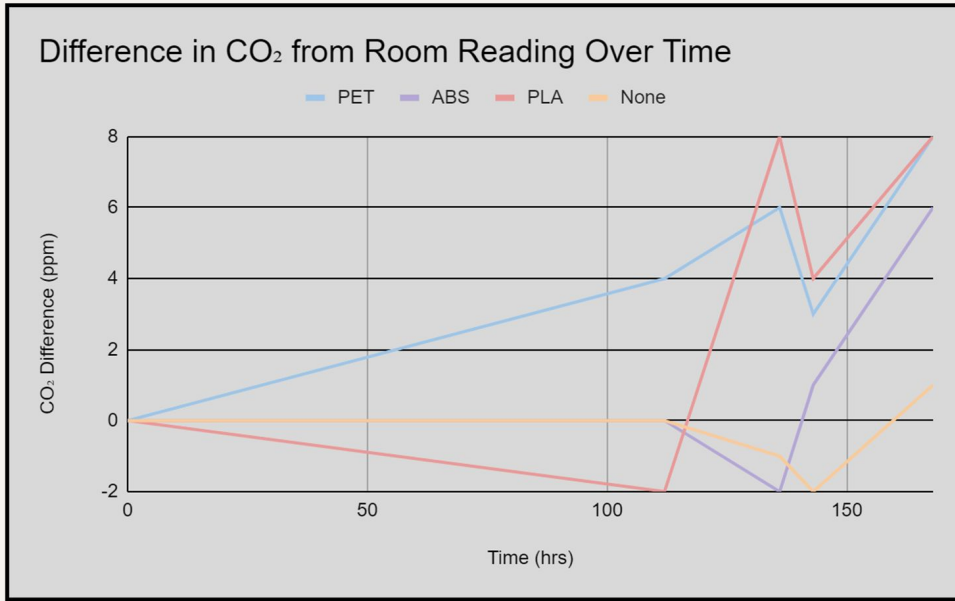


- Carbon dioxide levels **increased** for PET and PLA filament groups by an average of 6 ppm, but not for the ABS filament group.
- p-values of 0.91 for all plastic groups.


Results - Mass

- Mass **increased** by 0.02 for PET and 0.008 for PLA, and **decreased** by 0.017 for ABS.
- p-values of 0.98 for PET and PLA, 0.99 for ABS → not statistically significant.
- Final mass was measured to not disrupt the biofilm, so it also measured the mass of the bacteria.
- The increase in mass, although not statistically significant, was likely the bacteria that were adapting to develop the enzyme to use the plastic as a carbon source.

Results - pH

- All groups became more basic and then the pH began to decrease.
- The pH of PET was 8.31 112 hours in, and at 168 hours it had decreased to 7.55, however, a similar trend was seen in all groups.

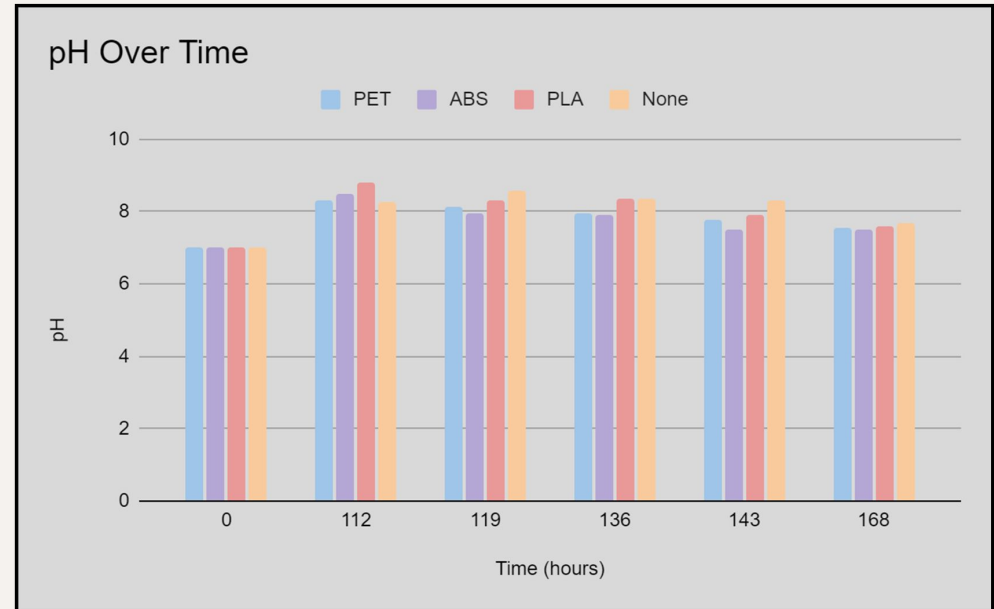

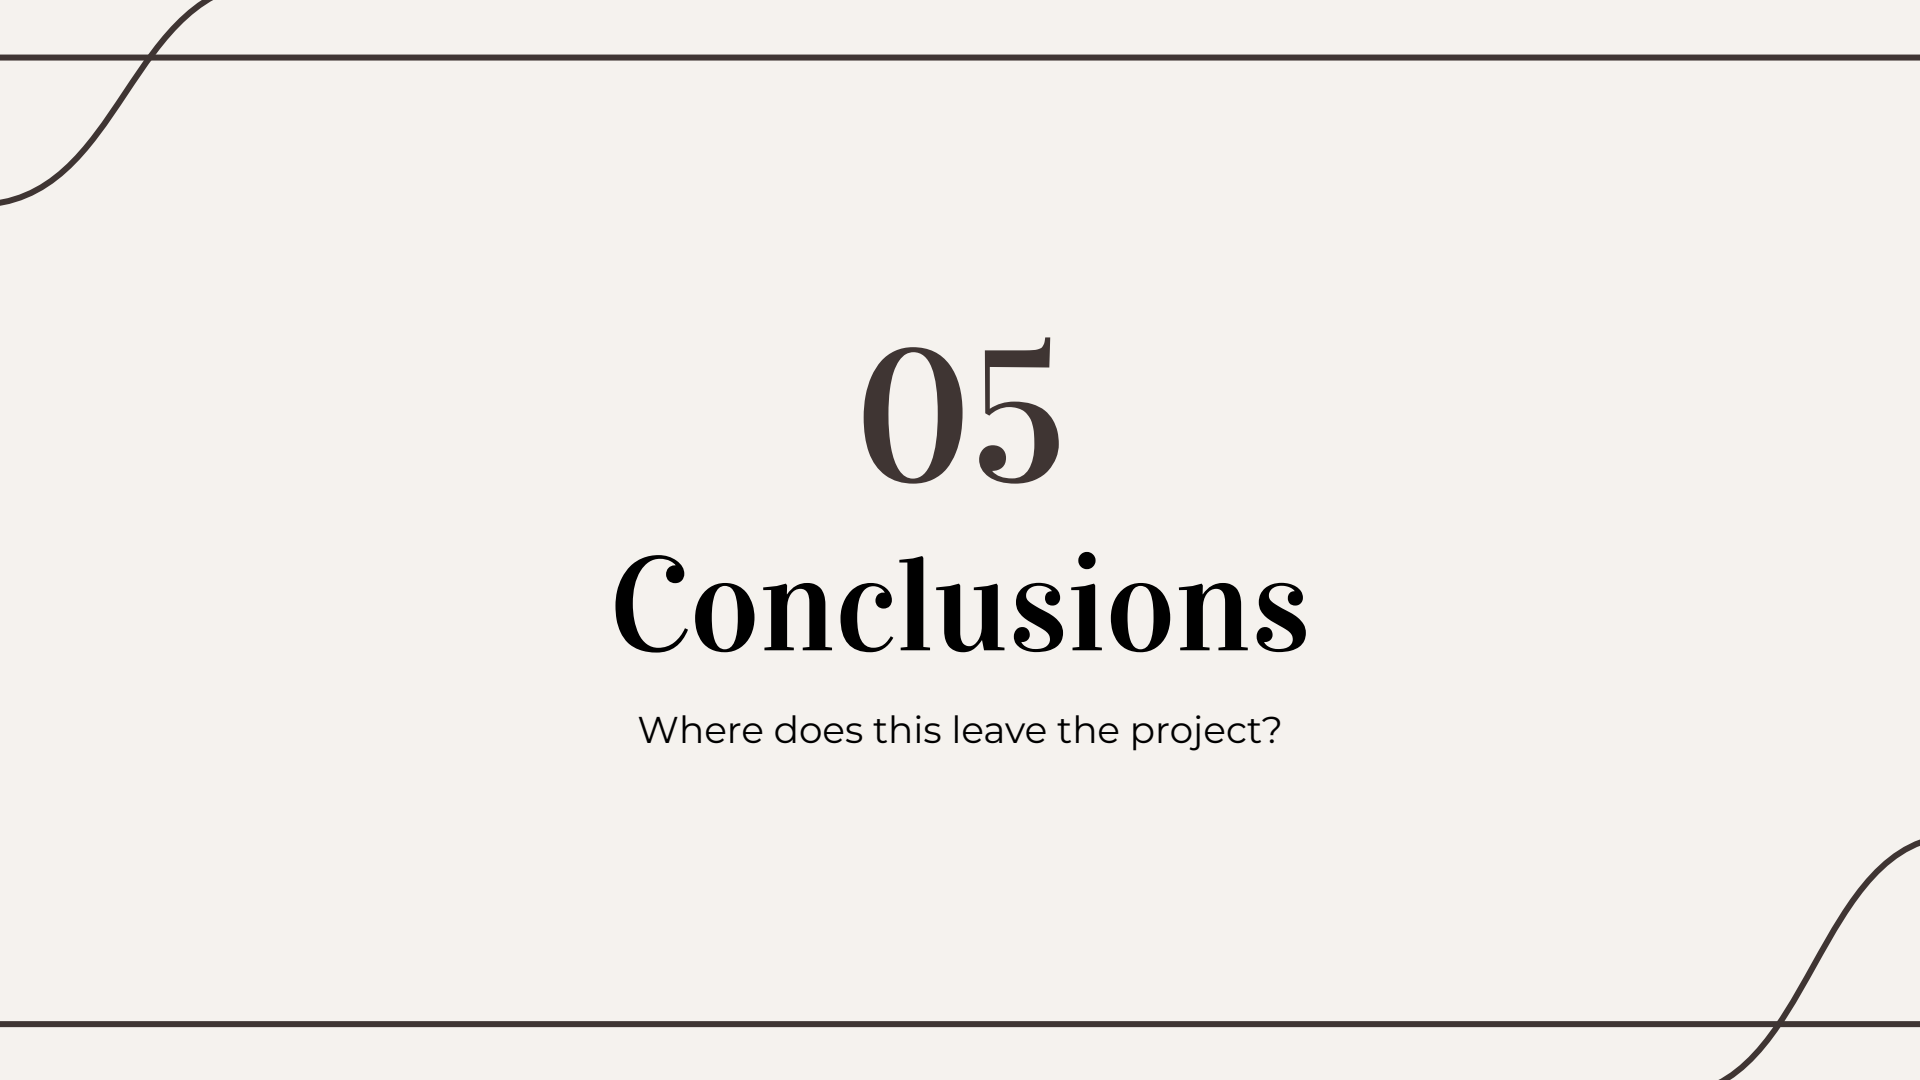

05


Conclusions

Where does this leave the project?

Impact

- Not viable for industry to culture with this process
 - Knowledge of process that doesn't work & idea of where to move forward
- Waste management to minimize pollution
 - Alternative approach
 - Reuse plastic
 - More open land for vegetation (no landfills)

Future Research

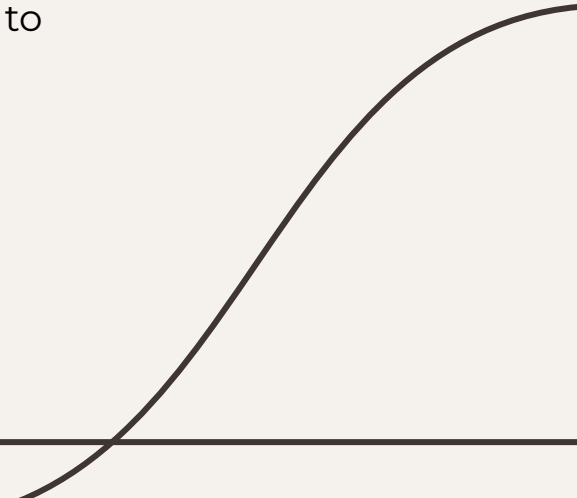- In the future, more research could be done to optimize the media for the growth of plastic-degrading bacteria.
 - A process could be developed to separate the ethylene glycol and terephthalic acid from the rest of the solution and media to be able to reuse these substances for plastic production.
- 

Conclusion

Using bacteria to degrade plastic was not achieved at this time.

- For the first hypothesis that the mass would decrease, it was found that this was not supported since the p-values were between 0.98 and 0.99.
- For the second hypothesis that the carbon dioxide would increase, this was also not significantly supported, with p-values of 0.91 for all three groups.
- For the last hypothesis that the pH would decrease, this was not supported based on the p-values of 0.78, 0.72, and 0.66 for PET, ABS, and PLA respectively.

Plastic pollution is growing uncontrollably, however, the use of bacteria may allow for a new approach to tackle this issue if a process can be developed

Poster Board




Use of PETase for PET Degradation in a Bioreactor to Improve Effectivity of Recycling

Jessie Taubert
Advisor: Dr. Crowthers



Graphical Abstract



With this technology, an input of PET plastic will result in an output of its building blocks, which can be remade into the plastic to create a more effective recycling system.

Background

Plastic Pollution

Plastic pollution is growing at an unsustainable rate, and these polymers do not naturally decay well. PET is one common type of polymer that is used in bottles and clothing.



Recycling

No real effective method of recycling is being implemented, which is detrimental in a consumer-based society, and currently it is more financially beneficial for manufacturers to make new plastic rather than reusing plastic. In under-developed countries, economies are not stable enough to support waste-management systems. Existing ways of disposing of plastic harm the environment.



Enzymes

Ideonella sakaiensis 201-F6 has developed an enzyme that aids in the process of breaking down PET and PEF for carbon and energy. Recent studies have looked at modifying this enzyme to better function for industrial use.




Engineering Need

As industries continue to mass produce plastic, it is becoming more apparent that there is no effective way to recycle plastic and address plastic pollution.


Engineering Goal

Engineer a device to effectively degrade plastic.

Results & Analysis



- Mass increased by 0.02 for PET and 0.008 for PLA, and decreased by 0.017 for ABS.
- p-values of 0.98 for PET and PLA, 0.99 for ABS → not significant.
- Final mass was measured to not disrupt the biofilm, so it also measured the mass of the bacteria.
- The increase in mass was likely the bacteria adapting to use the plastic as a carbon source.



Conclusion

- Using bacteria to degrade plastic was not achieved at this time.
- For the first hypothesis that the mass would decrease, it was found that this was not supported since the p values were between 0.98 and 0.99.
- For the second hypothesis that the carbon dioxide would increase, this was also not significantly supported, with p values of 0.91 for all three groups.
- For the last hypothesis that the pH would decrease, this was not supported based on the p-values of 0.78, 0.72, and 0.66 for PET, ABS, and PLA respectively.
- Plastic pollution is growing uncontrollably, however, the use of bacteria may allow for a new approach to tackle this issue if a process can be developed.

METHODS

The procedure by Odošević was followed to make the YSV media and culture the bacteria.

MEDIA

200 mL of the YSV minimal carbon media was placed in a mason jar.

FILAMENT

3 types of plastic filament - PET, PLA, and ABS - were sterilized with ethanol and placed in separate jars with a stir bar.




INCUBATOR

An incubator was used to culture *E. coli* K12. The stir plate was placed in the incubator with the four jars on it and taped shut.

MEASUREMENTS

Mass was measured before and after, and CO₂ and pH readings were taken at regular intervals.



Impact

- A bacteria-oriented recycling process would benefit waste management in both rural and urban areas.
- Discarded plastic could actively be reused in the industry rather than relying on new plastic, thus reducing pollution.
- More land would be open for vegetation as plastic landfills would no longer be needed.
- A process could be developed to separate the ethylene glycol and terephthalic acid from the rest of the solution and media to be able to reuse these substances for plastic.
- In the future, more research could be done to optimize the media for the growth of plastic-degrading bacteria.

References

- Bellini, E. (2019). Scientists analyze toxic gases released from burning thin-film, pet-laminated modules. *pv magazine International*.
<https://www.pv-magazine.com/2019/12/09/scientists-analyze-toxic-gases-released-from-burning-thin-film-pet-laminate-d-modules/>
- Cornwall, W. (2021). The plastic eaters. *Science*, 373(6550), 36–39. <https://doi.org/10.1126/science.373.6550.36>
- Demircan, T., & Keskin, E. (2020). Method for preparing recombinant petase and mhetase enzymes for use in decomposition of plastics (World Intellectual Property Organization Patent No. WO2020055369A2).
<https://patents.google.com/patent/WO2020055369A2/en?q=petase&oq=petase>
- Hiraga, K., Taniguchi, I., Shousuke, Y., Kimura, Y., & Oda, K. (2019). Biodegradation of waste PET. *EMBO Reports*, 20(11), e49365.
<https://doi.org/10.15252/embr.201949365>
- Odobašić, B. (2020). Biochemical characterisation of *Ideonella sakaiensis* and the influence of culture conditions on plastic degradation.
- O'Toole, G., Kaplan, H. B., & Kolter, R. (2000). Biofilm Formation as Microbial Development. *Annual Review of Microbiology*, 54(1), 49–79. <https://doi.org/10.1146/annurev.micro.54.1.49>
- Sheth, M. U., Kwartler, S. K., Schmaltz, E. R., Hoskinson, S. M., Martz, E. J., Dunphy-Daly, M. M., Schultz, T. F., Read, A. J., Eward, W. C., & Somarelli, J. A. (2019). Bioengineering a future free of marine plastic waste. *Frontiers in Marine Science*, 6.
<https://doi.org/10.3389/fmars.2019.00624>
- Stanton, T., Johnson, M., & Kay, P. (2020, October 27). The war against plastic is distracting us from pollution that can't be seen. *LiveScience*. Retrieved July 7, 2021, from <https://www.livescience.com/war-against-plastic-distraction.html>

CREDITS: This presentation template was created
by **Slidesgo**, including icons by **Flaticon**, and
infographics & images by **Freepik**

Please keep this slide for attribution