

DOBLEZ

MEDIDA	DIMENSION	LIM. I	LIM.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo MFG
A	3.720	3.705	3.735				
B	1.250	1.235	1.265				
C	19.940	19.925	19.955				
D	3.720	3.705	3.735				
E	1.230	1.215	1.245				
F	4.970	4.955	4.985				
G	0.500	0.485	0.515				
H	0.250	0.235	0.265				
I	34.810	34.795	34.825				
J	0.750	0.735	0.765				
K	2.950	2.935	2.965				
L	2.800	2.785	2.815				
M	0.230	0.215	0.245				



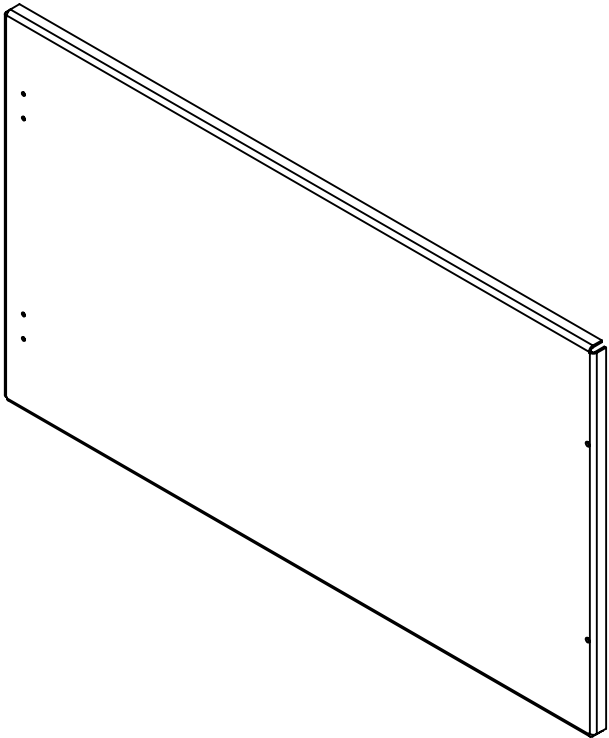


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

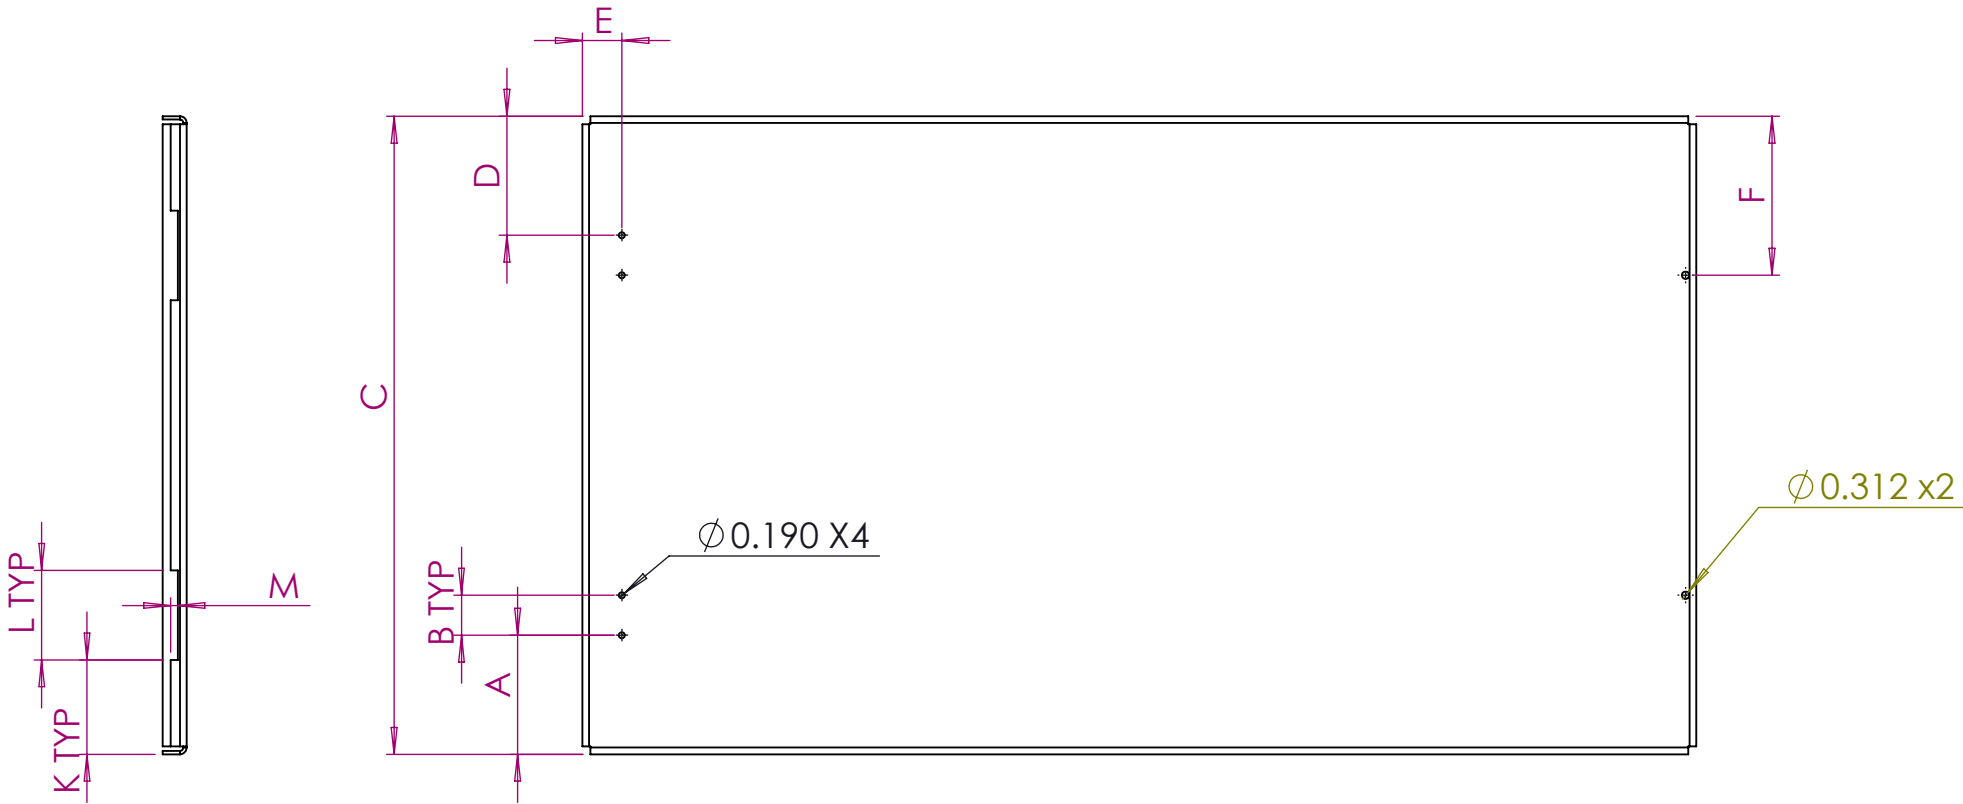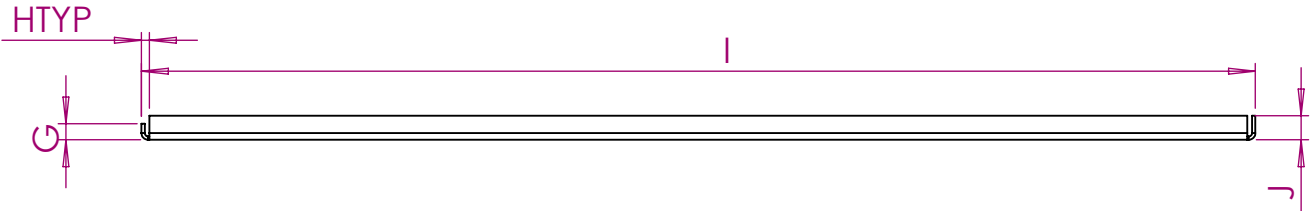


INSTRUMENT DOOR BLANK 20" HIGH			
Dwn: AWV	24/03/2026	Chk: AWV	24/03/2026

Dwn No: 12-A-6199-02-(12gacr ANSI-61) - K47 - V3-R2	Rev: 00
Apvd: AWV	Sht 1 of 1

No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	21.085	21.070	21.100				
2	LASER	19.440	19.425	19.455				
3	LASER	35.705	35.690	35.720				
4	LASER	34.310	34.295	34.325				
5	LASER	0.190	0.175	0.205				
6	LASER	0.230	0.215	0.245				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-A-6199-02 (12gacr) k61 R0	24/02/26	0.61	21.163	35.783	0.105
R1	12-A-6199-02 (12gacr) k61 R1	24/02/26	0.42	21.068	35.688	0.105
R2	12-A-6199-02 (12gacr) k47 R4	24/03/26	0.47	21.085	35.705	0.105
R3						

CORTE

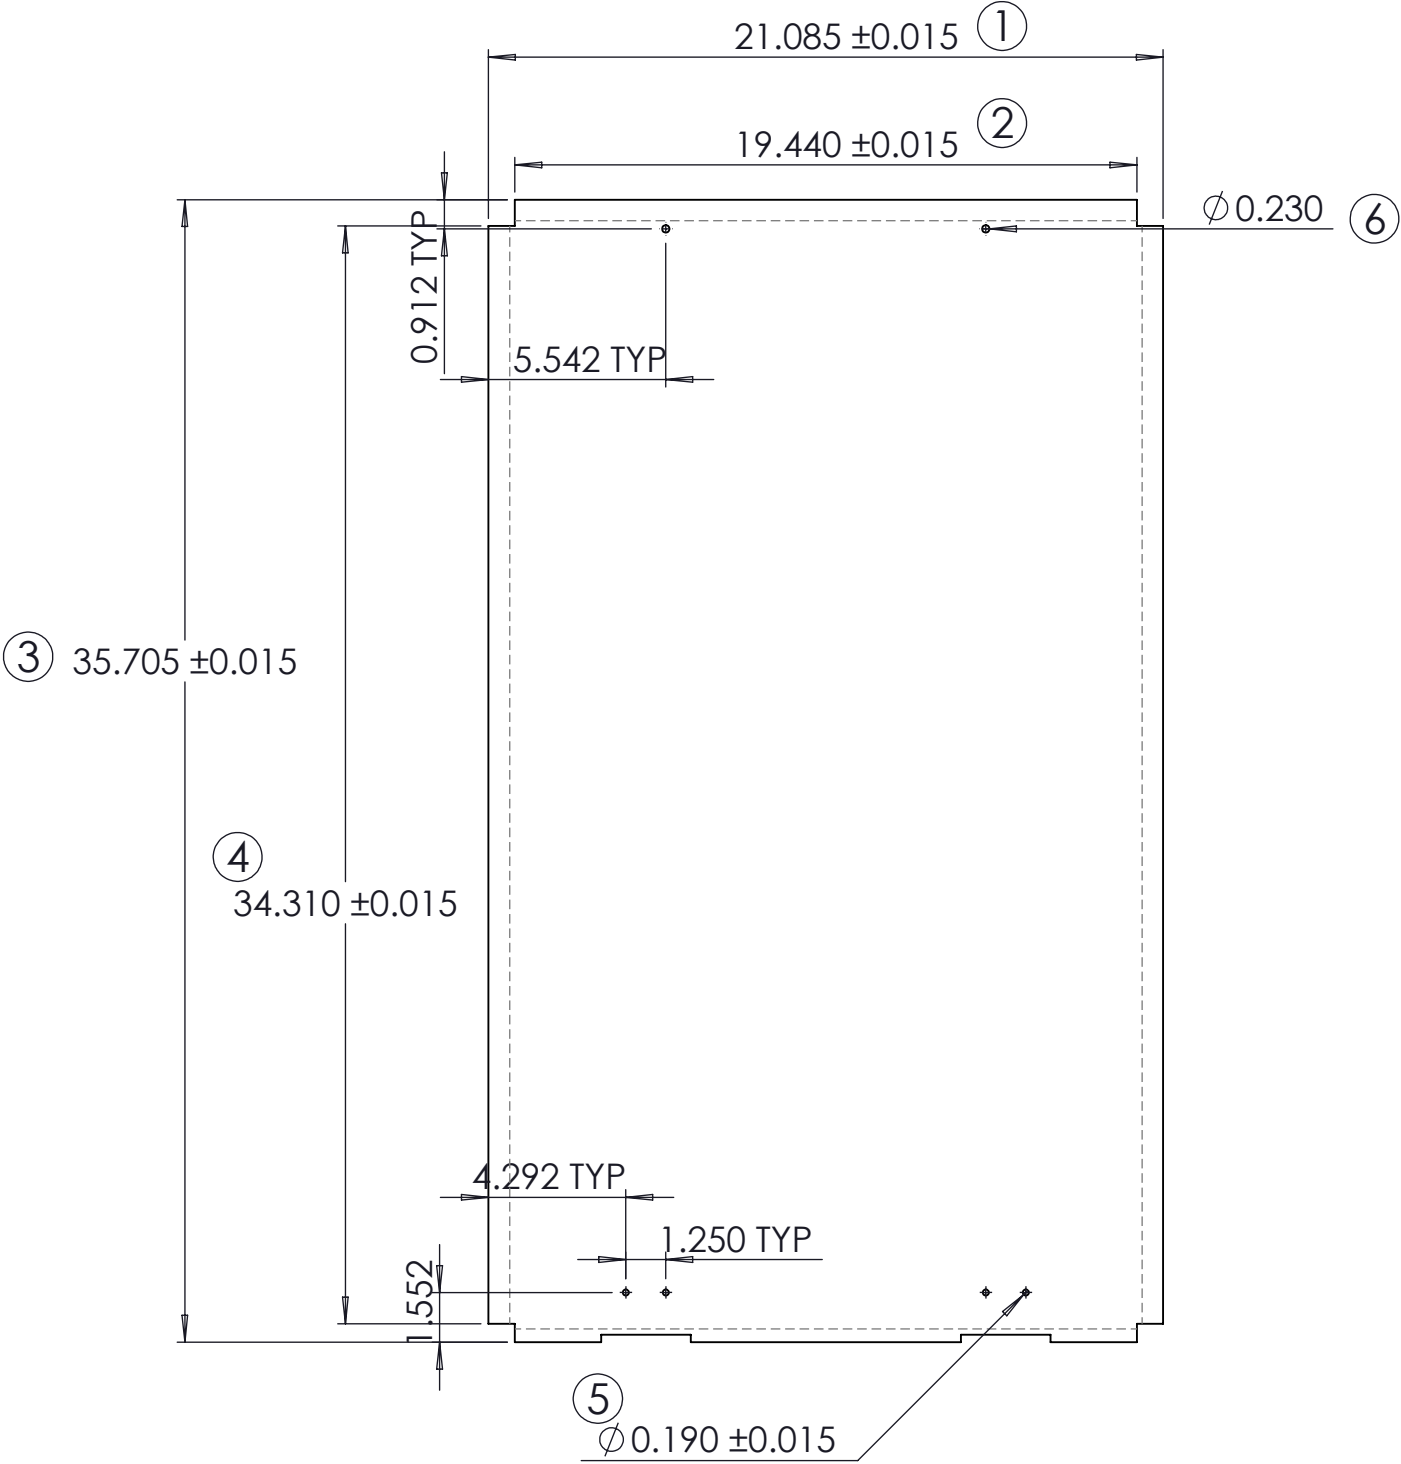

OC:

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



INSTRUMENT DOOR BLANK
20" HIGH

Dwn No: 12-A-6199-02-(12gacr ANSI-61) - K47 - V3-R2
Rev: 00

Dwn: AWV 24/03/2026 Chk: AWV 24/03/2026 Apvd: AWV 24/03/2026 Sht 1 of 1