



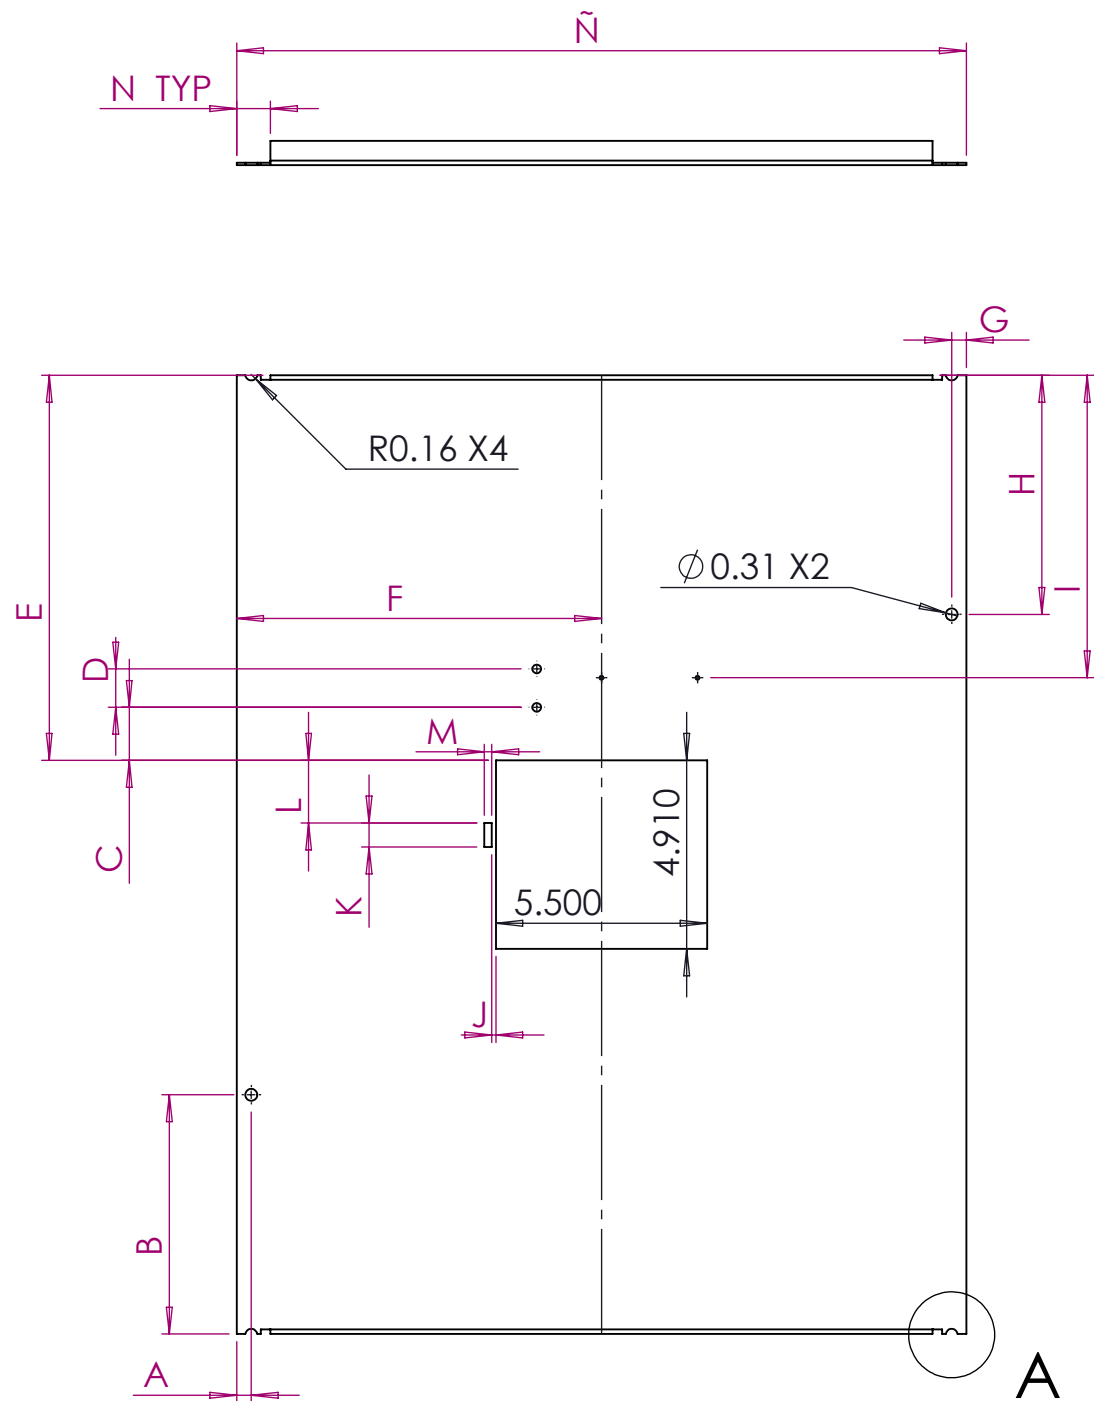


A

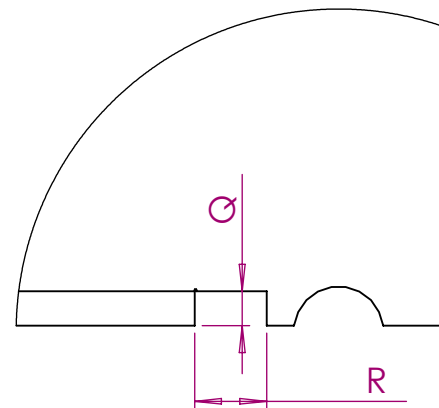

DETALLE A
X4

ESCALA 3 : 2

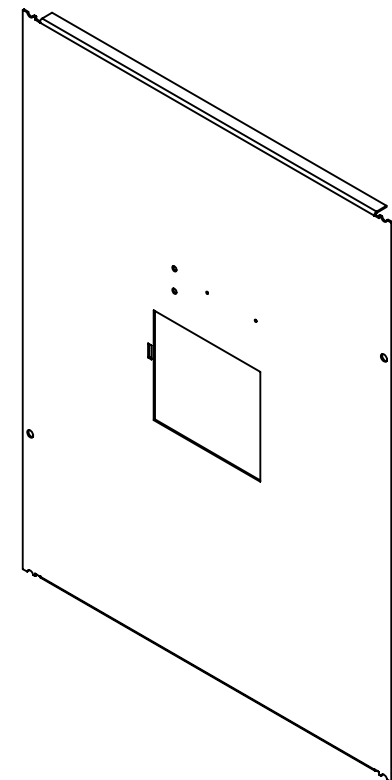

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.380	0.365	0.395				
B	6.230	6.215	6.245				
C	1.380	1.365	1.395				
D	1.000	0.985	1.015				
E	10.030	10.015	10.045				
F	9.500	9.485	9.515				
G	0.380	0.365	0.395				
H	6.230	6.215	6.245				
I	17.880	17.865	17.895				
J	0.110	0.095	0.125				
K	0.630	0.615	0.645				
L	1.630	1.615	1.645				
M	0.190	0.175	0.205				
N	0.880	0.865	0.895				
Ñ	19.000	18.985	19.015				
O	24.970	24.955	24.985				
P	0.630	0.615	0.645				
Q	0.120	0.105	0.135				
R	0.250	0.235	0.265				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



3VA 400/600A COVER W/KEY
INTERLOCK


Dwn No: PP22121-01-(16ga ANSI-61) - K48 - V0-R0
Rev: 00

Dwn: AWV 26/02/2026 Chk: AWV 26/02/2026 Apvd: AWV 26/02/2026 Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	19.000	18.985	19.015				
2	LASER	26.029	26.014	26.044				
3	LASER	24.970	24.955	24.985				
4	LASER	0.312	0.297	0.327				
5	LASER	5.500	0.615	0.645				
6	LASER	17.240	17.225	17.255				
7	LASER	4.910	4.895	4.925				
8	LASER	0.228	0.213	0.243				
9	LASER	0.100	0.085	0.115				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	PP22121-01-(16ga ANSI-61) - K48 - V0-R0	26/02/26	0.48	26.029	19.000	0.06
R1						
R2						
R3						

CORTE

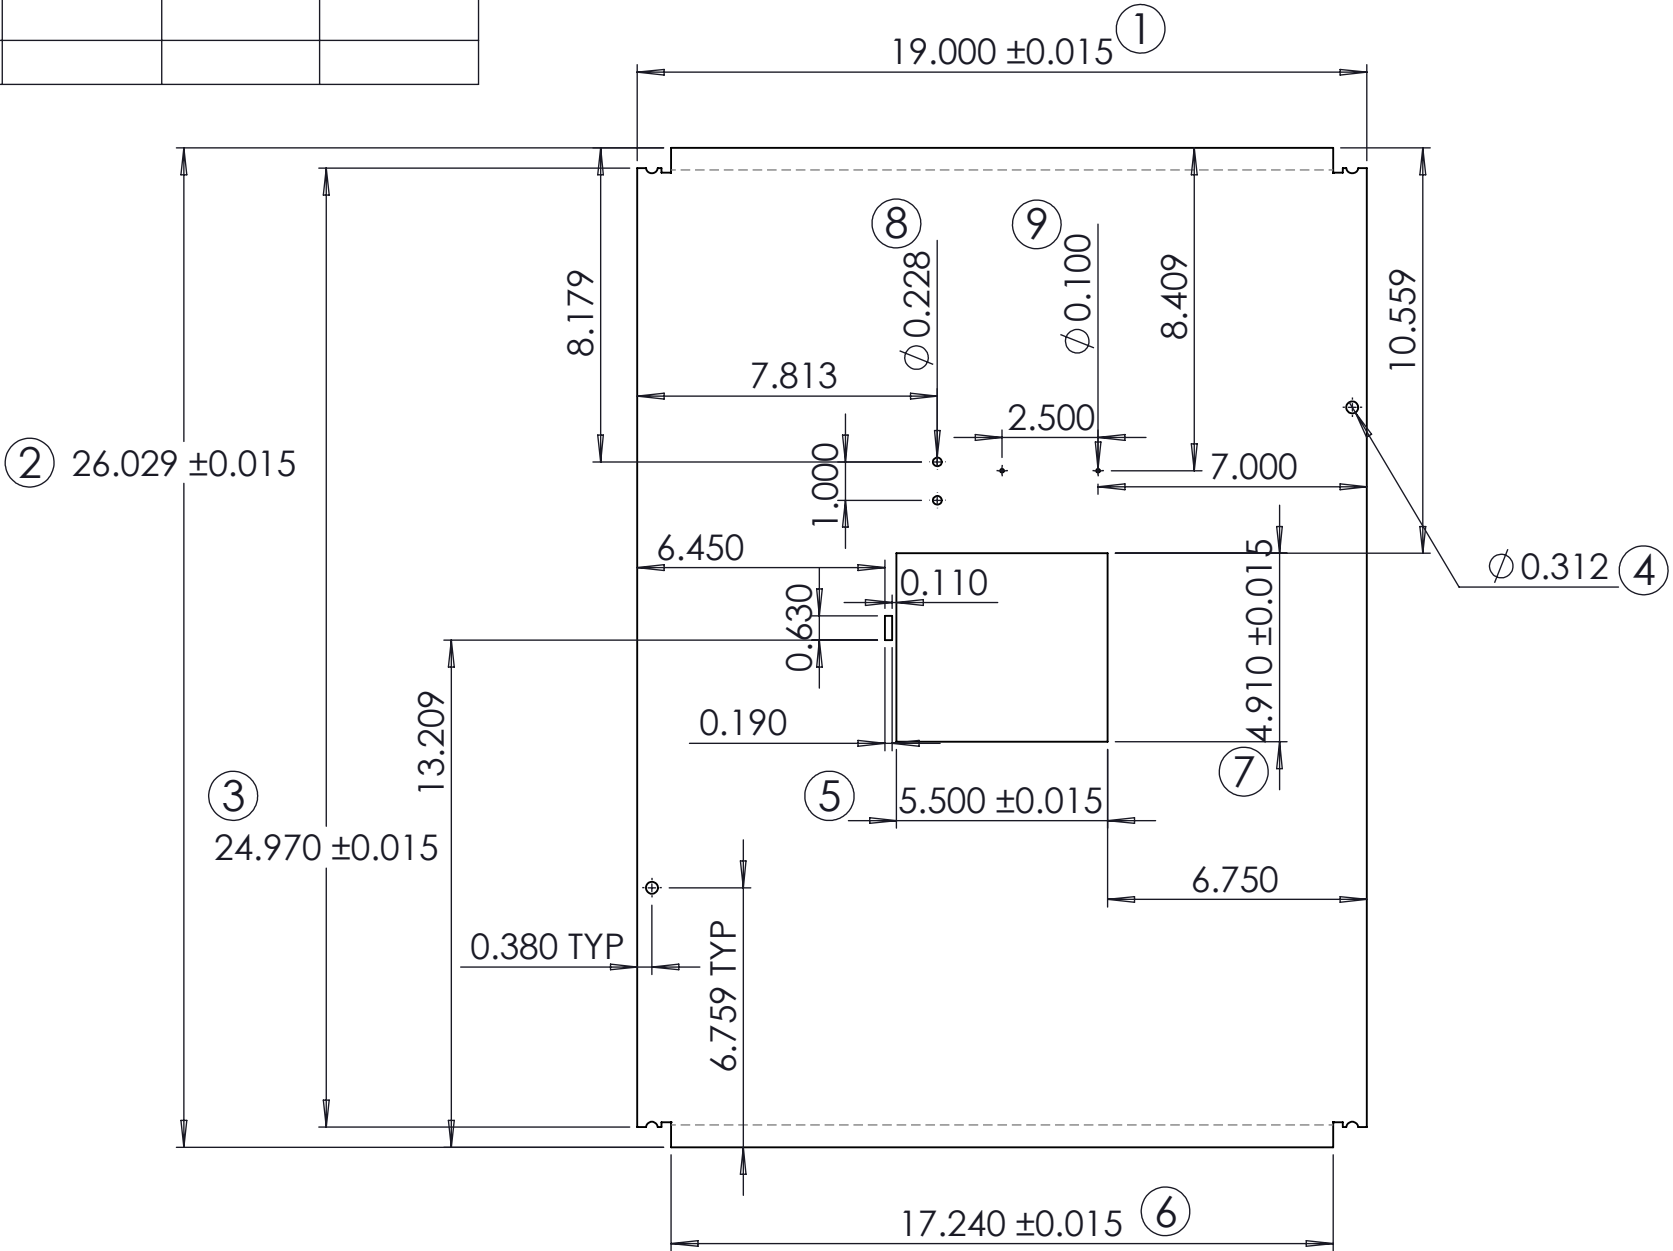

OC: