


Revision	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	PP22121-02-(16ga ANSI-61) - K48 - V0-R0	08/06/2026	0.48	19.000	26.029	0.06



Dwn: JRFM

08/06/2026

Chk: JRFM

08/06/2026


Dwn No:
PP22121-02-(16ga ANSI-61) - K48 - V0-R0

Rev: 00


Apvd: JRFM

08/06/2026

Sht 1 of 1

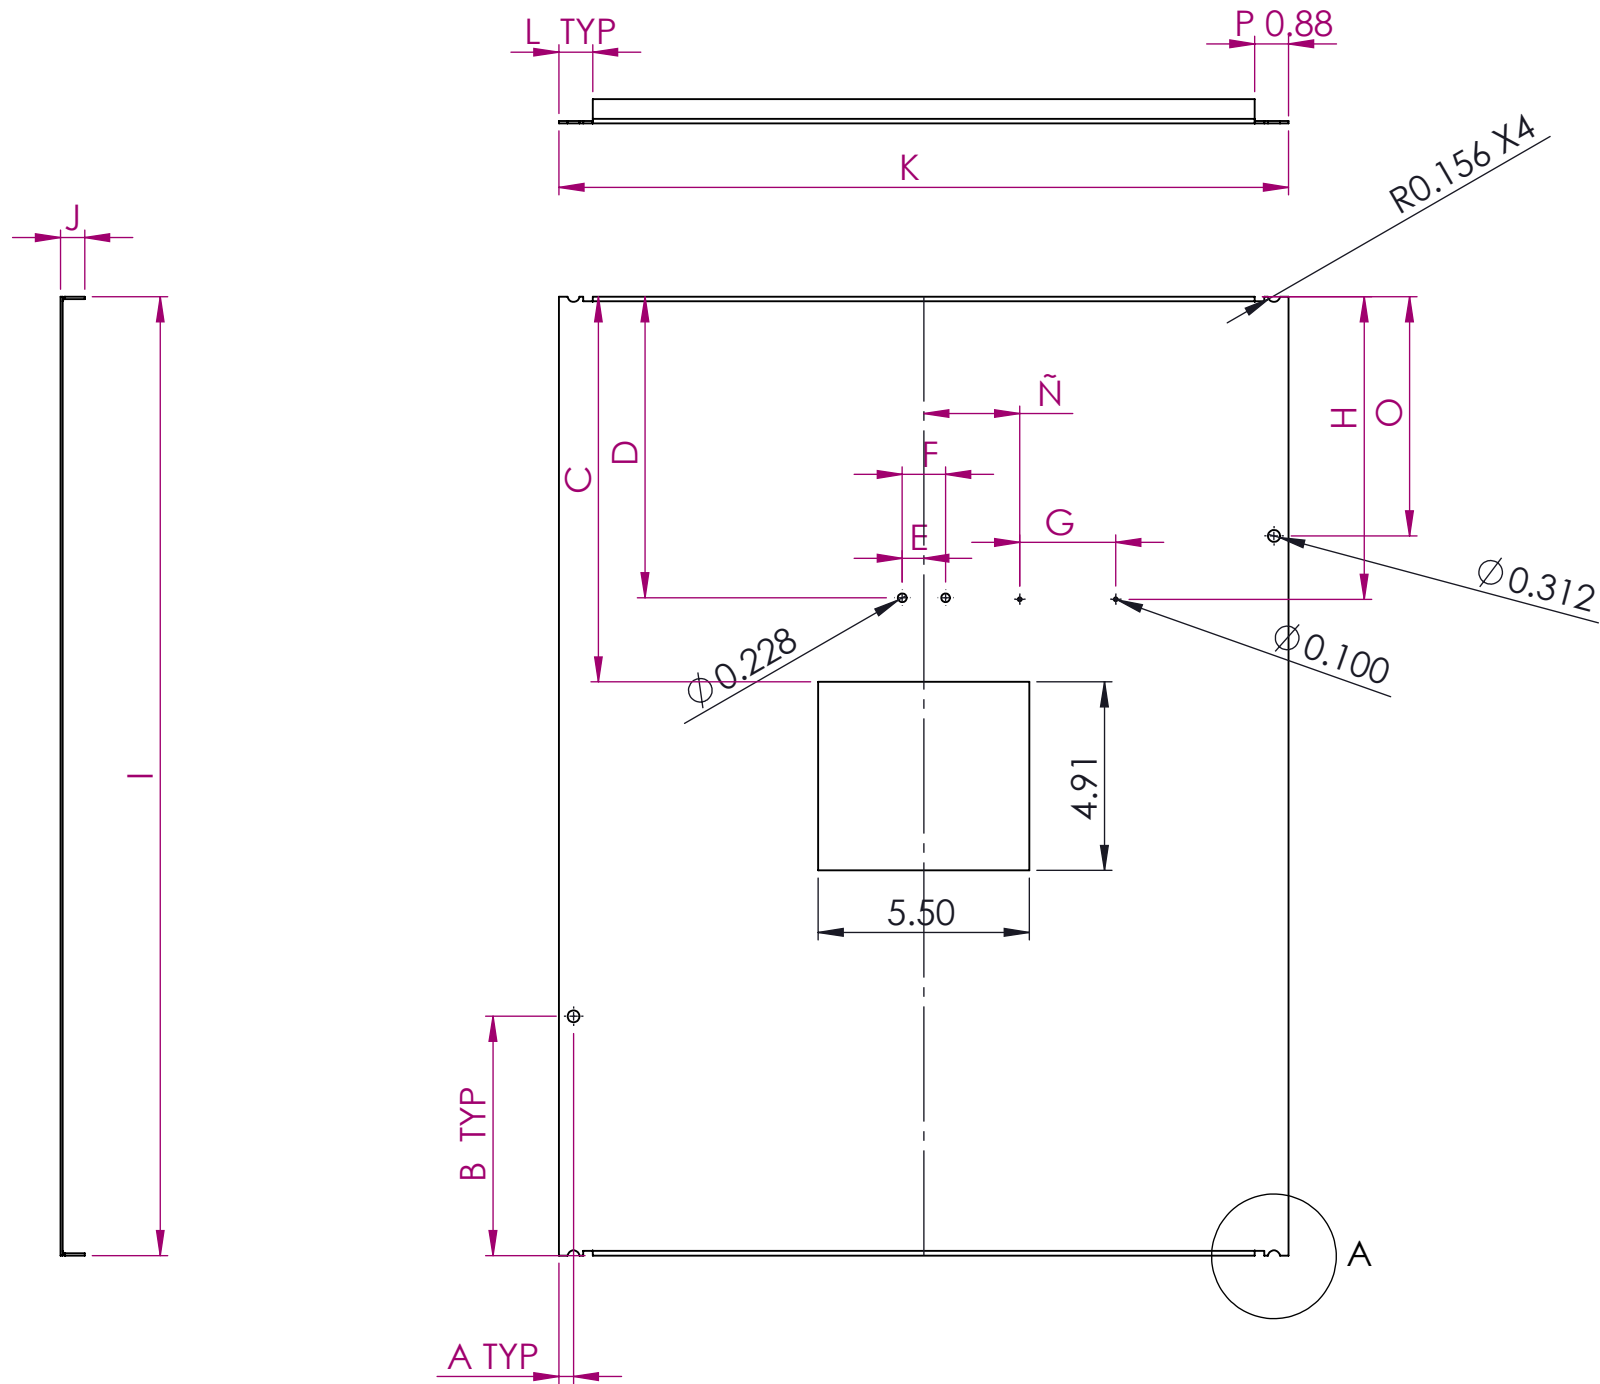

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.380	0.365	0.395				
B	6.230	6.215	6.245				
C	10.030	10.015	10.045				
D	7.840	7.825	7.855				
E	0.560	0.545	0.575				
F	1.130	1.115	1.145				
G	2.500	2.485	2.515				
H	7.880	7.865	7.895				
I	24.970	24.955	24.985				
J	0.630	0.615	0.645				
K	19.000	18.985	19.015				
L	0.880	0.865	0.895				
M	0.250	0.235	0.265				
N	0.120	0.105	0.135				
Ñ	2.500	2.485	2.515				
O	6.230	6.215	6.245				
P	0.880	0.865	0.895				

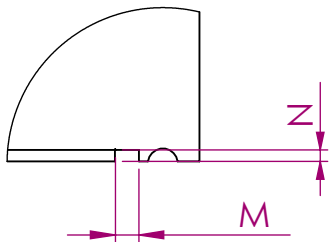

DETALLE A TYP X4
ESCALA 1 : 2

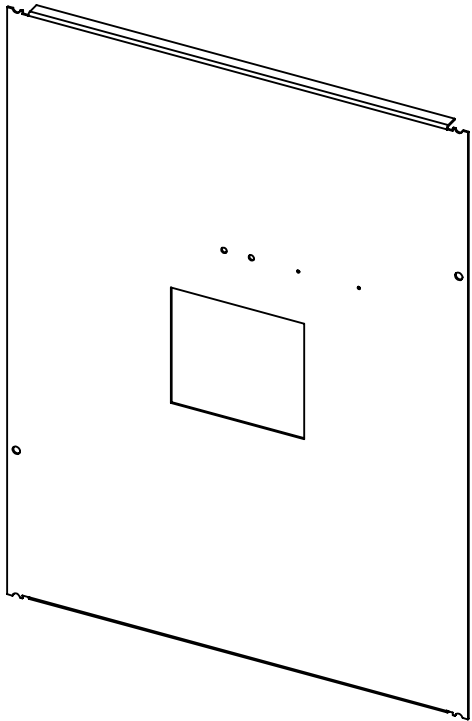


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



3VA 400/600 COVER W/KEY INTERLOCK				Dwn No: PP22121-02-(16ga ANSI-61) - K48 - V0-R0		Rev: 00
Dwn: JRFM	08/06/2026	Chk: JRFM	08/06/2026	Apvd: JRFM	08/06/2026	Sht 1 of 1