


No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	46.239	46.224	46.254				
2	LASER	18.109	18.094	18.124				
3	LASER	44.440	44.425	44.455				
4	LASER	16.570	16.555	16.585				
5	LASER	0.312	0.297	0.327				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	11-A-6015-01-(16gacr ANSI-61) - K48 - V3-R0	15/07/2026	0.48	18.109	46.239	0.060

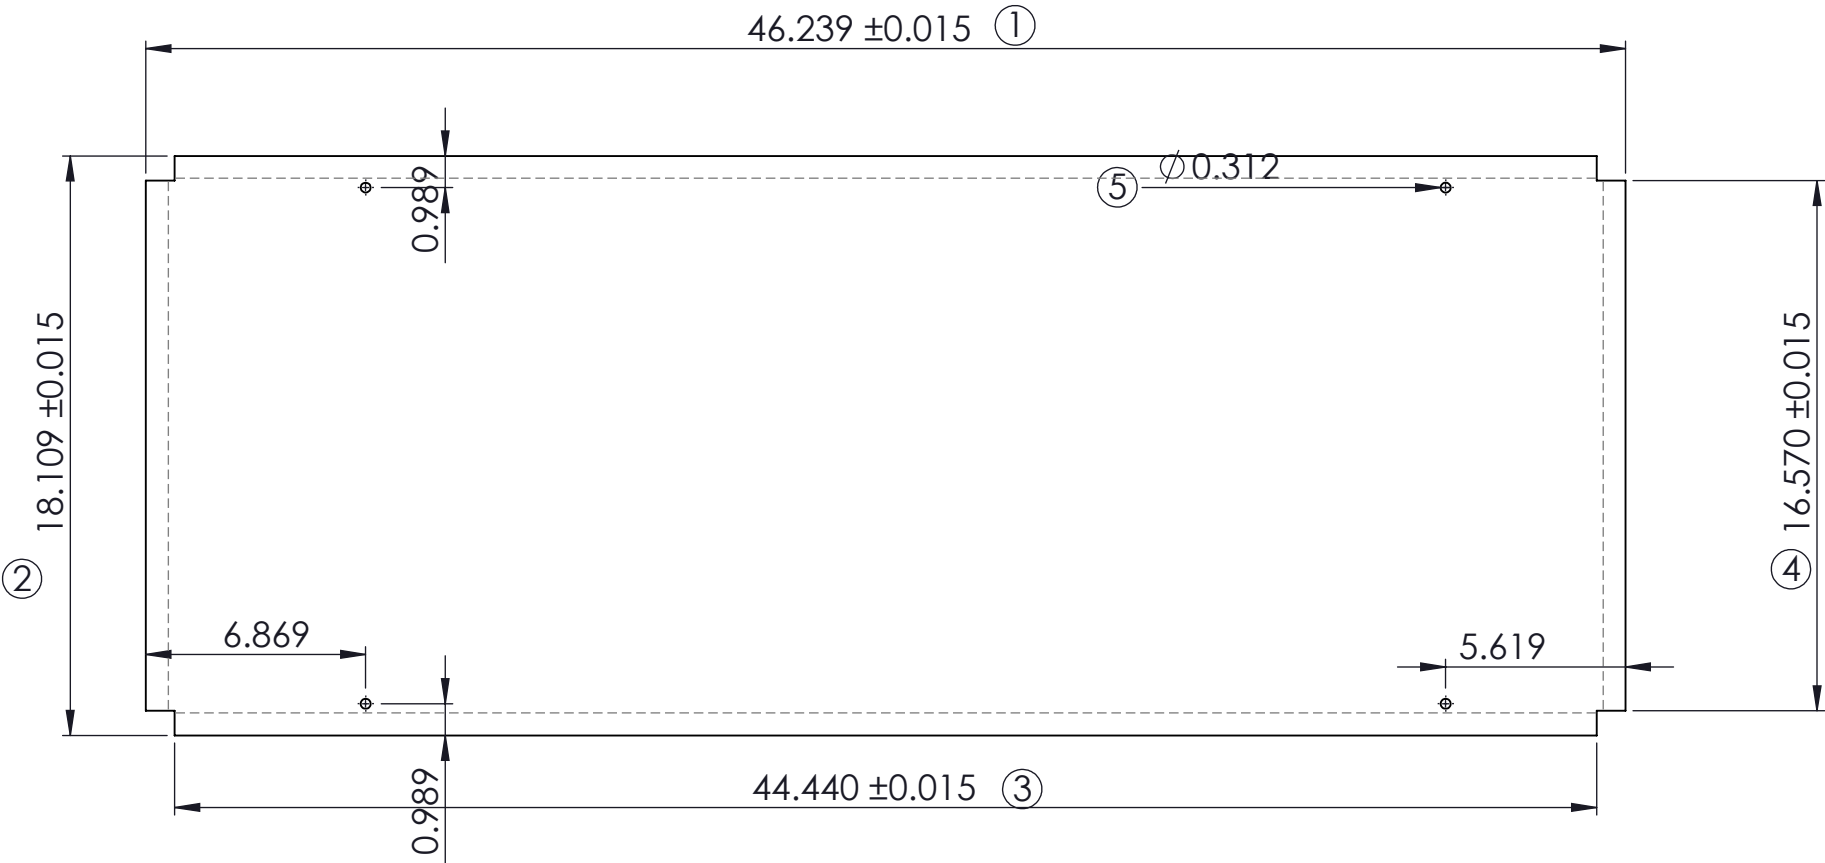

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	6.220	6.205	6.235				
C	44.940	44.925	44.955				
D	4.970	4.955	4.985				
E	0.750	0.735	0.765				
F	0.250	0.235	0.265				
G	16.810	16.795	16.825				
H	0.120	0.105	0.135				



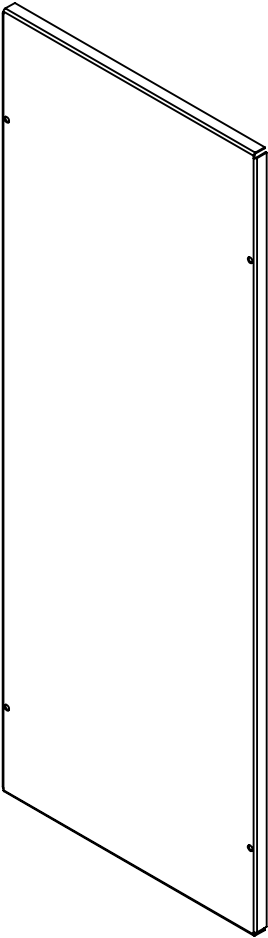


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

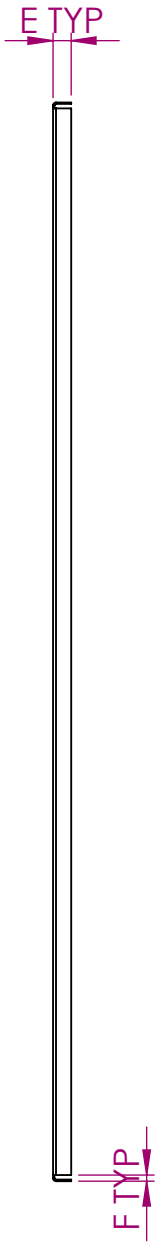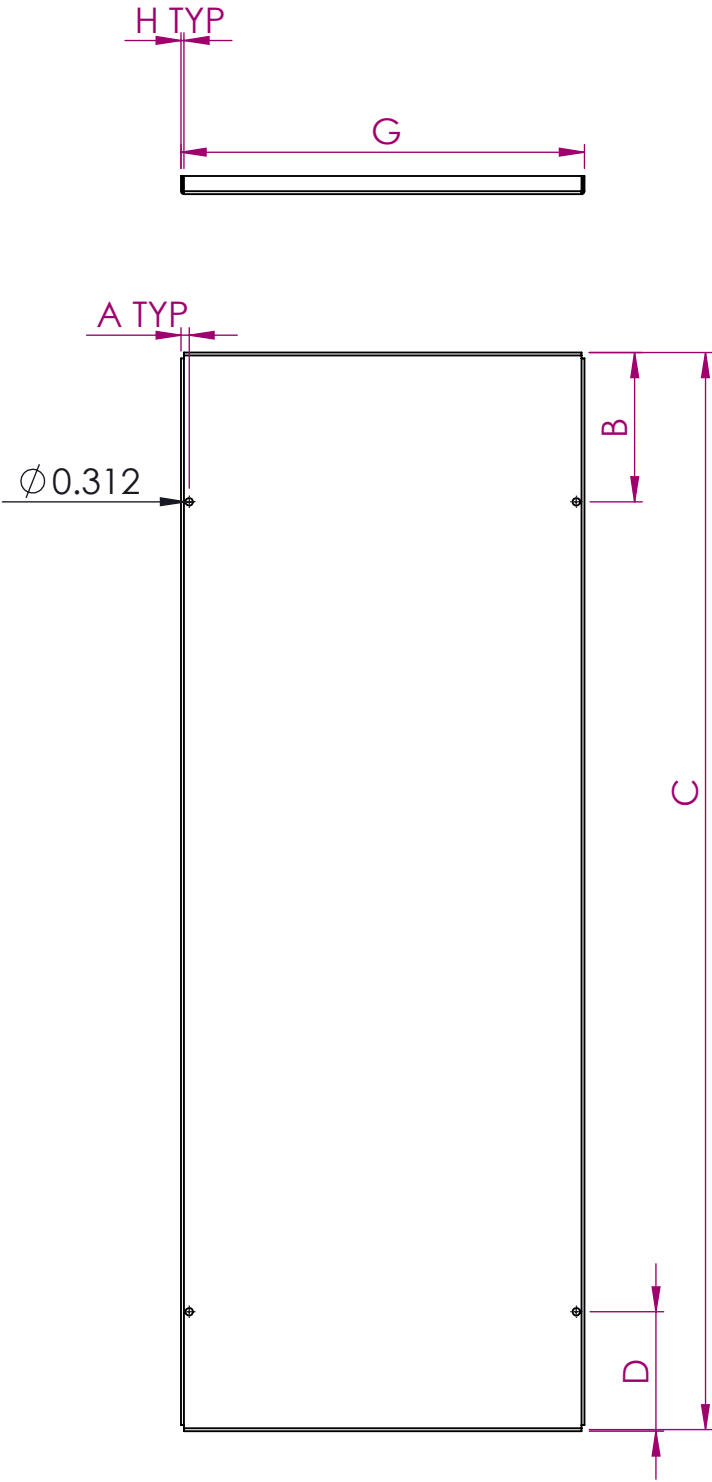

17" WIDE			
Dwn: JRFM	15/07/2026	Chk: JRFM	15/07/2026

Dwn No: 11-A-6015-01-(16gacr ANSI-61) - K48 - V3-R0	Rev: 00
Apvd: JRFM	Sht 1 of 1