


PC No.	A	B	C	D	E	MATL	FINISH	WIDTH	LENGTH	THK	WEIGHT	REF.
11-A-6016-01	44.94	22.47	6.22 ▲	4.97	6	16gacr	ANSI-61	26.08	46.20	0.06	20.97	90°H SWBD.
11-A-6016-02	34.94	-	6.22 ▲	4.97	4	16gacr	ANSI-61	26.08	36.20	0.06	16.43	70°H SWBD.
11-A-6016-03	9.94	-	2.47	2.47	4	16gacr	ANSI-61	26.08	11.20	0.06	5.08	10°H PULLBOX
11-A-6016-04	14.94	-	2.47	2.47	4	16gacr	ANSI-61	26.08	16.20	0.06	7.35	15°H PULLBOX
11-A-6016-05	19.94	-	4.97	4.97	4	16gacr	ANSI-61	26.08	21.20	0.06	9.62	20°H PULLBOX
11-A-6016-06	24.94	-	4.97	4.97	4	16gacr	ANSI-61	26.08	26.20	0.06	11.89	25°H PULLBOX
11-A-6016-07	29.94	-	4.97	4.97	4	16gacr	ANSI-61	26.08	31.20	0.06	14.16	30°H PULLBOX

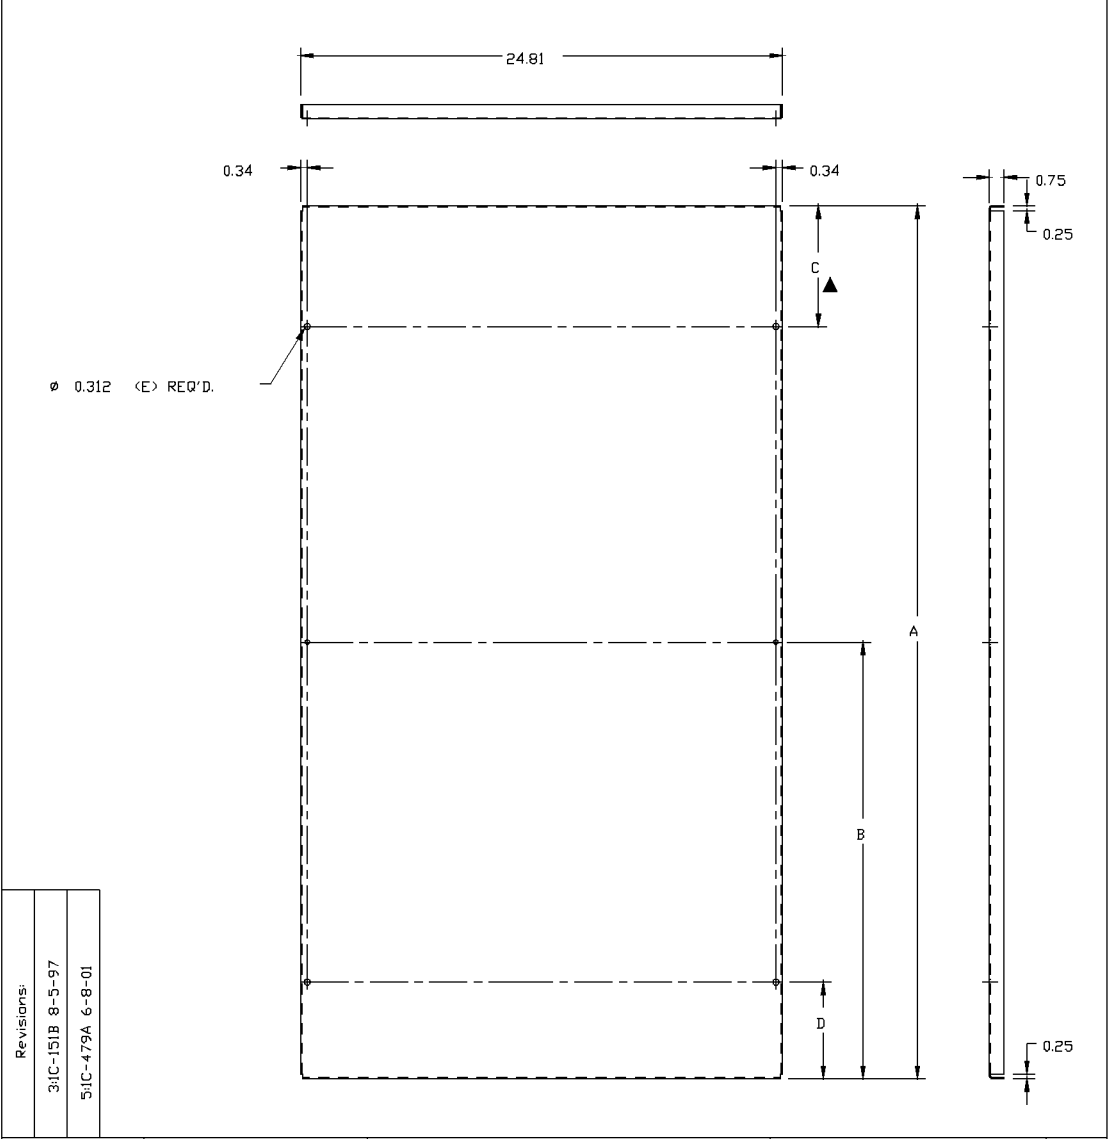

Revisions:	
31C-151B 8-5-97	
51C-479A 6-8-01	

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2°	Confidential - property of Siemens Energy Automation, Inc. Distribution Products Division	25° WIDE 16gacr	Dwg No 11-A-6016	Rev 5
Units are in inches.	Dwn: JAJ	3-29-93	Chk: JW	4-1-93
	Apvd: AW	4-1-93	Sht 1 of 1	