

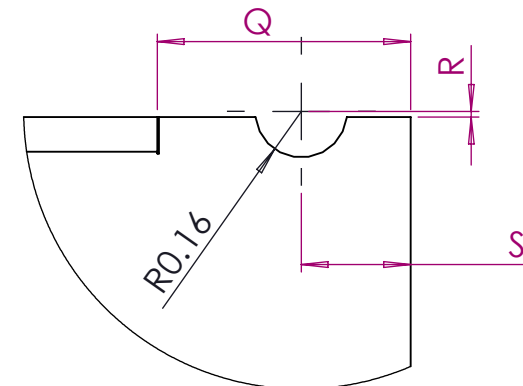
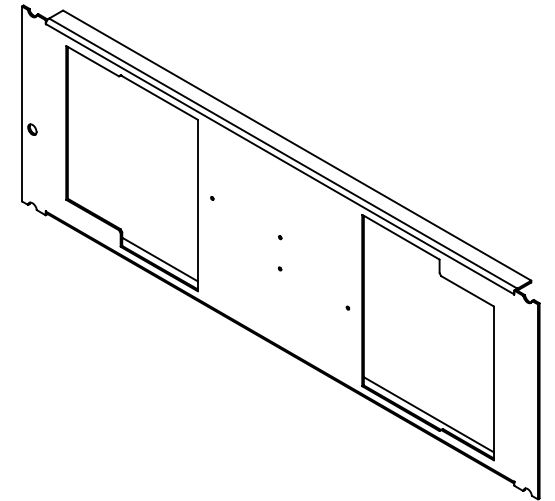


DOBLEZ

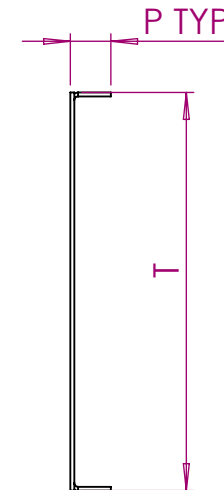

MEDIDA	MEDISION	LIM. I	LIM. S	VALOR MFG	VoBo	VALOR CAL	VoBo
A	5.470	5.455	5.485				
B	0.063	0.048	0.078				
C	2.000	1.985	2.015				
D	0.530	0.515	0.545				
E	2.840	2.825	2.885				
F	0.500	0.485	0.515				
G	2.000	1.985	2.015				
H	5.470	5.455	5.485				
I	2.500	2.485	2.515				
J	0.370	0.355	0.385				
K	0.500	0.485	0.515				
L	0.380	0.365	0.395				
M	2.480	2.465	2.495				
N	2.600	2.585	2.165				
O	1.000	0.985	1.015				
P	0.630	0.615	0.645				
Q	0.880	0.865	0.895				
R	0.020	0.005	0.035				
S	0.380	0.365	0.395				
T	6.220	6.205	6.235				
W	19.000	18.985	19.015				
X	5.470	5.455	5.485				
Y	4.910	4.895	4.925				
Z	0.880	0.865	0.895				

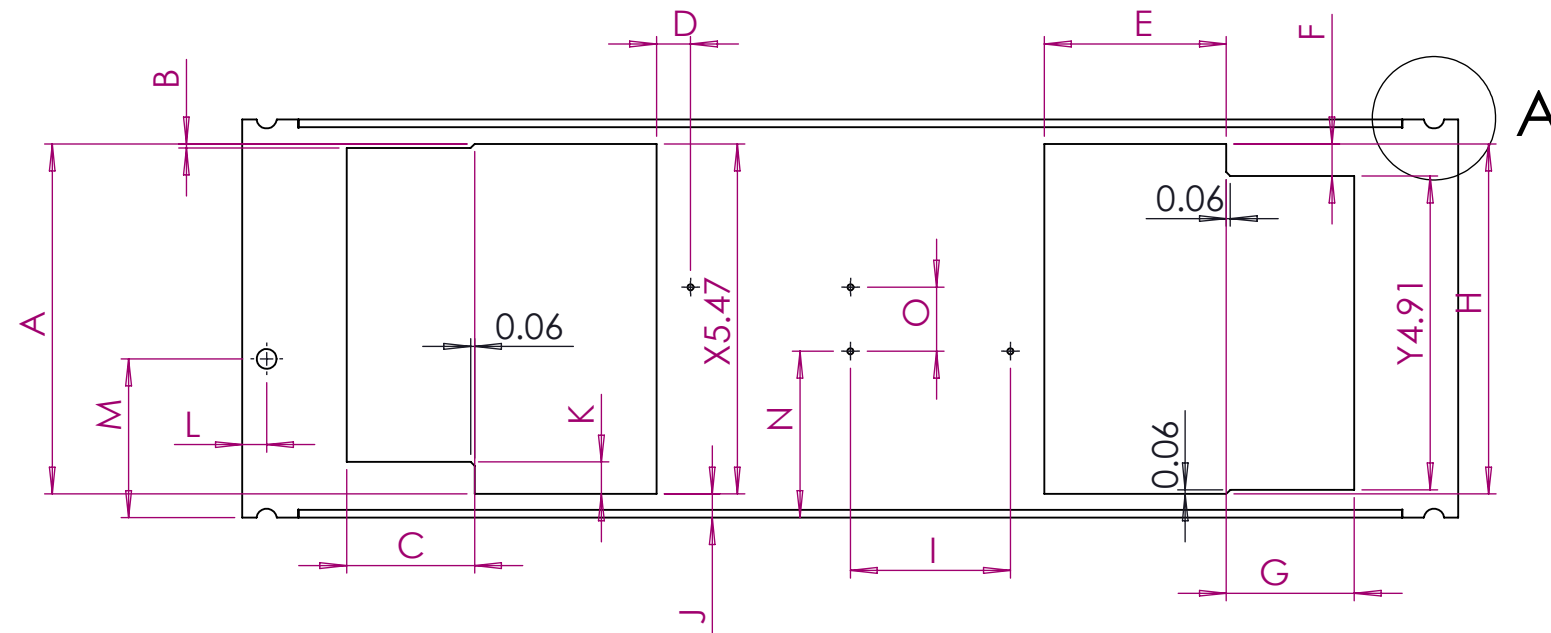

DETALLE A
X4

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:	
.XX ±	.030
.XXX ±	.015
Angular ±	2°
Units are in inches	



400/600A 6.25" TMTU/ETU
COVER PLATE


Dwn No: 11-D-3402-01-(16gacr ANSI-61) - K48 - V1-R0	Rev: 00
--	------------

Dwn: AWW	24/02/2026	Chk: AWW	24/02/2026	Apvd: AWW	24/02/2026	Sht 1 of 1
----------	------------	----------	------------	-----------	------------	------------

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	19.000	18.985	19.015				
2	LASER	17.240	17.225	17.255				
3	LASER	7.279	7.264	7.294				
4	LASER	0.312	0.297	0.327				
5	LASER	6.220	6.205	6.235				
6	LASER	0.095	0.080	0.110				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	11-D-3402-01-(16gacr ANSI-61) - K48 - V1-R0	24/02/26	0.48	7.279	19.000	0.060
R1						
R2						
R3						

CORTE

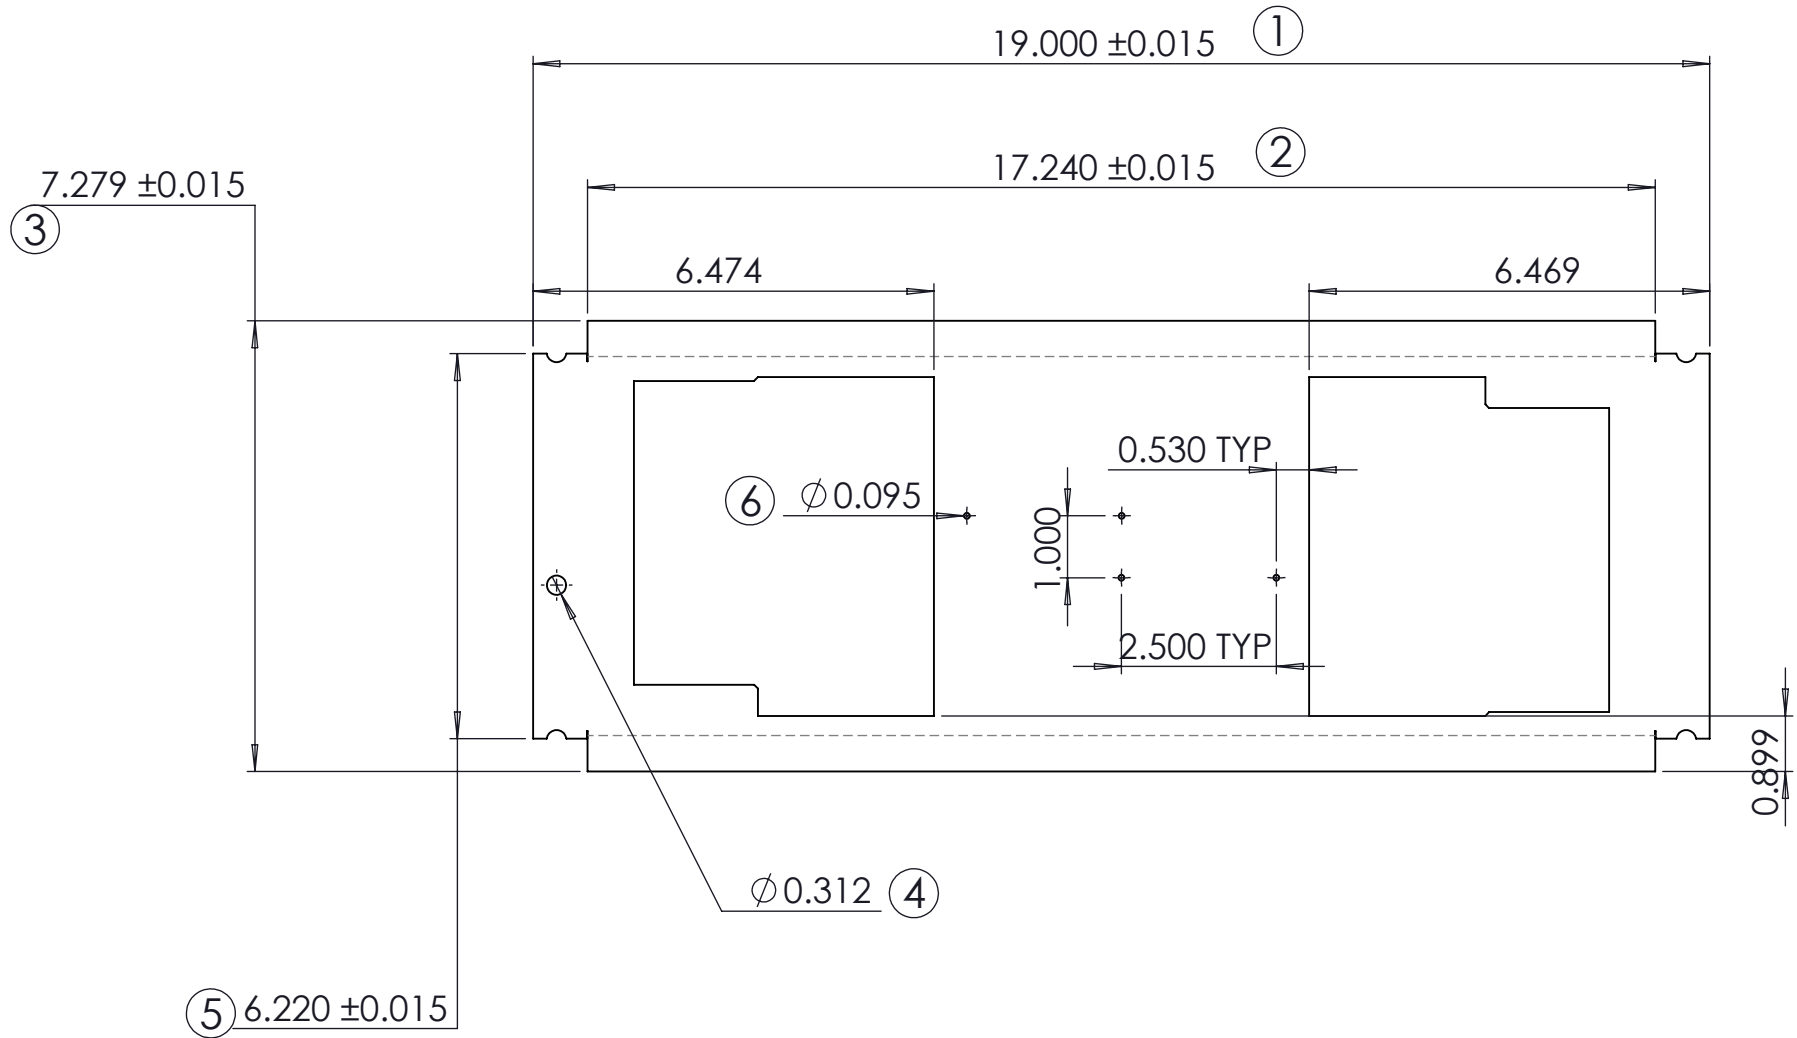

OC: