

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.000	1.985	2.015				
B	1.120	1.105	1.135				
C	0.500	0.485	0.515				
D	0.880	0.865	0.895				
E	0.440	0.425	0.455				
F	1.500	1.485	1.515				
G	0.190	0.175	0.205				
H	0.780	0.765	0.795				
I	2.000	1.985	2.015				
J	0.650	0.635	0.665				
K	0.500	0.485	0.515				


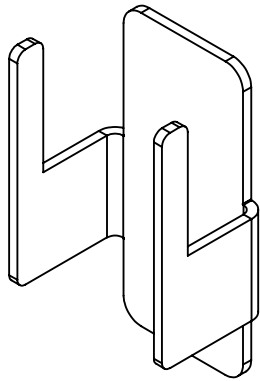


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

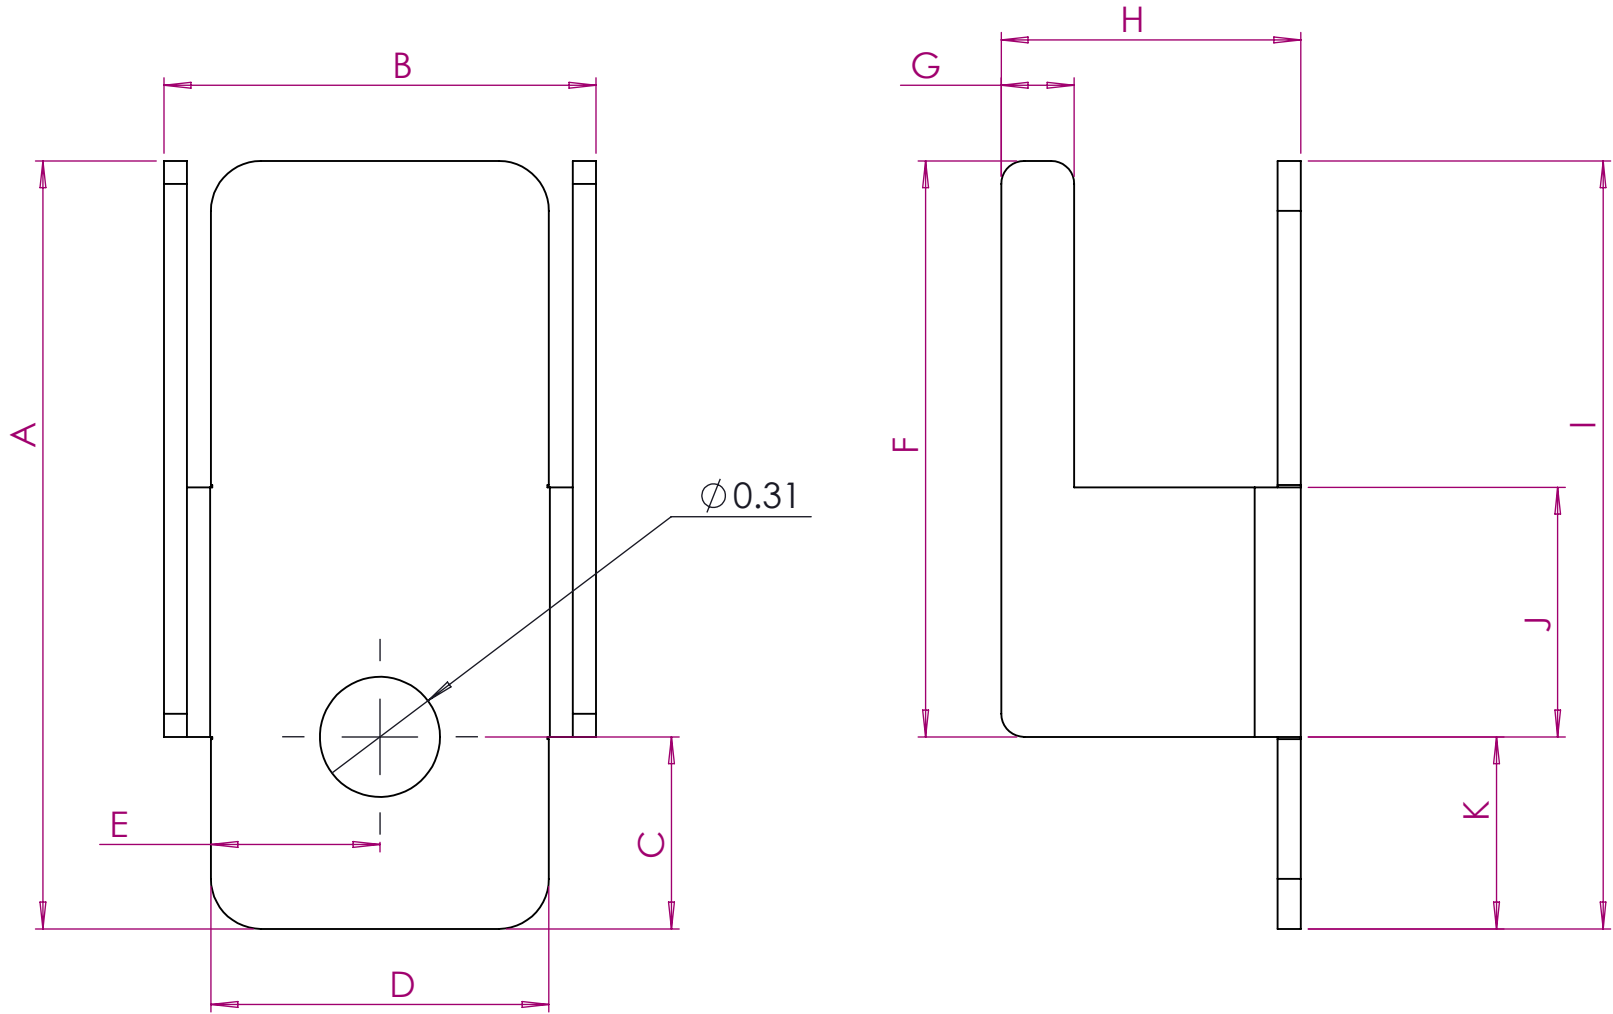


3VA53 54 63 64 HANDLE EXT MTG BRACKET			
Dwn: AWV	26/02/2026	Chk: AWV	26/02/2026

Dwn No: 11-D-3408-01-(16gacr ANSI-61) - K48 - V0-R0		Rev: 00
Apvd: AWV	26/02/2026	Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	2.484	2.469	2.499				
2	LASER	2.000	1.985	2.015				
3	LASER	0.880	0.865	0.895				
4	LASER	0.313	0.297	0.328				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	11-D-3408-01-(16gacr ANSI-61) - K48 - V0-R0	26/02/26	0.48	2.484	2.000	0.060
R1						
R2						
R3						

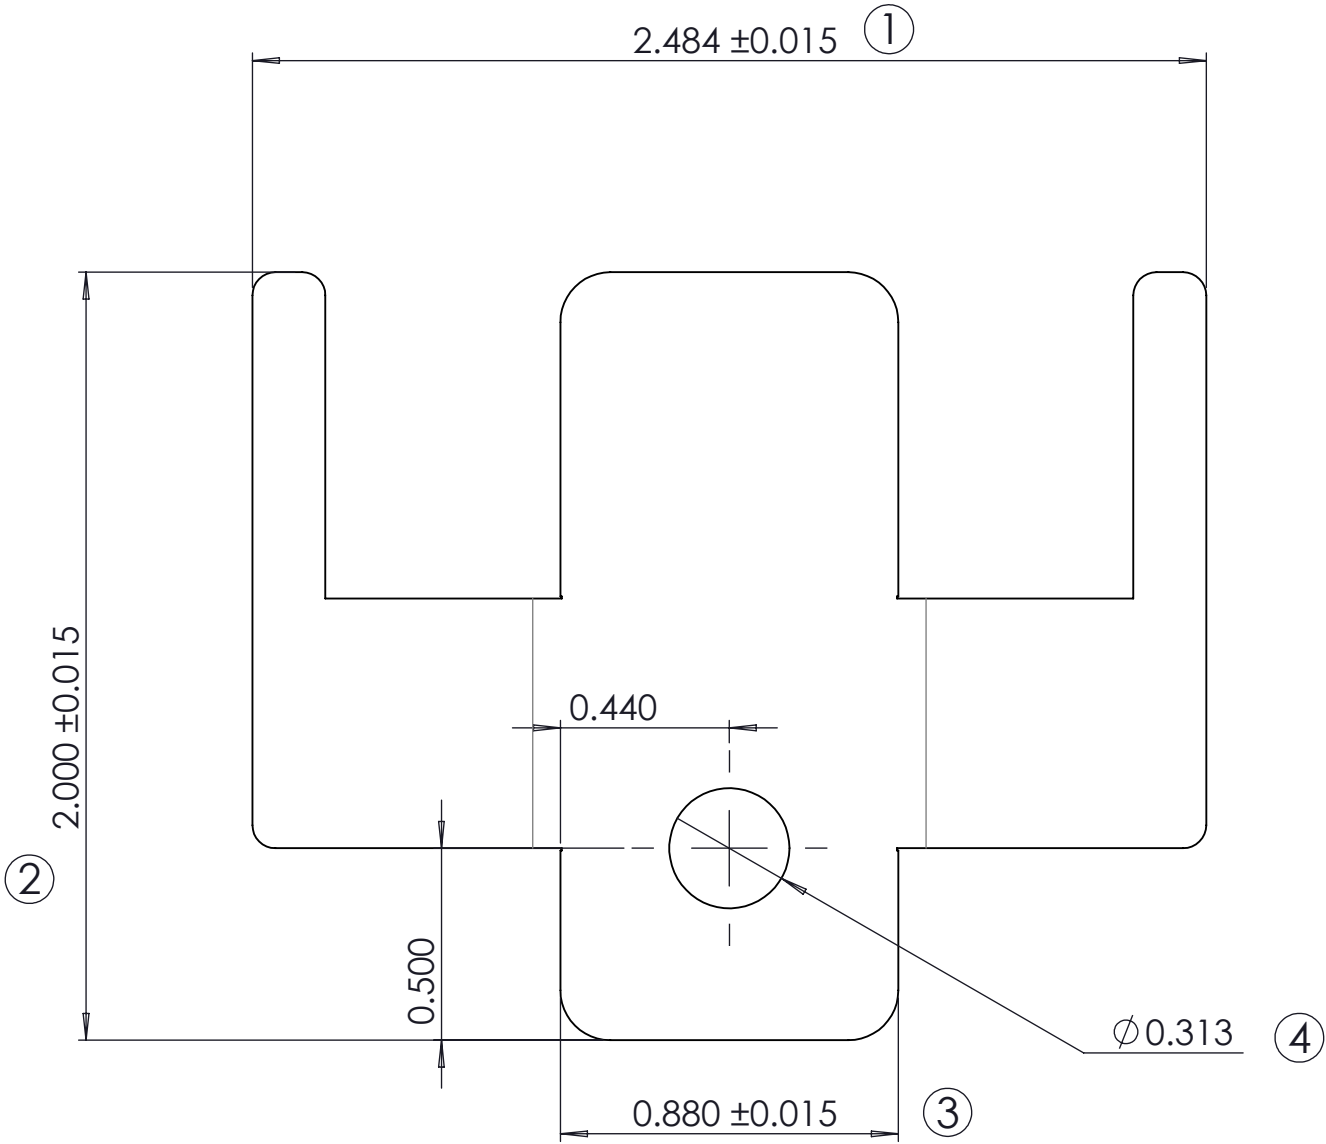

OC:

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches		3VA53 54 63 64 HANDLE EXT MTG BRACKET				Dwn No: 11-D-3408-01-(16gacr ANSI-61) - K48 - V0-R0		Rev: 00	
		Dwn: AWV	26/02/2026	Chk: AWV	26/02/2026	Apvd: MGOS	26/02/2026	Sht 1 of 1	