
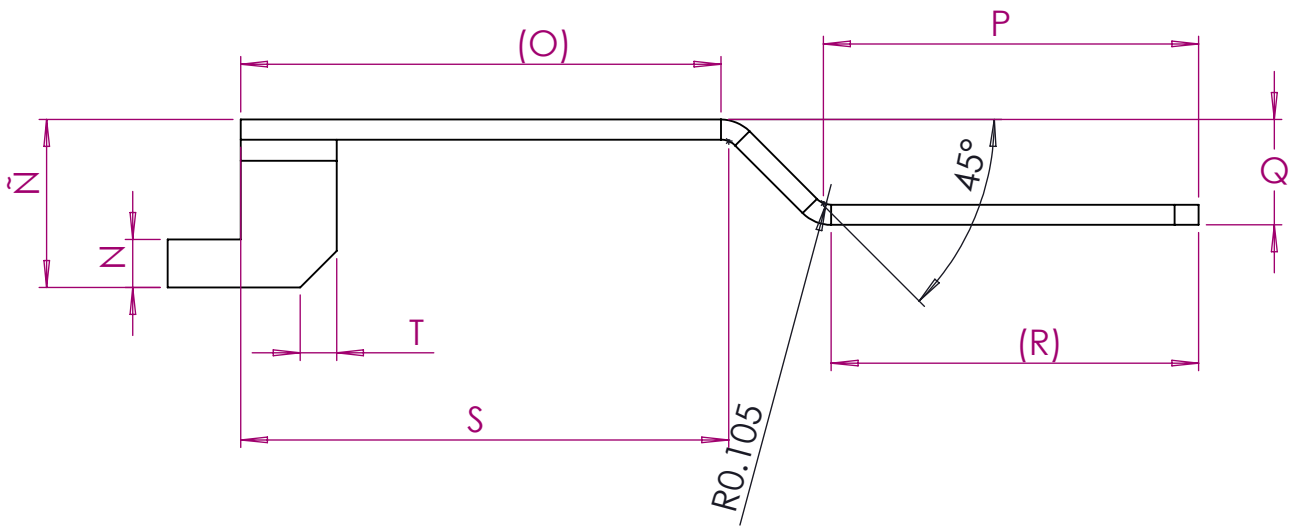


Cotas entreparentesis () están referenciadas a los
inicios de golpe

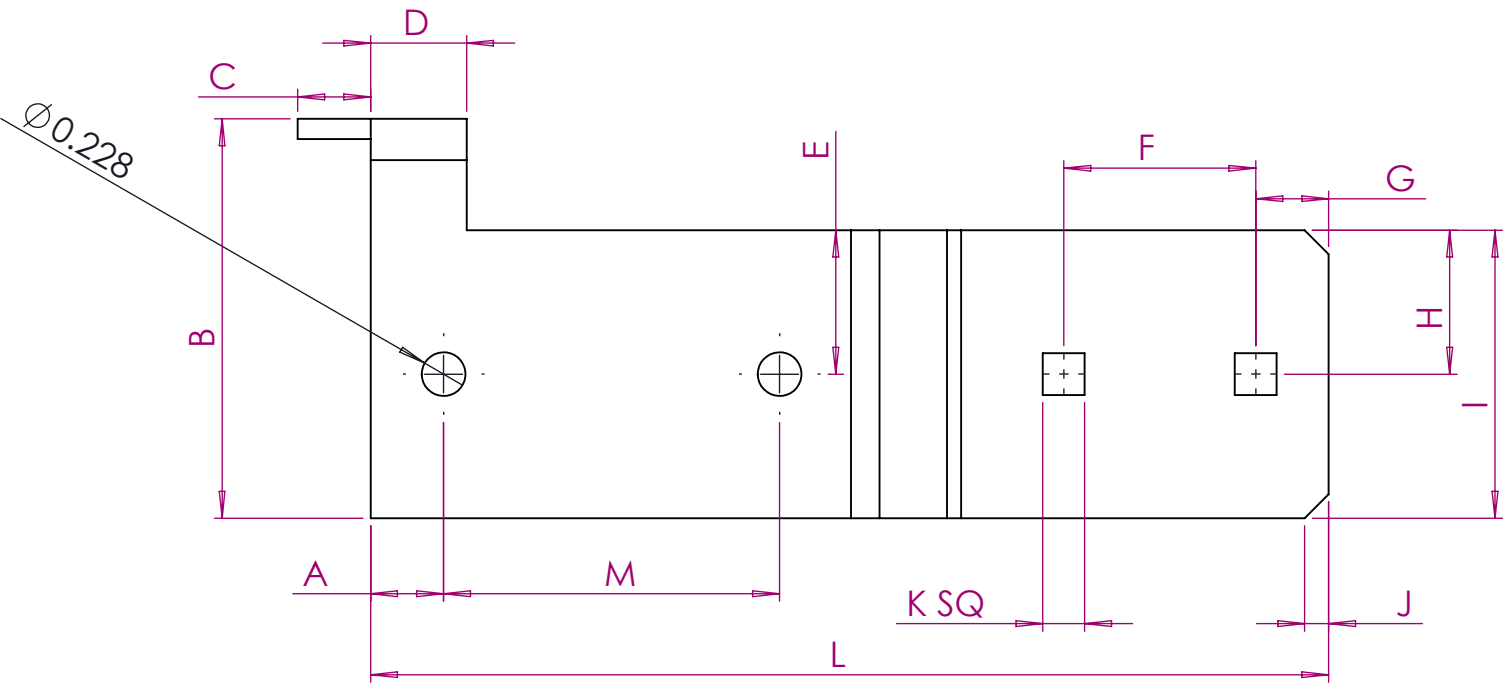

MEDIDA	DIMENSION	LIM.I	LIM.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.380	0.365	0.395				
B	2.080	2.065	2.095				
C	0.380	0.365	0.395				
D	0.500	0.485	0.515				
E	0.750	0.735	0.765				
F	1.000	0.985	1.015				
G	0.380	0.365	0.395				
H	0.750	0.735	0.765				
I	1.500	1.485	1.515				
J	0.130	0.115	0.145				
K	0.220	0.205	0.235				
L	4.990	4.975	5.005				
M	1.750	1.735	1.765				
N	0.250	0.235	0.265				
Ñ	0.880	0.865	0.895				
O	2.500	2.485	2.515				
P	1.950	1.935	1.965				
Q	0.550	0.535	0.565				
R	1.910	1.895	1.925				
S	2.540	2.525	2.555				
T	0.190	0.175	0.205				

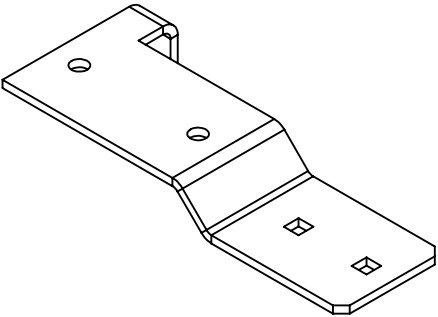


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm	-		

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches




3VA KEY INTERLOCK OFFSET PLATE				Dwn No: 11-D-3409-02-(12gacr ANSI-61) - K48 - V1-R0		Rev: 01
Dwn: AWV	24/02/2026	Chk: AWV	24/02/2026	Apvd: AWV	24/02/2026	Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	5.157	5.142	5.172				
2	LASER	1.500	1.485	1.515				
3	LASER	2.777	2.762	2.792				
4	LASER	0.228	0.213	0.243				
5	LASER	0.218	0.203	0.233				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	11-D-3409-02-(12gacr ANSI-61) - K48 - V1-R0	24/02/26	0.48	2.777	5.537	0.098
R1						
R2						
R3						

CORTE

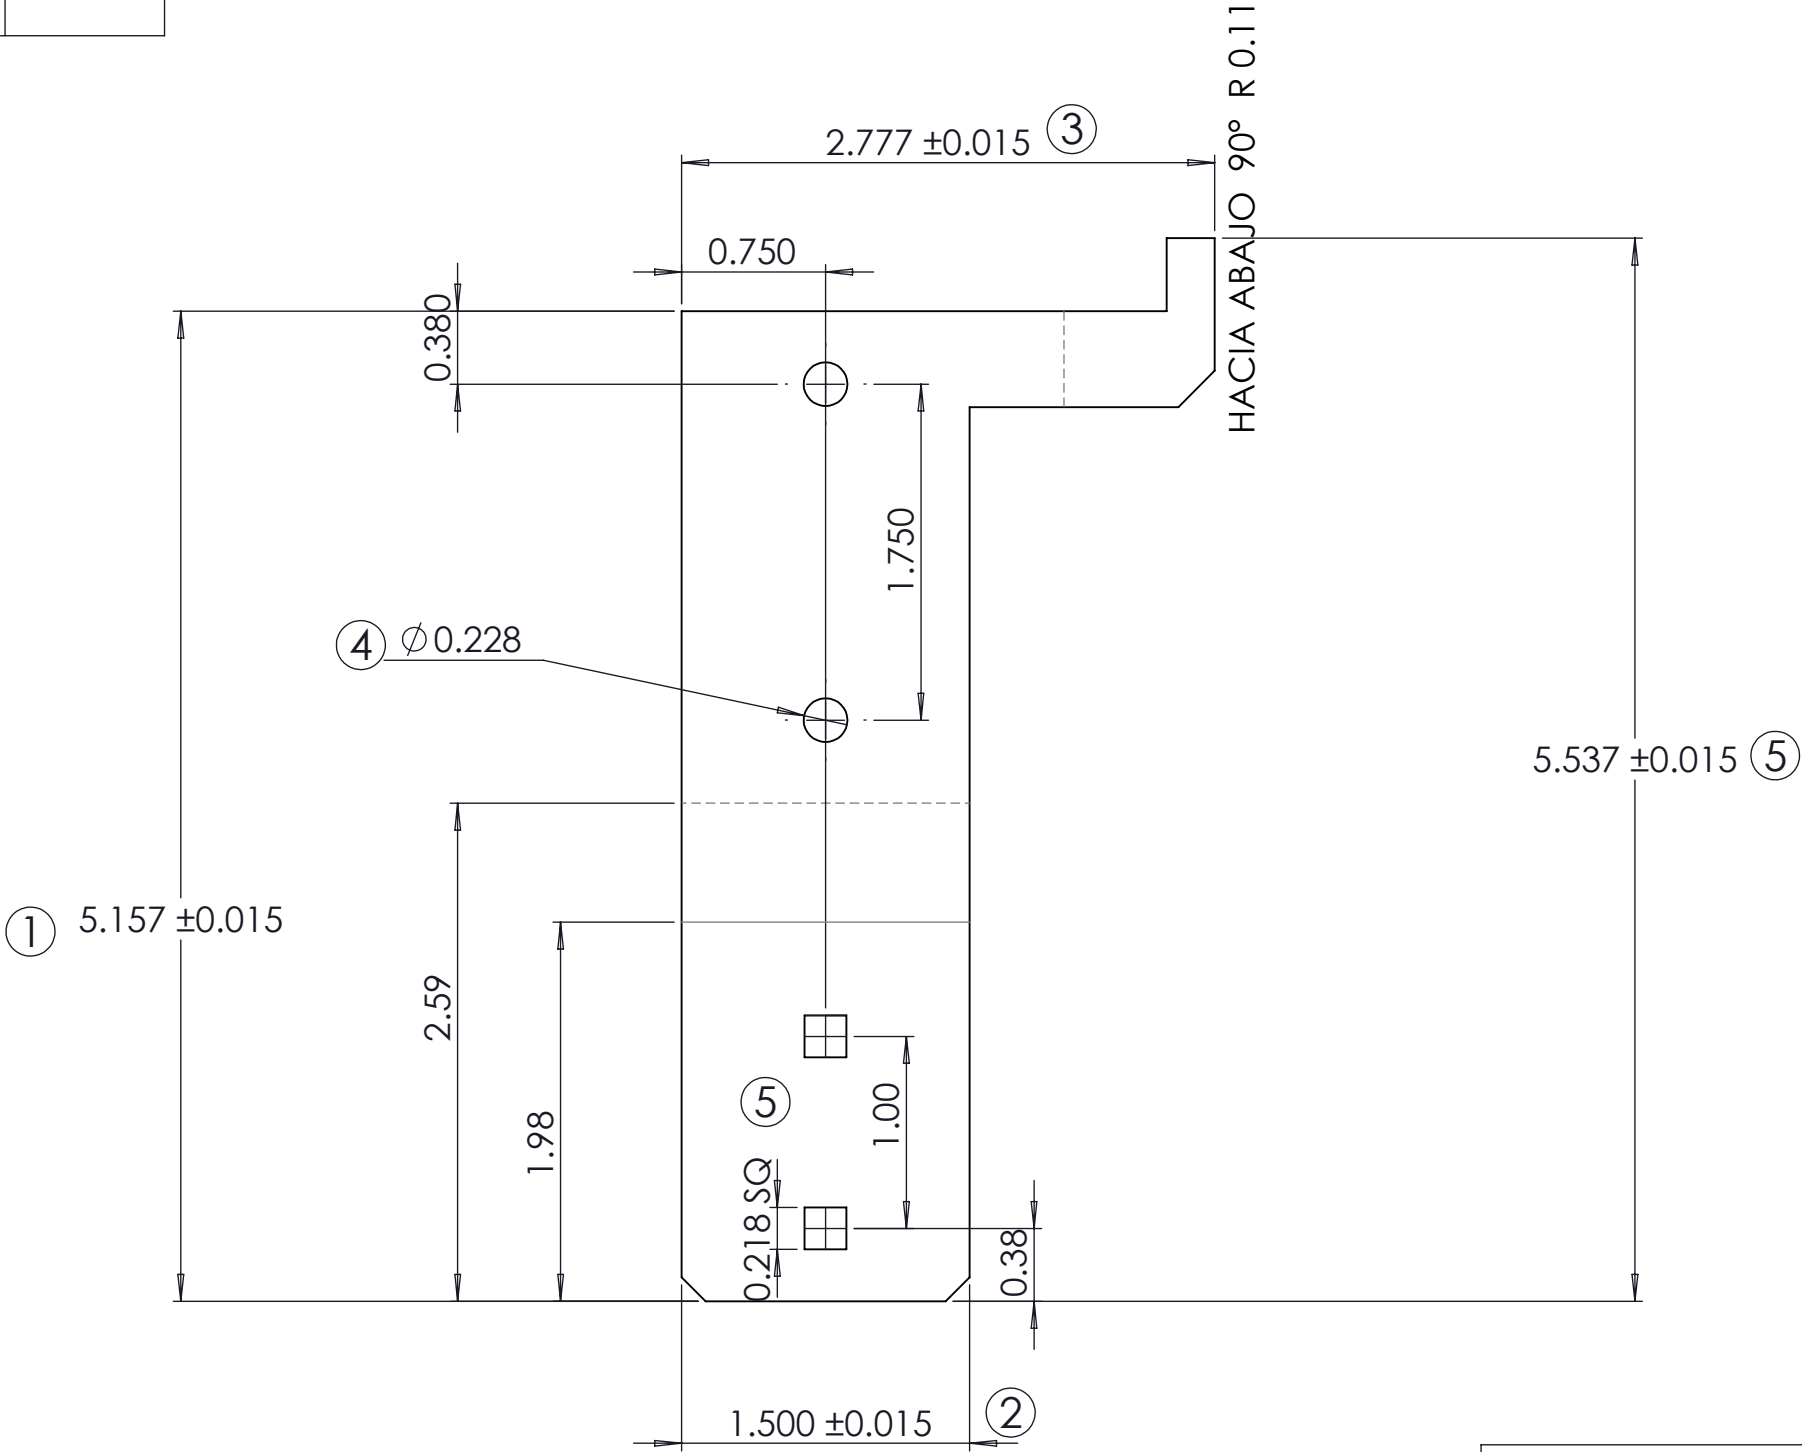

OC: