

| PC No. | A | MATL | FINISH | WIDTH | LENGTH | THK | WEIGHT |
|---|---|---|---|---|---|---|---|
| 11-D-3409-01 | 1.52 | 12GACR | ANSI61 | 2.22 | 5.15 | .105 | .34 |
| 11-D-3409-02 | 2.08 | 12GACR | ANSI61 | 2.77 | 5.15 | .105 | .43 |


FOR SIEMENS INTERNAL USE ONLY

INSIDE BEND RADII, FLAT PATTERN "LENGTH" AND "WIDTH" ARE BASED UPON TOOLING USED IN SIEMENS IS-1610.

NOTE:
1. 12GA STEEL SHEET MATERIAL PER IS-6903-02 AND IS-1601.
2. ANSI 61 FINISH PER IS-1900.
3. ALL HOLE DIAMETER DIMENSION TOLERANCES ARE ± .003 UNLESS OTHERWISE SPECIFIED.
4. BURRS SHALL NOT EXCEED 8% OF MATERIAL THICKNESS, MAX.
5. PART SHALL NOT BE SUFFICIENTLY SHARP TO CAUSE RISK OF INJURY TO PERSONS IN NORMAL MAINTENANCE OR USE.
6. ALL TABS ARE TO BE REMOVED FOR PARTS MADE ON TURRET PRESSES.
7. "Ⓠ" DESIGNATES CRITICAL TO QUALITY FEATURES. REFER TO THE CURRENT SIEMENS SI EP NA (OR SUCCESSOR) PPAP HANDBOOK FOR ADDITIONAL INFORMATION AND REQUIREMENTS.
8. "▲" INDICATES DRAWING CHANGE SINCE LAST REVISION.
9. DIMENSIONS AND TOLERANCES PER ASME Y14.5 - 2009.
10. PART MUST BE RoHS COMPLIANT PER LATEST RoHS DIRECTIVE REVISION. IT IS THE RESPONSIBILITY OF MANUFACTURER TO ENSURE THE PART (OR ASSEMBLY) MEET THE RoHS REQUIREMENTS.
11. FAB MUST VERIFY THAT FINAL HEIGHT DIMENSION FALLS WITHIN SPECIFIED LIMITS AFTER BENDING. ▲

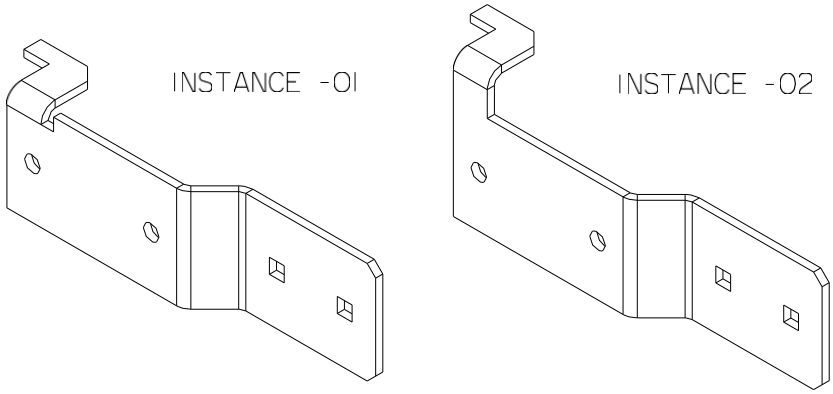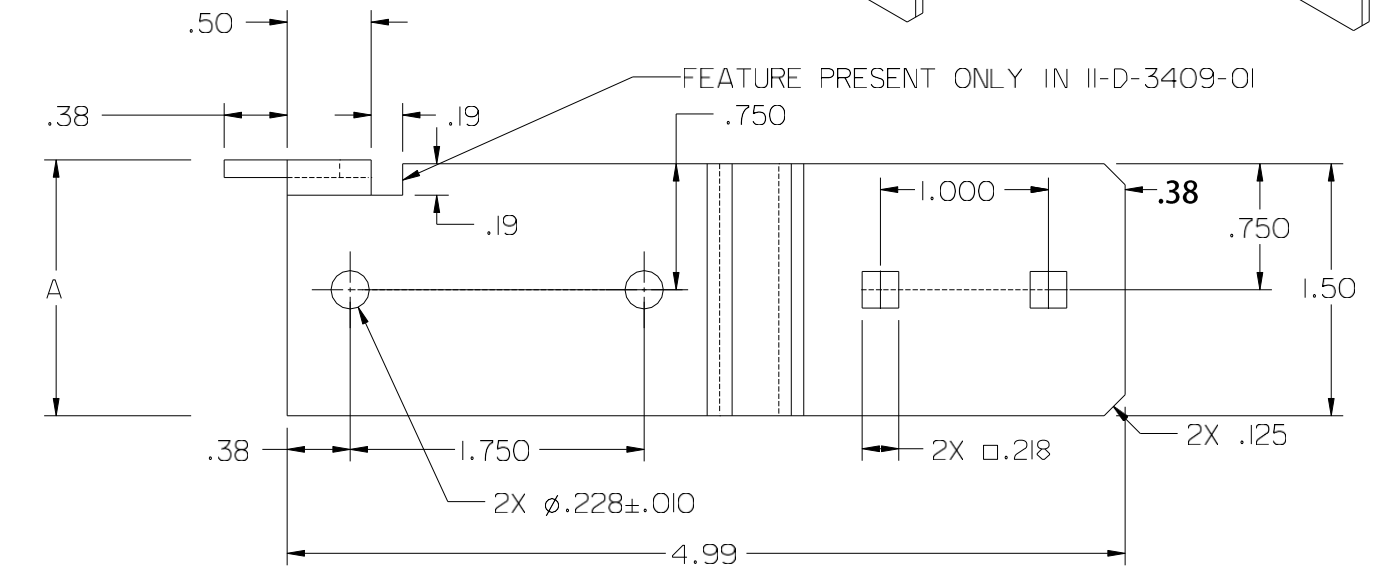


▲ 08/28/25

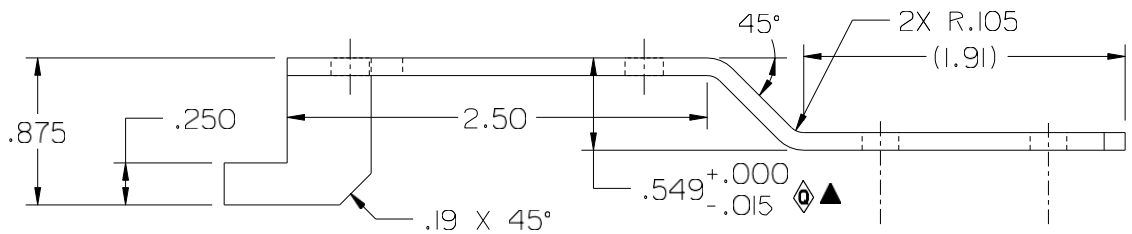Revisions:
IE-439N 12/06/21

| Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches. | Confidential - property of Siemens Industry, Inc. Norcross, GA | 3VA KEY INTERLOCK OFFSET PLATE | | | | Dwg No 11-D-3409 | | | Rev 01 |
|---|---|---|---|---|---|---|---|---|---|
| | | Dwn: EGA | 12/01/21 | Chk: RHR | 12/15/21 | Apvd: RHR | 12/15/21 | Sht 1 of 1 | |