
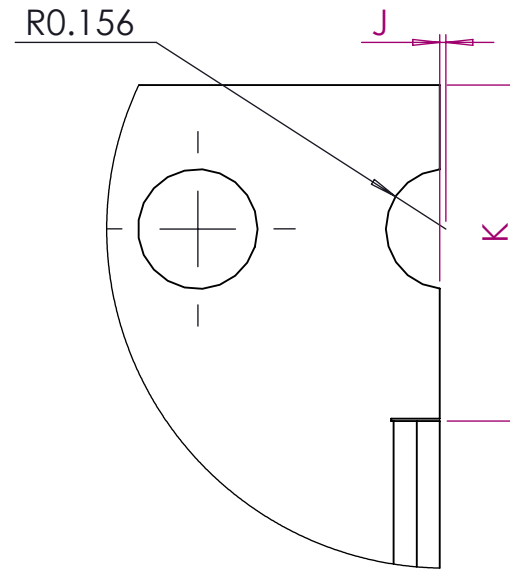
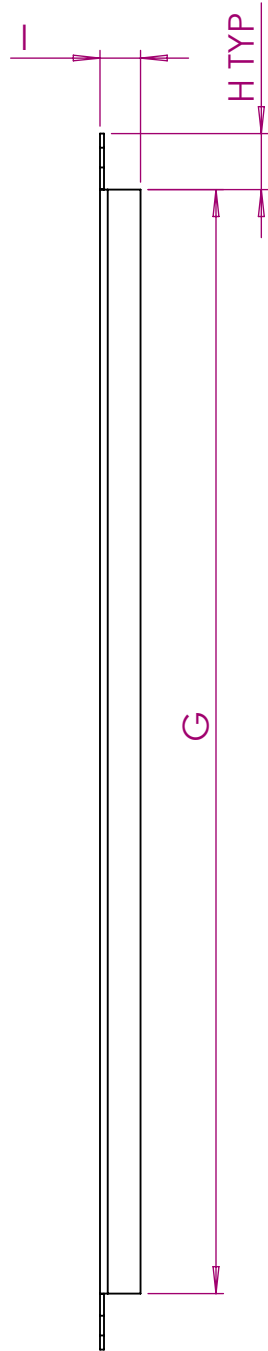


MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.630	0.615	0.645				
B	18.250	18.235	18.265				
C	1.220	1.205	1.235				
D	0.630	0.615	0.645				
E	0.380	0.365	0.395				
F	19.000	18.985	19.015				
G	17.250	17.235	17.265				
H	0.880	0.865	0.895				
I	0.630	0.615	0.645				
J	0.020	0.005	0.035				
K	0.880	0.865	0.895				

DETALLE A
ESCALA 2 : 1

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

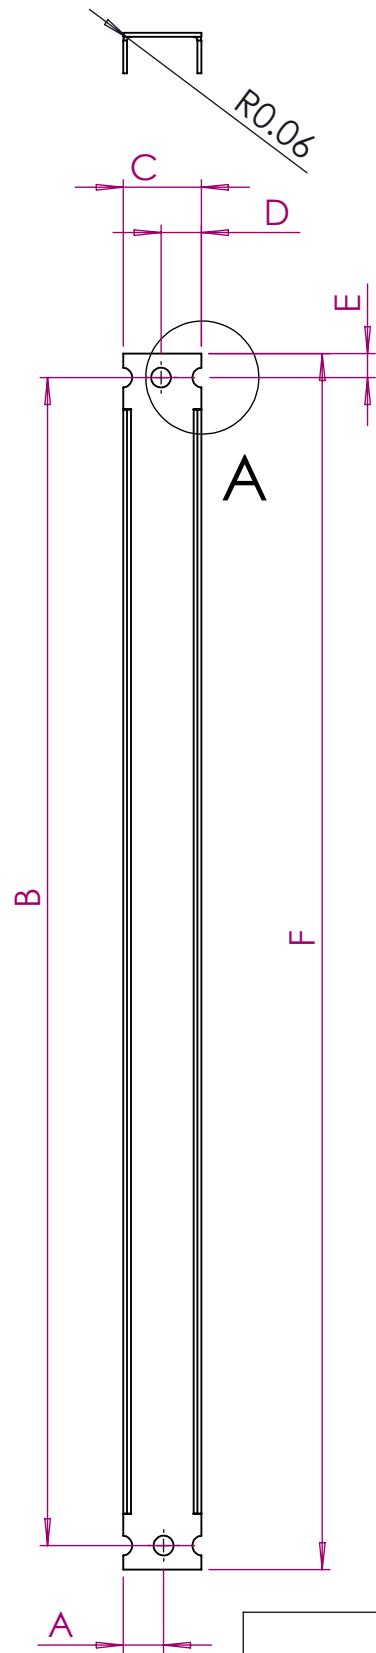

BLANK FILLER PLATE NEUTRAL			
Dwn: AWV	25/02/2026	Chk: AWV	25/02/2026

Dwn No: 12-6010-01-(16gacr ANSI-61) - K48 - V11-R0			Rev: 01
Apvd: AWV	25/02/2026	Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	2.280	2.265	2.295				
2	LASER	1.220	1.205	1.235				
3	LASER	19.000	18.985	19.015				
4	LASER	17.250	17.235	17.265				
5	LASER	0.312	0.297	0.327				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-6010-01-(16gacr ANSI-61) - K48 - V11-R0	25/02/26	0.48	2.28	19.00	0.060
R1						
R2						
R3						

CORTE


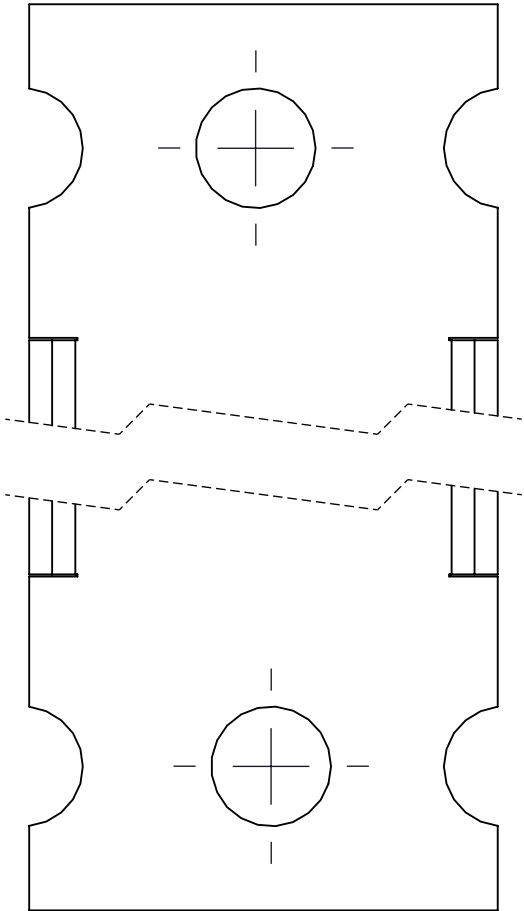


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm	-		

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

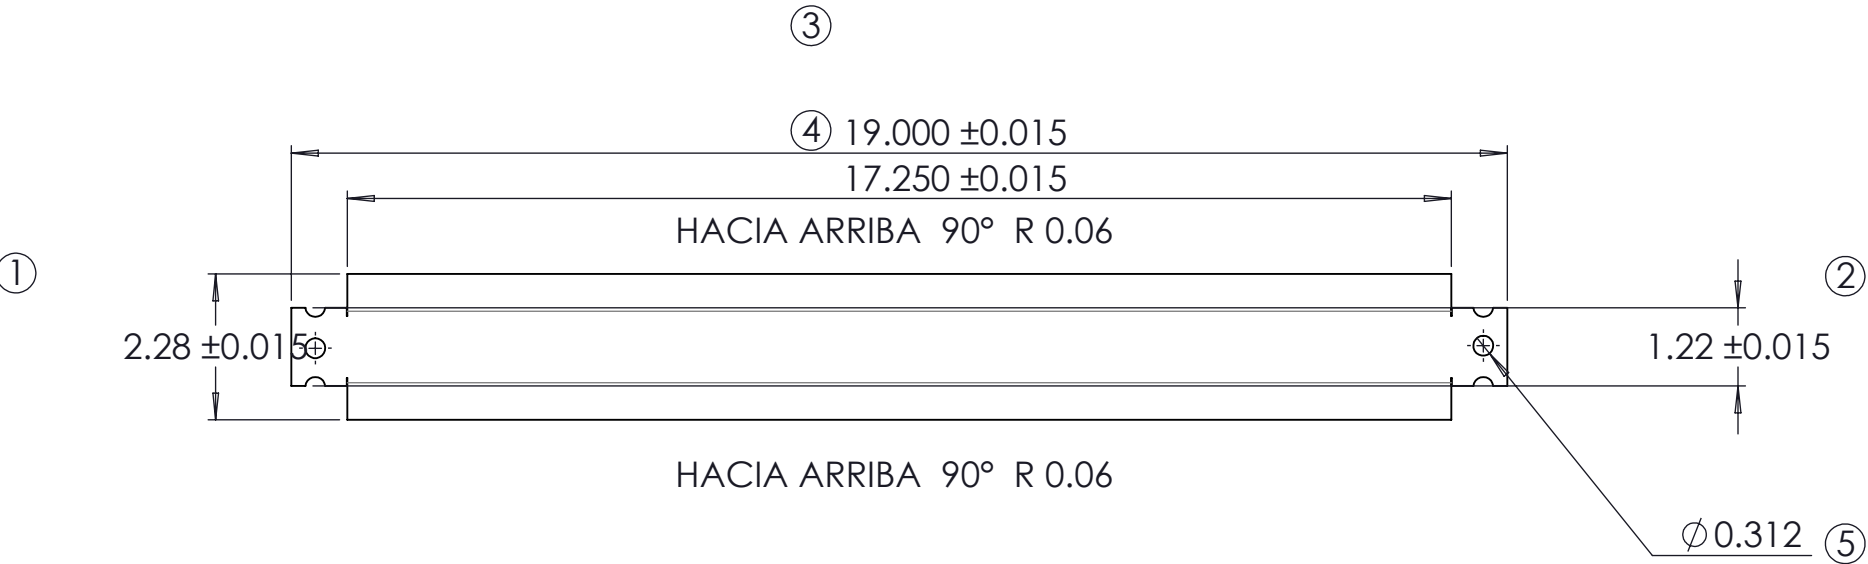

BLANK FILLER PLATE

Dwn: AWV 25/02/2026 Chk: AWV 25/02/2026 Apvd: AWV 25/02/2026 Sht 1 of 1

OC:

Dwn No: 12-6010-01-(16gacr ANSI-61) - K48 - V11-R0 Rev: 01