

No	Resp	Dim	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	19.000	18.985	19.015				
2	LASER	17.250	17.235	17.265				
3	LASER	3.529	3.514	3.544				
4	LASER	2.470	2.455	2.485				
5	LASER	0.312	0.297	0.327				

CORTE

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches				BLANK FILLER PLATE				Dwn No: 12-6010-02-(16gacr ANSI-61) - K48 - V11-R0		Rev: 00			
Dwn: JRFM		14/07/2026		Chk: JRFM		14/07/2026		Apvd: JRFM		14/07/2026		Sht 1 of 1	

MEDIDA	DIMENSION	L.I.	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	1.220	1.205	1.235				
B	2.470	2.455	2.485				
C	0.380	0.365	0.395				
D	18.250	18.235	18.265				
E	19.000	18.985	19.015				
F	0.630	0.615	0.645				
G	0.880	0.865	0.895				
H	17.250	17.235	17.265				






TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm	-		

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

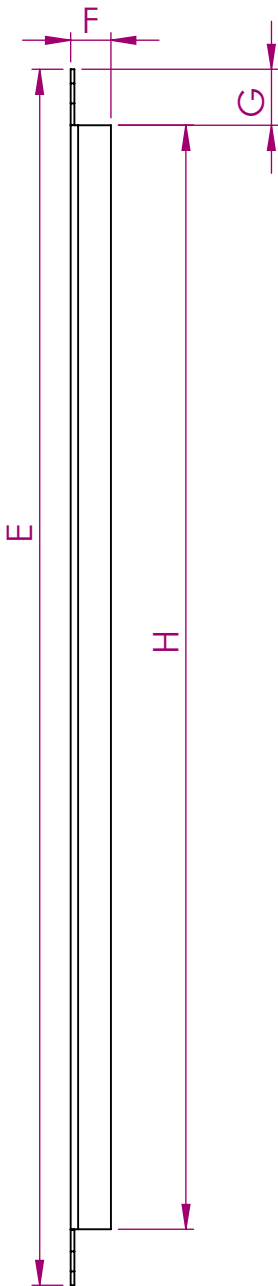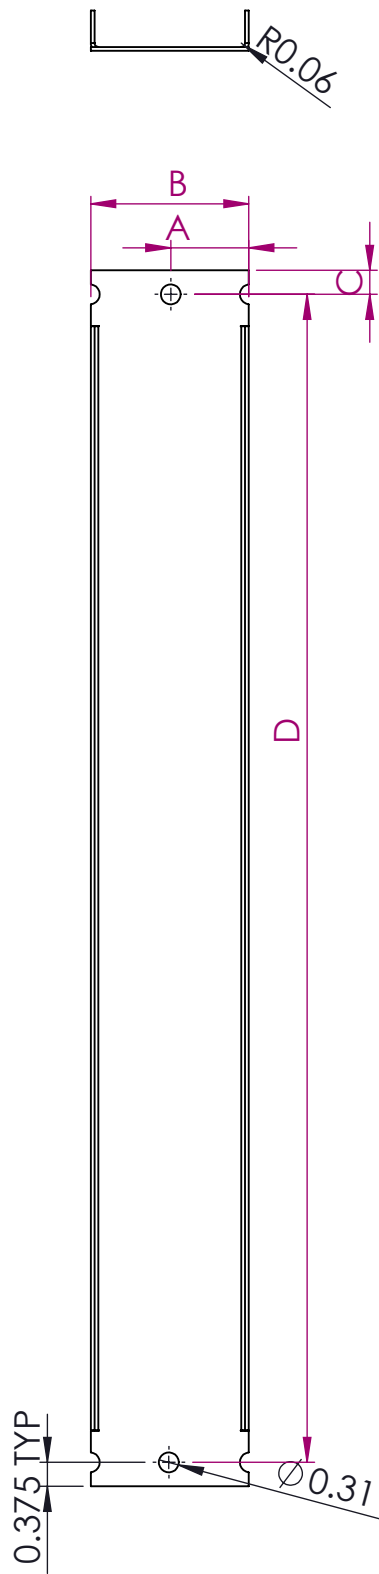

BLANK FILLER PLATE			
Dwn: JRFM	14/07/2026	Chk: JRFM	14/07/2026

Dwn No: 12-6010-02-(16gacr ANSI-61) - K48 - V11-R0	Rev: 00
Apvd: JRFM	14/07/2026
Sht 1 of 1	