

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.470	2.455	2.485				
B	14.940	14.925	14.955				
C	2.470	2.455	2.485				
D	0.340	0.325	0.355				
E	28.810	28.795	28.825				
F	3.740	3.725	3.755				
G	1.250	1.235	1.265				
H	1.230	1.215	1.245				
I	0.250	0.235	0.265				
J	0.750	0.735	0.765				
K	0.250	0.235	0.265				
L	0.500	0.485	0.515				
M	2.960	2.945	2.975				
N	2.800	2.785	2.815				
Ñ	0.230	0.215	0.245				



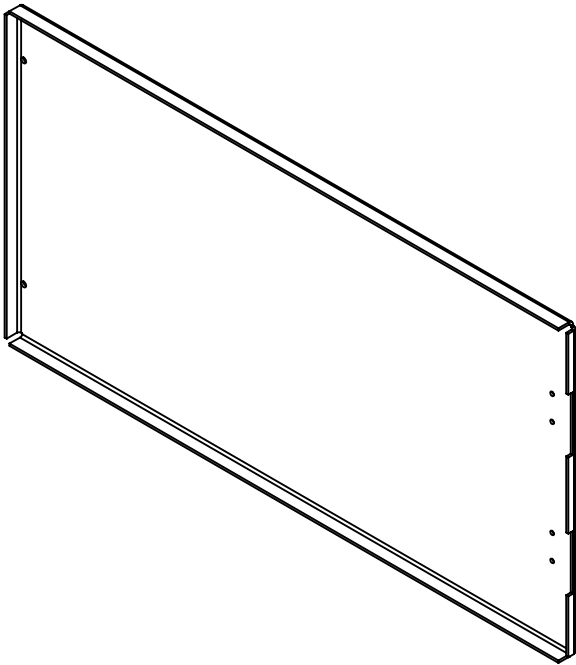


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	16 mm			


Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

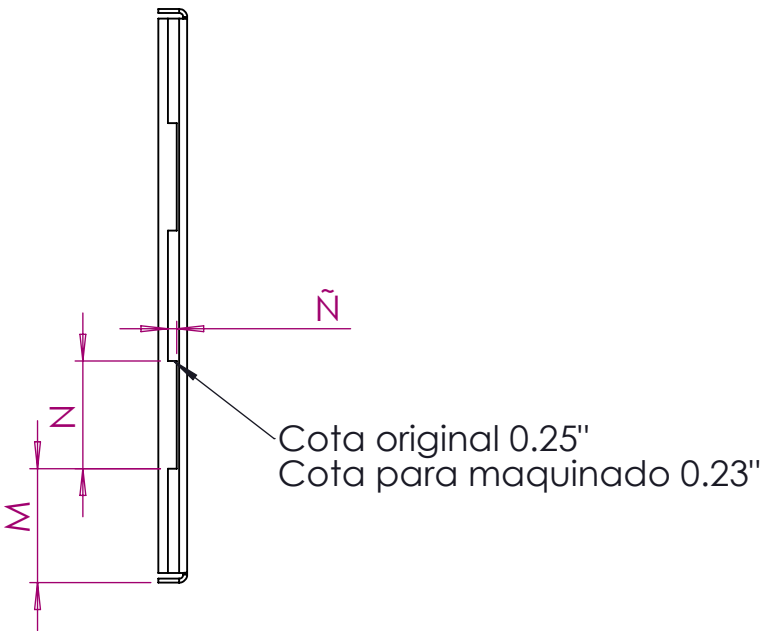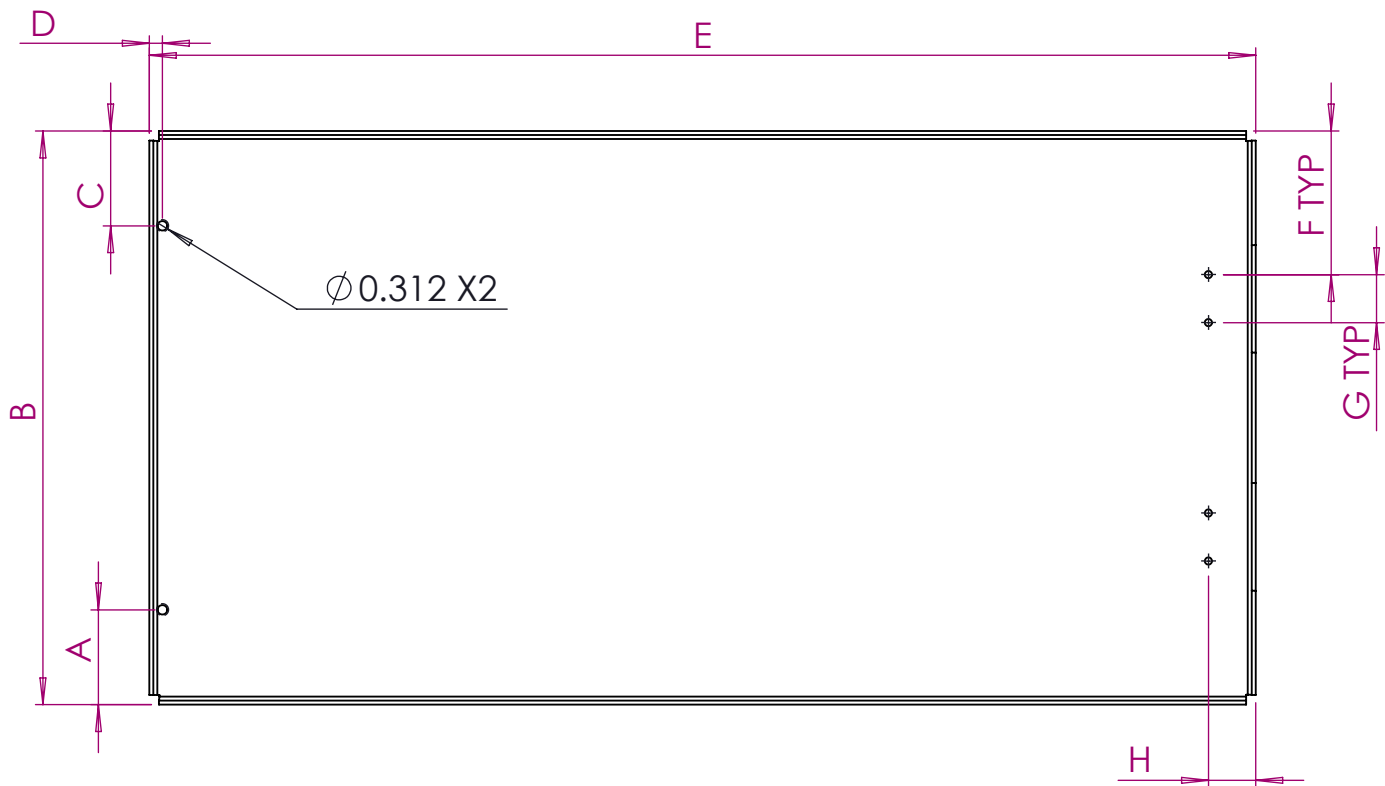

INSTRUMENT DOOR BLANK 15" HIGH				Dwn No: 12-A-6200-02-(12gacr ANSI-61) - K47 - V4-R2		Rev: 00
Dwn: MATH	24/03/2026	Chk: AWV	24/03/2026	Apvd: AWV	24/03/2026	Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	16.085	16.070	16.100				
2	LASER	29.705	29.690	29.720				
3	LASER	28.310	28.295	28.325				
4	LASER	14.440	14.425	14.455				
5	LASER	0.190	0.175	0.205				
6	LASER	0.200	0.185	0.215				

CORTE

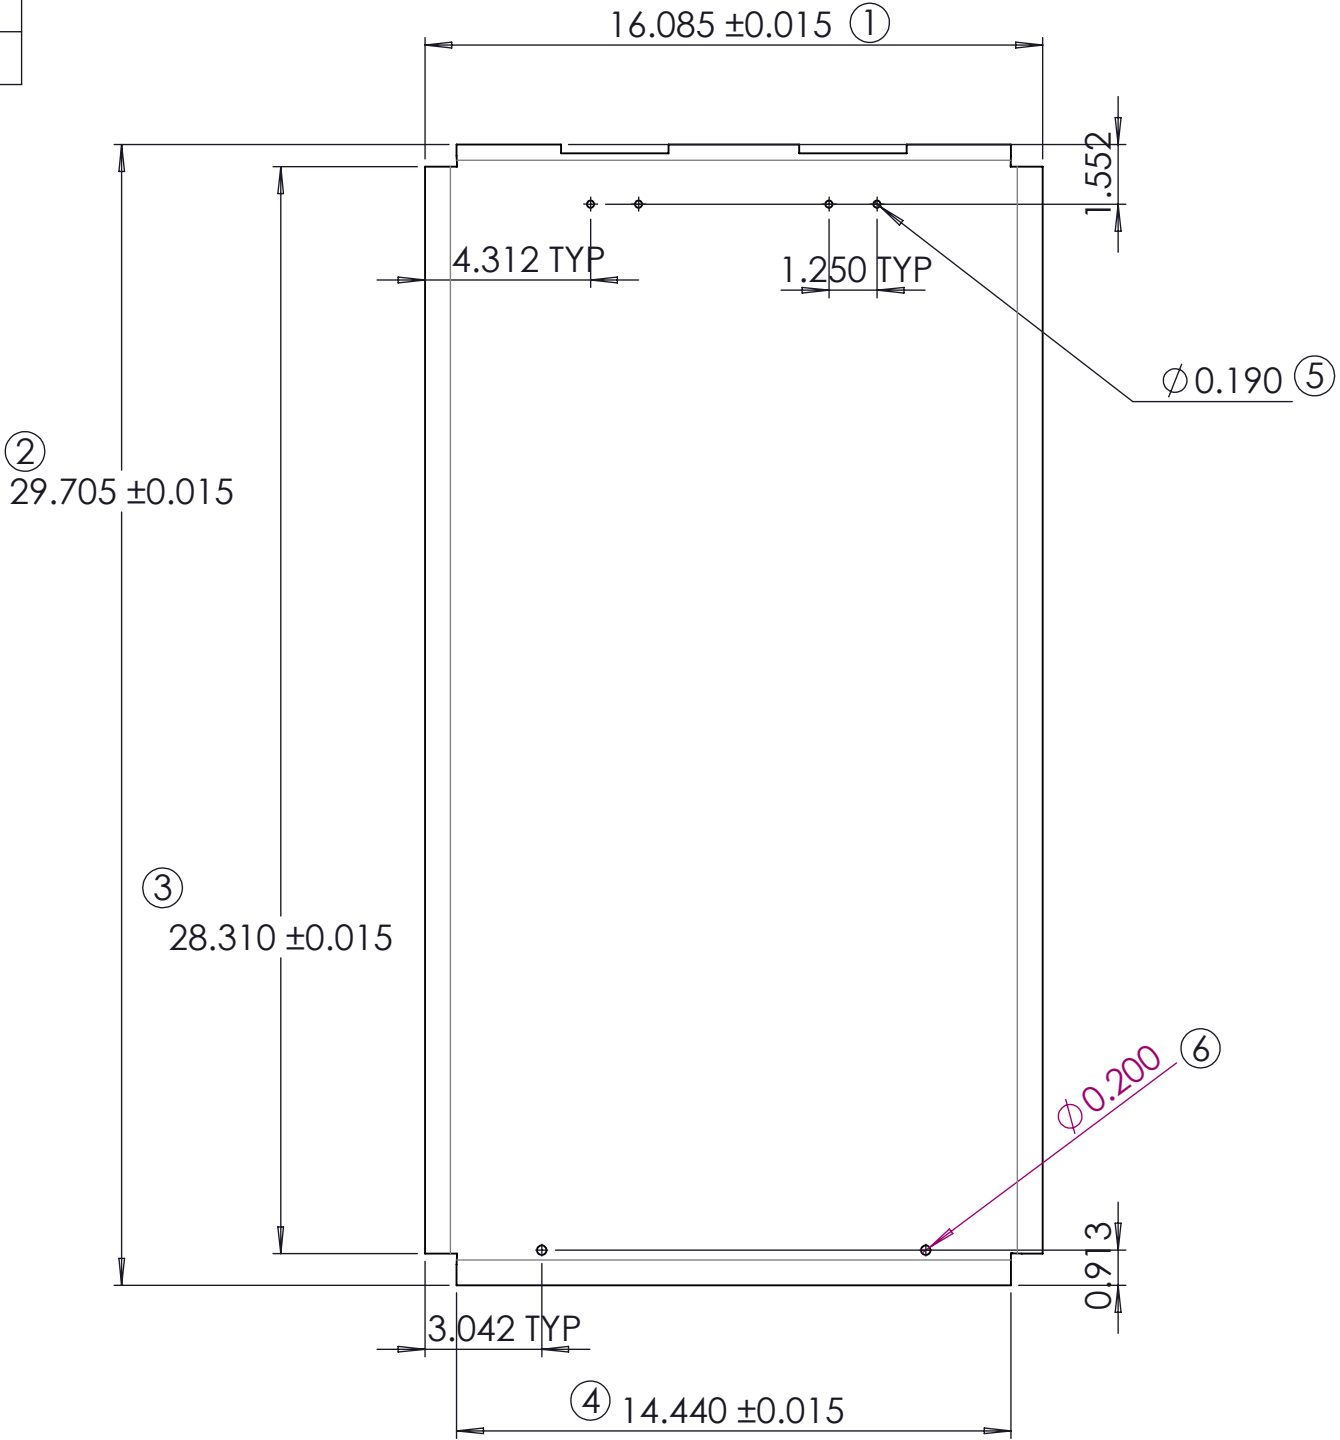

OC:

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



INSTRUMENT DOOR BLANK 15" HIGH

Dwn: AWV

24/03/2026

Chk: AWV

24/03/2026

Dwn No: 12-A-6200-02-(12gacr ANSI-61) - K47 - V4-R2

Rev: 00

Apvd: AWV

24/03/2026

Sht 1 of 1