

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.470	2.455	2.485				
B	14.940	14.925	14.955				
C	2.470	2.455	2.485				
D	0.340	0.325	0.355				
E	1.230	1.215	1.245				
F	3.740	3.725	3.755				
G	1.250	1.235	1.265				
H	0.250	0.235	0.265				
I	0.750	0.735	0.765				
J	34.810	34.795	34.825				
K	0.500	0.485	0.515				
L	0.250	0.235	0.265				
M	2.970	2.955	2.985				
N	2.800	2.785	2.815				
Ñ	0.230	0.215	0.245				

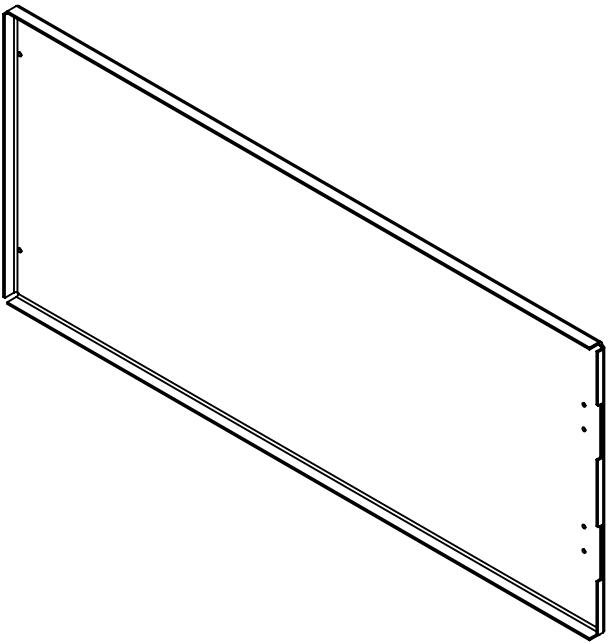


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	16 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches




INTRUMENT DOOR
BLANK 15" H

Dwn No:
12-A-6200-03-(12gacr ANSI-61) - K47 - V4-R3

Rev:
00

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	16.085	16.070	16.100				
2	LASER	35.705	35.690	35.720				
3	LASER	34.310	34.295	34.325				
4	LASER	14.440	14.425	14.55				
5	LASER	0.190	0.175	0.205				
6	DOBLEZ	0.312	0.297	0.327				

CORTE

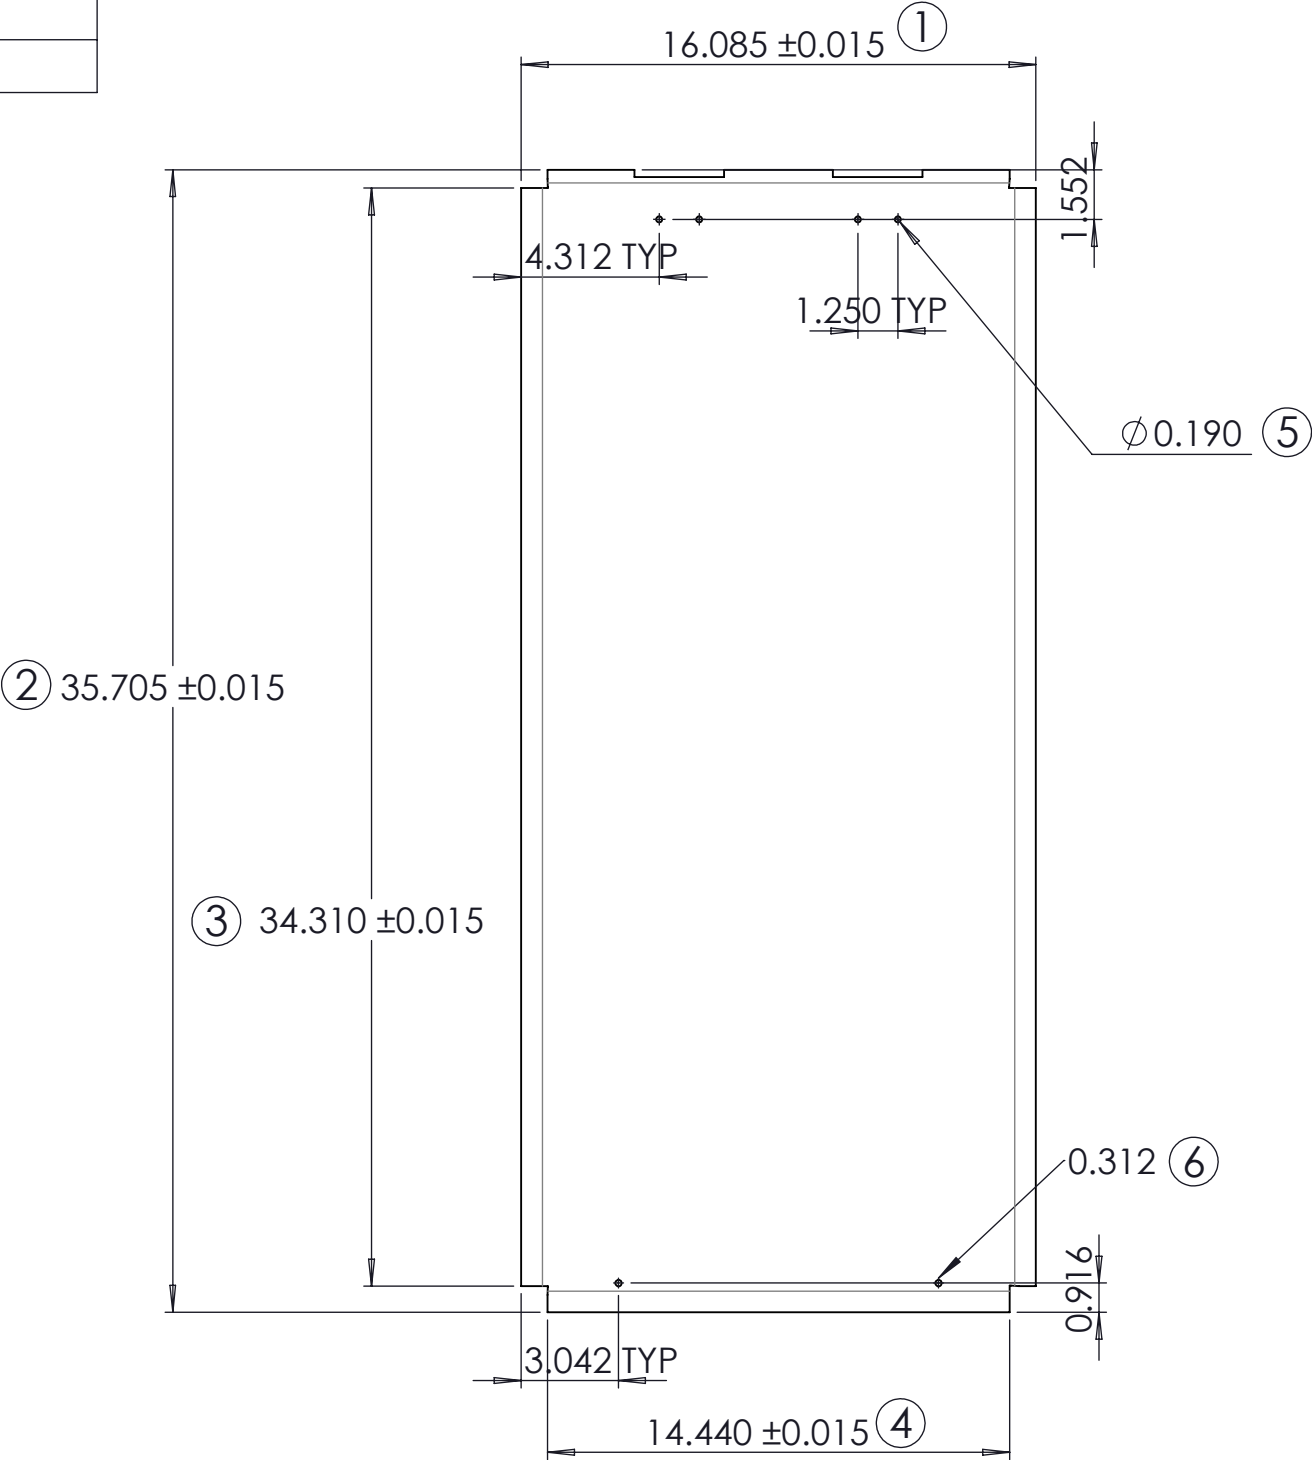

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-A-6200-03 (12gacr) k61 R0	24/02/26	0.61	16.131	35.751	0.105
R1	12-A-6200-03 (12gacr) k42 R2	18/03/26	0.42	16.068	35.688	0.105
R2	12-A-6200-03-(12gacr ANSI-61) - K47 - V4-R3	25/03/26	0.47	16.085	35.705	0.105
R3						

OC: