


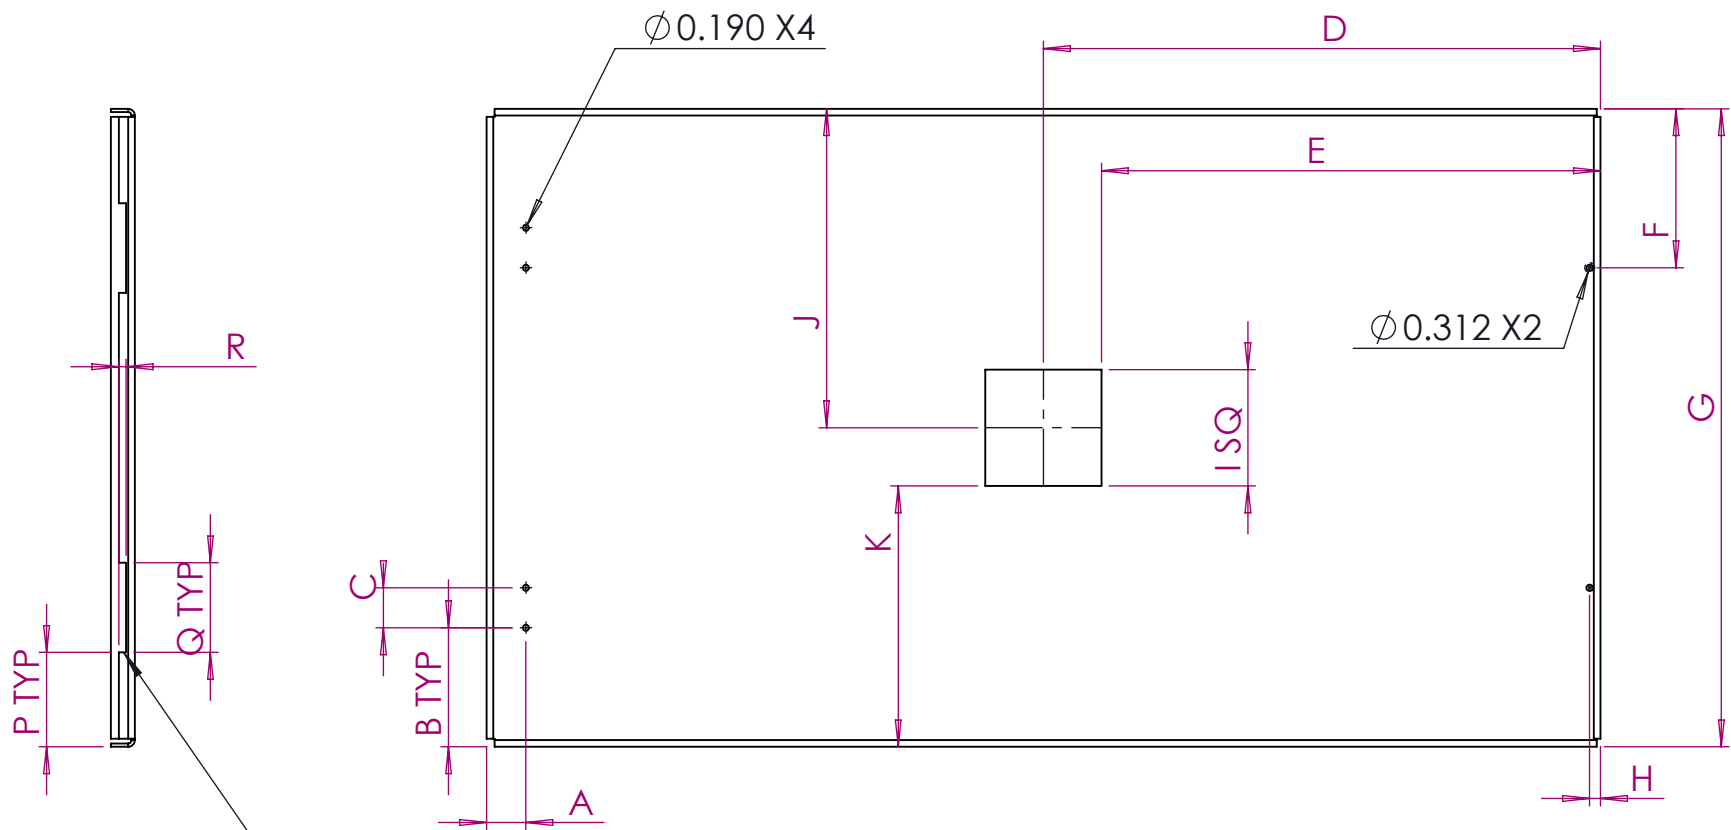

Cota original de 0.25"
Cota para fabricacion 0.23"

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	1.230	1.215	1.245				
B	3.720	3.705	3.735				
C	1.250	1.235	1.265				
D	17.410	17.395	17.425				
E	15.600	15.585	15.615				
F	4.970	4.955	4.985				
G	19.940	19.925	19.955				
H	0.340	0.325	0.355				
I	3.630	3.615	3.645				
J	9.970	9.955	9.985				
K	8.160	8.145	8.175				
L	0.500	0.485	0.515				
M	0.250	0.235	0.265				
N	34.810	34.795	34.825				
Ñ	0.750	0.735	0.765				
O	0.120	0.105	0.135				
P	2.950	2.935	2.965				
Q	2.800	2.785	2.815				
R	0.230	0.215	0.245				

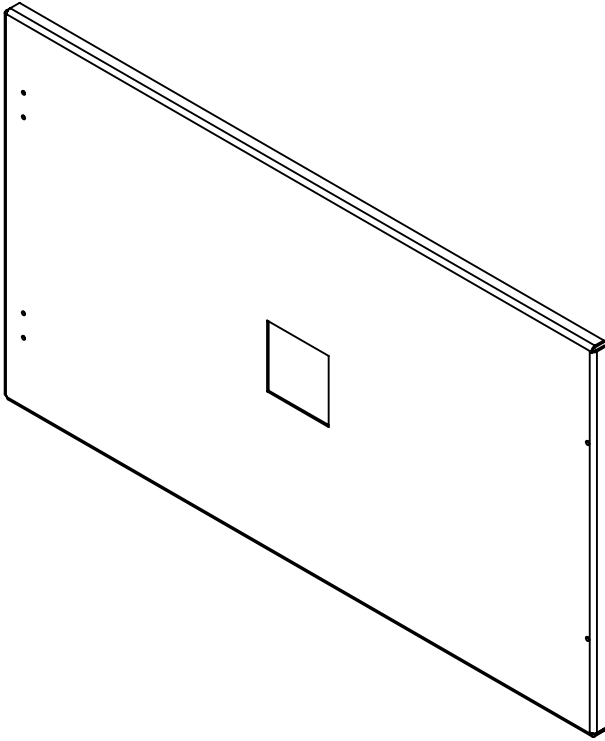


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	16 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches




INSTRUMENT DOOR 20"H				Dwn No: 12-A-6359-02-(12gacr ANSI-61) - K47 - V6-R3		Rev: 00	
Dwn: AWV	24/03/2026	Chk: AWV	24/03/2026	Apvd: AWV	24/03/2026	Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	35.705	35.690	35.720				
2	LASER	34.440	34.425	34.455				
3	LASER	21.085	21.170	21.100				
4	LASER	19.440	19.425	19.455				
5	LASER	3.630	3.615	3.645				
6	LASER	0.190	0.175	0.205				
7	LASER	0.200	0.185	0.215				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R1	12-A-6359-02 (20260223)	27/02/26	0.61	21.131	35.770	0.105
R2	12-A-6359-02 (12gacr) k61 R1	27/02/26	0.61	21.131	35.770	0.105
R3	12-A-6359-02 (12gacr) k42 R2	11/03/26	0.42	21.068	35.668	0.105
R4	12-A-6359-02-(12gacr ANSI-61) - K47 - V6-R3	24/03/26	0.47	21.085	35.705	0.105

CORTE

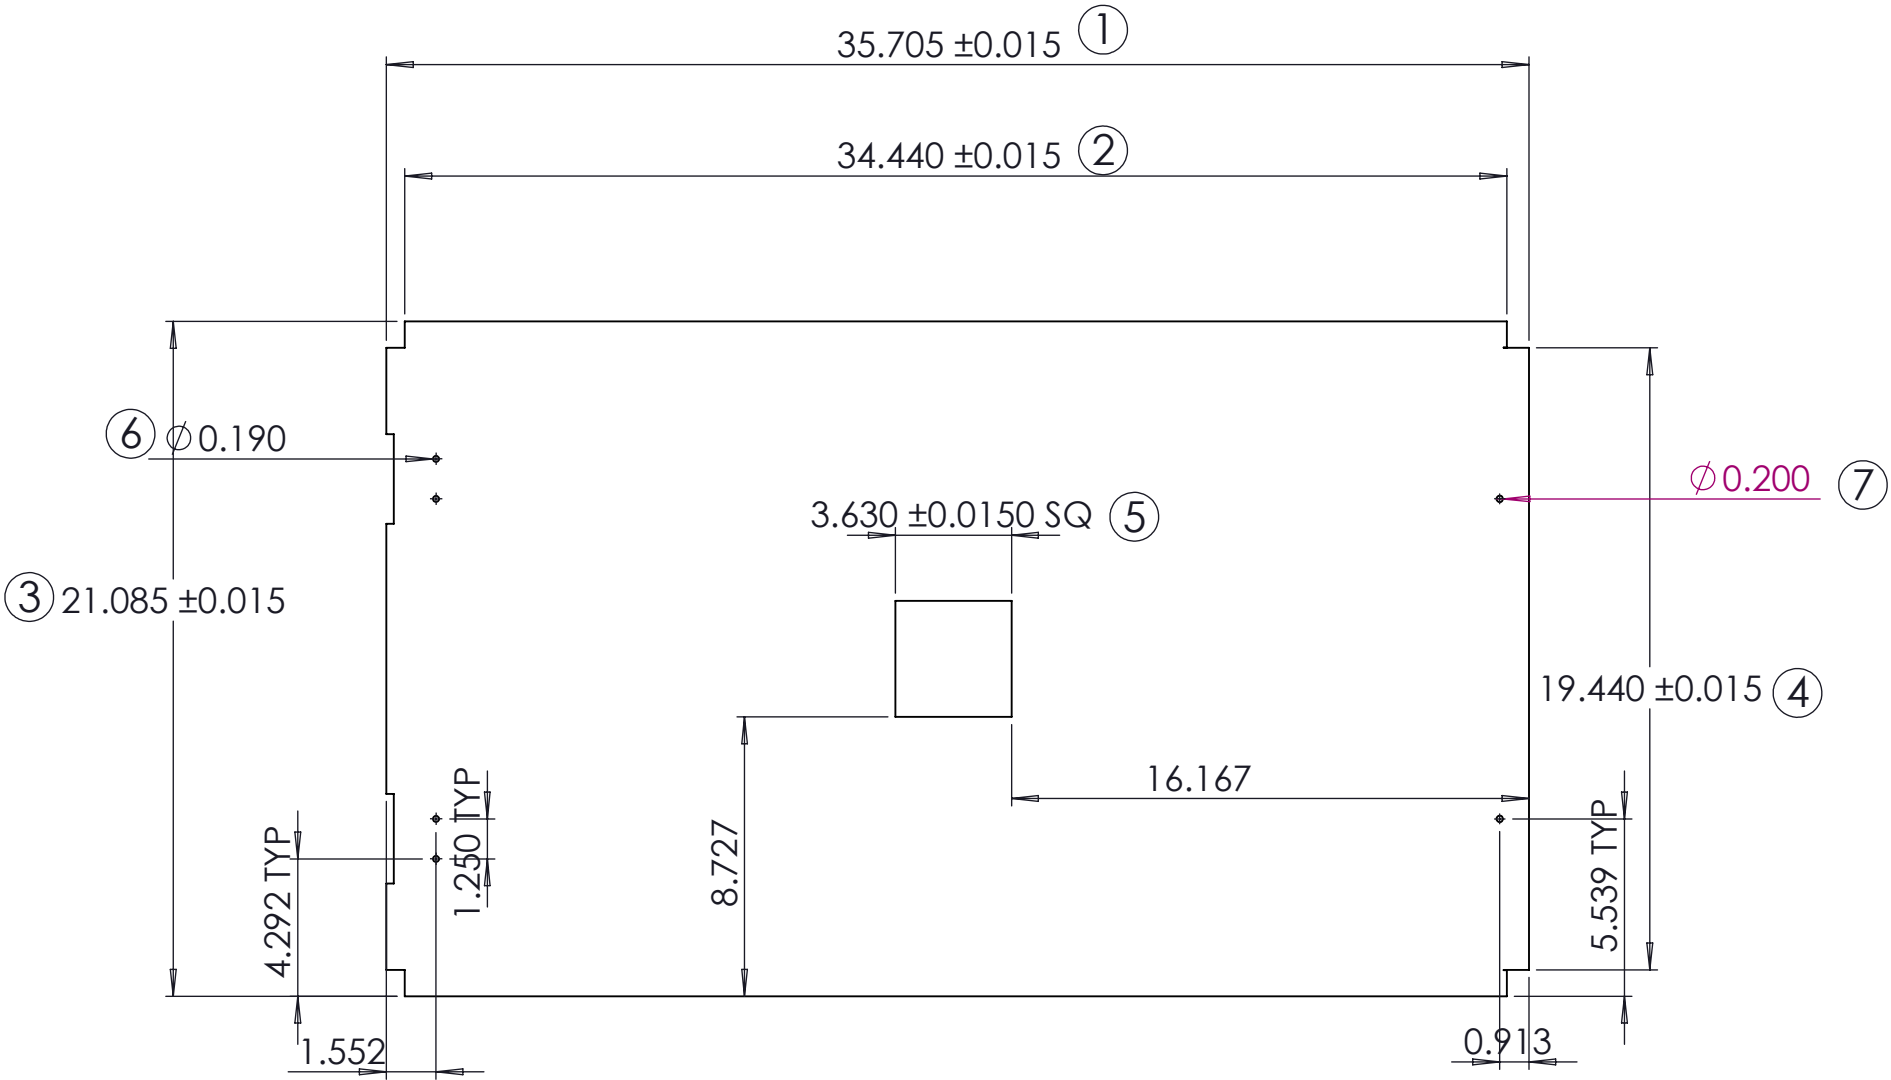

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



INTRUMENT DOOR 20"H

Dwn: AWV	24/03/2026	Chk: AWV	24/03/2026
----------	------------	----------	------------

Dwn No: 12-A-6359-02-(12gacr ANSI-61) - K47 - V6-R3			Rev: 00
Apvd: AWV	24/03/2026	Sht 1 of 1	