

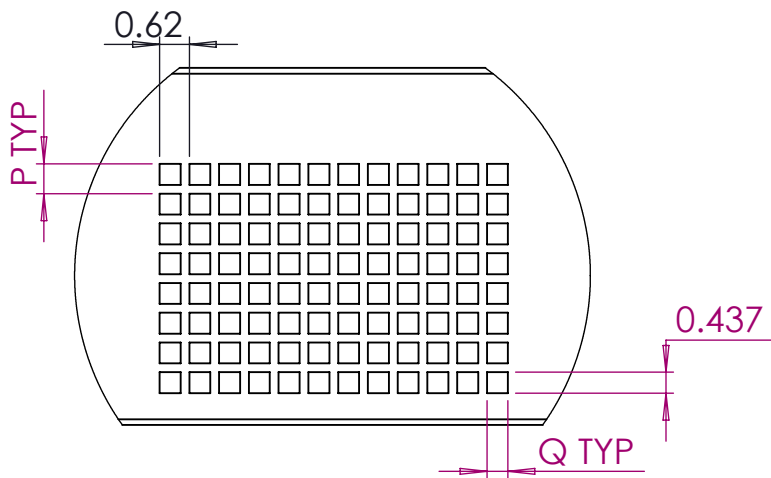
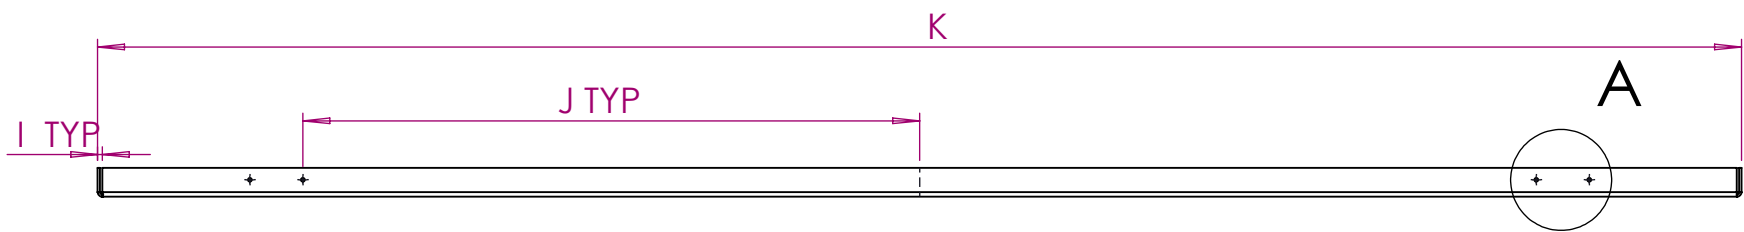
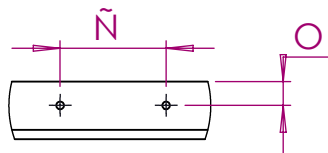
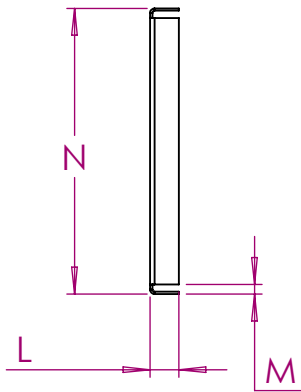


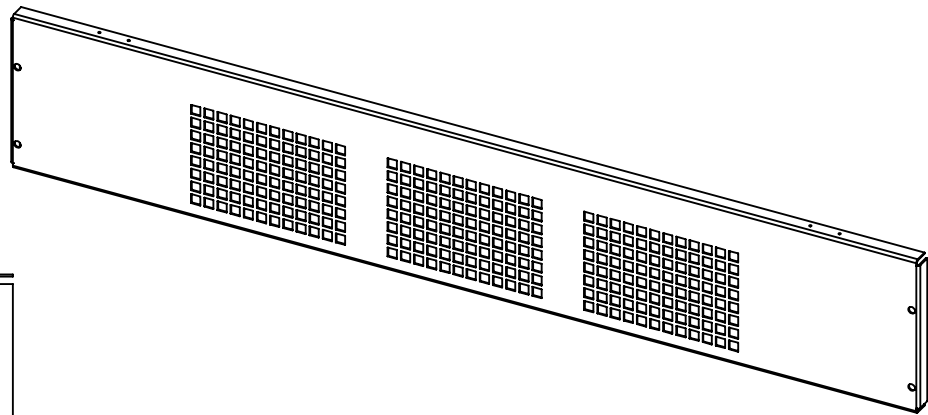

DETALLE B

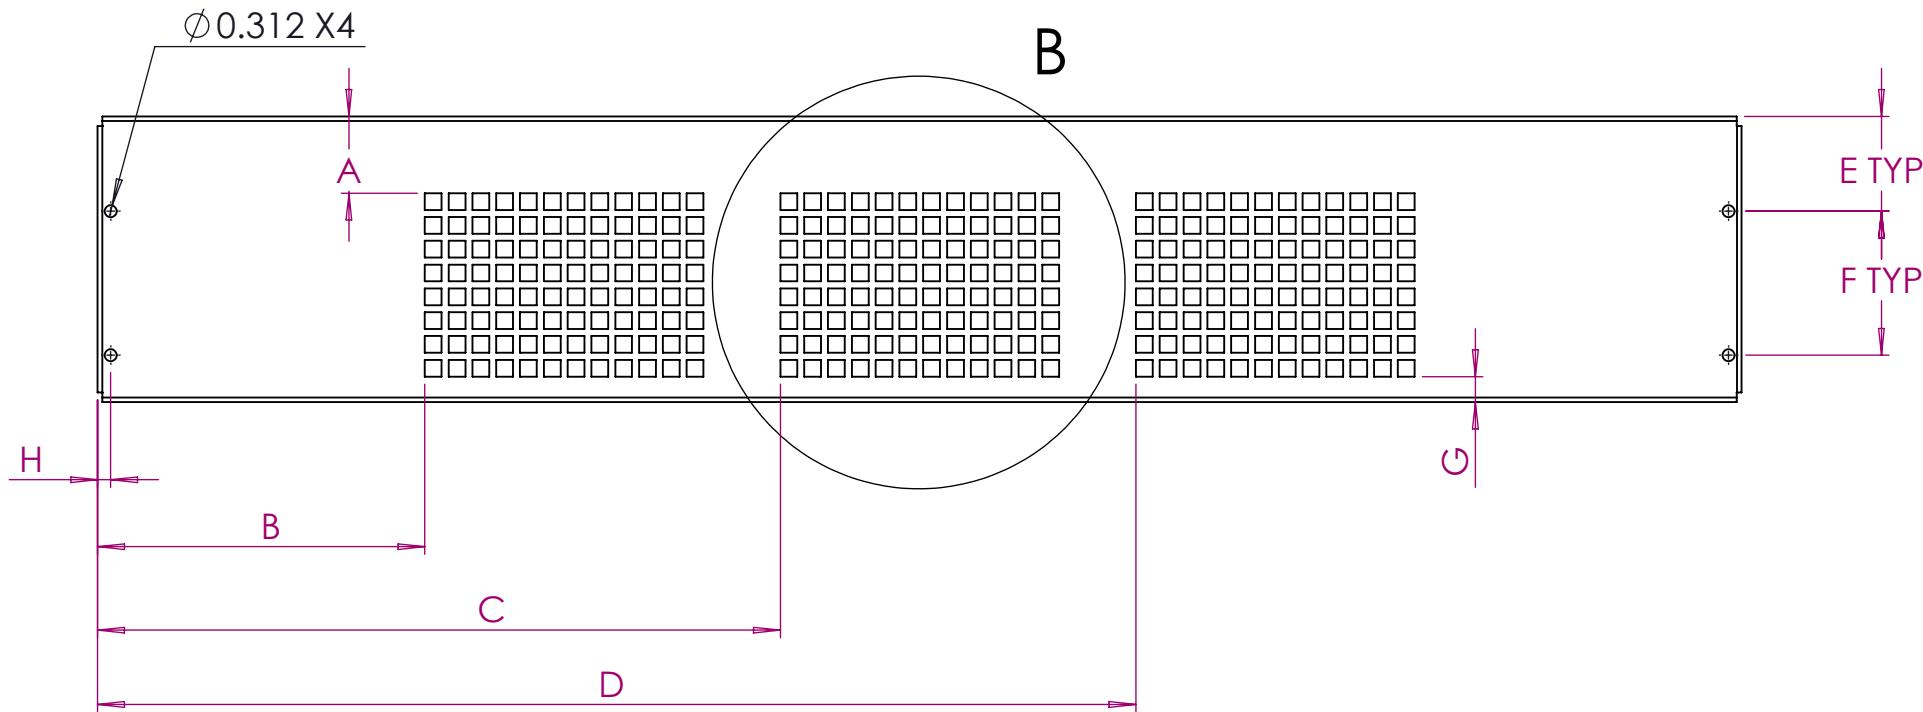

DETALLE A

MEDIDA	DIMENSION	LIM. I	LIM. S	VALOR MFG	VoBo	VALOR CAL	VoBo CAL
A	2.000	1.985	2.015				
B	8.520	8.505	8.535				
C	17.780	17.765	17.795				
D	27.040	27.025	27.055				
E	2.470	2.455	2.485				
F	3.750	3.735	3.765				
G	0.660	0.645	0.675				
H	0.340	0.325	0.355				
I	0.120	0.105	0.135				
J	16.060	16.045	16.075				
K	42.810	42.795	42.825				
L	0.750	0.735	0.765				
M	0.250	0.235	0.265				
N	7.440	7.425	7.455				
Ñ	1.380	1.365	1.395				
O	0.310	0.295	0.325				
P	0.620	0.605	0.635				
Q	0.437	0.422	0.452				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches




7.5" VENT COVER			
Dwn: AWW	26/05/2026	Chk: AWW	26/05/2025

Dwn No: 12-D-6047-03-(16gacr ANSI-61) - K48 - V4-R0	Rev: 00
Apvd: AWW	26/05/2025
Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	8.739	8.724	8.754				
2	LASER	0.437	0.422	0.452				
3	LASER	44.109	44.094	44.124				
4	LASER	0.312	0.297	0.327				
5	LASER	0.100	0.085	0.115				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6047-03-(16gacr ANSI-61) - K48 - V4-R0	26/05/26	0.48	8.739	44.109	0.060
R1						
R2						
R3						

CORTE

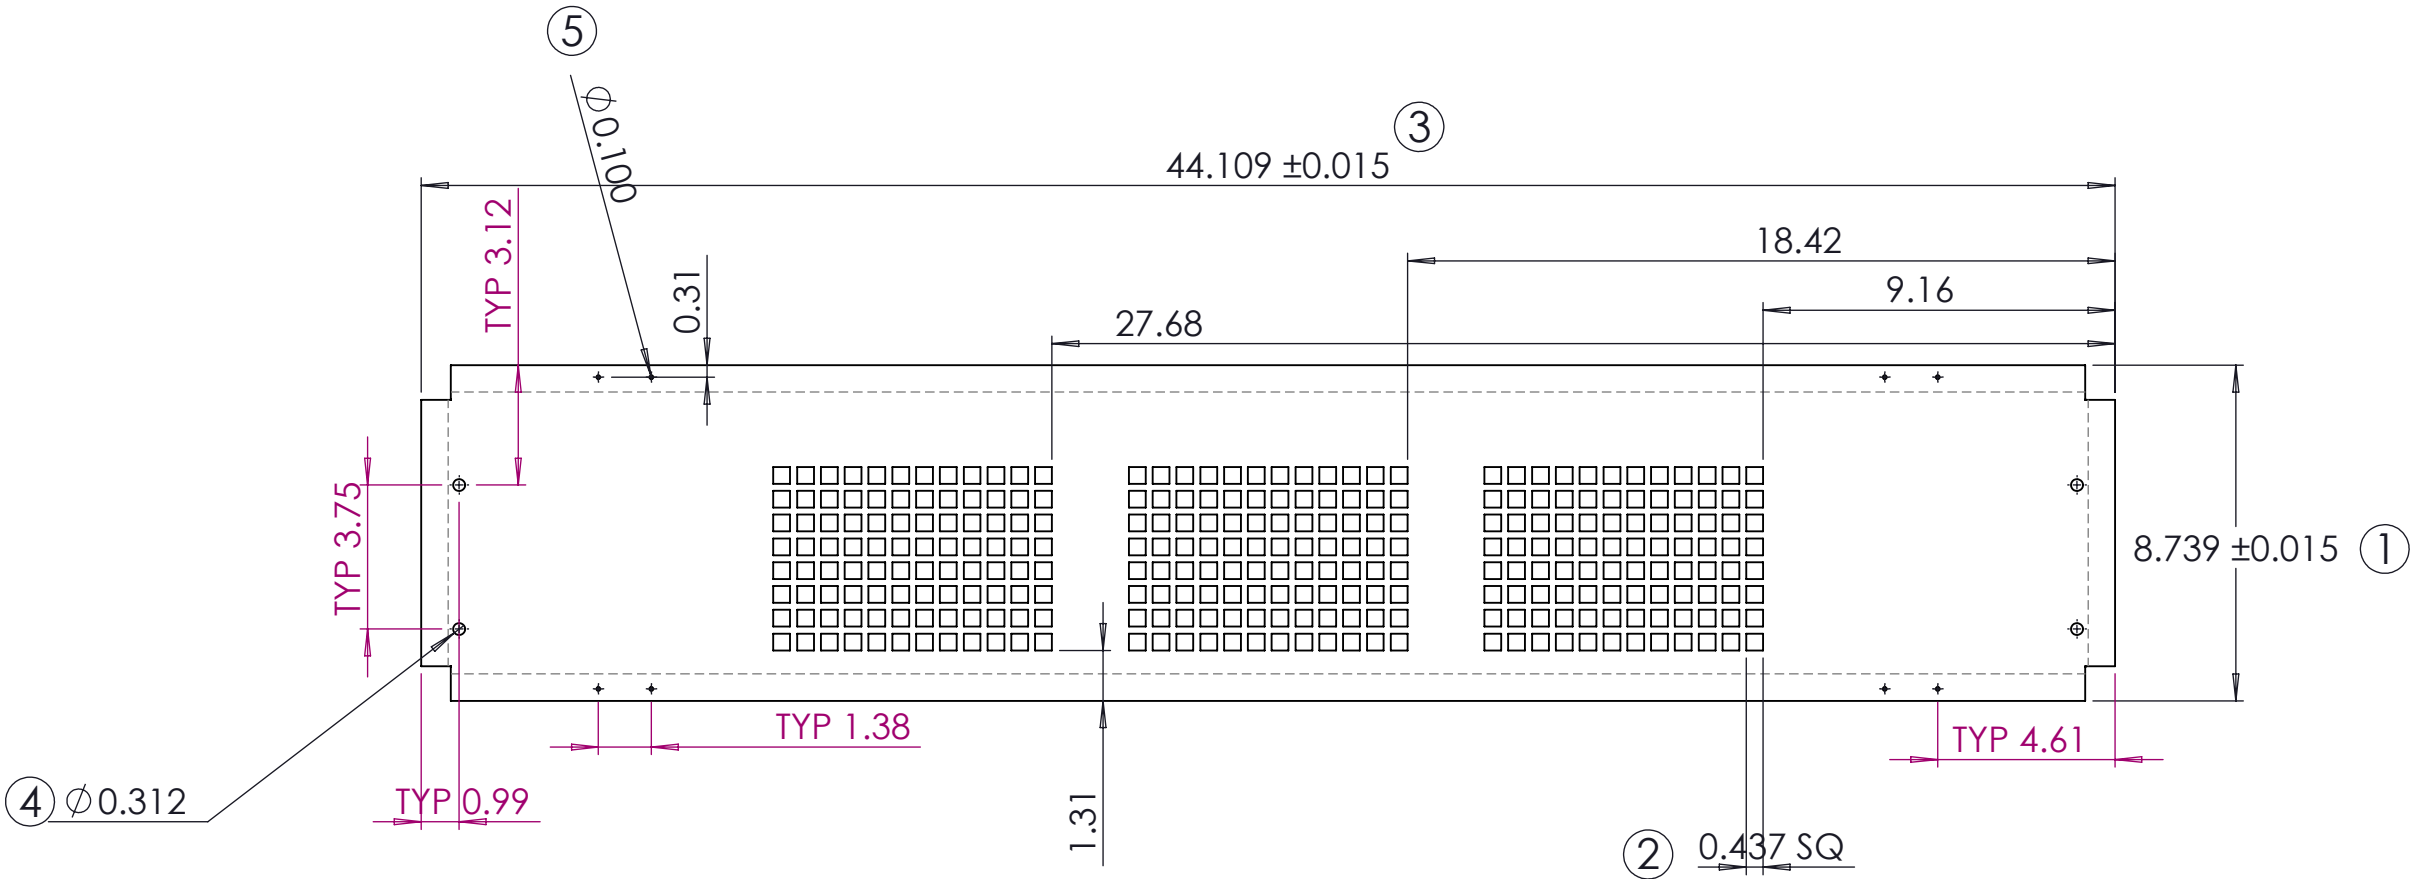

OC:

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



7.5" VENT COVER

Dwn: AWV	26/052026	Chk: AWV	26/05/2026
----------	-----------	----------	------------

Dwn No: 12-D-6047-03-(16gacr ANSI-61) - K48 - V4-R0	Rev: 00
Apvd: AWV	26/05/2026
Sht 1 of 1	