

MEDIDA	DIMENSION	LIM. I	LIM. S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo
A	0.340	0.325	0.355				
B	2.470	2.455	2.485				
C	2.470	2.455	2.485				
D	8.690	8.675	8.705				
E	0.750	0.735	0.765				
F	0.250	0.235	0.265				
G	34.810	34.795	34.825				
H	0.120	0.105	0.135				




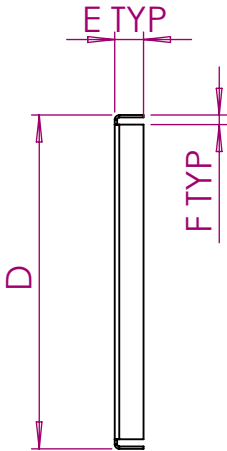


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

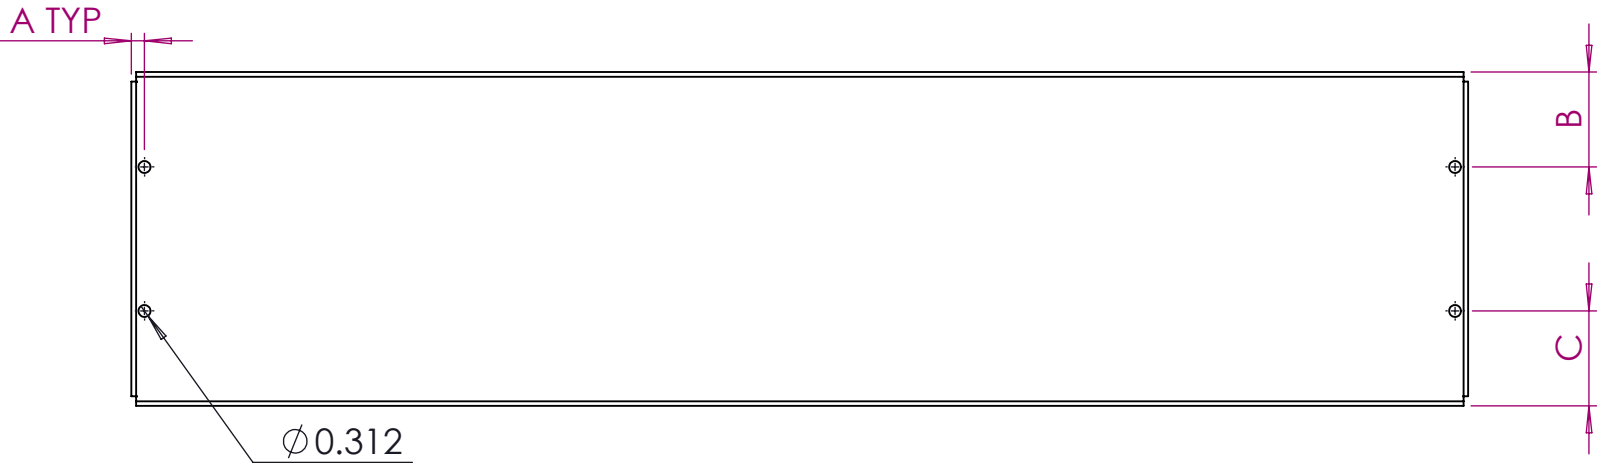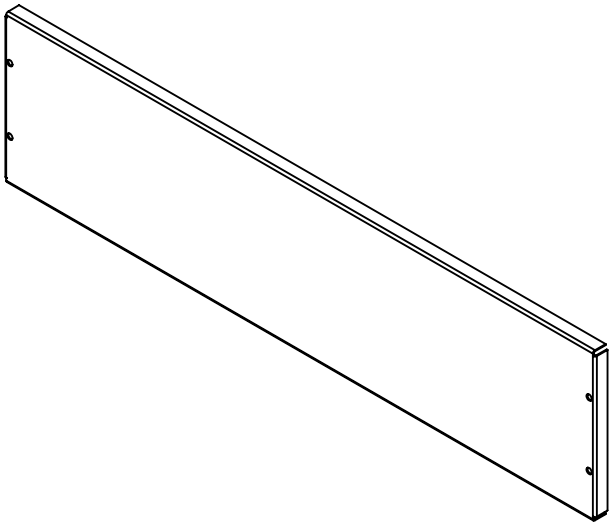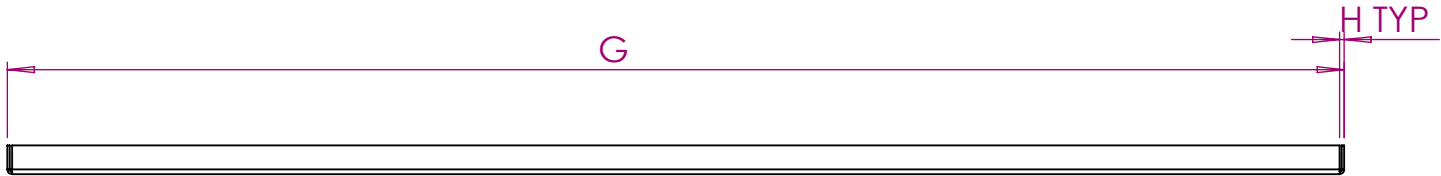


8.75" COVER			
Dwn: AWV	11/03/2026	Chk: AWV	11/03/2026

Dwn No: 12-D-6063-06-(16gacr ANSI-61) - K48 - V1-R0	Rev: 00
Apvd: AWV	11/03/2026
Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	9.989	9.974	10.004				
2	LASER	36.109	36.094	36.124				
3	LASER	0.310	0.295	0.325				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6063-06-(16gacr ANSI-61) - K48 - V1-R0	11/03/26	0.48	9.989	36.109	0.060
R1						
R2						
R3						

CORTE

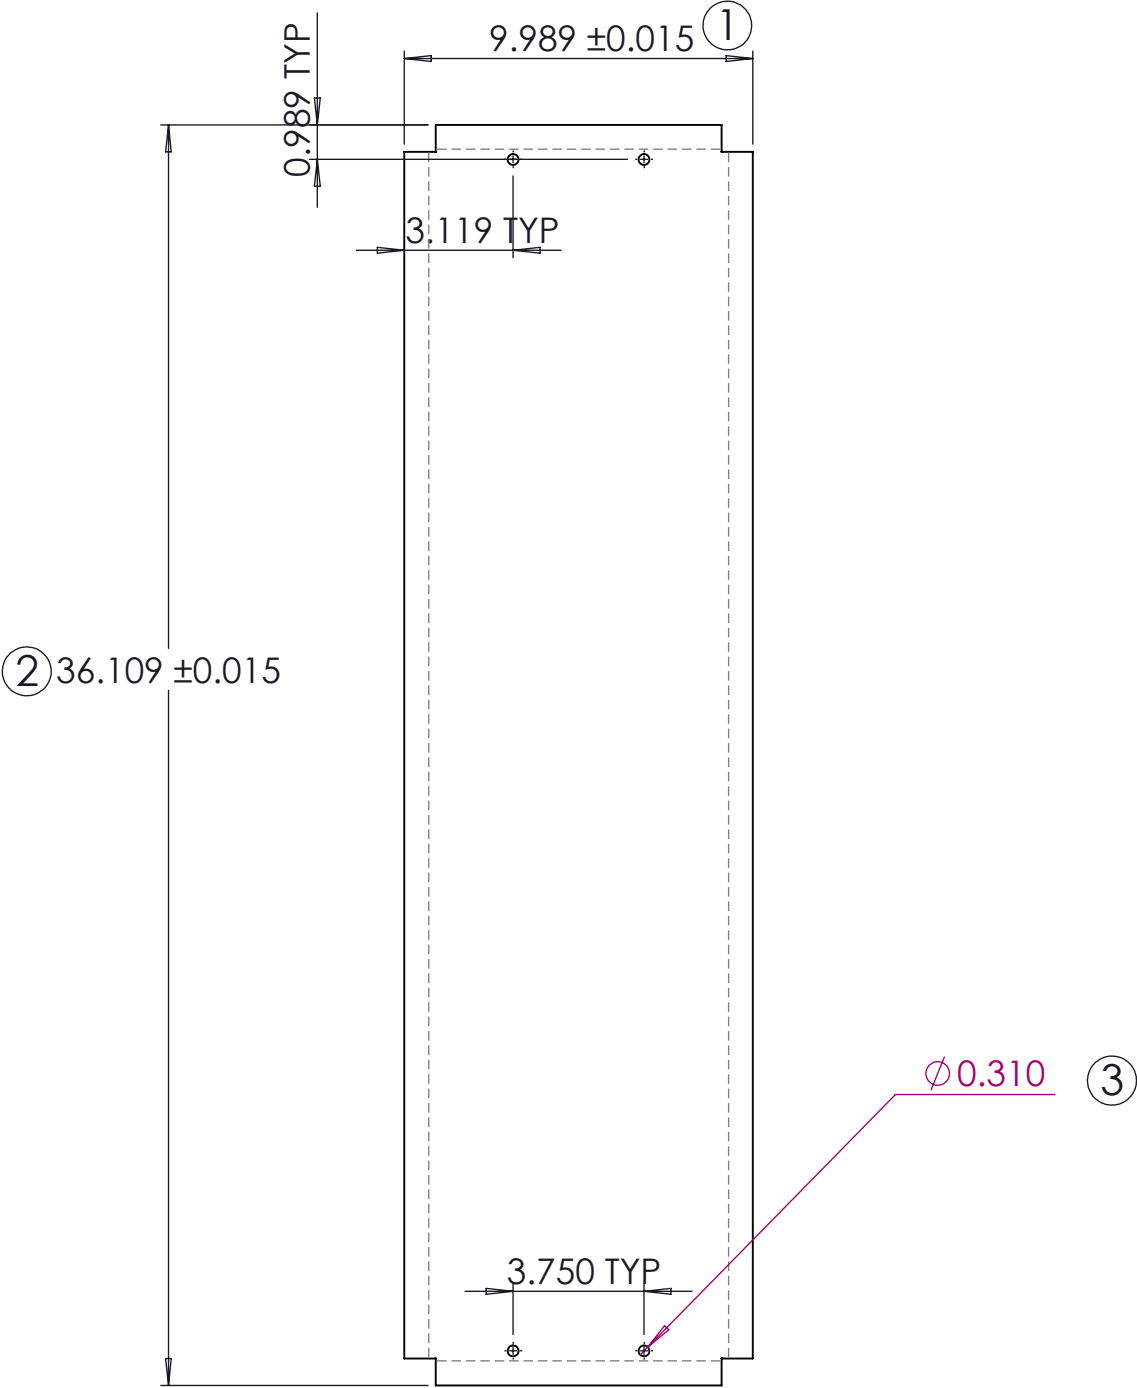

OC:

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches				8.75" COVER				Dwn No: 12-D-6063-06-(16gacr ANSI-61) - K48 - V1-R0		Rev: 00					
Dwn: AWV				11/03/2026		Chk: AWV		11/03/2026		Apvd: AWV		11/03/2026		Sht 1 of 1	