

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	28.810	28.795	28.825				
C	0.340	0.325	0.355				
D	2.440	2.425	2.455				
E	1.220	1.205	1.235				
F	0.750	0.735	0.765				
G	0.250	0.235	0.265				






TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

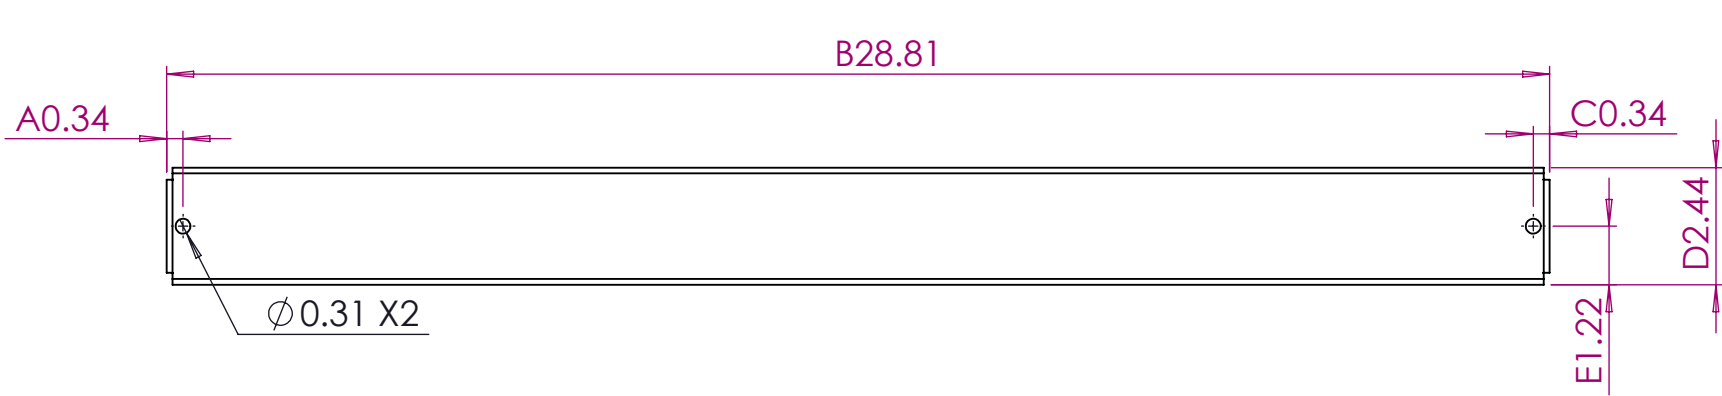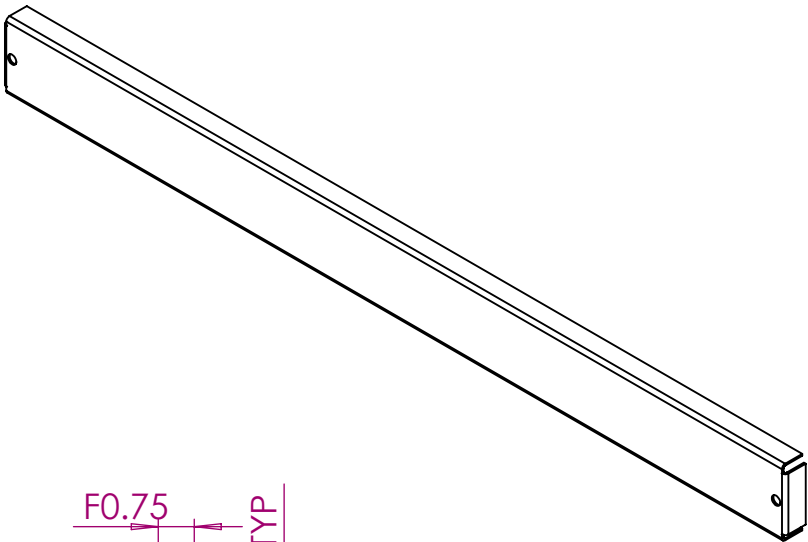


2.5" COVER			
Dwn: AWV	10/03/2026	Chk: AWV	10/03/2026

Dwn No: 12-D-6078-05-(16gacr ANSI-61) - K48 - V0-R0	Rev: 00
Apvd: AWV	10/03/2026

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	3.739	3.724	3.754				
2	LASER	30.109	3.094	3.124				
3	LASER	0.312	0.297	0.327				

CORTE

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6078-05-(16gacr ANSI-61) - K48 - V0-R0	10/03/26	0.48	3.739	30.109	0.060
R1						
R2						
R3						

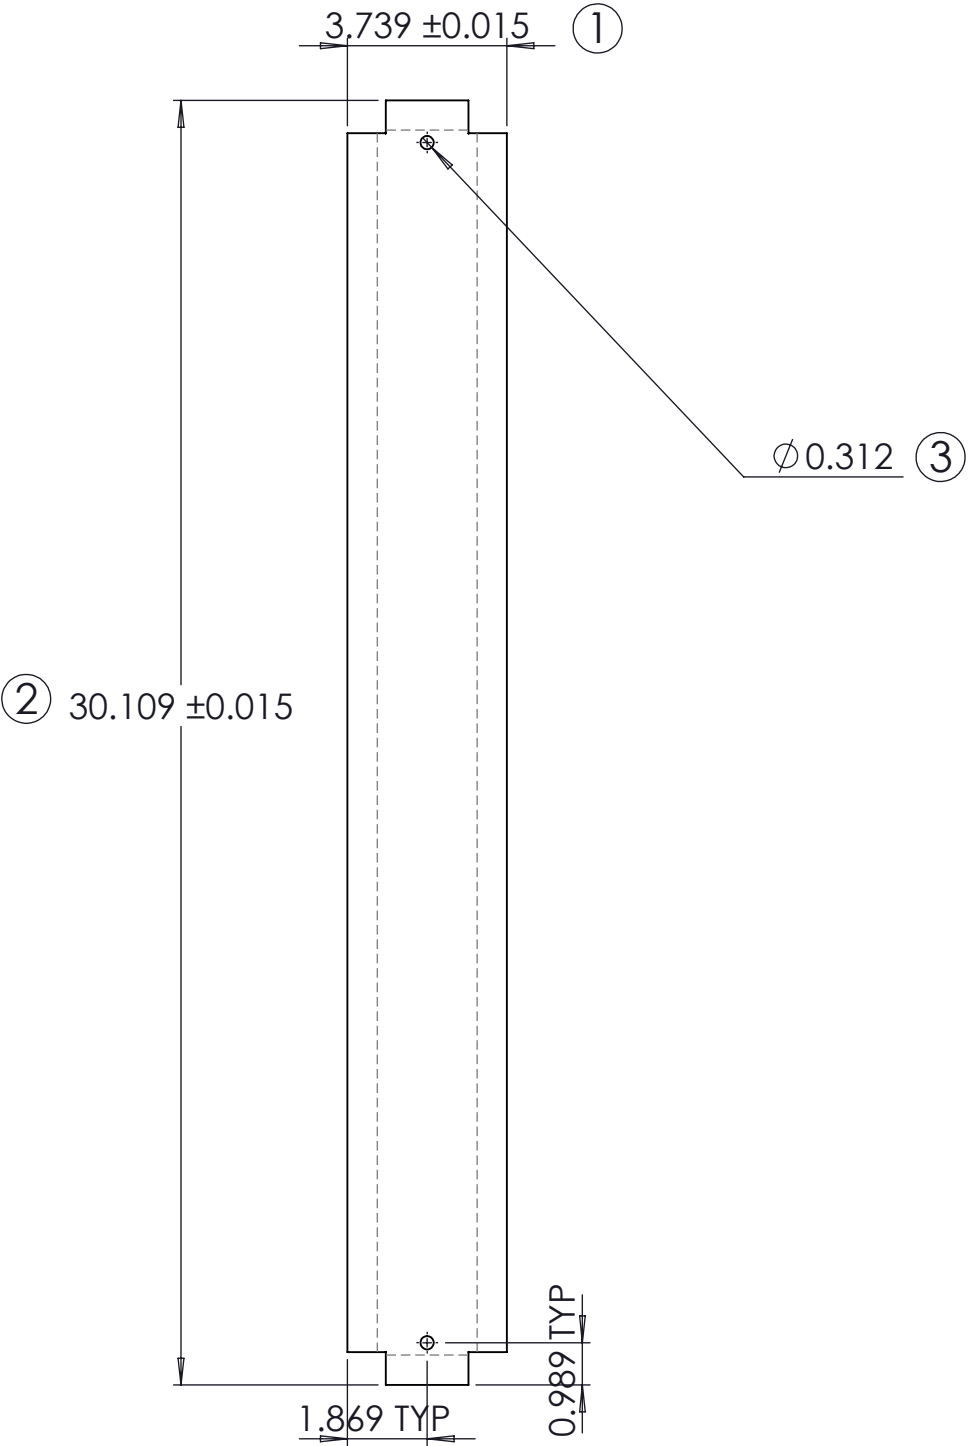

OC:

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches		2.5" COVER				Dwn No: 12-D-6078-05-(16gacr ANSI-61) - K48 - V0-R0		Rev: 00	
		Dwn: AWV	10/03/2026	Chk: AWV	10/03/2026	Apvd: AWV	10/03/2026	Sht 1 of 1	