

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	0.340	0.325	0.355				
C	2.470	2.455	2.485				
D	34.810	34.795	34.825				
E	0.750	0.735	0.765				
F	4.940	4.925	4.955				
G	0.750	0.735	0.765				
H	0.250	0.235	0.265				







TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

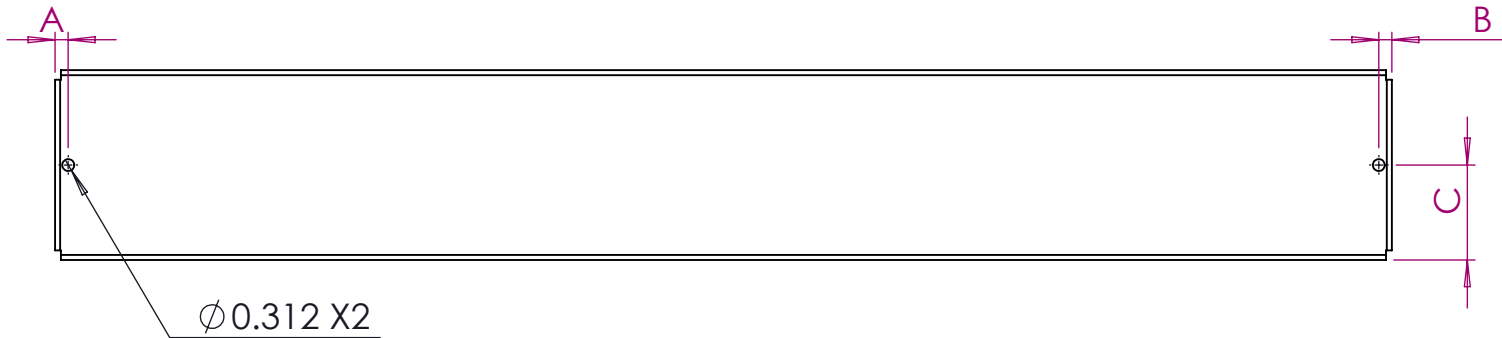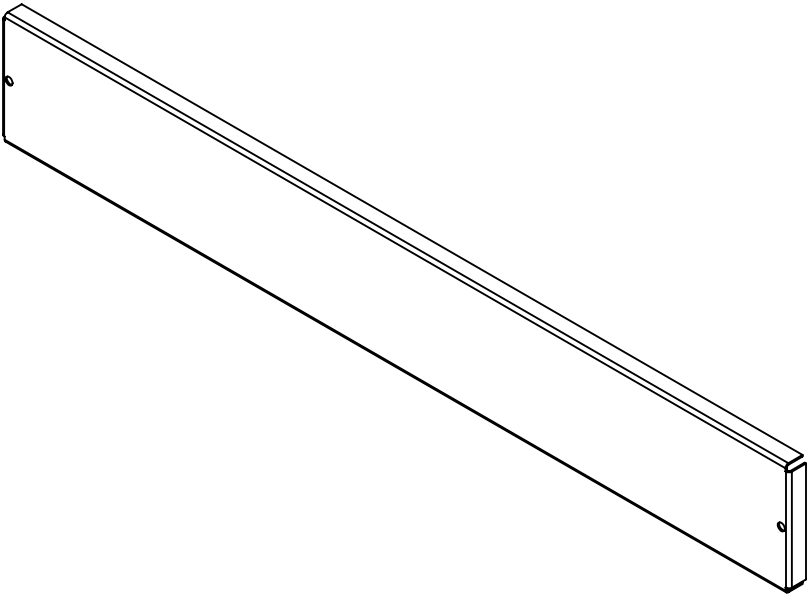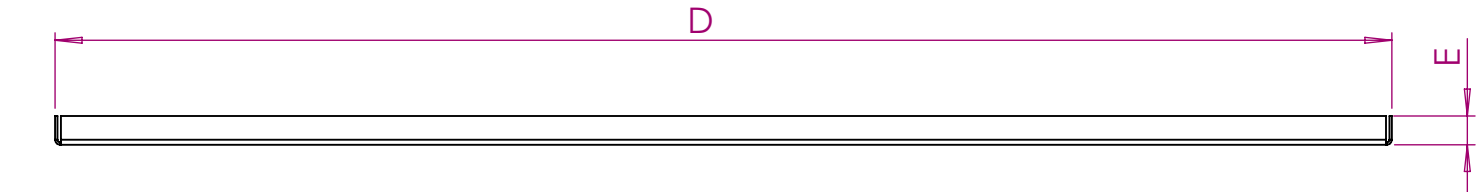

5.00" COVER 16GACR			
Dwn: AWV	09/03/2026	Chk: AWV	09/03/2026


Dwn No: 12-D-6080-06-(16gacr ANSI-61) - K48 - V4-R0	Apvd: AWV	09/03/2026
--	-----------	------------

Rev: 00	Sht 1 of 1
------------	------------

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	6.236	6.221	6.251				
2	LASER	36.106	36.091	36.121				
3	LASER	34.510	34.495	34.525				
4	LASER	4.440	4.425	4.455				
5	LASER	0.312	0.297	0.327				

CORTE

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6080-06-(16gacr ANSI-61) - K48 - V4-R0	09/03/26	0.48	6.236	36.106	0.060
R1						
R2						
R3						

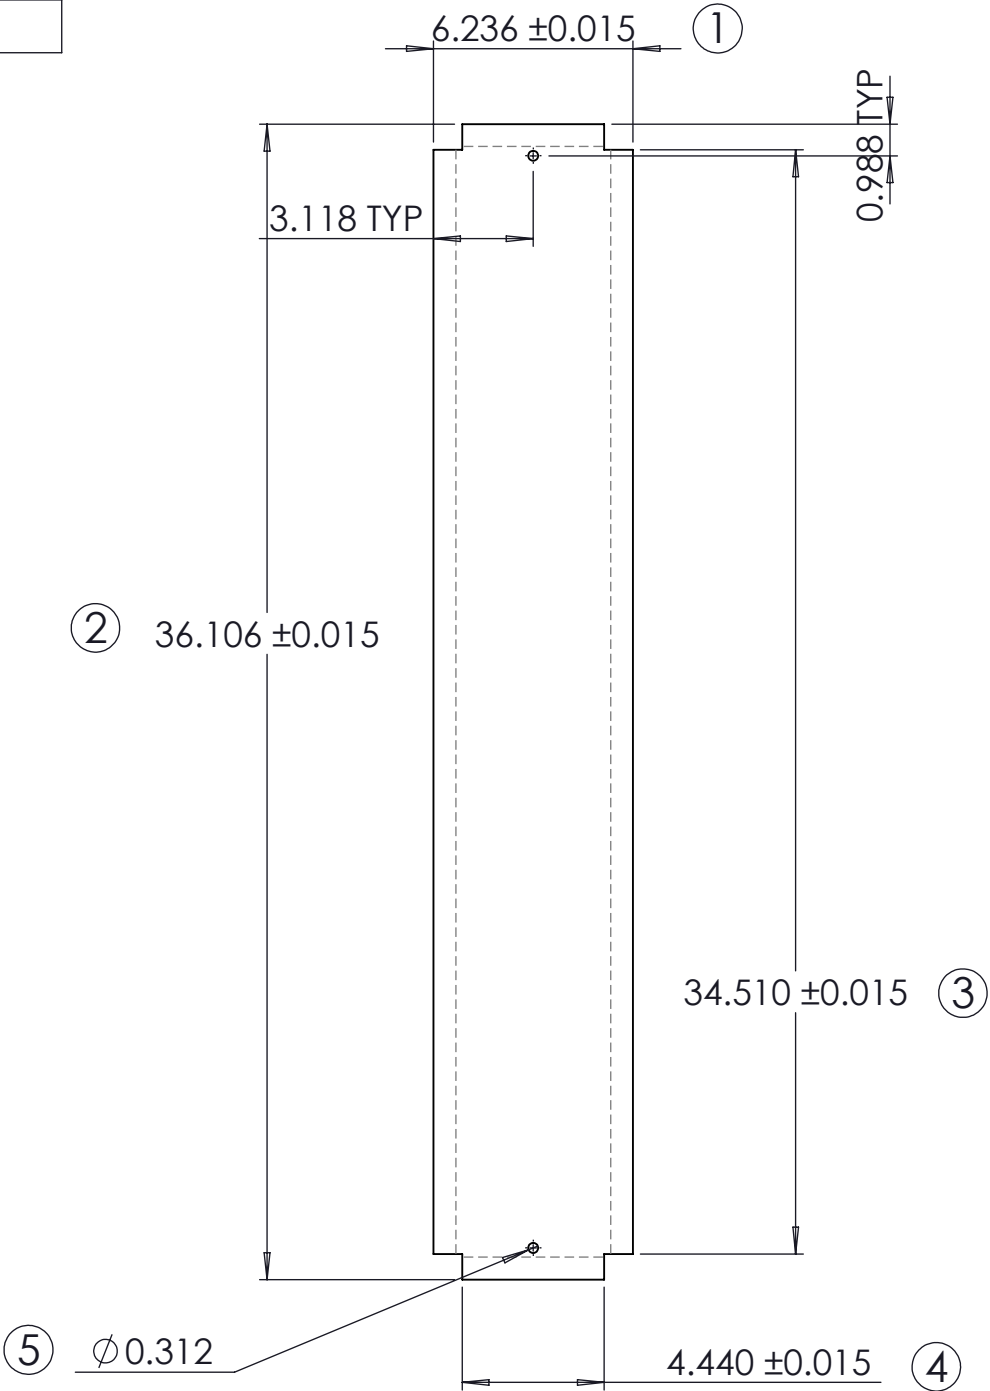

OC:

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



5" COVER
16 GACR

Dwn: AWV	09/03/2026	Chk: AWV	09/03/2026
----------	------------	----------	------------

Dwn No:
12-D-6080-06-(16gacr ANSI-61) - K48 - V4-R0

Apvd: AWV	09/03/2026
-----------	------------

Rev:
00

Sht 1 of 1