


NO.	RESP	Dim	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	6.236	6.221	6.251				
2	LASER	44.102	44.087	44.117				
3	LASER	42.550	42.535	42.565				
4	LASER	4.440	4.425	4.455				
5	LASER	0.312	0.297	0.327				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	12-D-6080-07-(16gacr ANSI-61) - K48 - V4-R0	15/07/2026	0.48	6.232	44.102	0.060

CORTE

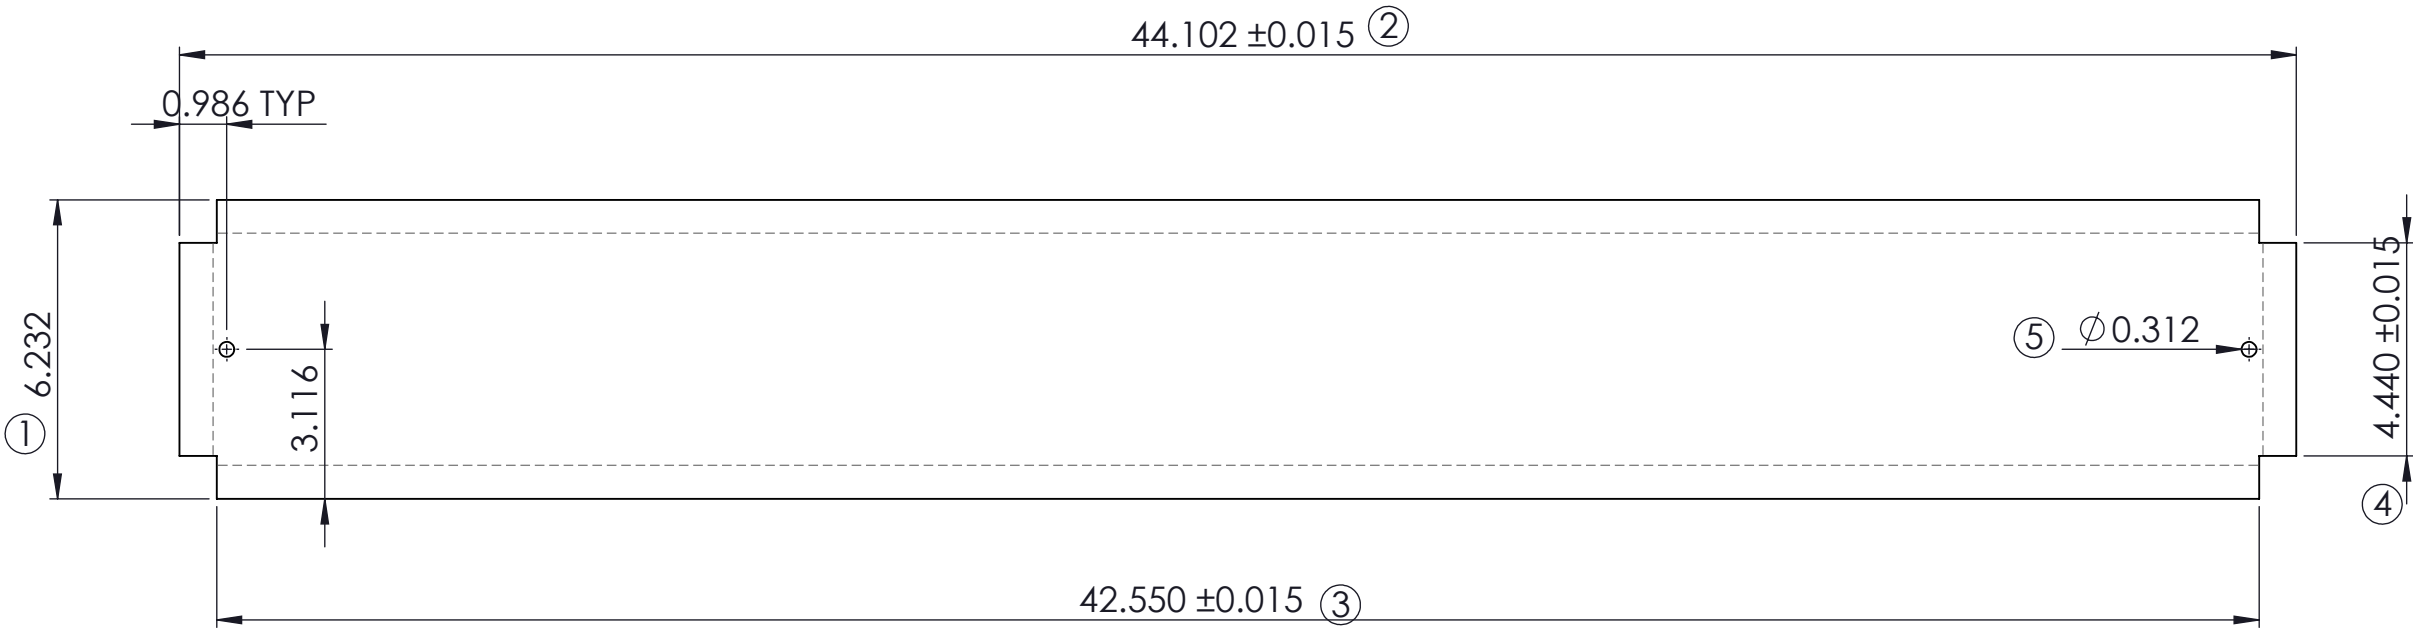

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	0.340	0.325	0.355				
C	2.470	2.455	2.485				
D	42.810	42.795	42.825				
E	0.750	0.735	0.765				
F	4.940	4.925	4.955				
G	0.750	0.735	0.765				
H	0.250	0.235	0.265				
I	0.130	0.115	0.145				



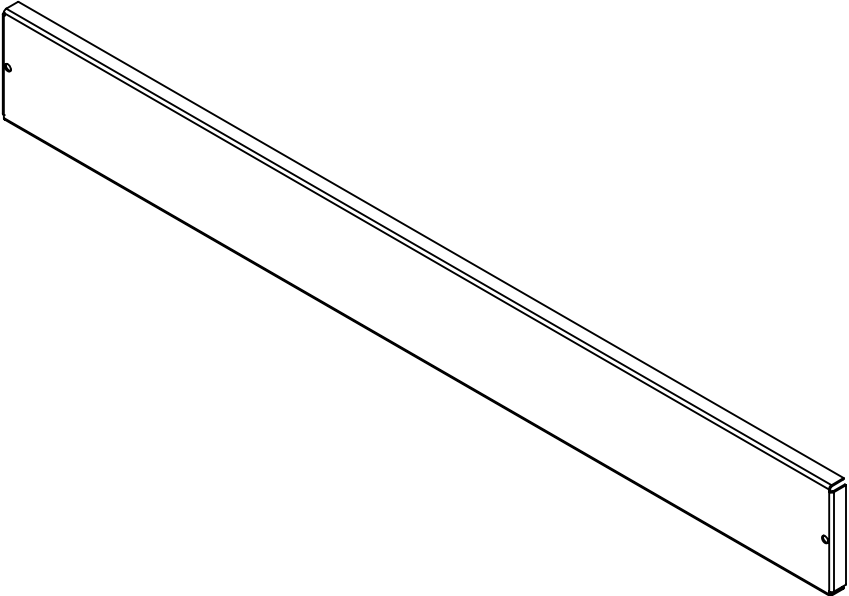


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

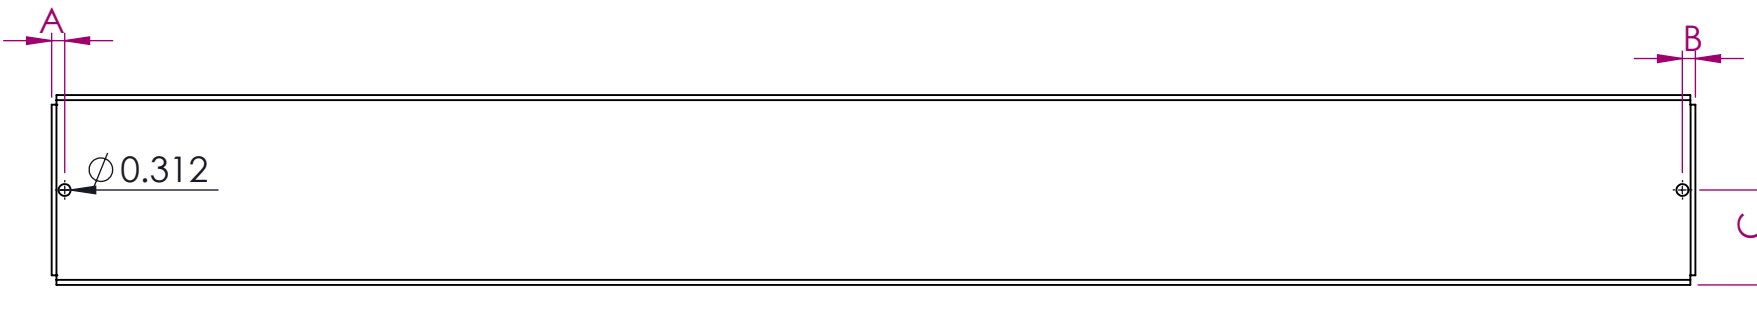

5.00" COVER			
Dwn: JRFM	15/07/2026	Chk: JRFM	15/07/2026

Dwn No: 12-D-6080-07-(16gacr ANSI-61) - K48 - V4-R0	Rev: 00
Apvd: JRFM	15/07/2026
Sht 1 of 1	