


No.	RESP	Dim	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	30.109	30.094	30.124				
2	LASER	7.489	7.474	7.504				
3	LASER	0.312	0.297	0.327				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	12-D-6081-05-(16gacr ANSI-61) - K48 - V2-R0	30/07/2026	0.48	7.489	30.109	0.060

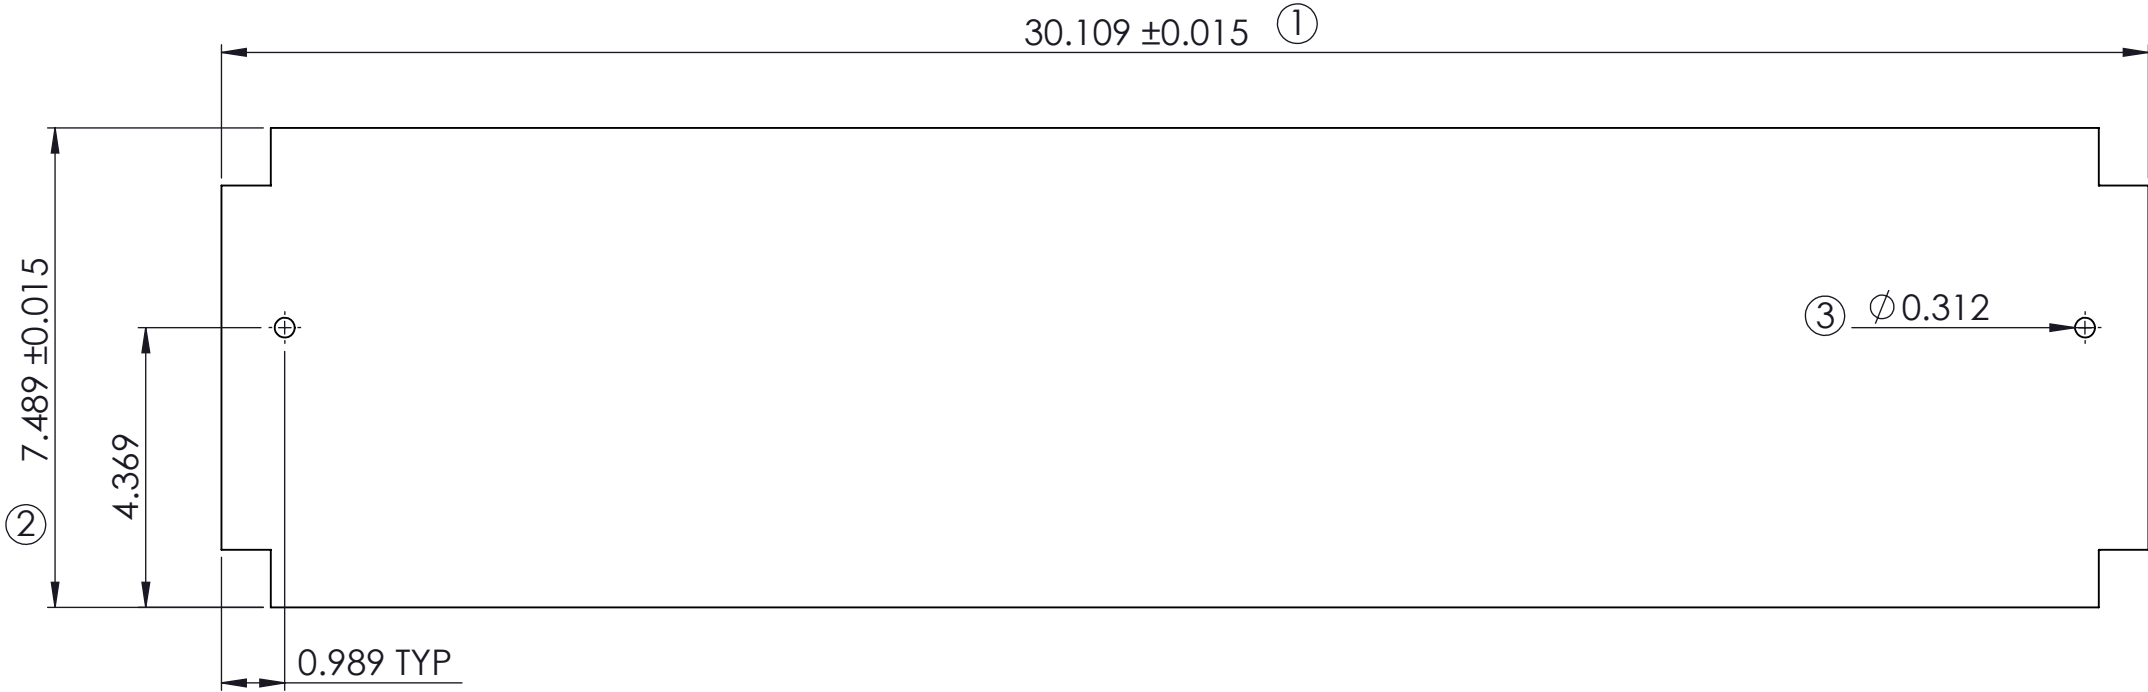

MEDIDA	MEDISION	LIM. I	LIM. S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.470	2.455	2.485				
B	0.340	0.325	0.355				
C	6.190	6.175	6.205				
D	0.750	0.735	0.765				
E	0.250	0.235	0.265				
F	28.810	28.795	28.825				
G	0.120	0.105	0.135				




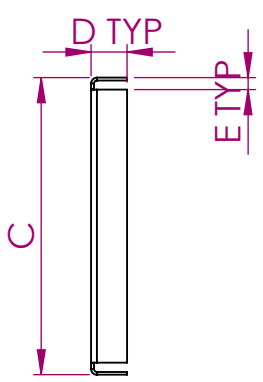


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

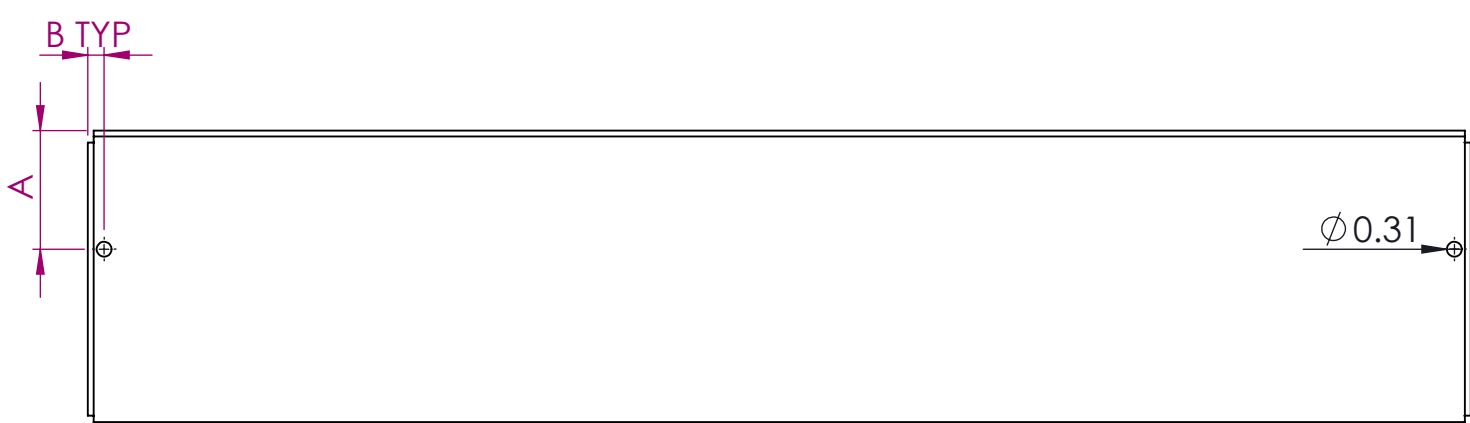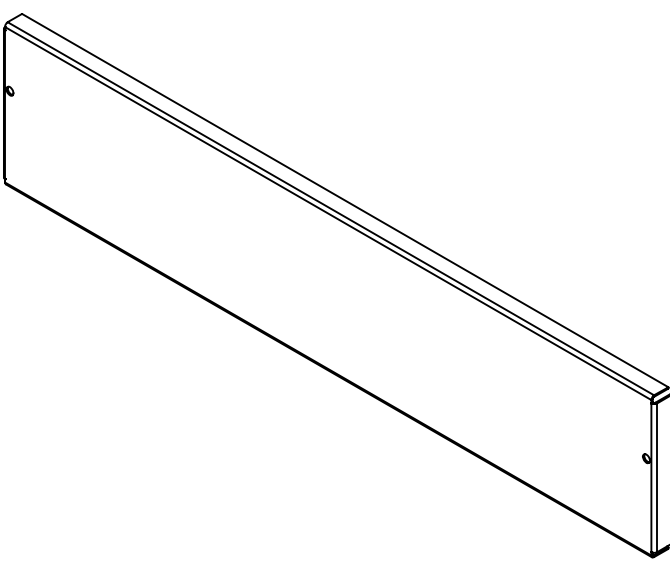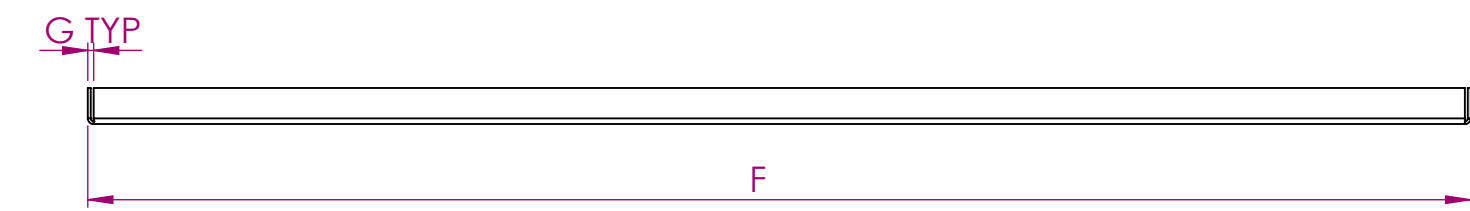

6.25" COVER				Dwn No: 12-D-6081-05-(16gacr ANSI-61) - K48 - V2-R0		Rev: 00
Dwn: JRFM	30/07/2026	Chk: JRFM	30/07/2026	Apvd: JRFM	30/07/2026	Sht 1 of 1