
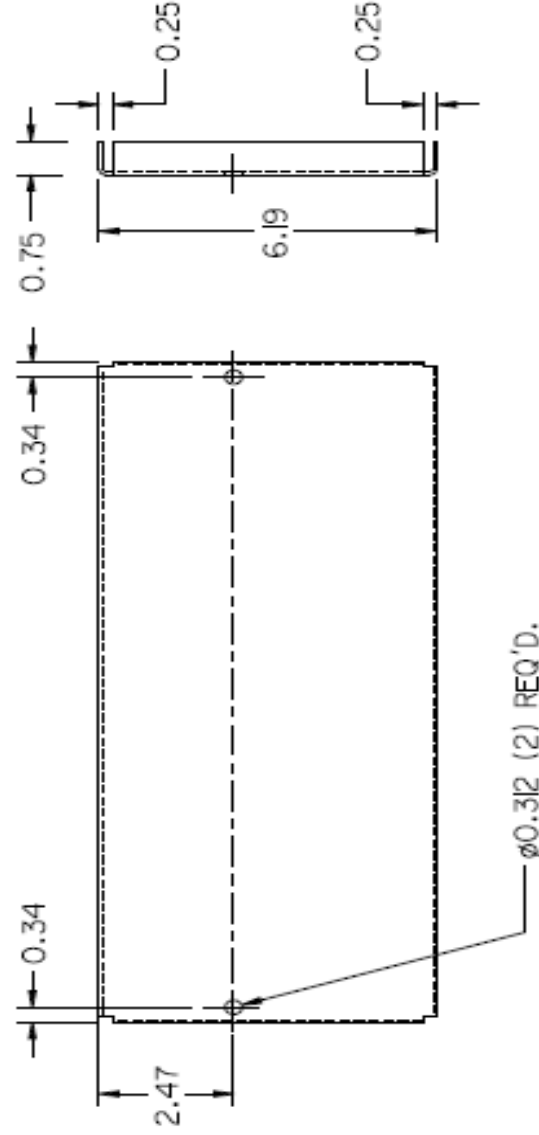


PC No.	A	MATL	FINISH	WIDTH	LENGTH	THK	WEIGHT	REF
I2-D-608I-01	10.8I	I6GACR	ANSI6I	12.09	7.47	0.060	1.54	14"W
I2-D-608I-02	14.8I	I6GACR	ANSI6I	16.09	7.47	0.060	2.05	18"W
I2-D-608I-03	16.8I	I6GACR	ANSI6I	18.09	7.47	0.060	2.30	20"W
I2-D-608I-04	22.8I	I6GACR	ANSI6I	24.09	7.47	0.060	3.07	26"W
I2-D-608I-05	28.8I	I6GACR	ANSI6I	30.09	7.47	0.060	3.83	32"W
I2-D-608I-06	34.8I	I6GACR	ANSI6I	36.09	7.47	0.060	4.59	38"W
I2-D-608I-07	42.8I	I6GACR	ANSI6I	44.09	7.47	0.060	5.6I	46"W
I2-D-608I-08	48.8I	I6GACR	ANSI6I	50.09	7.47	0.060	6.38	52"W
I2-D-608I-09	54.8I	I6GACR	ANSI6I	56.09	7.47	0.060	7.14	58"W
I2-D-608I-10	21.8I	I6GACR	ANSI6I	23.09	7.47	0.060	2.94	25"W

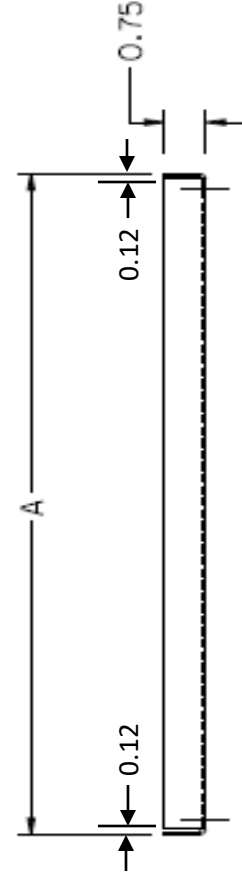

- ▲ 1) INSIDE BEND RADII, FLAT PATTERN "LENGTH" AND "WIDTH" ARE BASED UPON TOOLING USED IN SIEMENS IS-1610.
 2) I6GA STEEL SHEET MATERIAL PER IS-6903-02 AND IS-1601.
 3) ANSI 6I FINISH PER IS-1900.
 4) BURRS TO BE 8% OF MATERIAL THICKNESS MAX. ALL TABS ARE TO BE REMOVED FOR PARTS MADE ON TURRET PRESSES.
 5) DIMENSIONING AND TOLERANCING PER ASME Y14.5-2009.
 6) DESIGN CONTROL FOR THIS DOCUMENT MUST BE THROUGH SI EP NA R&D SYST PANELBOARD / SWITCHBOARD PRODUCT DEVELOPMENT ENGINEERING OR SUCCESSOR.

Revisions:	IE-461H 07/20/23
------------	------------------