

MEDIDA	DIMENSION	LIM. I	LIM. S	VALOR MFG	VoBo	VALOR CAL	VoBo
A	2.470	2.455	2.485				
B	0.340	0.325	0.355				
C	6.190	6.175	6.205				
D	0.750	0.735	0.765				
E	0.250	0.235	0.265				
F	34.810	34.795	34.825				
G	0.120	0.105	0.135				
H	0.750	0.735	0.765				




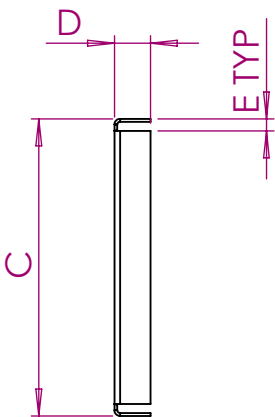


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

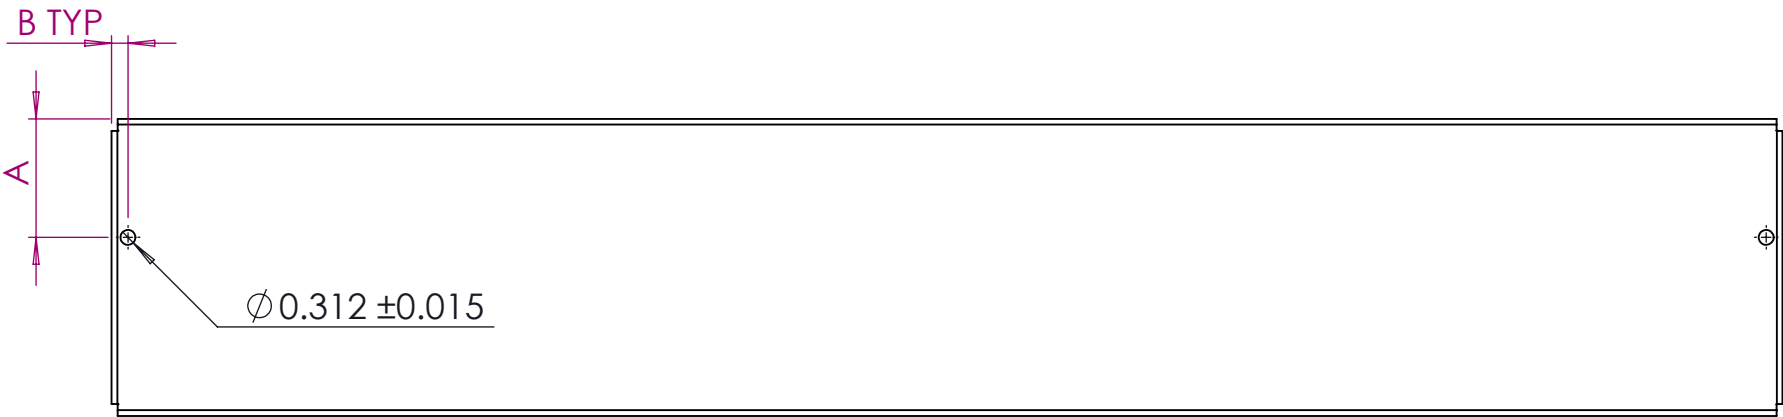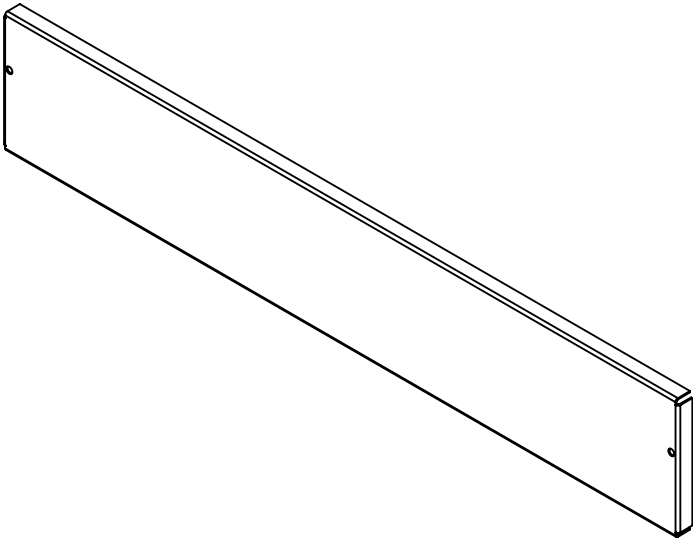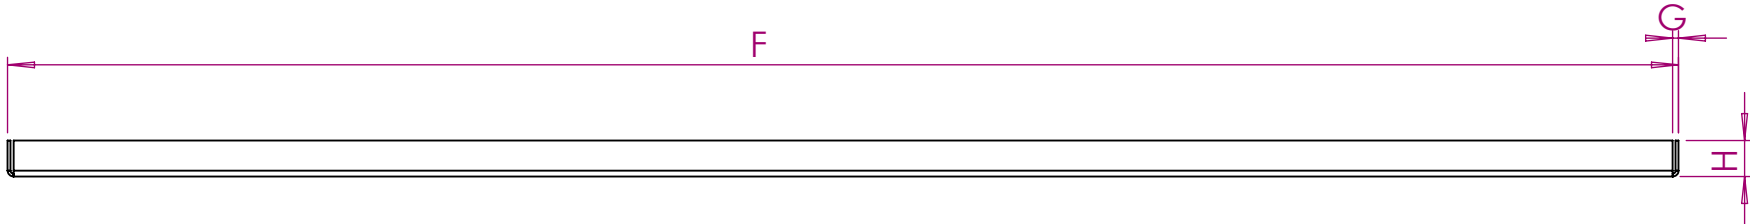


6.25" COVER			
Dwn: AWV	11/03/2026	Chk: AWV	11/03/2026

Dwn No: 12-D-6081-06-(16gacr ANSI-61) - K48 - V2-R0	Rev: 00
Apvd: AWV	11/03/2026
Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	7.489	7.47	7.504				
2	LASER	36.109	36.094	36.124				
3	LASER	0.312	0.297	0.327				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6081-06-(16gacr ANSI-61) - K48 - V2-R0	11/03/26	0.48	7.489	36.109	0.060
R1						
R2						
R3						

CORTE

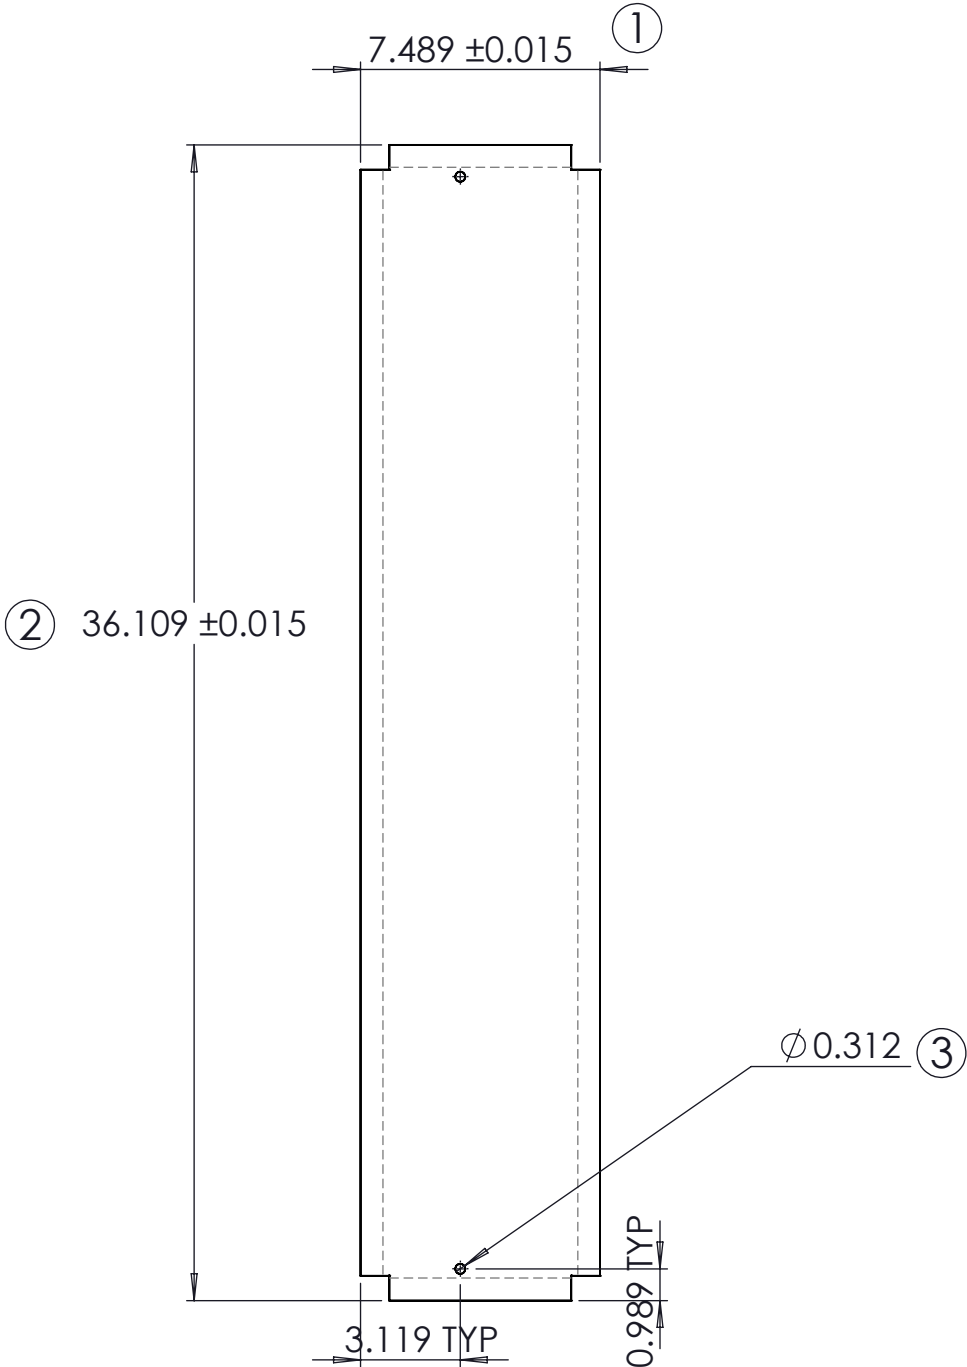

OC:

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches			6.25" COVER				Dwn No: 12-D-6081-06-(16gacr ANSI-61) - K48 - V2-R0		Rev: 00
			Dwn: AWV	11/03/2026	Chk: AWV	11/03/2026	Apvd: AWV	11/03/2026	Sht 1 of 1