

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	0.340	0.325	0.355				
C	4.970	4.955	4.985				
D	2.470	2.455	2.485				
E	7.440	7.425	7.455				
F	0.750	0.735	0.765				
G	0.250	0.235	0.265				
H	0.120	0.105	0.135				
I	34.810	34.795	34.825				
J	0.750	0.735	0.765				




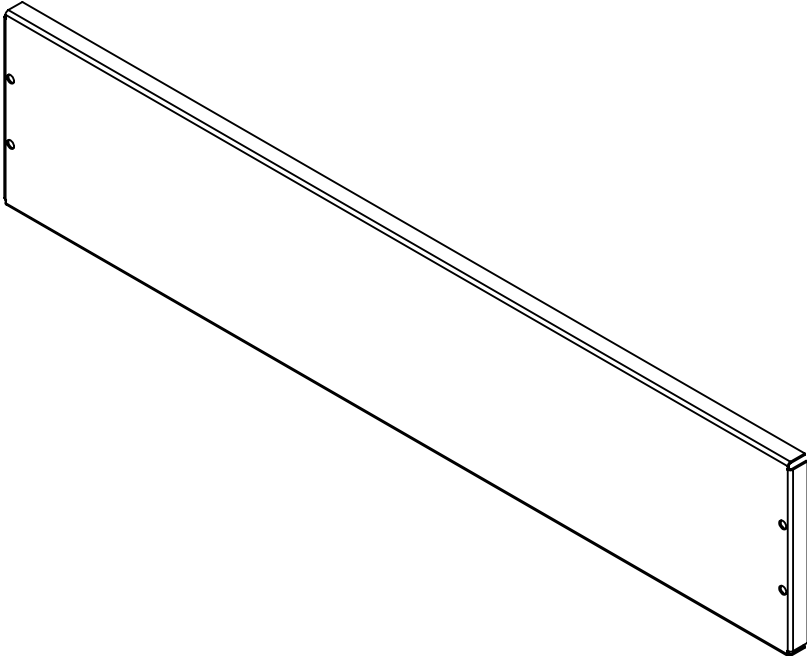


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

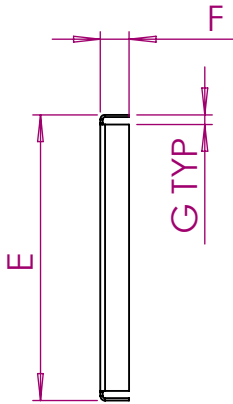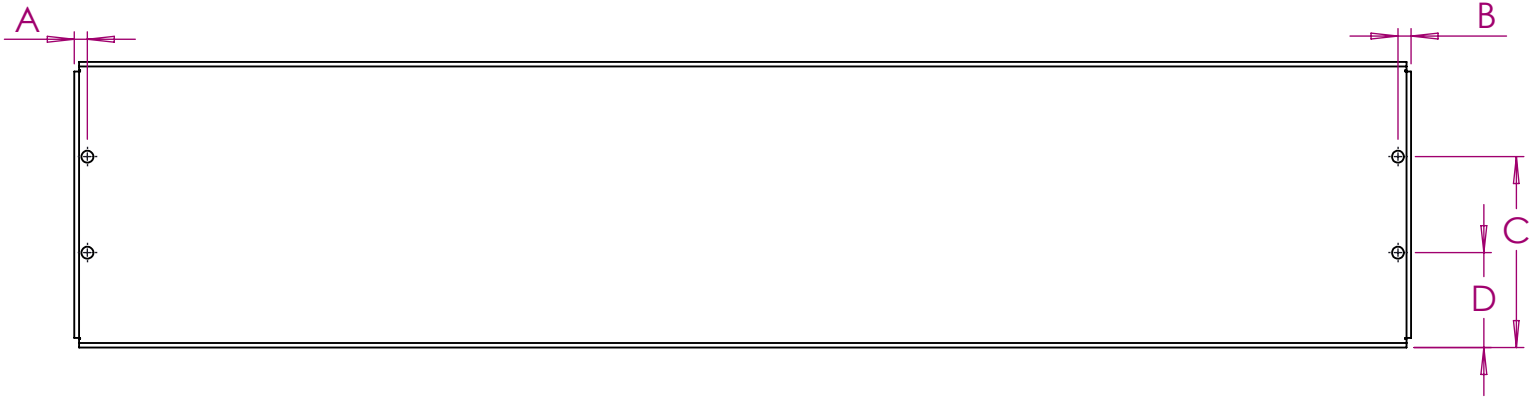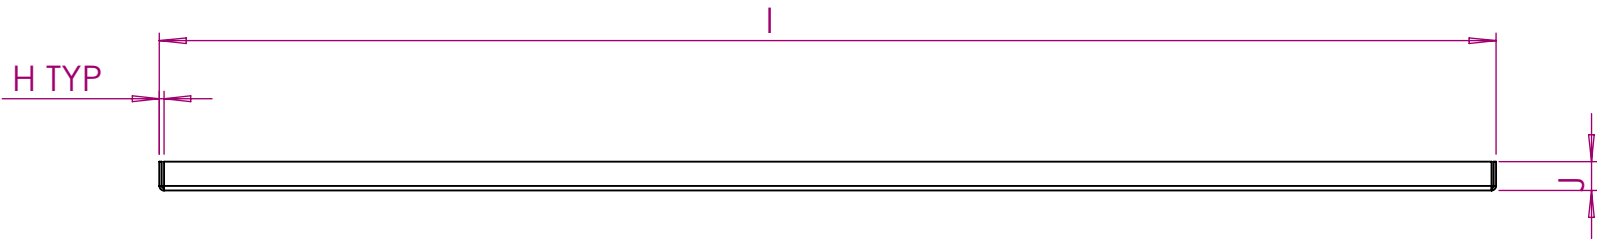


7.50" COVER				Dwn No: 12-D-6082-06-(16gacr ANSI-61) - K48 - V1-R0		Rev: 00
Dwn: AWV	11/03/2026	Chk: AWV	11/03/2026	Apvd: AWV	11/03/2026	Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	8.739	8.724	8.754				
2	LASER	36.109	36.094	36.124				
3	LASER	0.312	0.297	0.327				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6082-06-(16gacr ANSI-61) - K48 - V1-R0	11/03/26	0.48	8.739	36.109	0.060
R1						
R2						
R3						

CORTE

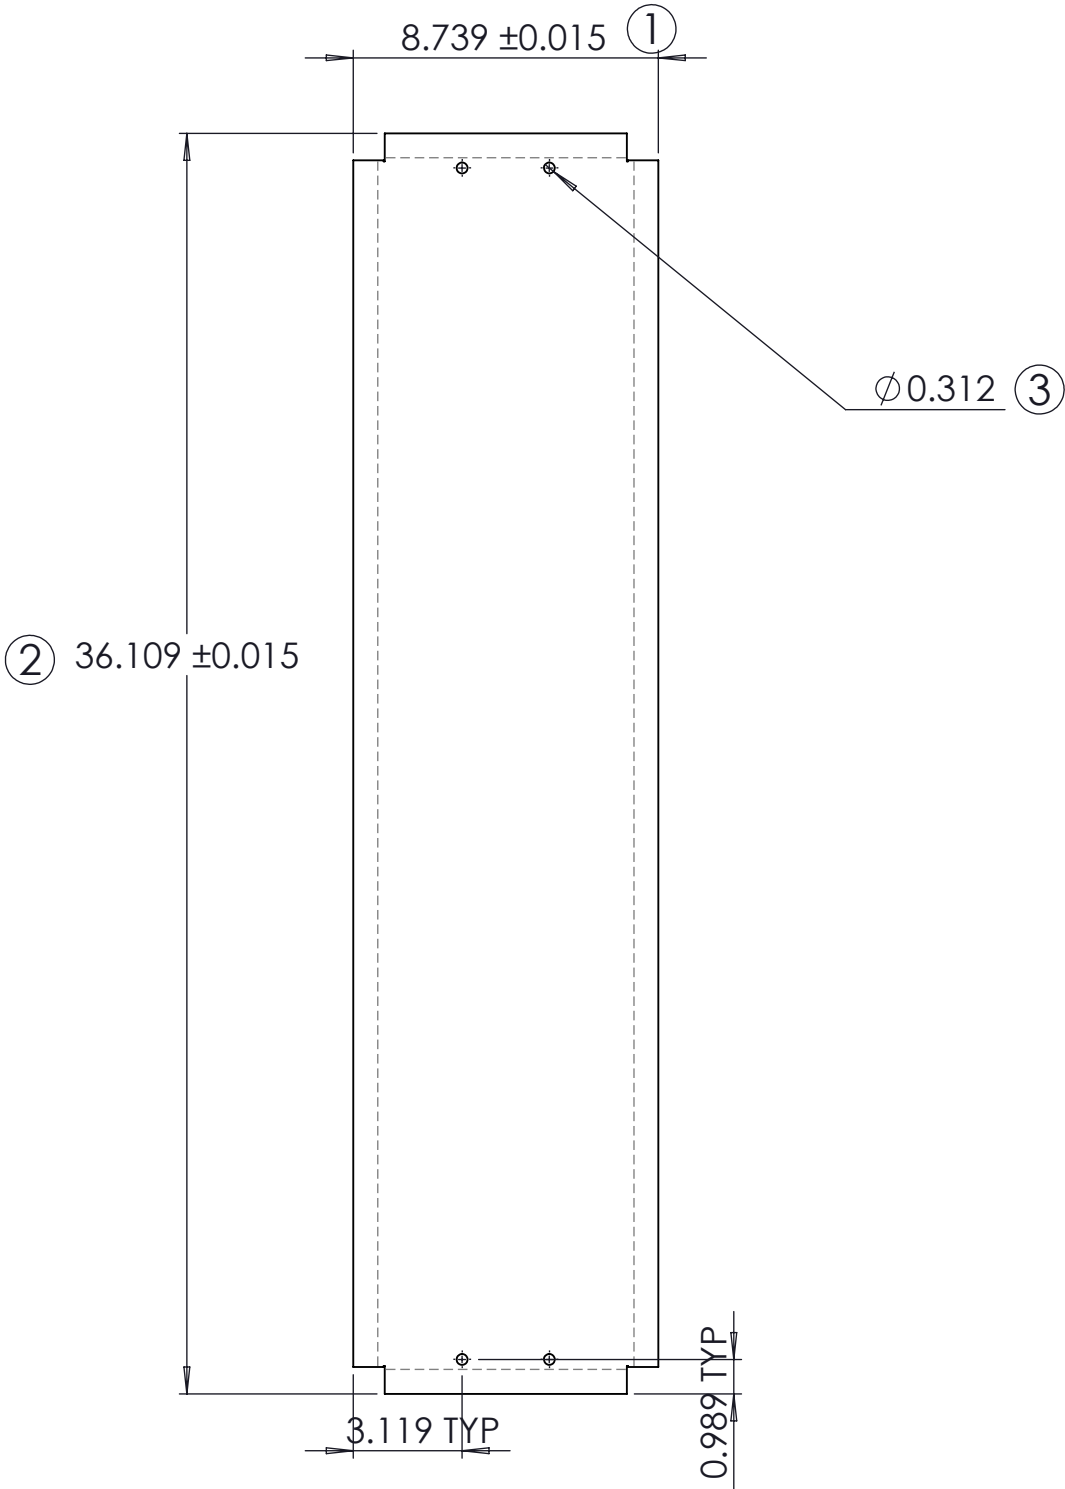

OC:

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



7.50" COVER

Dwn: AWV	11/03/2026	Chk: AWV	11/03/2026
----------	------------	----------	------------

Dwn No:
12-D-6082-06-(16gacr ANSI-61) - K48 - V1-R0

Apvd: AWV	11/03/2026	Sht 1 of 1
-----------	------------	------------

Rev:
00