

DOBLEZ

MEDIDA	DIMENSION	LIM. I	LIM. S	VALOR MFG	VoBo	VALOR CAL	VoBo
A	0.340	0.325	0.355				
B	7.470	7.455	7.485				
C	2.470	2.455	2.485				
D	9.940	9.925	9.955				
E	0.750	0.735	0.765				
F	0.250	0.235	0.265				
G	0.120	0.105	0.135				
H	34.810	34.795	34.825				



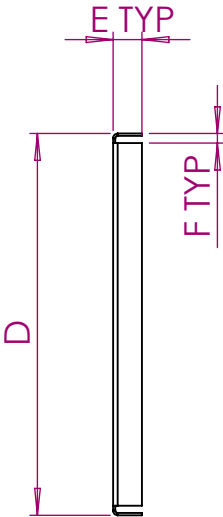


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			


Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

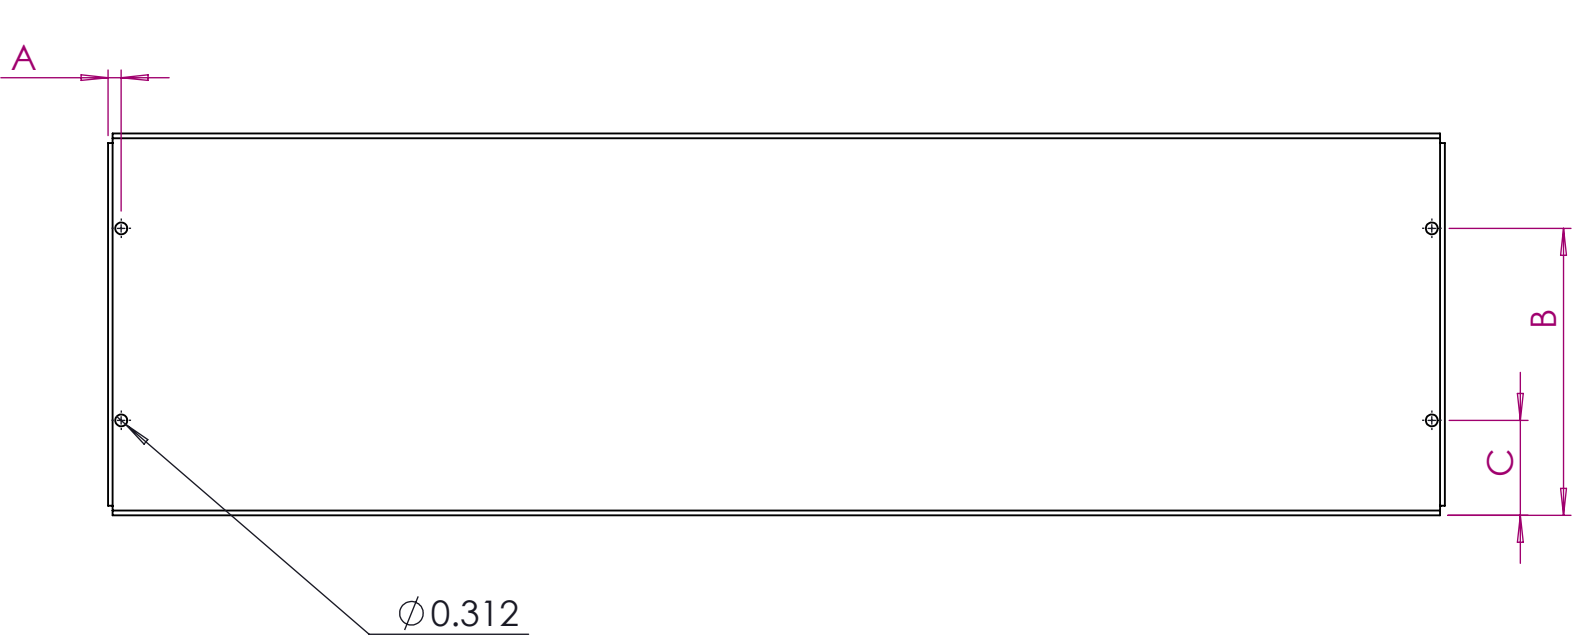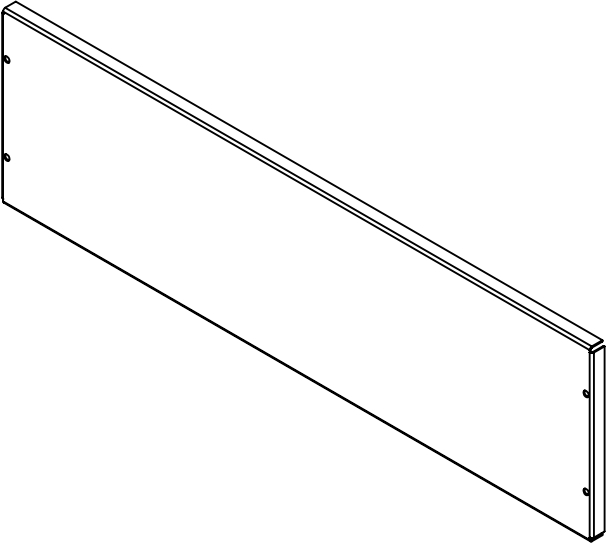

10.00" COVER				Dwn No: 12-D-6083-06-(16gacr ANSI-61) - K48 - V3-R0		Rev: 00
Dwn: AWV	11/03/2026	Chk: AWV	11/03/2026	Apvd: AWV	11/03/2026	Sht 1 of 1

TABLE																
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal		Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
1	LASER	11.239	11.224	11.254						R0	12-D-6083-06-(16gacr ANSI-61) - K48 - V3-R0	11/03/26	0.48	11.239	36.109	0.060
2	LASER	36.109	36.094	36.124						R1						
3	LASER	0.312	0.297	0.327						R2						
										R3						

CORTE

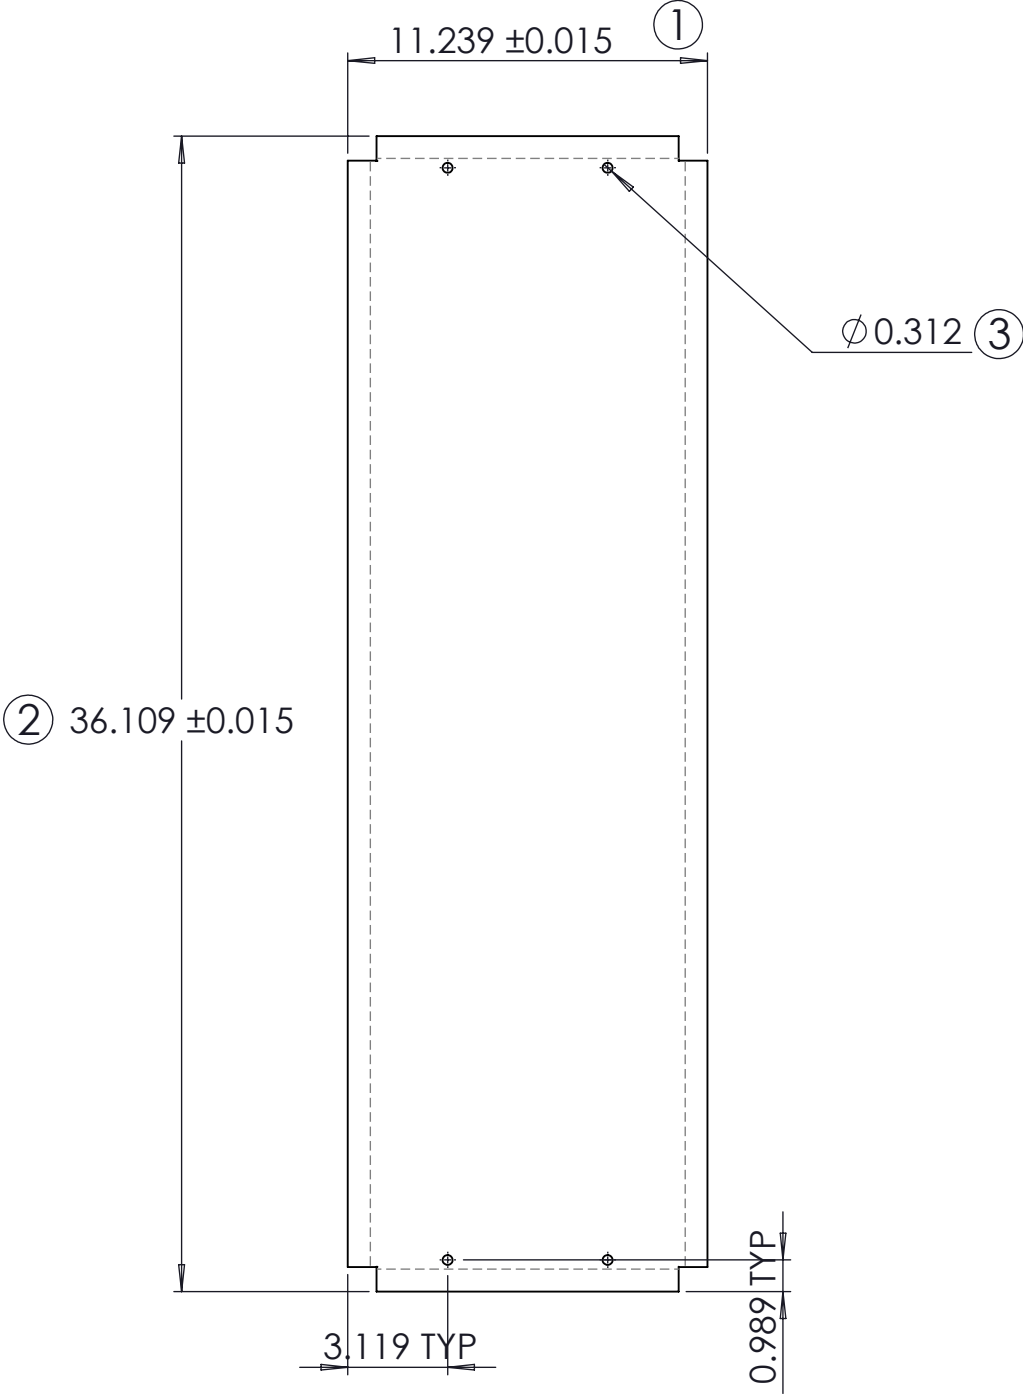

OC:

Tolerances:			10.00" COVER				Dwn No:		Rev:	
.XX ±	.030						12-D-6083-06-(16gacr ANSI-61) - K48 - V3-R0		00	
.XXX ±	.015									
Angular ±	2°									
Units are in inches			Dwn: AWV	11/03/2026	Chk: AWV	11/03/2026	Apvd: AWV	11/03/2026	Sht 1 of 1	