

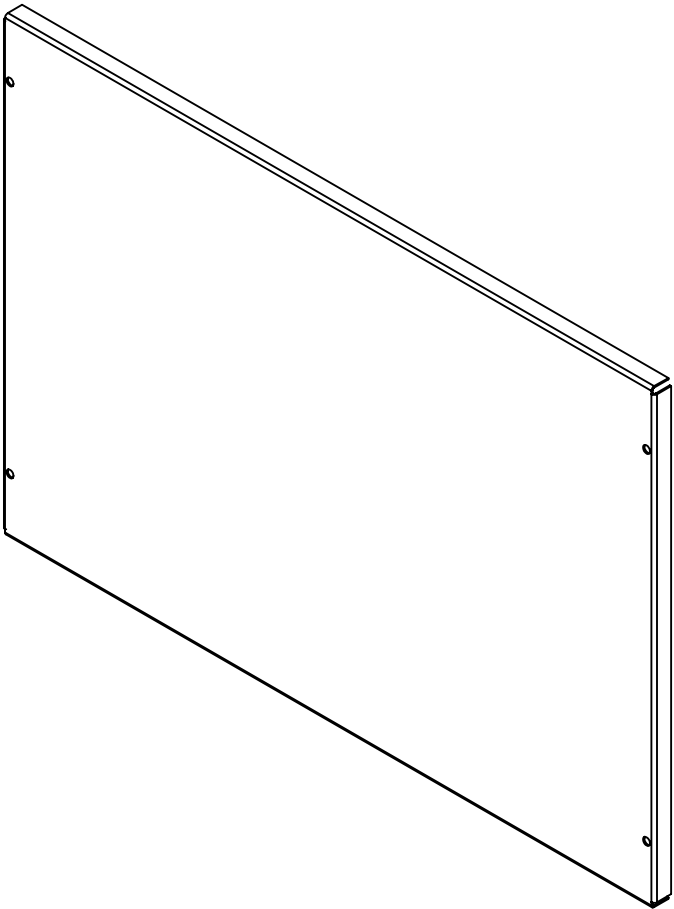


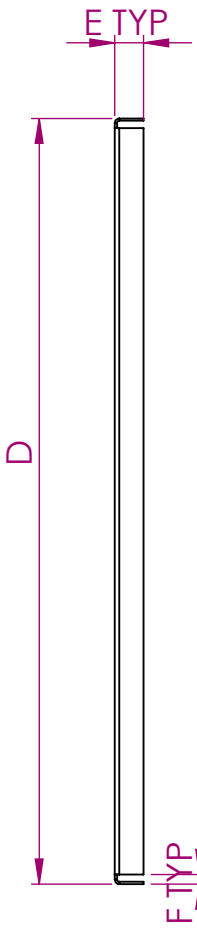

| MEDIDA | MEDISION | LIM. I | LIM. S | VALOR MFG | VoBo MFG | VALOR CAL | VoBo CAL |
|--------|----------|--------|--------|-----------|----------|-----------|----------|
| A      | 2.470    | 2.455  | 2.485  |           |          |           |          |
| B      | 17.470   | 17.455 | 17.485 |           |          |           |          |
| C      | 0.340    | 0.325  | 0.355  |           |          |           |          |
| D      | 19.940   | 19.925 | 19.955 |           |          |           |          |
| E      | 0.750    | 0.735  | 0.765  |           |          |           |          |
| F      | 0.250    | 0.235  | 0.265  |           |          |           |          |
| G      | 0.120    | 0.105  | 0.135  |           |          |           |          |
| H      | 28.810   | 28.795 | 28.825 |           |          |           |          |
| I      | 0.120    | 0.105  | 0.135  |           |          |           |          |

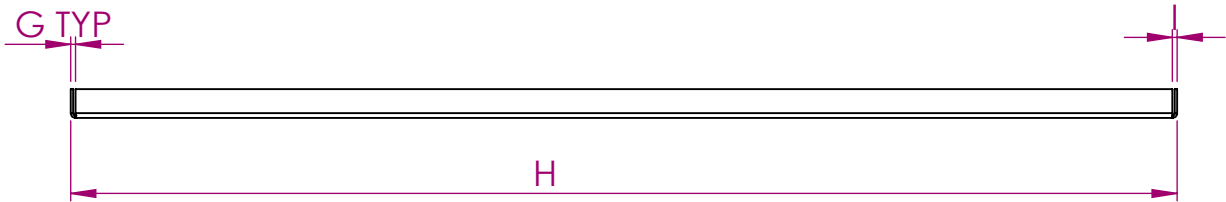

| TABLA DE CRITERIOS |          |            |          |          |
|--------------------|----------|------------|----------|----------|
| CRITERIO           | Correcto | Incorrecto | VoBo MFG | VoBo Cal |
| Gauge Perfil       | Embona   | No Embona  |          |          |
| V de Doblado       | 10 mm    |            |          |          |

Tolerances:  
.XX ± .030  
.XXX ± .015  
Angular ± 2°  
Units are in inches



| 20.00" COVER |            |           |            |
|--------------|------------|-----------|------------|
| Dwn: JRFM    | 30/07/2026 | Chk: JRFM | 30/07/2026 |

|                                                        |            |
|--------------------------------------------------------|------------|
| Dwn No:<br>12-D-6088-06-(16gacr ANSI-61) - K48 - V2-R0 | Rev:<br>00 |
| Apvd: JRFM                                             | 30/07/2026 |
| Sht 1 of 1                                             |            |