


MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	17.470	17.455	17.485				
C	2.470	2.455	2.485				
D	19.940	19.925	19.955				
E	0.750	0.735	0.765				
F	0.250	0.235	0.265				
G	34.810	34.795	34.825				
H	0.750	0.735	0.765				

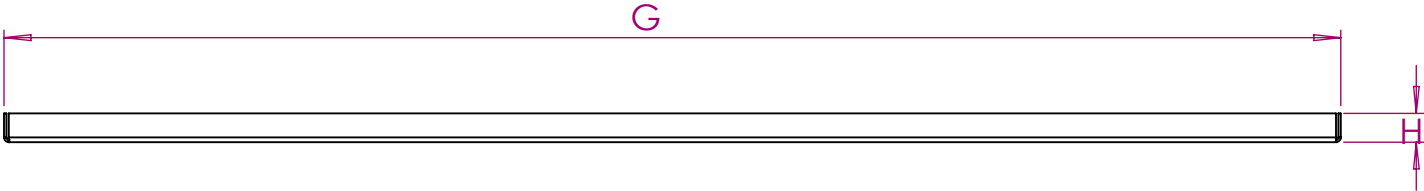

Ø0.312 X4


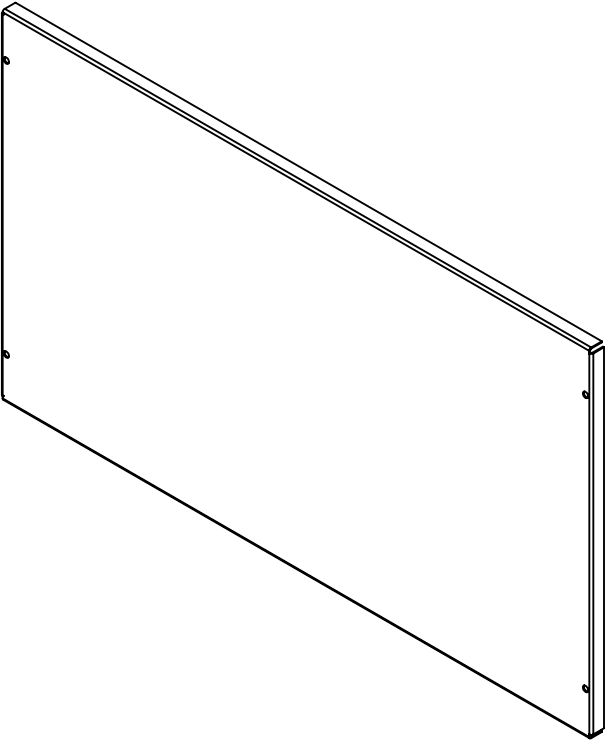


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

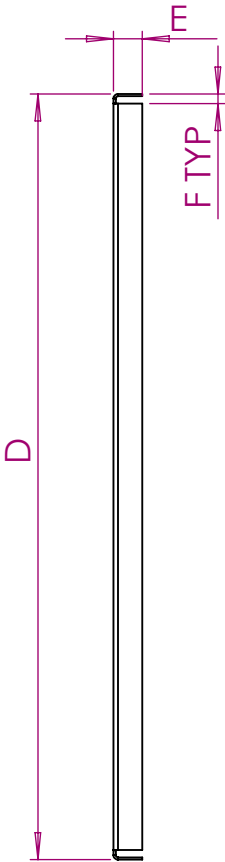


20.00" COVER			
Dwn: AWV	10/03/2026	Chk: AWV	10/03/2026

Dwn No: 12-D-6088-08-(16ga ANSI-61) - K48 - V2-R0	Rev: 00
Apvd: AWV	10/03/2026
Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	21.239	21.224	21.254				
2	LASER	36.109	36.094	36.124				
3	LASER	0.312	0.297	0.327				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6088-08-(16ga ANSI-61) - K48 - V2-R0	10/03/26	0.48	21.239	36.109	0.060
R1						
R2						
R3						

CORTE

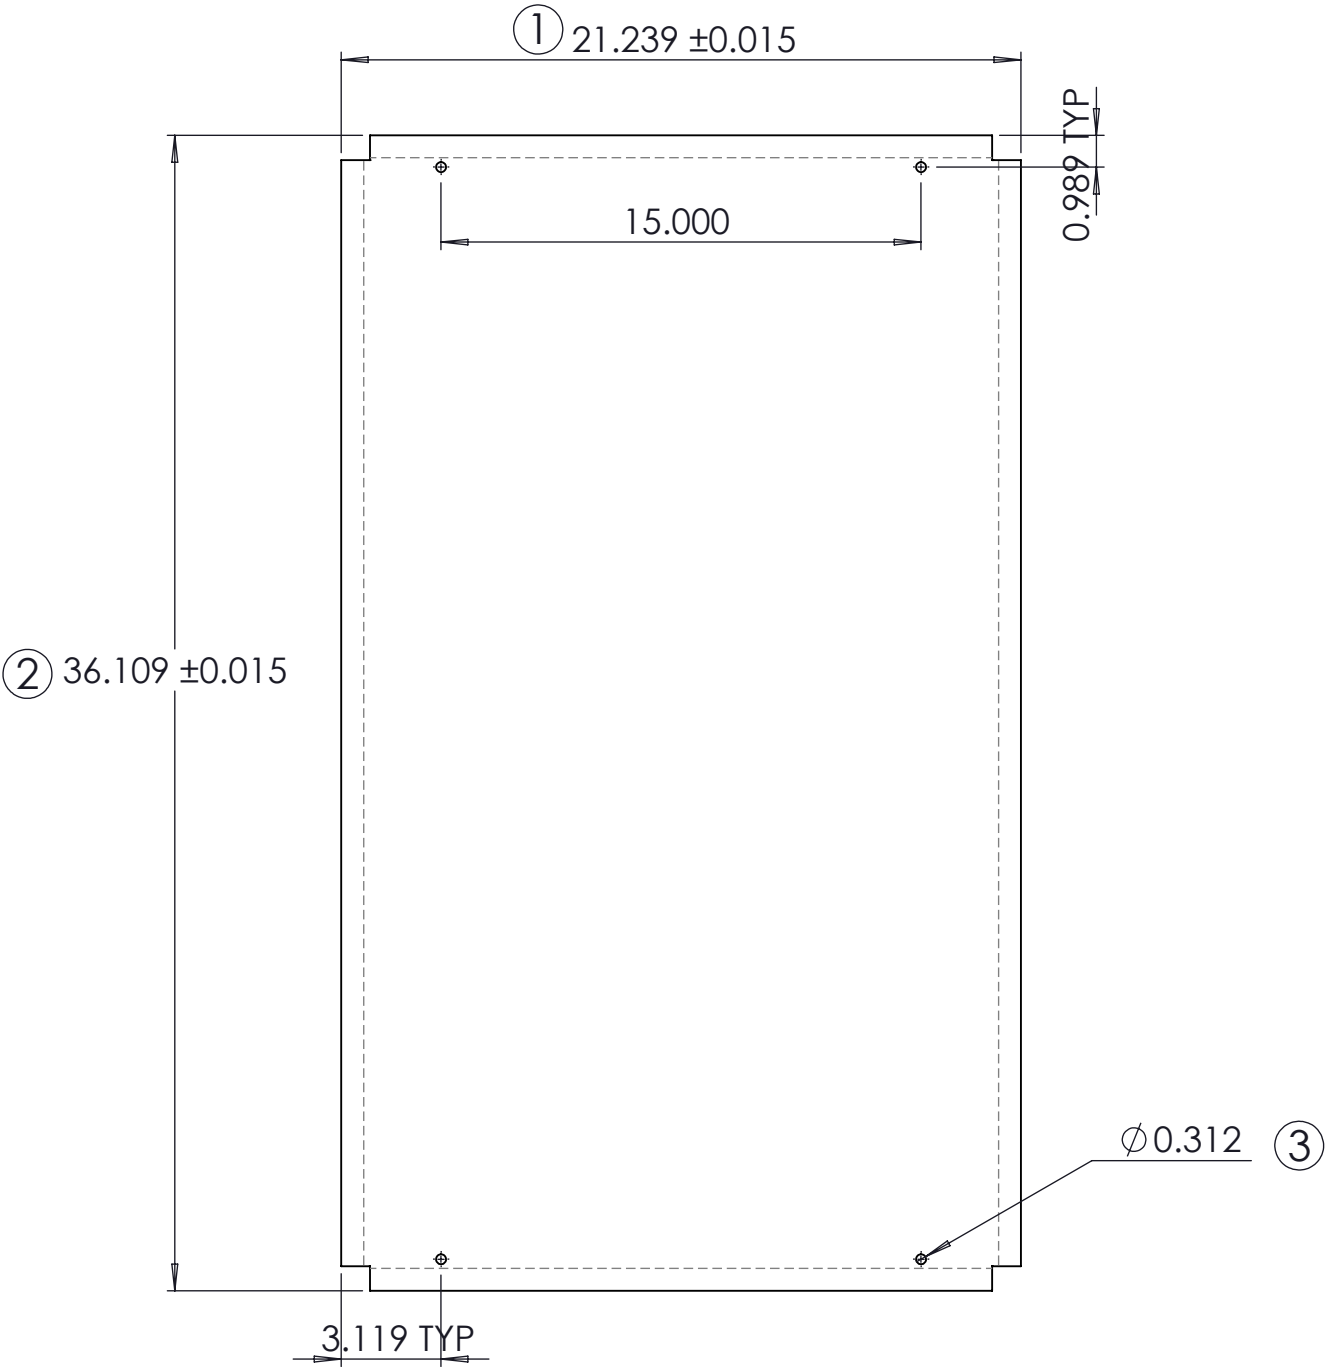

OC:

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches			20.00" COVER				Dwn No: 12-D-6088-08-(16ga ANSI-61) - K48 - V2-R0		Rev: 00
			Dwn: AWV	10/03/2026	Chk: AWV	10/03/2026	Apvd: AWV	10/03/2026	Sht 1 of 1