


PC No.	A	MATL	FINISH	WIDTH	LENGTH	THK	WEIGHT	REFERENCE
12-D-6088-01	10.81	16gacr	ANSI-61	21.21	12.08	0.060	4.46	14"W
12-D-6088-02	14.81	16gacr	ANSI-61	21.21	16.08	0.060	5.93	18"W
12-D-6088-03	16.81	16gacr	ANSI-61	21.21	18.08	0.060	6.67	20"W
12-D-6088-04	21.81	16gacr	ANSI-61	21.21	23.08	0.060	8.51	25"W
12-D-6088-05	22.81	16gacr	ANSI-61	21.21	24.08	0.060	8.88	26"W
12-D-6088-06	28.81	16gacr	ANSI-61	21.21	30.08	0.060	11.0	32"W
12-D-6088-07	31.81	16gacr	ANSI-61	21.21	33.08	0.060	12.20	35"W
12-D-6088-08	34.81	16gacr	ANSI-61	21.21	36.08	0.060	13.31	38"W
12-D-6088-09	42.81	16gacr	ANSI-61	21.21	44.08	0.060	16.26	46"W
12-D-6088-10	48.81	16gacr	ANSI-61	21.21	50.08	0.060	18.48	52"W
12-D-6088-11	54.81	16gacr	ANSI-61	21.21	56.08	0.060	20.69	58"W
12-D-6088-12	36.81	16gacr	ANSI-61	21.21	38.08	0.060	14.05	40"W
12-D-6088-13	44.81	16gacr	ANSI-61	21.21	46.08	0.060	17.00	48"W

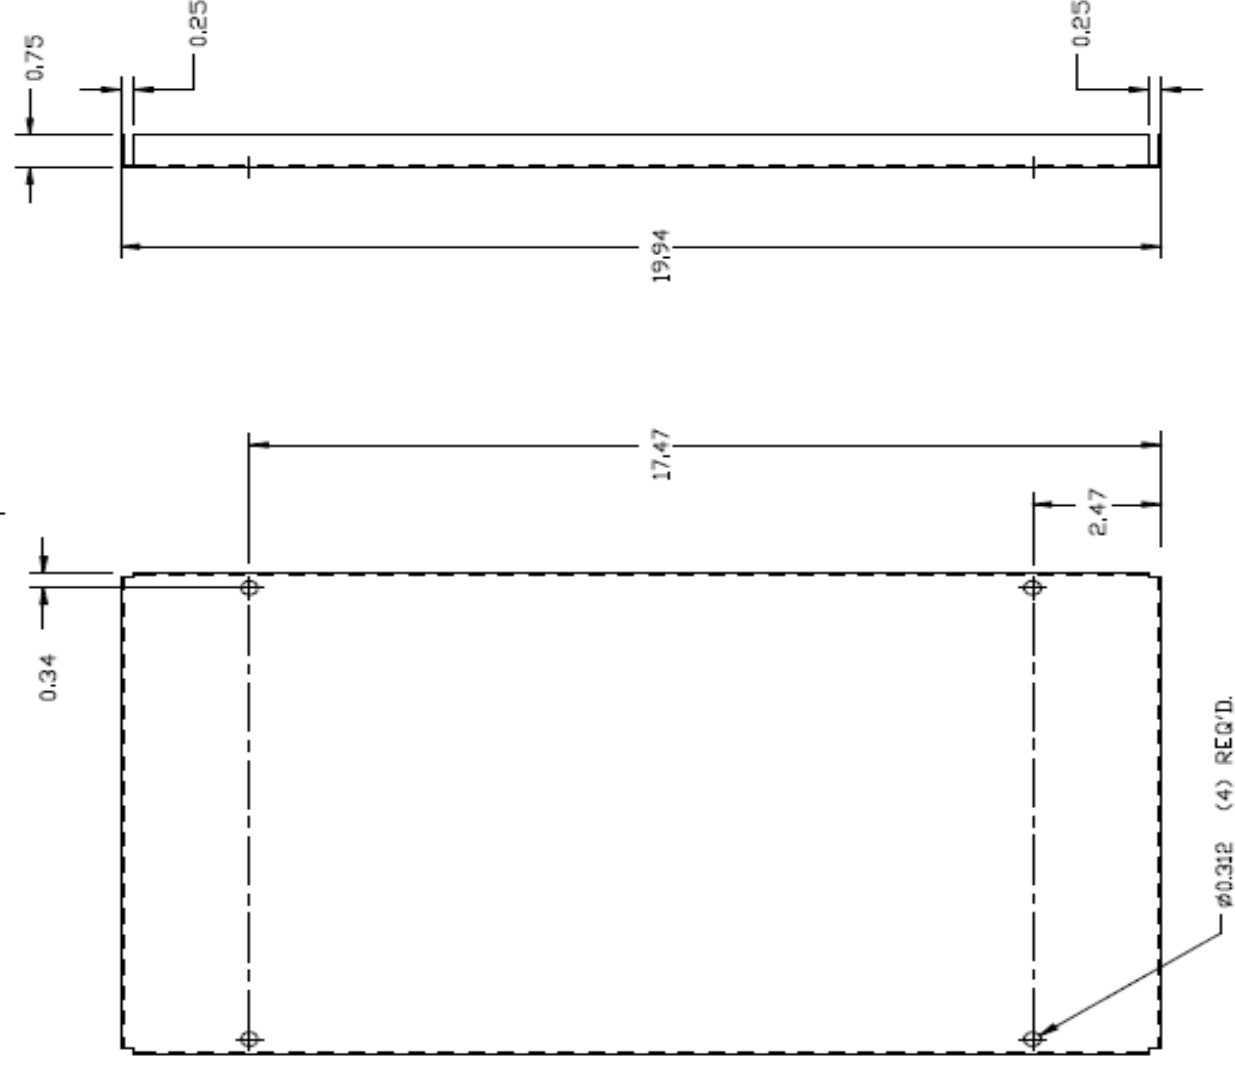

Revisions	01C-320A 4-12-00	11C-640A 7-25-03
-----------	------------------	------------------

Tolerances: XX ± .030 XXX ± .015 Angular ± .2°	Confidential - property of Siemens Energy & Automation, Inc.		20.00" COVER 16gacr		12-D-6088		Rev
	Dwn: J/W	4/10/00	Chk: RHR	4/10/00	Apv: JAJ	4/10/00	Sht 1 of 1