


PC No.	A	B	C	MATL	FINISH	WIDTH	LENGTH	THK	WEIGHT	REF
12-D-6089-01	10.81	-	4	16gacr	ANSI-61	12.08	23.71	0.06	4.98	14"W
12-D-6089-02	14.81	-	4	16gacr	ANSI-61	16.08	23.71	0.06	6.63	18"W
12-D-6089-03	16.81	-	4	16gacr	ANSI-61	18.08	23.71	0.06	7.46	20"W
12-D-6089-04	22.81	-	4	16gacr	ANSI-61	24.08	23.71	0.06	9.93	26"W
12-D-6089-05	28.81	-	4	16gacr	ANSI-61	30.08	23.71	0.06	12.41	32"W
12-D-6089-06	34.81	-	4	16gacr	ANSI-61	36.08	23.71	0.06	14.88	38"W
12-D-6089-07	42.81	-	4	16gacr	ANSI-61	44.08	23.71	0.06	18.18	46"W
12-D-6089-08	48.81	5.00	6	16gacr	ANSI-61	50.08	23.71	0.06	20.66	52"W
12-D-6089-09	54.81	5.00	6	16gacr	ANSI-61	56.08	23.71	0.06	23.13	58"W

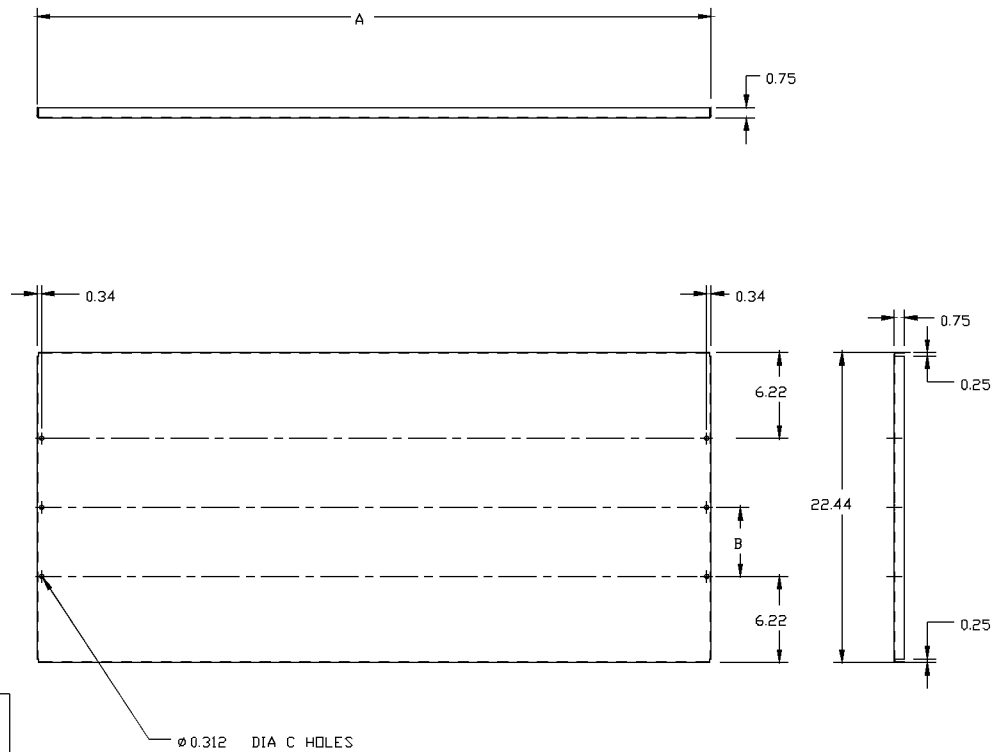

Revisions:	
0:IC-320A	4/12/00

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2°	Confidential - property of Siemens Energy Automation, Inc. Distribution Products Division	22.50" COVER 16gacr	Dwg No 12-D-6089	Rev 0
Units are in inches.	Dwn: JW	4/10/00	Chk: RHR	4/10/00
	Apvd: JAJ	4/10/00	Sht 1 of 1	