

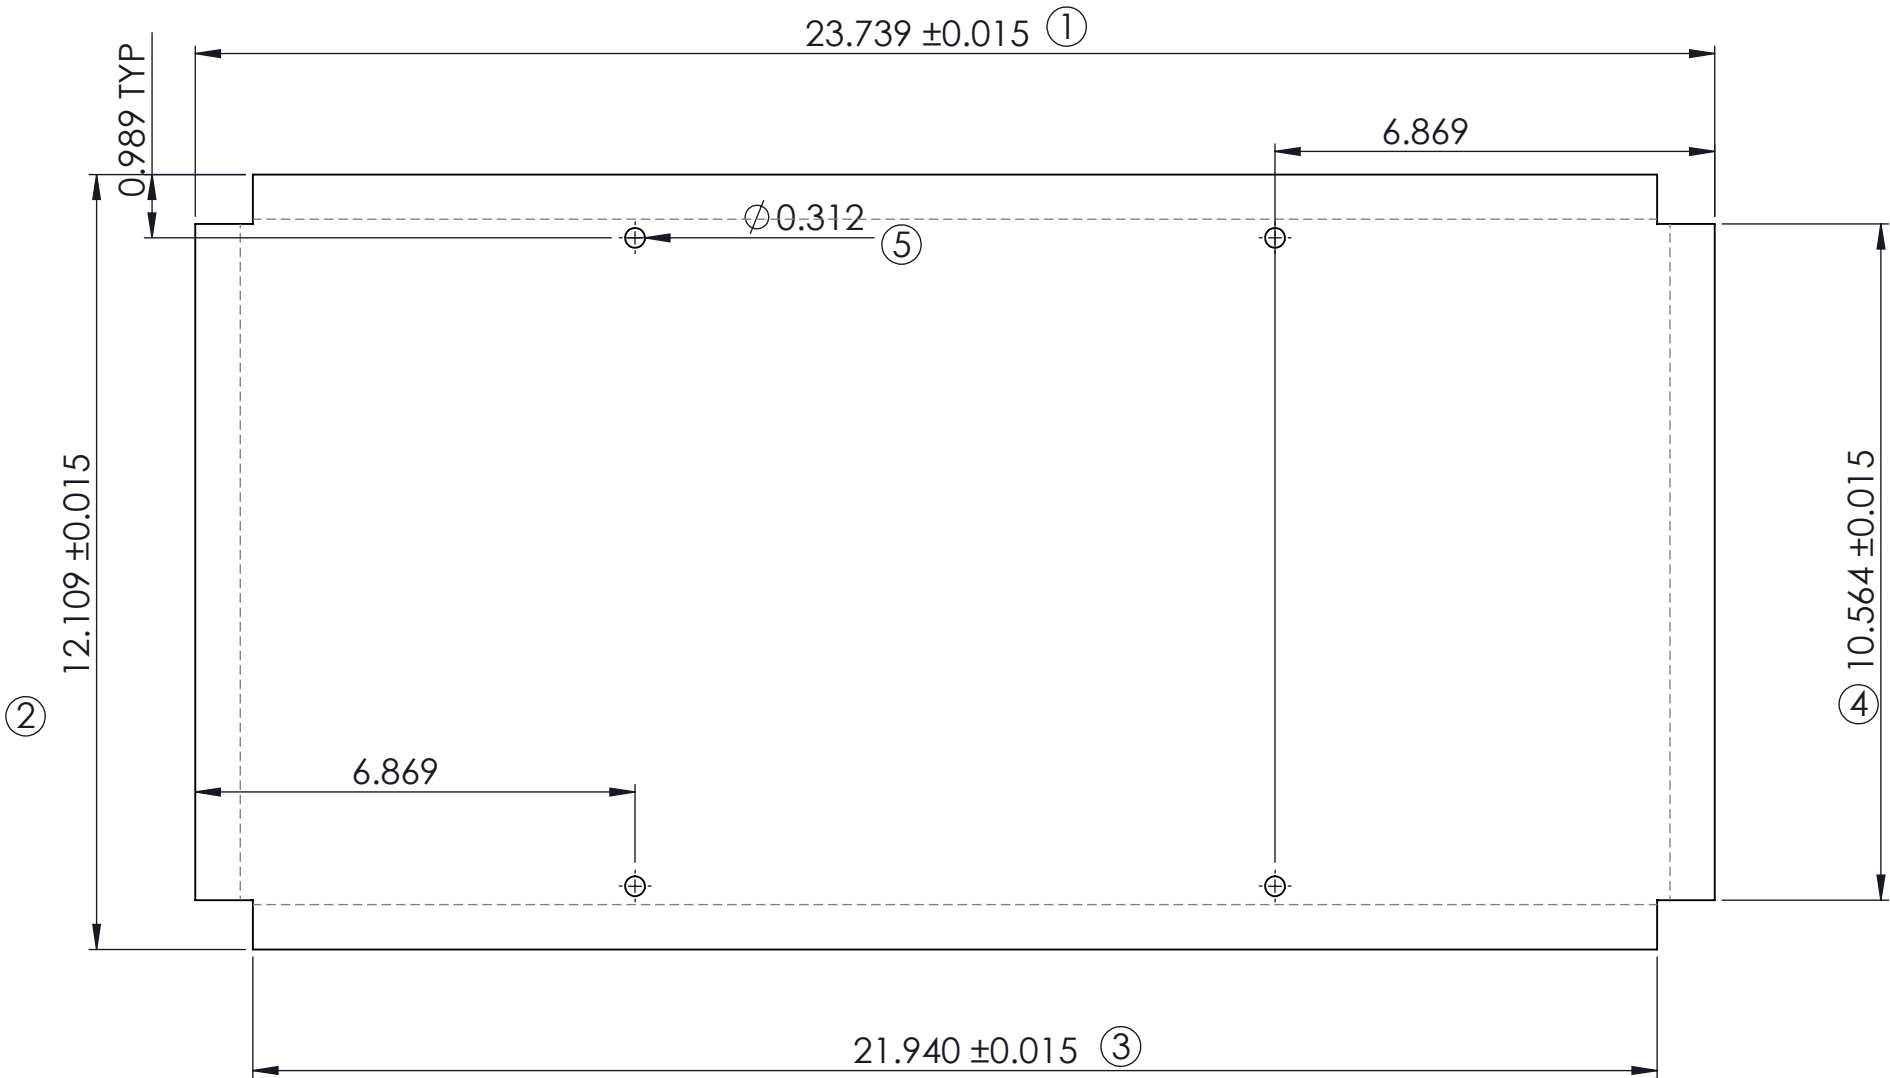
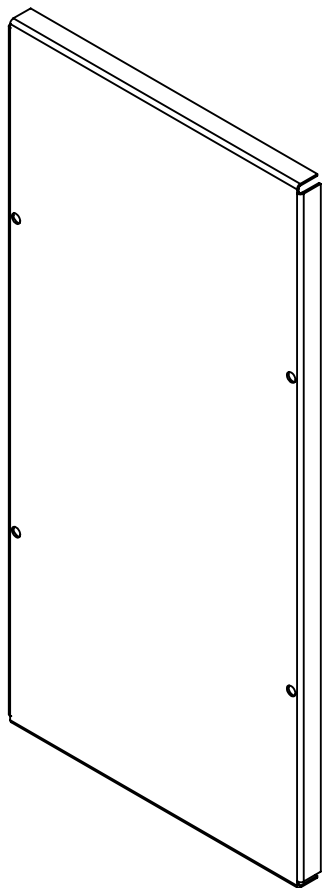


No.	RESP	Dim	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	23.739	23.724	23.754				
2	LASER	12.109	12.094	12.124				
3	LASER	21.940	21.925	21.955				
4	LASER	10.564	10.549	10.579				
5	LASER	0.312	0.297	0.327				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	12-D-6089-01-(16gacr ANSI-61) - K48 - V0-R0	30/07/2026	0.48	12.109	23.739	0.060

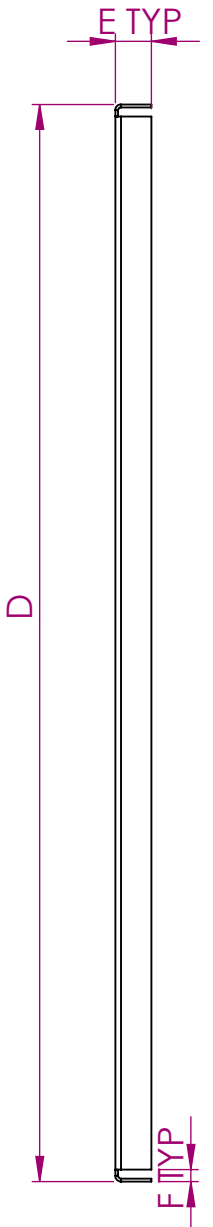

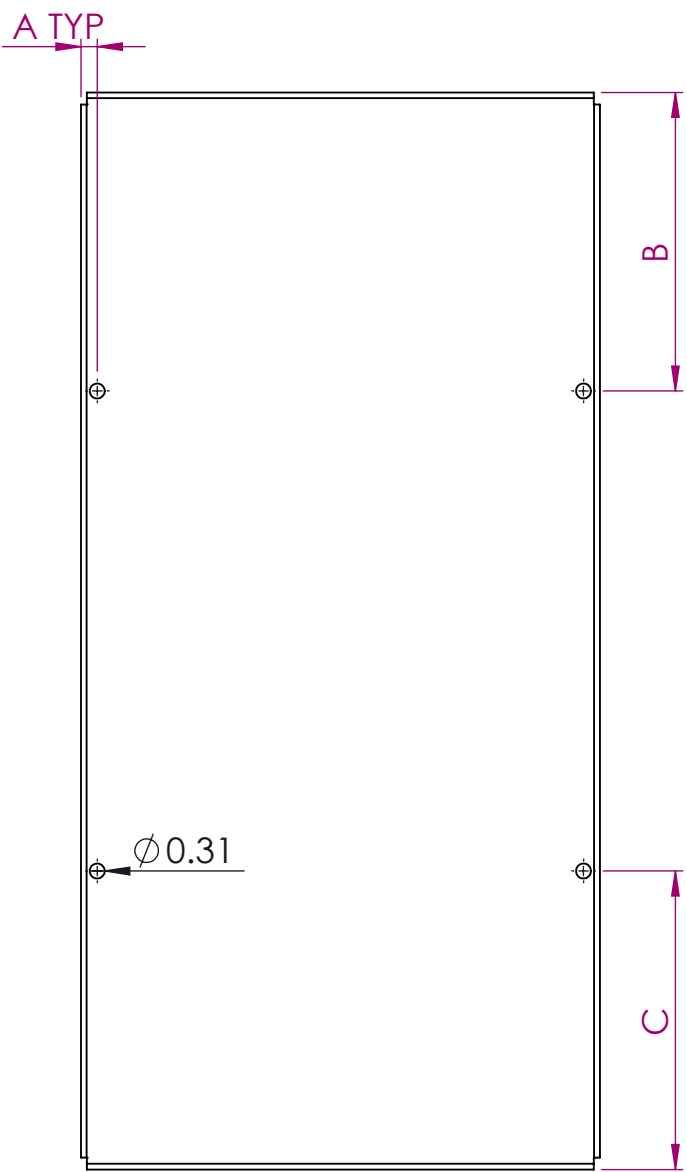

MEDIDA	MEDISION	LIM. I	LIM. S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	6.220	6.205	6.235				
C	6.220	6.205	6.235				
D	22.440	22.425	22.455				
E	0.750	0.735	0.765				
F	0.250	0.235	0.265				
G	10.810	10.795	10.825				
H	0.120	0.105	0.135				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



22.50" COVER			
Dwn: JRFM	30/07/2026	Chk: JRFM	30/07/2026

Dwn No: 12-D-6089-01-(16gacr ANSI-61) - K48 - V0-R0	Rev: 00
Apvd: JRFM	30/07/2026
Sht 1 of 1	