

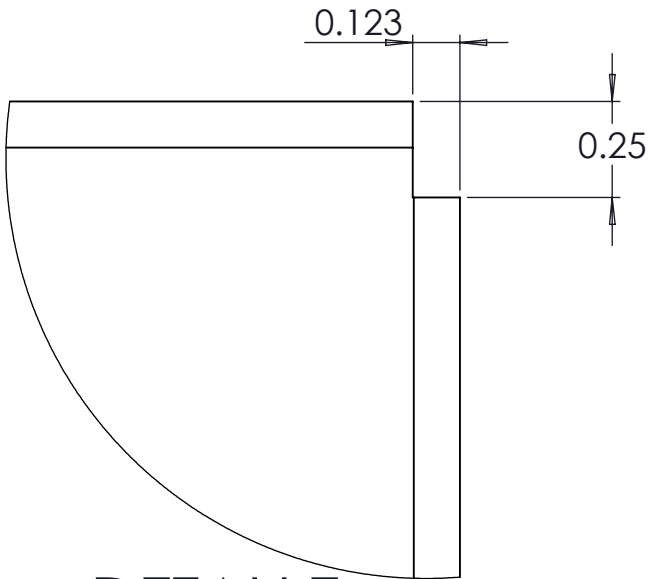
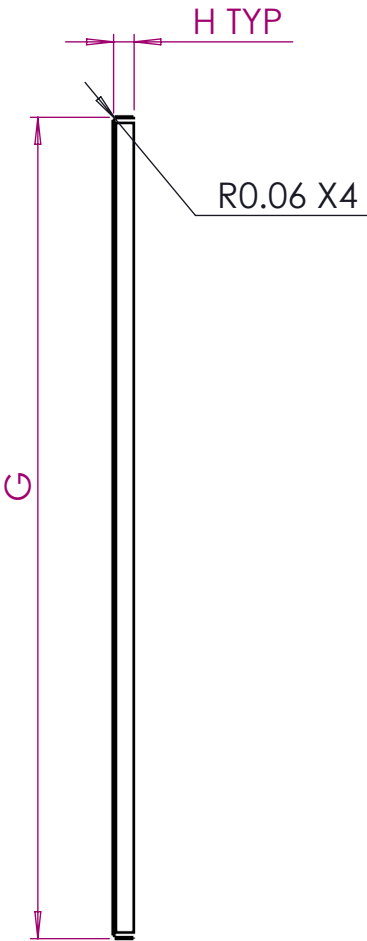


| MEDIDA | DIMENSION | L.I    | L.S    | VALOR<br>MFG | VoBo<br>MFG | VALOR<br>CAL | VoBo<br>CAL |
|--------|-----------|--------|--------|--------------|-------------|--------------|-------------|
| A      | 0.340     | 0.325  | 0.355  |              |             |              |             |
| B      | 34.130    | 34.115 | 34.145 |              |             |              |             |
| C      | 2.470     | 2.455  | 2.485  |              |             |              |             |
| D      | 25.000    | 24.985 | 25.015 |              |             |              |             |
| E      | 2.470     | 2.455  | 2.485  |              |             |              |             |
| F      | 34.130    | 34.115 | 34.145 |              |             |              |             |
| G      | 29.940    | 29.925 | 29.955 |              |             |              |             |
| H      | 0.750     | 0.735  | 0.765  |              |             |              |             |
| I      | 34.810    | 34.795 | 34.825 |              |             |              |             |

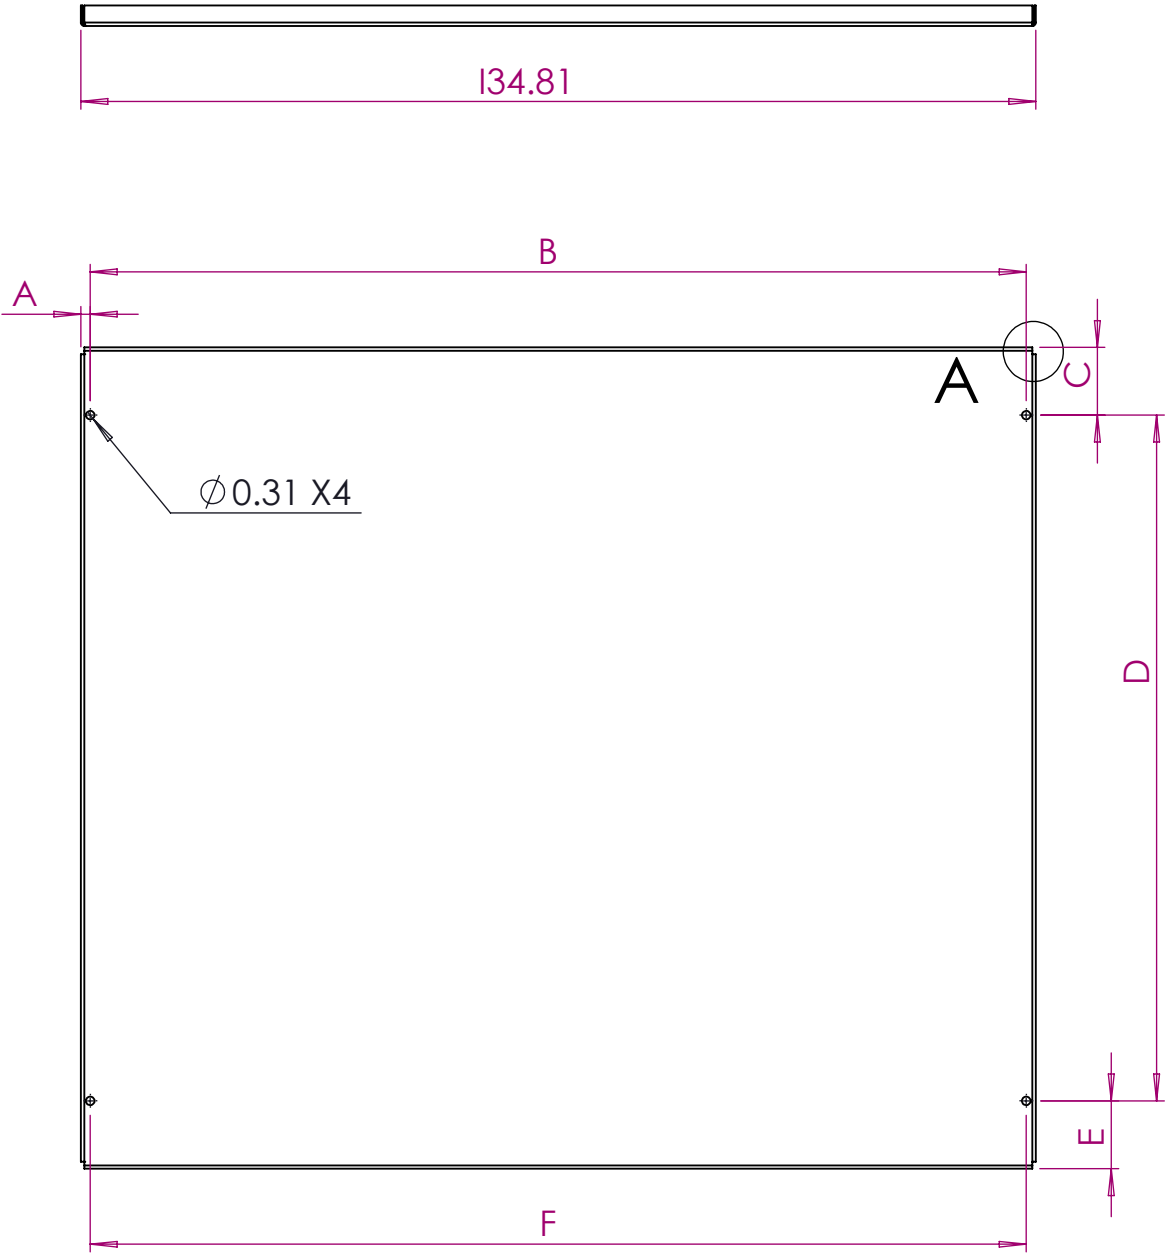

DETALLE A  
ESCALA 2 : 1

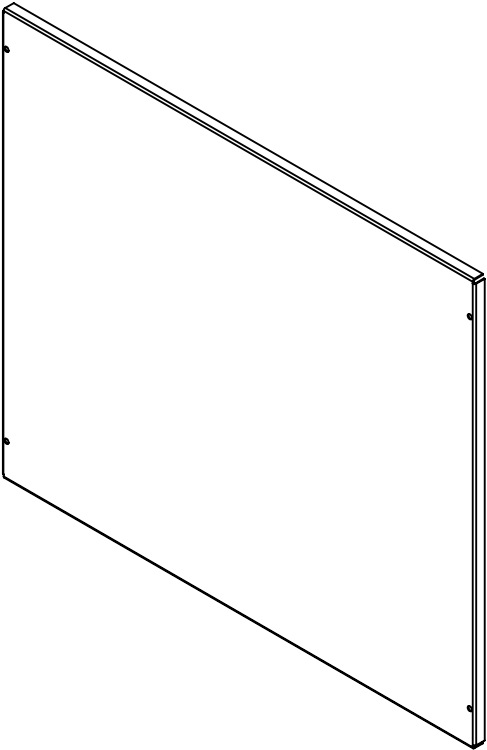

| TABLA DE CRITERIOS |          |            |             |             |
|--------------------|----------|------------|-------------|-------------|
| CRITERIO           | Correcto | Incorrecto | VoBo<br>MFG | VoBo<br>Cal |
| Gauge Perfil       | Embona   | No Embona  |             |             |
| V de Doblado       | 10 mm    |            |             |             |

Tolerances:  
.XX ± .030  
.XXX ± .015  
Angular ± 2°  
Units are in inches




| 30.00" COVER |            |          |            |
|--------------|------------|----------|------------|
| Dwn: AWV     | 05/03/2026 | Chk: AWV | 05/03/2026 |

|                                                        |            |
|--------------------------------------------------------|------------|
| Dwn No:<br>12-D-6091-08-(16gacr ANSI-61) - K48 - V1-R0 | Rev:<br>00 |
| Apvd: AWV                                              | 05/03/2026 |
| Sht 1 of 1                                             |            |

| TABLE |       |        |        |        |           |          |           |          |
|-------|-------|--------|--------|--------|-----------|----------|-----------|----------|
| No.   | RESP  | Dim    | L.I.   | L.S.   | Valor MFG | VoBo MFG | Valor Cal | VoBo Cal |
| 1     | LASER | 36.109 | 36.094 | 36.124 |           |          |           |          |
| 2     | LASER | 34.564 | 34.549 | 34.579 |           |          |           |          |
| 3     | LASER | 31.239 | 31.224 | 31.254 |           |          |           |          |
| 4     | LASER | 29.440 | 29.425 | 29.455 |           |          |           |          |
| 5     | LASER | 0.312  | 0.297  | 0.327  |           |          |           |          |

| Revisión | Nombre DXF                                  | Fecha    | Factor K | Ancho  | Largo  | Espesor |
|----------|---------------------------------------------|----------|----------|--------|--------|---------|
| R0       | 12-D-6091-08-(16gacr ANSI-61) - K48 - V1-R0 | 05/03/26 | 0.48     | 31.239 | 36.109 | 0.060   |
| R1       |                                             |          |          |        |        |         |
| R2       |                                             |          |          |        |        |         |
| R3       |                                             |          |          |        |        |         |

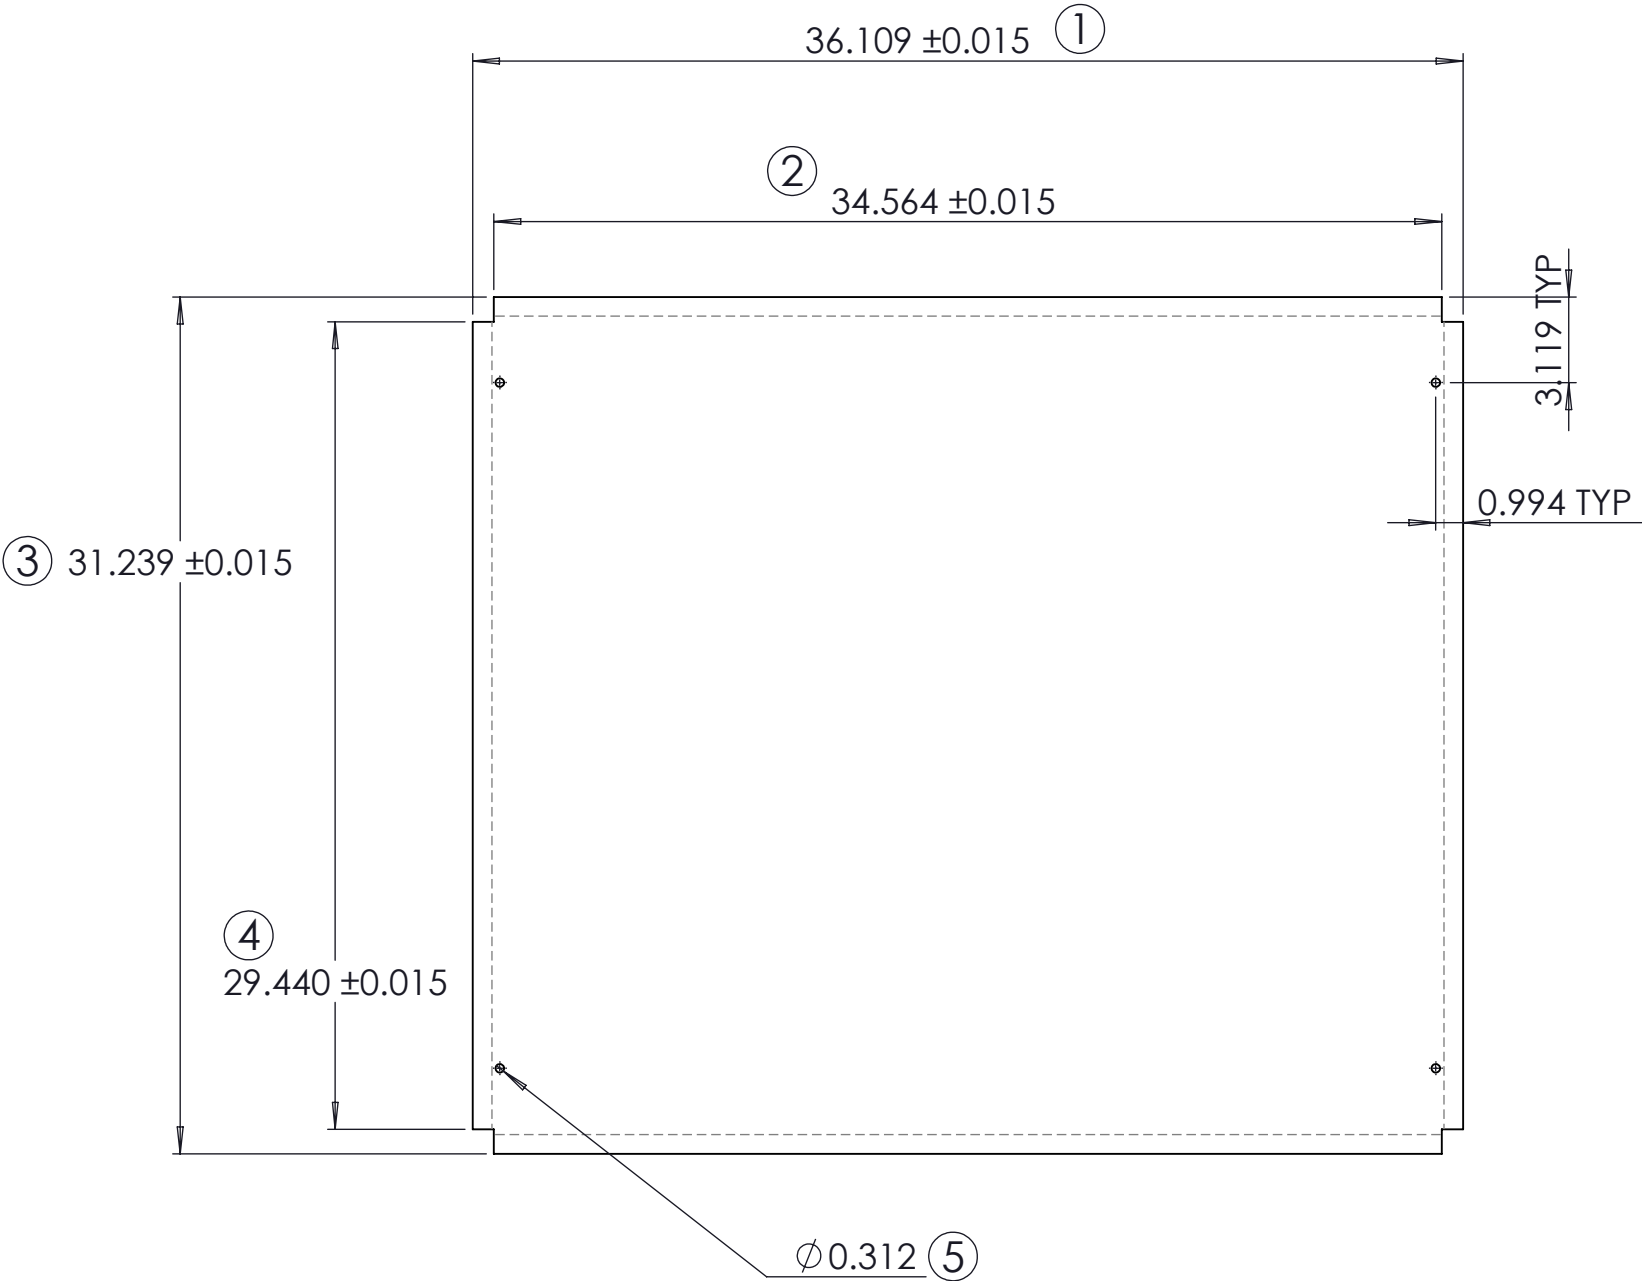

OC: