

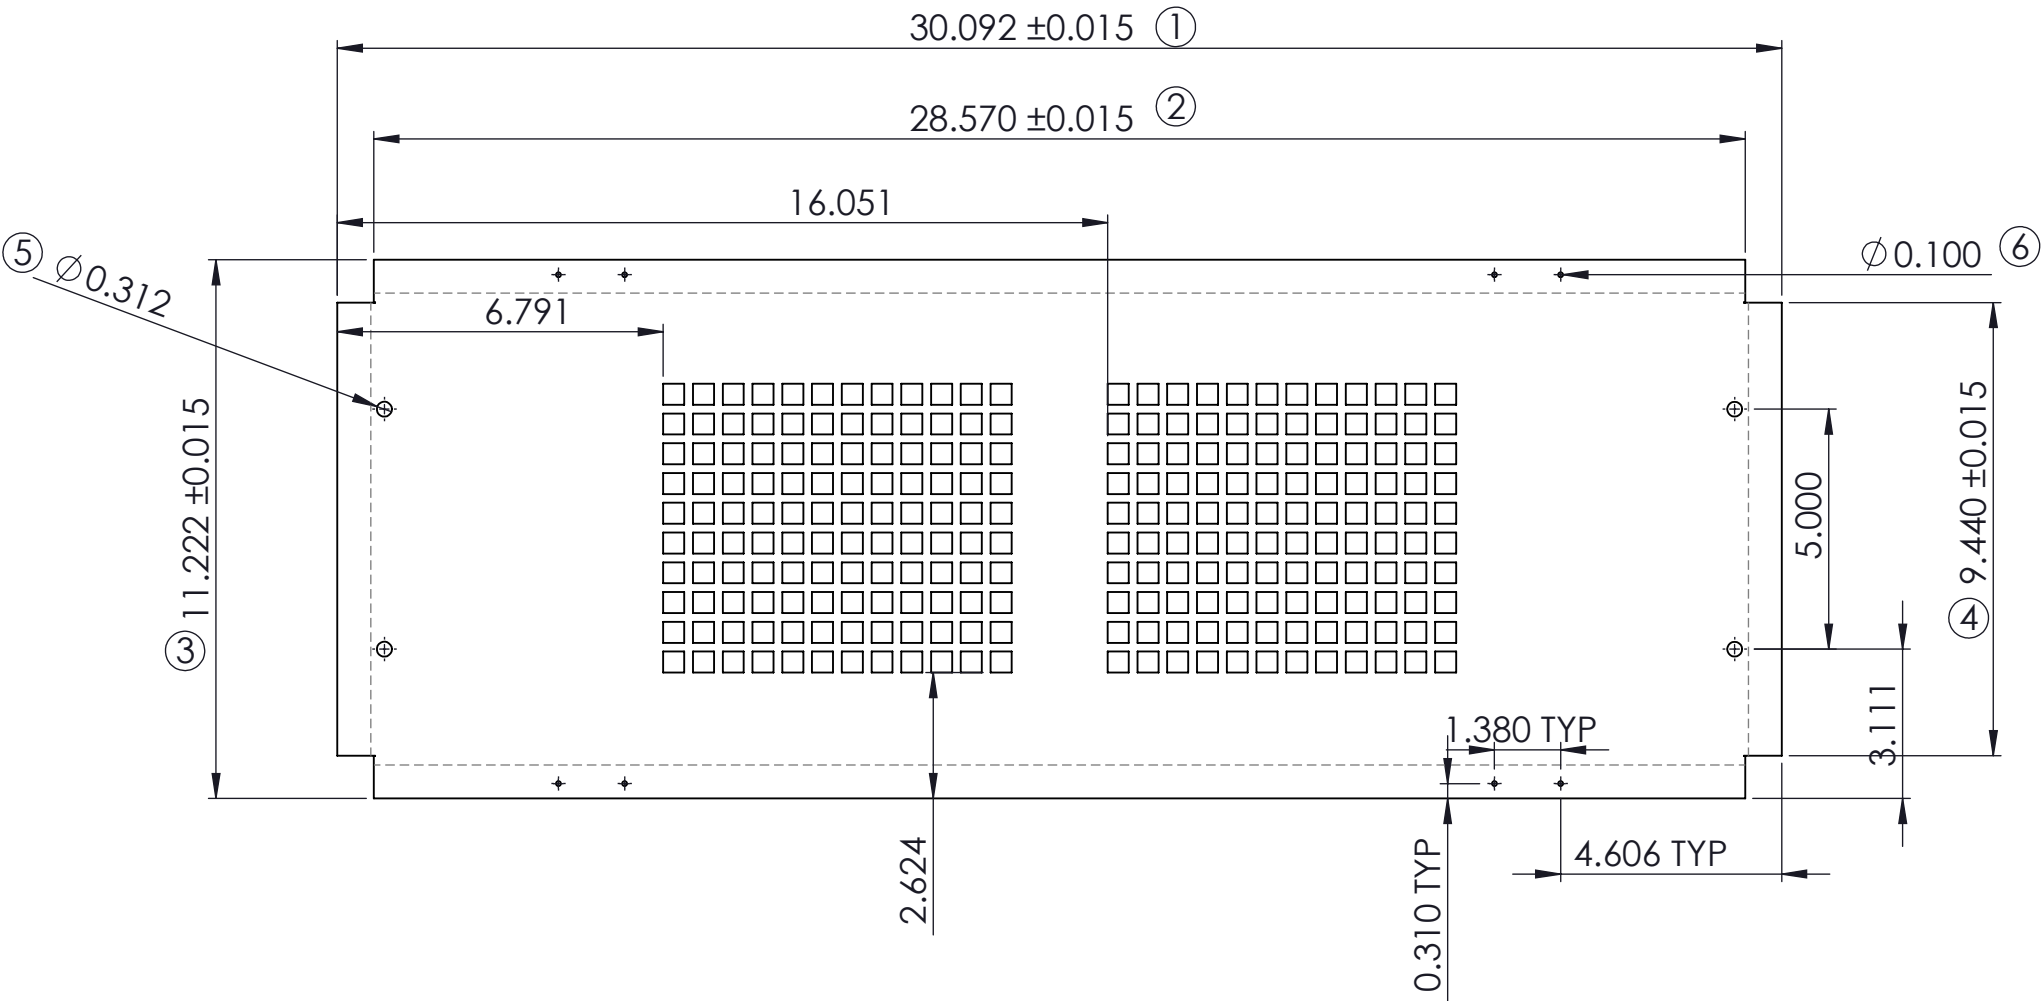
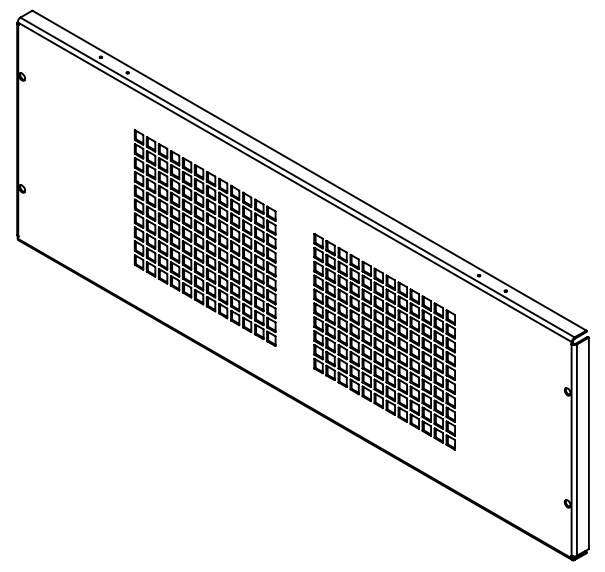
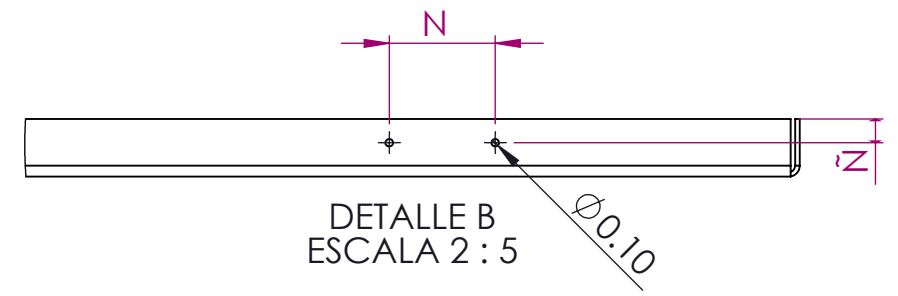
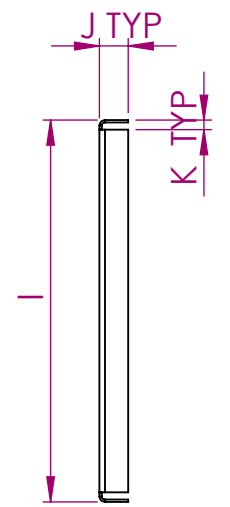


No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal	Revision						
1	LASER	30.092	30.077	30.107					R0	12-D-6106-06-(16gacr ANSI-61) - K48 - V7-R0	03/07/2026	0.48	11.222	30.092	0.060
2	LASER	28.570	28.555	28.585											
3	LASER	11.222	11.207	11.237											
4	LASER	9.440	9.425	9.455											
5	LASER	0.312	0.297	0.327											
6	LASER	0.100	0.085	0.115											

CORTE

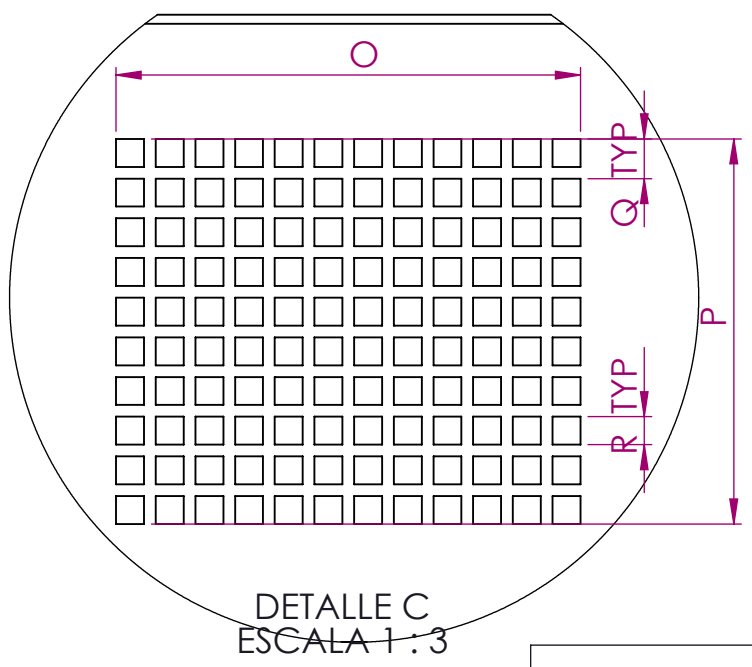

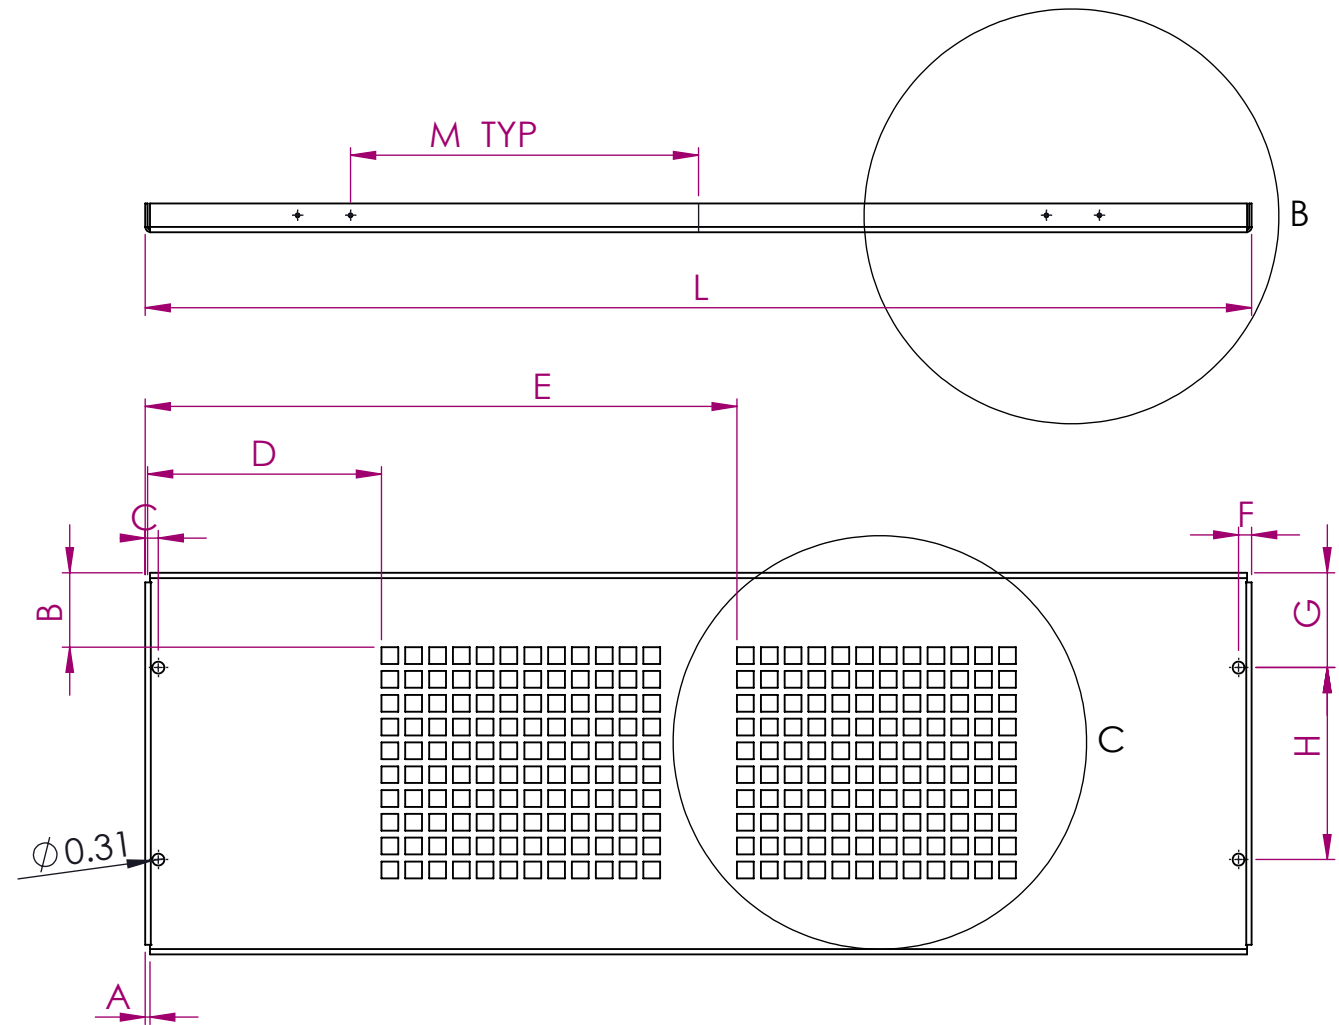

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.120	0.105	0.135				
B	1.940	1.925	1.955				
C	0.340	0.325	0.355				
D	6.090	6.075	6.105				
E	15.410	15.395	15.425				
F	0.340	0.325	0.355				
G	2.470	2.455	2.485				
H	5.000	4.985	5.015				
I	9.940	9.925	9.955				
J	0.750	0.735	0.765				
K	0.250	0.235	0.265				
L	28.810	28.795	28.825				
M	9.060	9.045	9.075				
N	1.380	1.365	1.395				
Ñ	0.310	0.295	0.325				
O	7.260	7.245	7.275				
P	6.020	6.005	6.035				
Q	0.620	0.605	0.635				
R	0.440	0.425	0.455				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



10.0" VENT COVER				Dwn No: 12-D-6106-06-(16gacr ANSI-61) - K48 - V7-R0		Rev: 00
Dwn: JRFM	03/07/2026	Chk: JRFM	03/07/2026	Apvd: JRFM	03/07/2026	Sht 1 of 1