



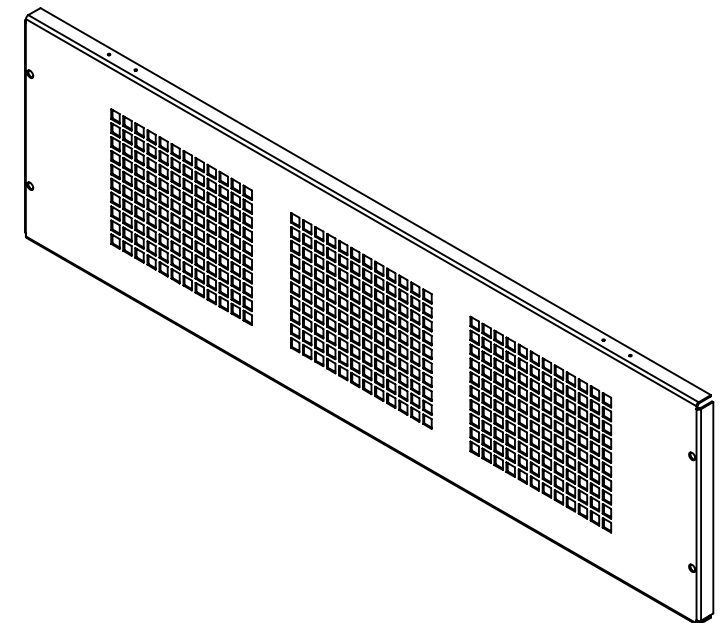


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:		
.XX	±	.030
.XXX	±	.015
Angular	±	2°
Units are in inches		

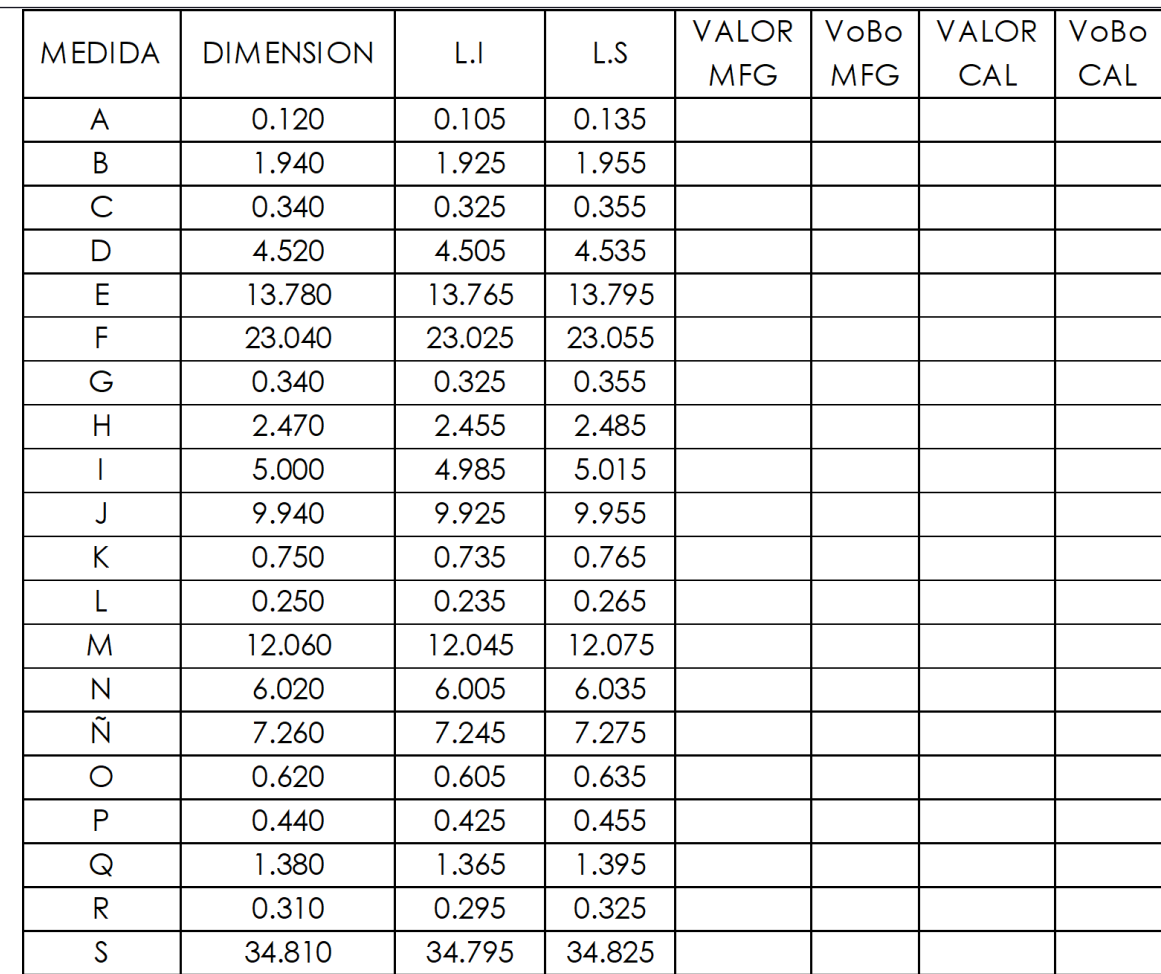

10.0" VENT COVER

Dwn No:	12-D-6106-07-(16gacr ANSI-61) - K48 - V7-R0
---------	---

Rev: 00

Dwn: A WV

05/03/2026

Chk: AWW

05/03/2026


Apvd: AWW

05/03/2026

Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	11.239	11.224	11.254				
2	LASER	9.440	9.425	9.455				
3	LASER	36.109	36.094	36.124				
4	LASER	34.570	34.555	34.585				
5	LASER	0.312	0.297	0.327				
6	LASER	0.100	0.085	0.115				

CORTE

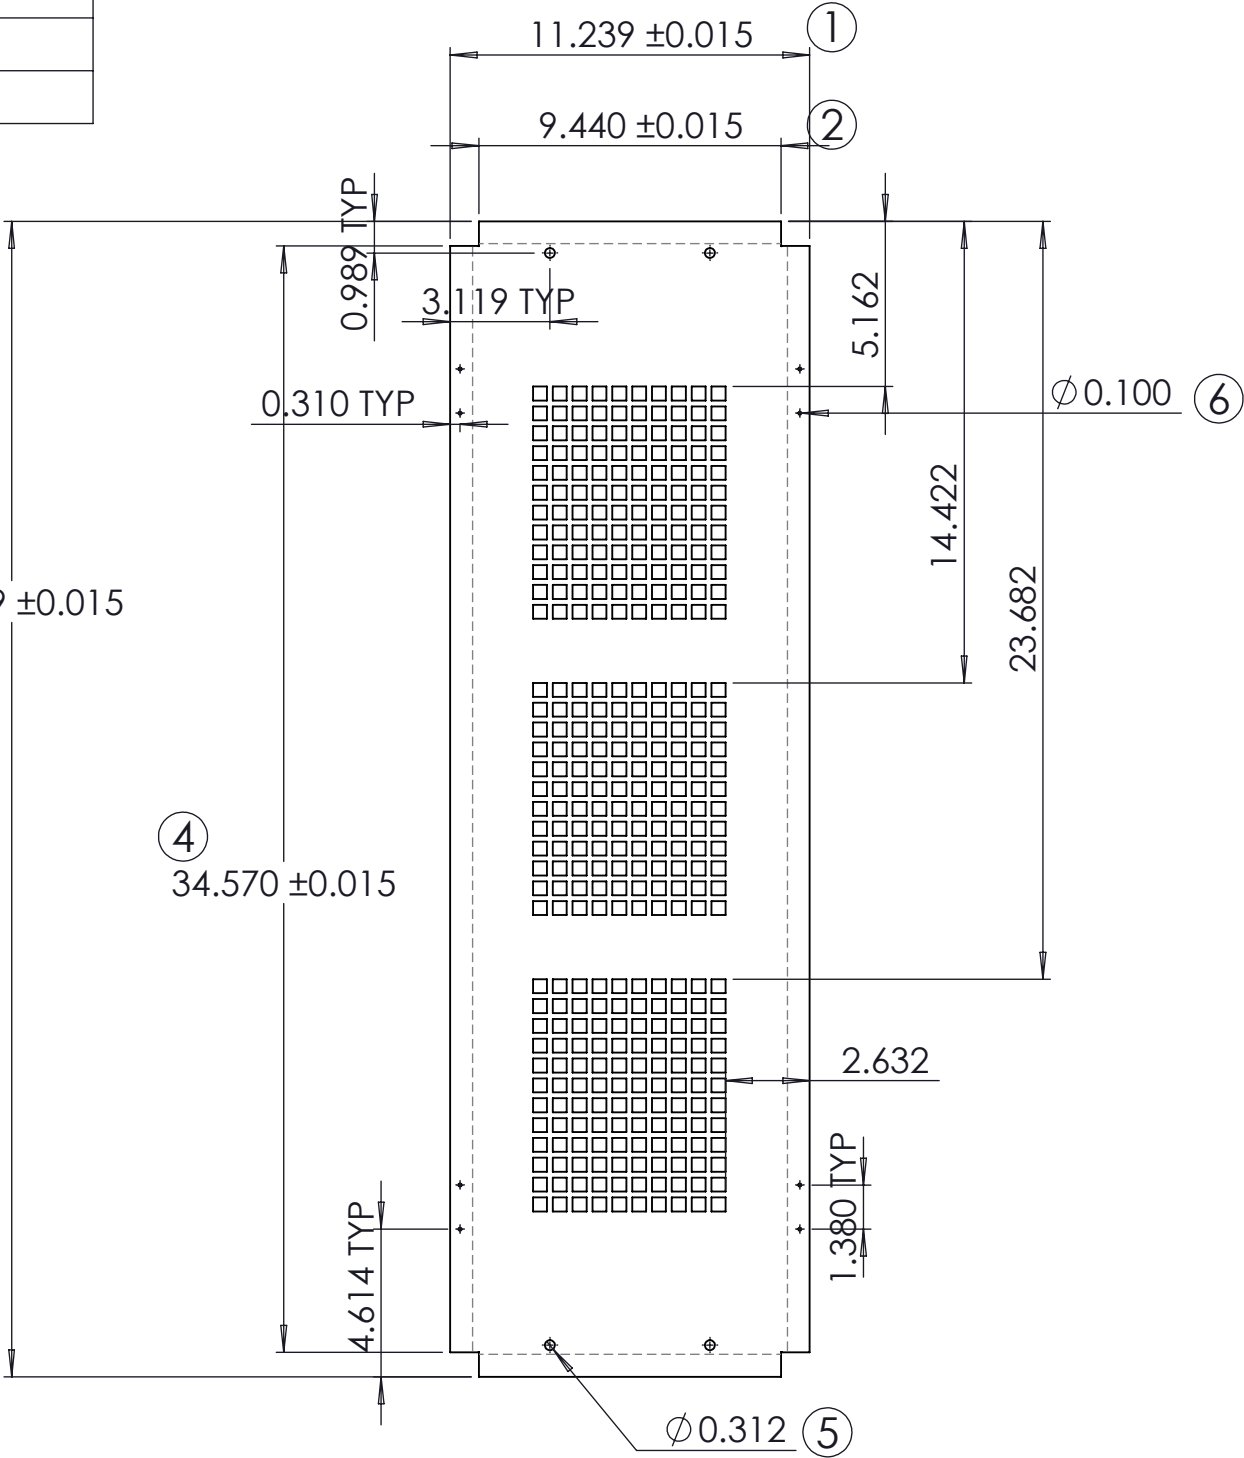

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6106-07-(16gacr ANSI-61) - K48 - V7-R0	05/03/26	0.48	11.239	36.109	0.060
R1						
R2						
R3						

OC: