







DOBLEZ

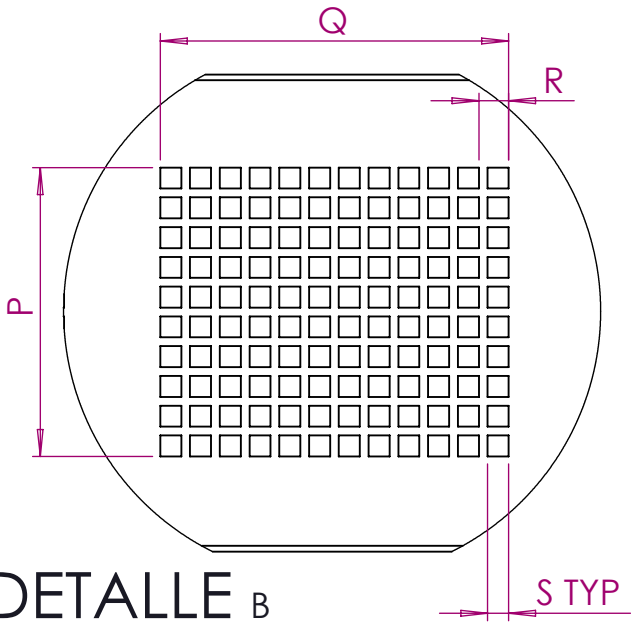

DETALLE B
ESCALA 1 : 4

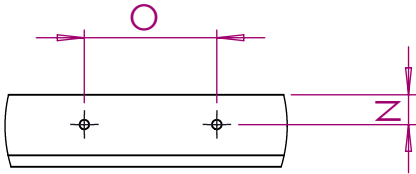

DETALLE A
ESCALA 1 : 2

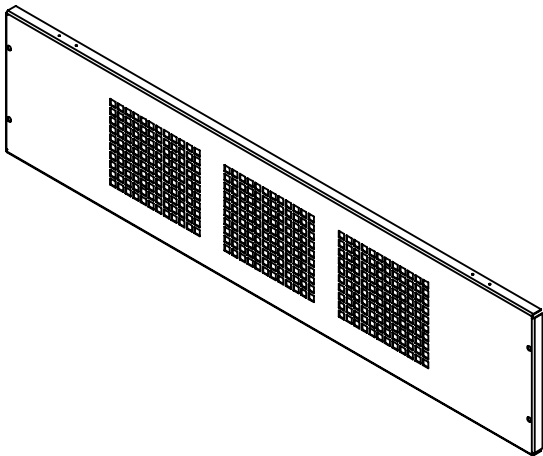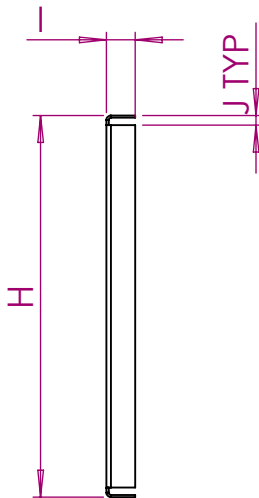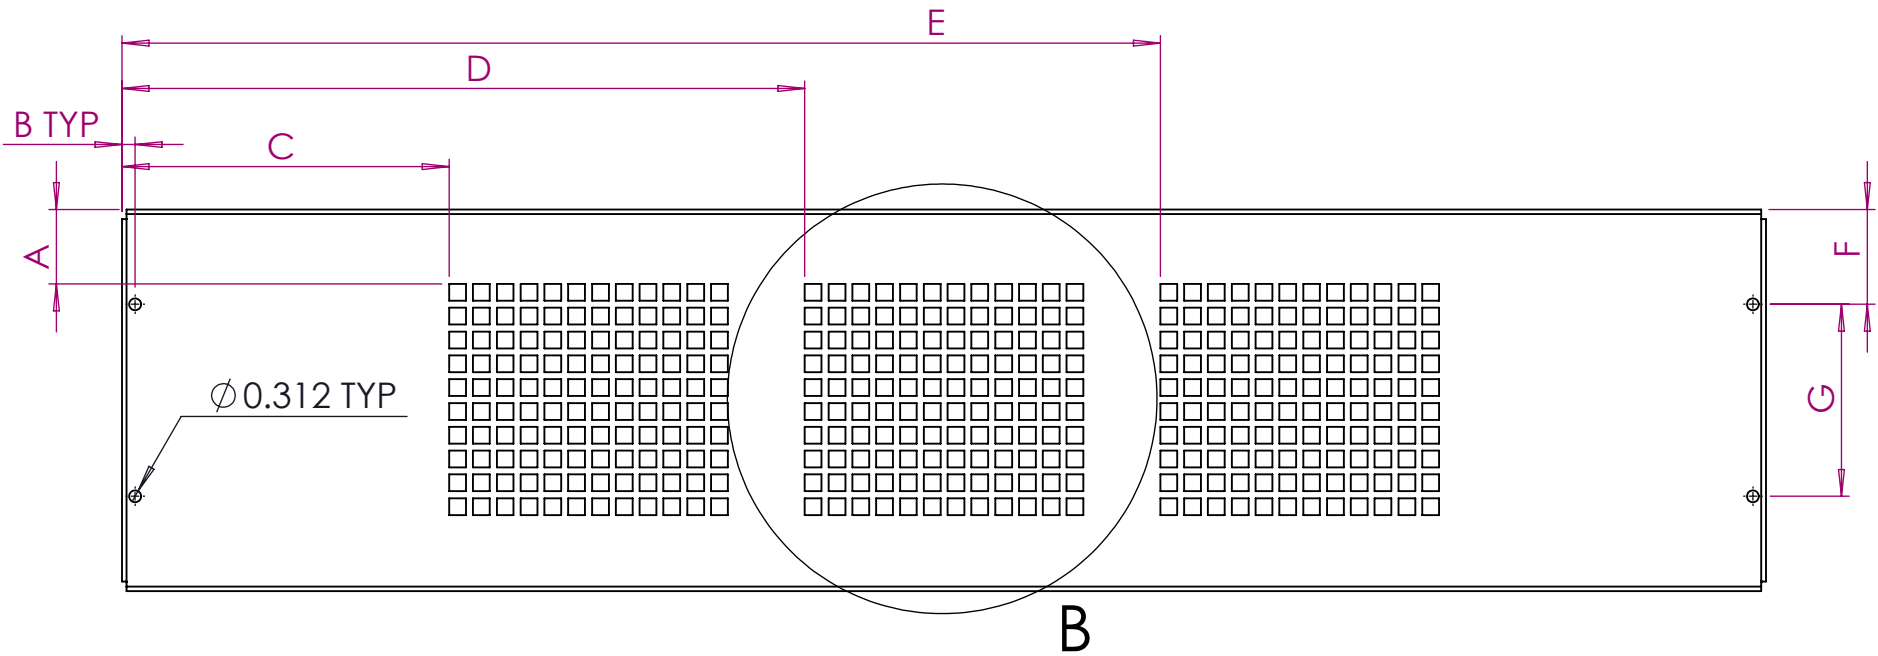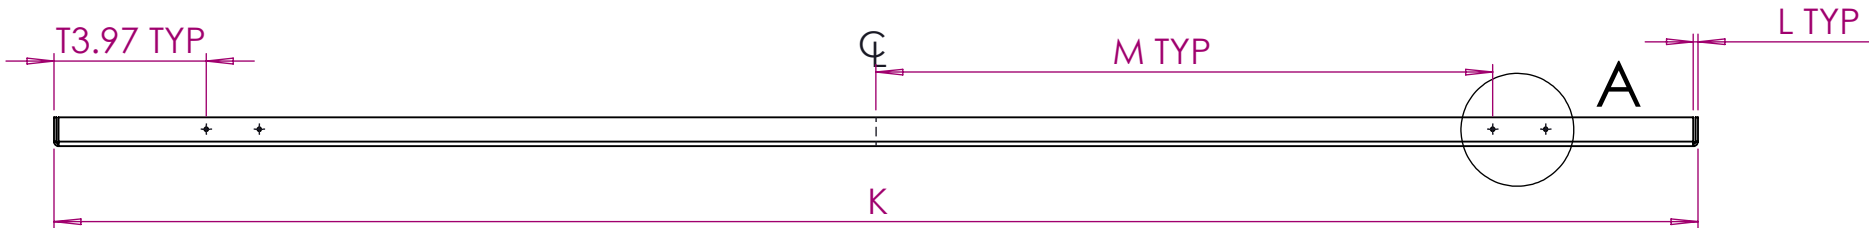

MEDIDA	DIMENSION	LIM. I	LIM. S	VALOR MFG	VoBo	VALOR CAL	VoBo
A	1.940	1.925	1.955				
B	0.340	0.325	0.355				
C	8.520	8.505	8.535				
D	17.780	17.765	17.795				
E	27.040	27.025	27.055				
F	2.470	2.455	2.485				
G	5.000	4.985	5.015				
H	9.940	9.925	9.955				
I	0.750	0.735	0.765				
J	0.250	0.235	0.265				
K	42.810	42.795	42.825				
L	0.120	0.105	0.135				
M	16.060	16.045	16.075				
N	0.310	0.295	0.325				
O	1.380	1.365	1.395				
P	6.020	6.005	6.035				
Q	7.260	7.245	7.275				
R	0.620	0.605	0.635				
S	0.440	0.425	0.455				
T	3.970	3.955	3.985				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



10.0" VENT COVER

Dwn No:
12-D-6106-08-(16gacr ANSI-61) - K48 - V7-R0


Rev:
00

Dwn: AWV 05/03/2026 Chk: AWV 05/03/2026 Apvd: AWV 05/03/2026 Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	11.239	11.224	11.254				
2	LASER	9.440	9.425	9.455				
3	LASER	44.109	44.094	44.124				
4	LASER	42.570	42.555	42.585				
5	LASER	0.312	0.297	0.327				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6106-08-(16gacr ANSI-61) - K48 - V7-R0	05/03/26	0.48	11.239	44.109	0.060
R1						
R2						
R3						

CORTE

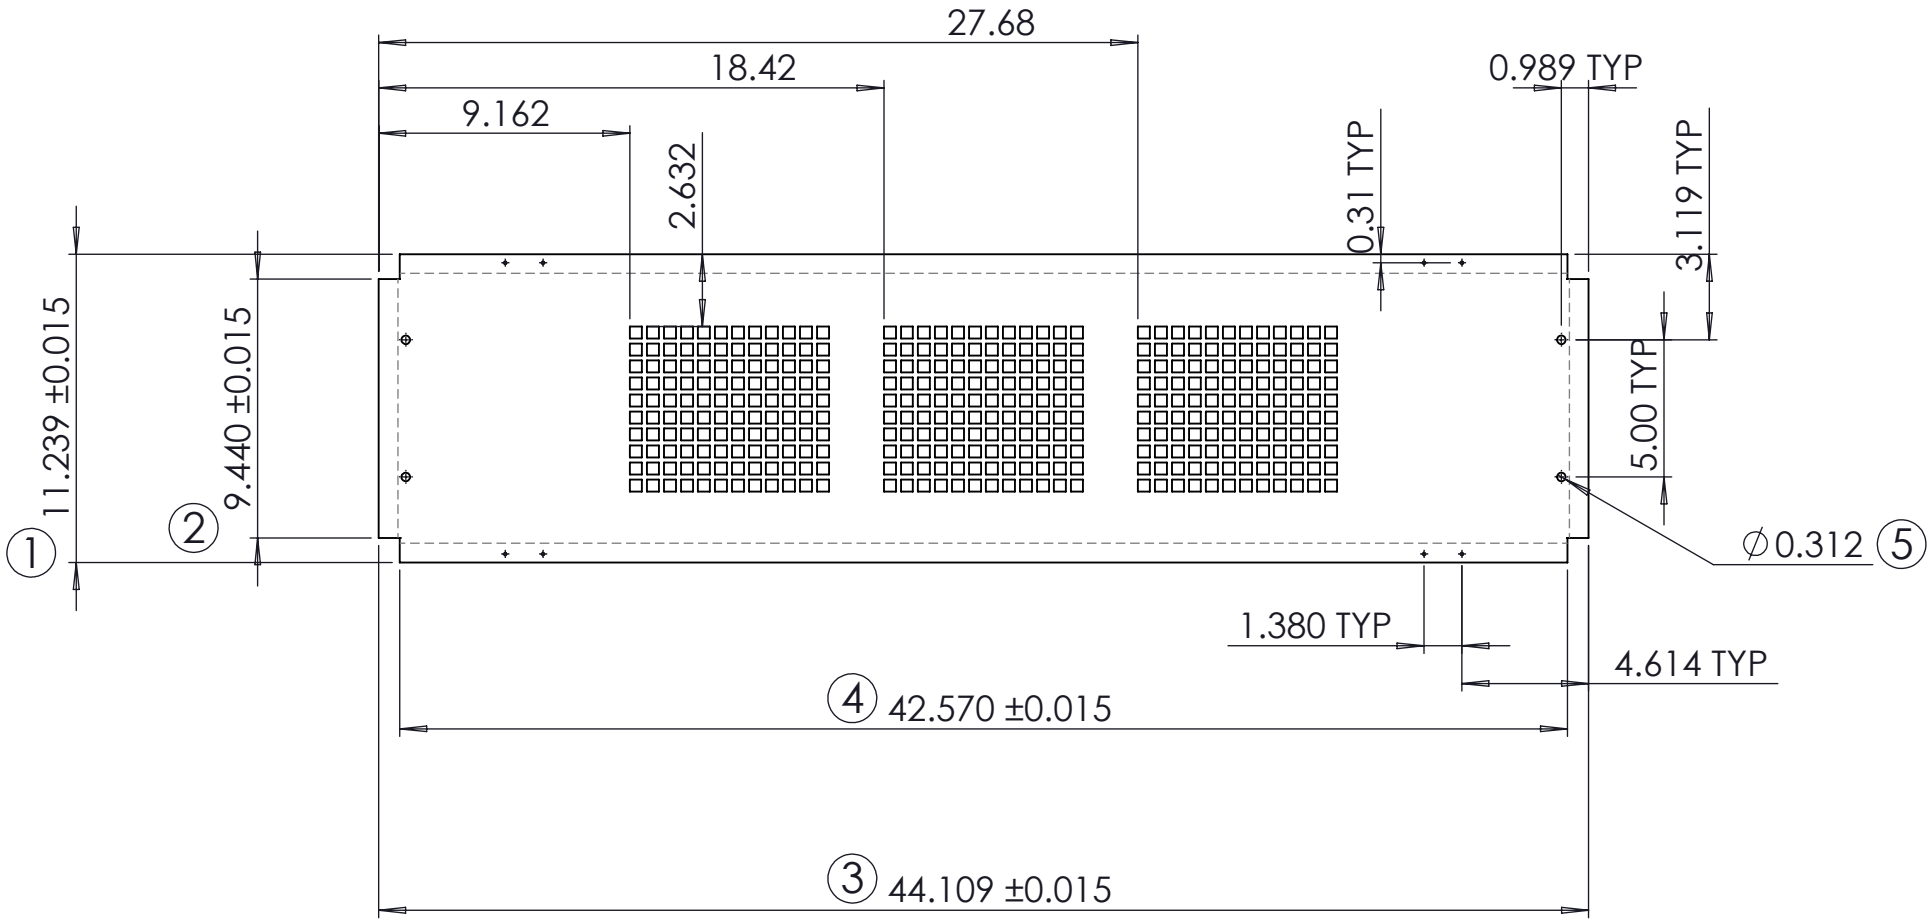

OC: