



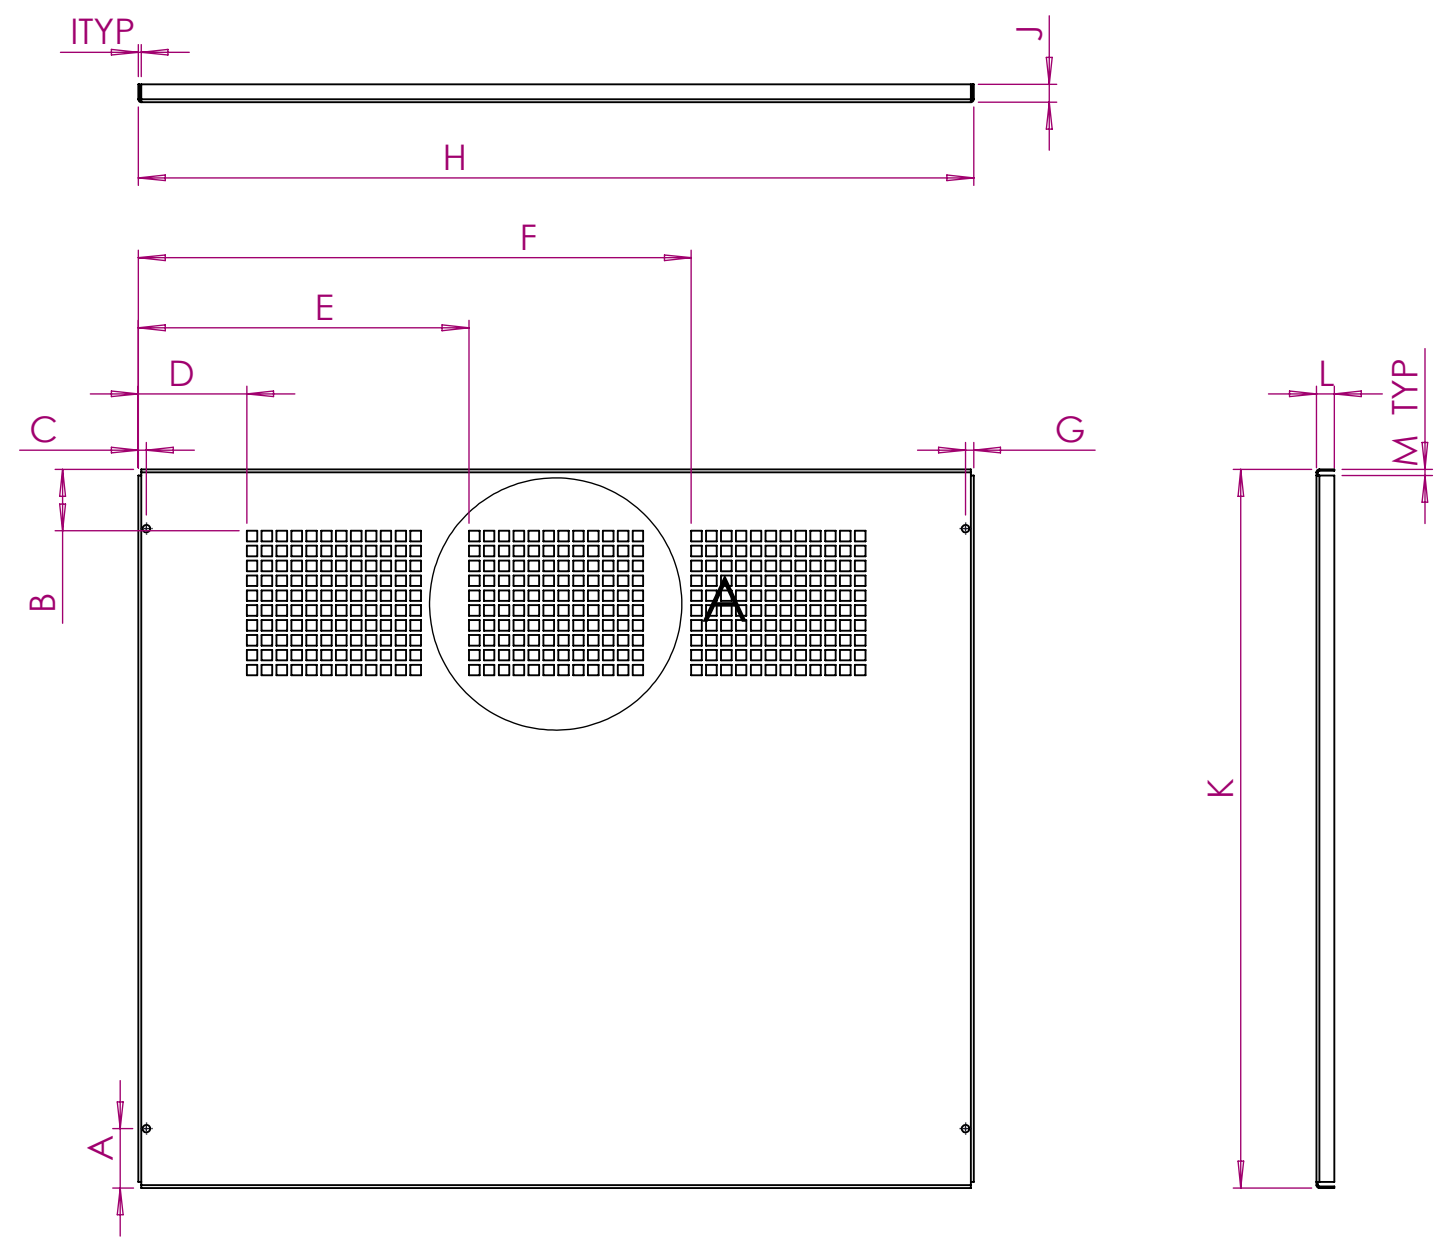

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.470	2.455	2.485				
B	2.560	2.545	2.575				
C	0.340	0.325	0.355				
D	4.520	4.505	4.535				
E	13.780	13.765	13.795				
F	23.040	23.025	23.055				
G	0.340	0.325	0.355				
H	34.810	34.795	34.825				
I	0.120	0.105	0.135				
J	0.750	0.735	0.765				
K	29.940	29.925	29.955				
L	0.750	0.735	0.765				
M	0.250	0.235	0.265				
N	6.020	6.005	6.035				
Ñ	7.260	7.245	7.275				
O	0.620	0.605	0.635				
P	0.440	0.425	0.455				

DETALLE A
ESCALA 1 : 4

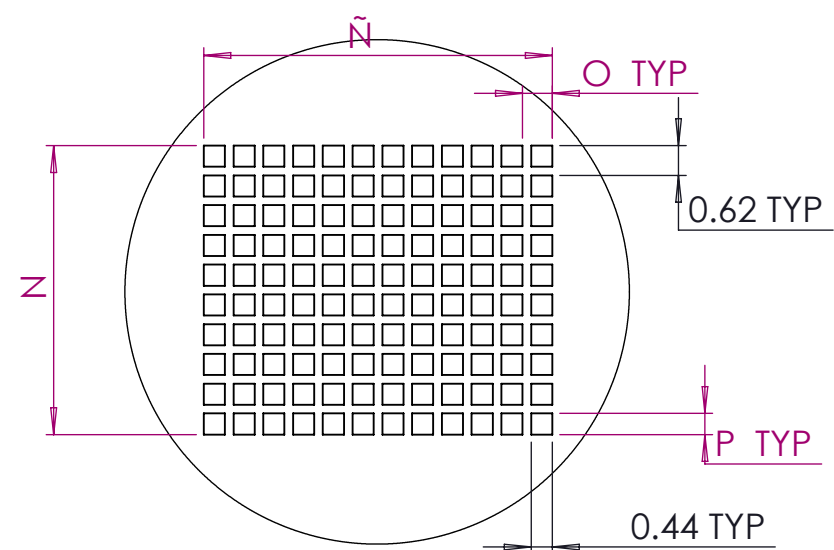

TYPICAL VENT PATTERN 0.44 SQ. HOLES
(10) VERT. X (12) HORZ.


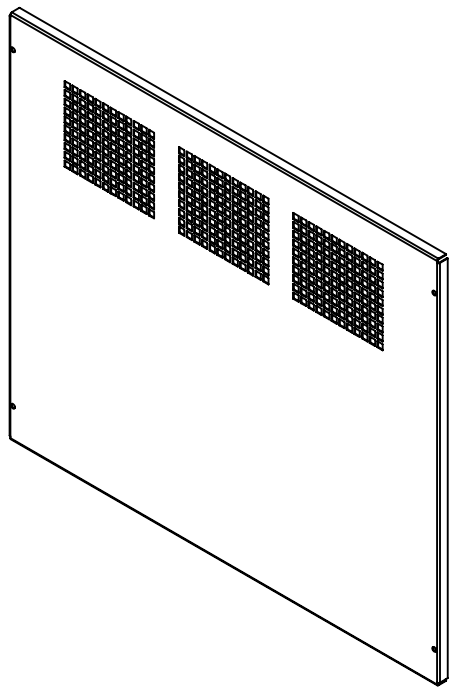


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	36.109	36.094	36.124				
2	LASER	34.570	34.555	34.585				
3	LASER	31.239	31.224	31.254				
4	LASER	29.440	29.425	29.455				
5	LASER	0.312	0.297	0.327				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	12-D-6107-01-(16ga ANSI-61) - K48 - V4-R1	05/03/26	0.50	31.073	35.943	0.060
R1	12-D-6107-01-(16gacr ANSI-61) - K48 - V4-R1	25/03/26	0.48	31.239	36.109	0.060
R2						
R3						

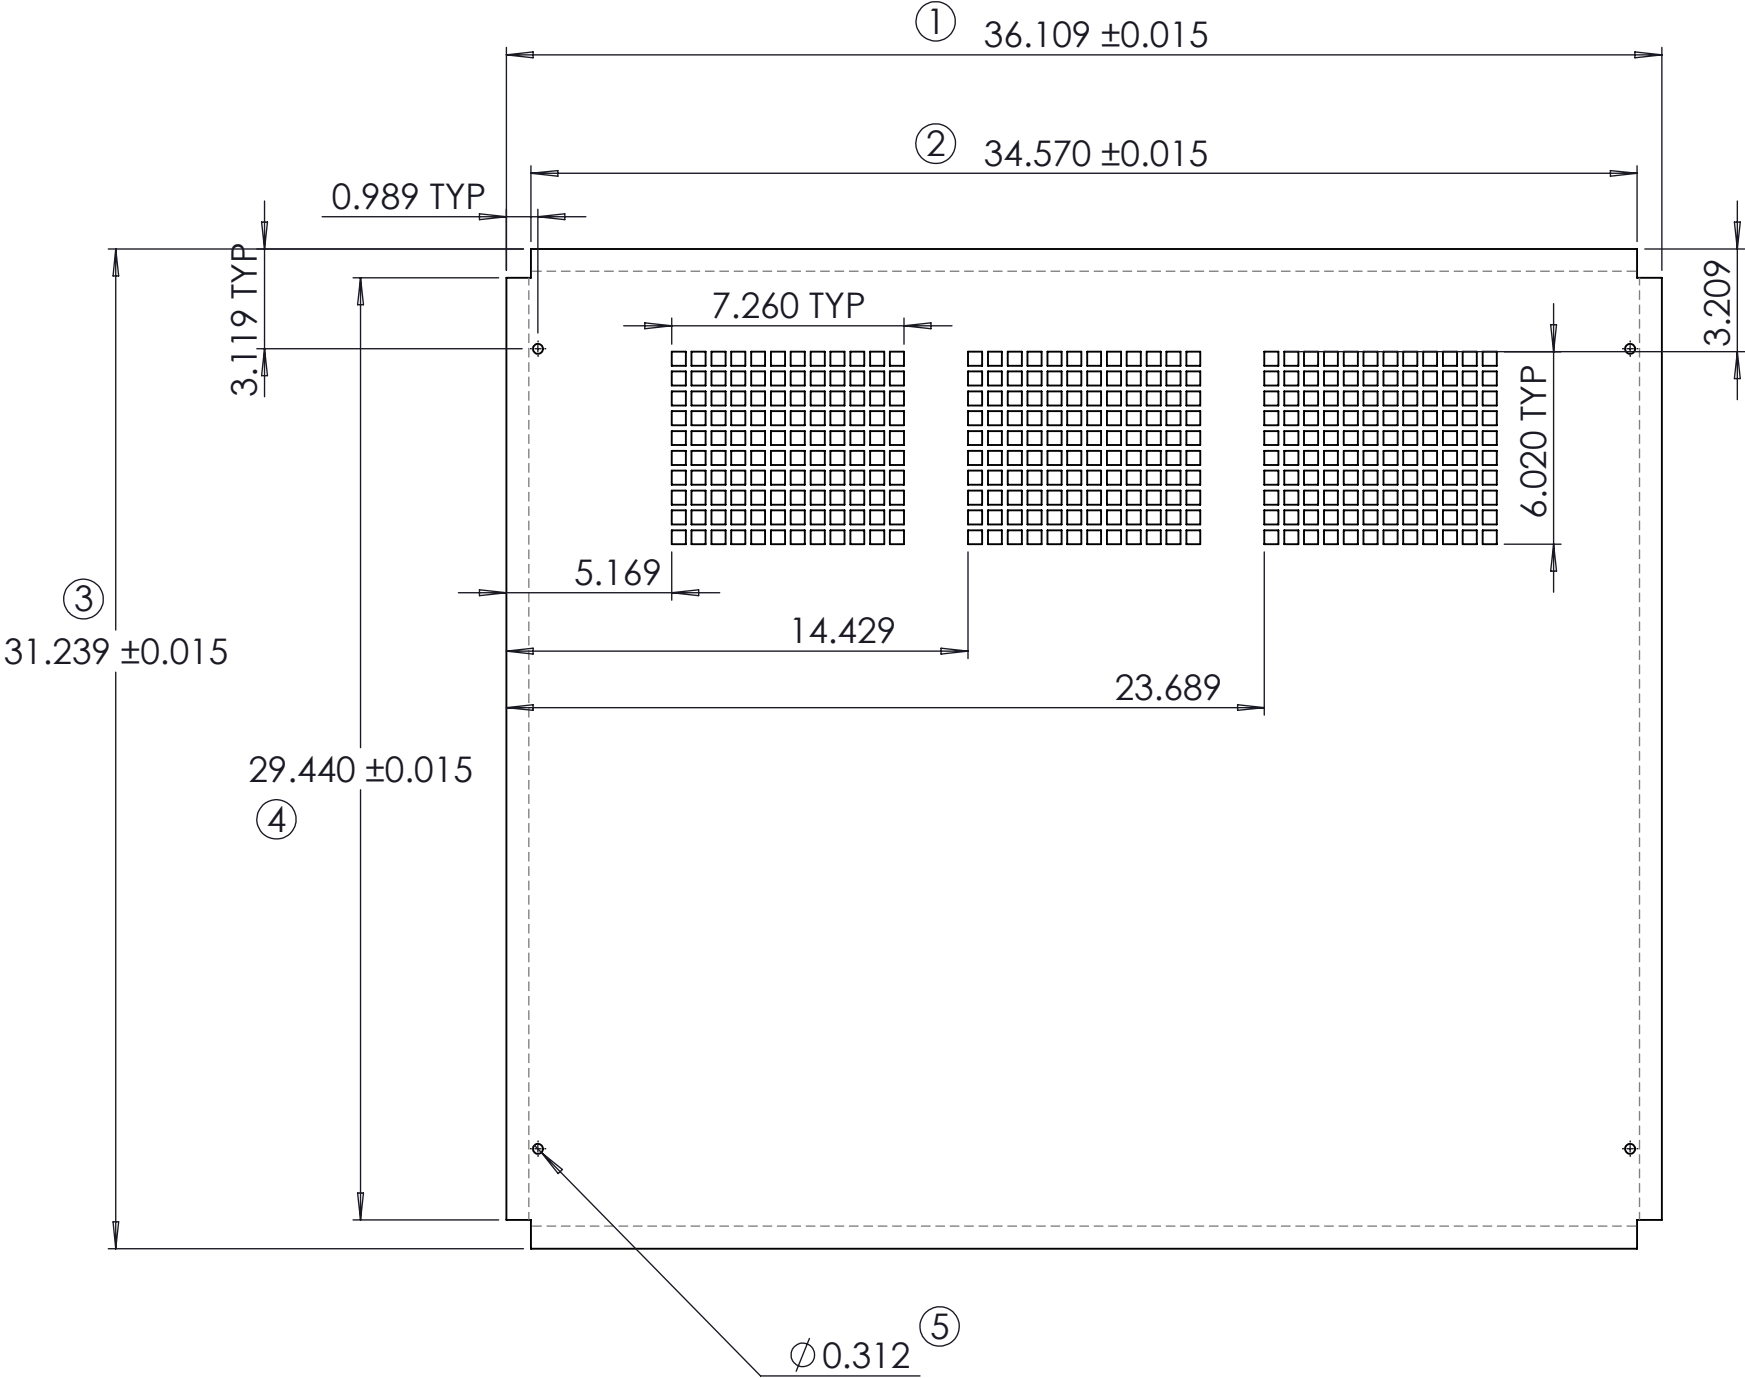

OC:

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



30.0" VENT COVER