


DOBLEZ

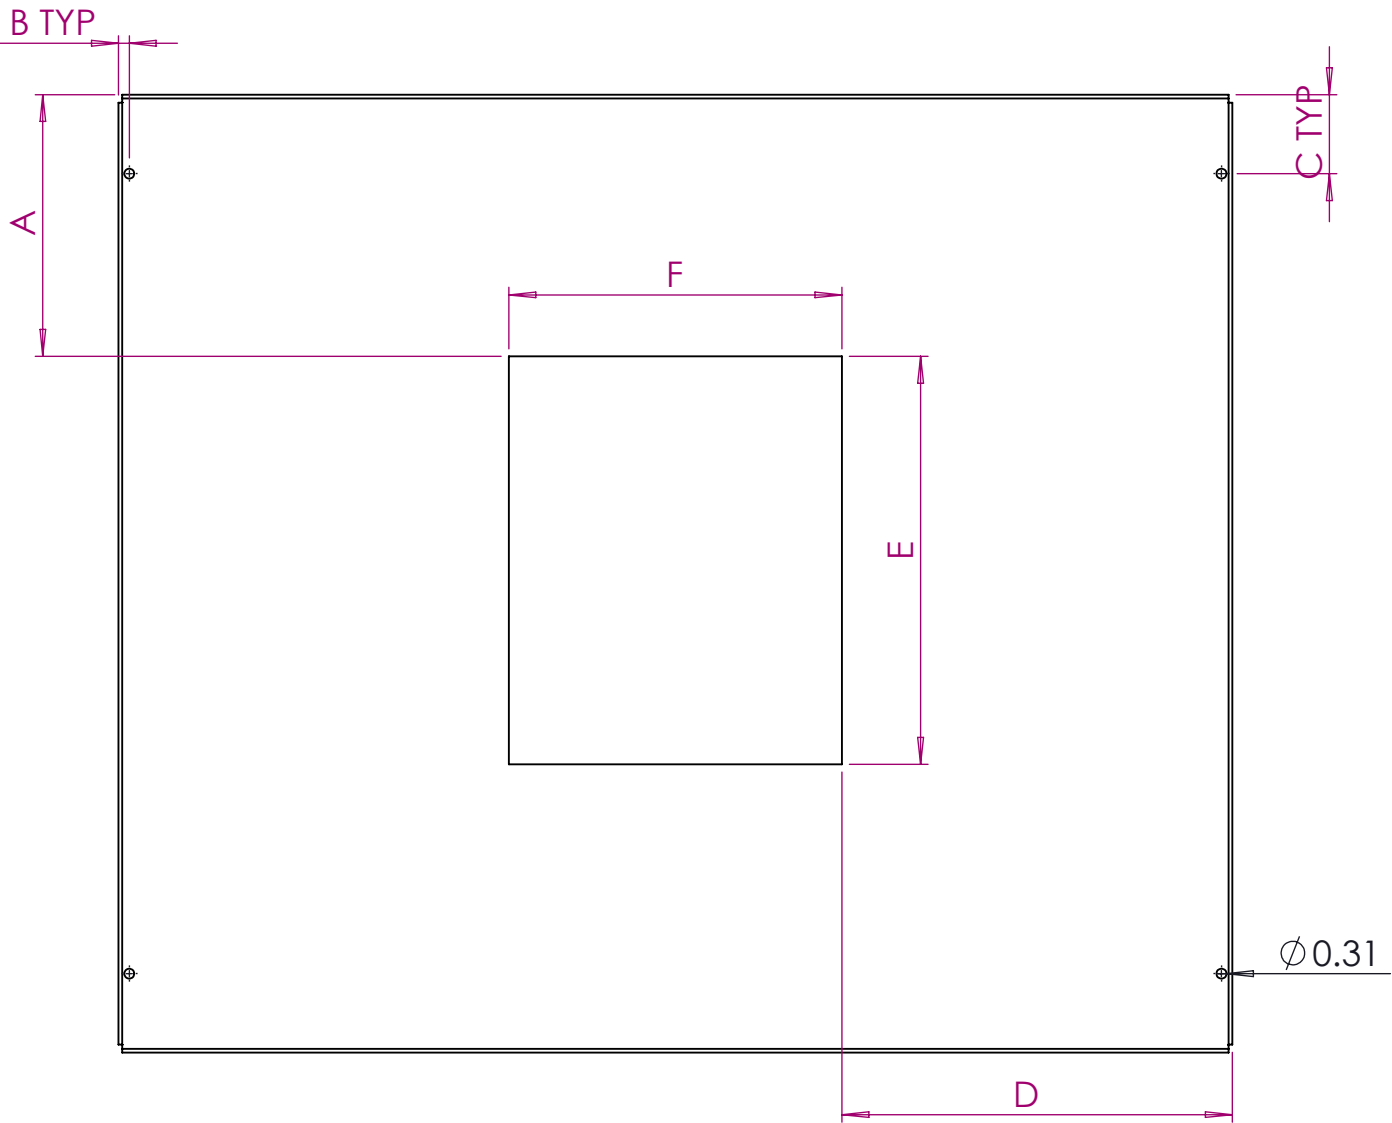

MEDIDA	DIMENSION	LIM. I	LIM. S	VALOR MFG	VoBo	VALOR CALIDAD	VoBo CAL
A	8.180	8.165	8.195				
B	0.340	0.325	0.355				
C	2.470	2.455	2.485				
D	12.200	12.185	12.215				
E	12.750	12.735	12.765				
F	10.410	10.395	10.425				
G	29.940	29.925	29.955				
H	0.750	0.735	0.765				
I	0.250	0.235	0.265				
J	34.810	34.795	34.825				
K	0.120	0.105	0.135				


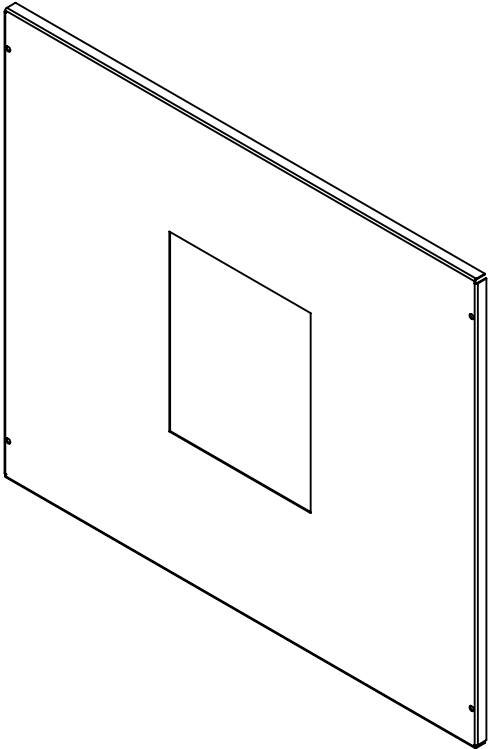


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

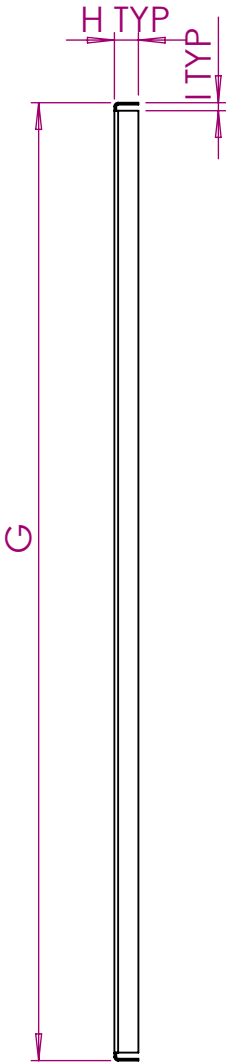


3WL - BREAKER COVER

Dwn No: 12-D-6348-12-(16gacr ANSI-61) - K48 - V12-R0

Rev: 00

No.	RESP	Dim.	L.I.	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL									
										Revisión	Nombre DXF		Fecha	Factor K	Ancho	Largo	Espesor
1	LASER	36.109	36.094	36.124						R0	12-D-6348-12-(16gacr ANSI-61) - K48 - V12-R0		04/03/26	0.48	31.239	36.109	0.060
2	LASER	34.570	34.555	34.585						R1							
3	LASER	31.239	31.224	31.254						R2							
4	LASER	29.440	29.425	29.455						R3							
5	LASER	0.310	0.295	0.325													
6	LASER	10.410	10.395	14.425													
7	LASER	12.750	12.735	12.765													

CORTE

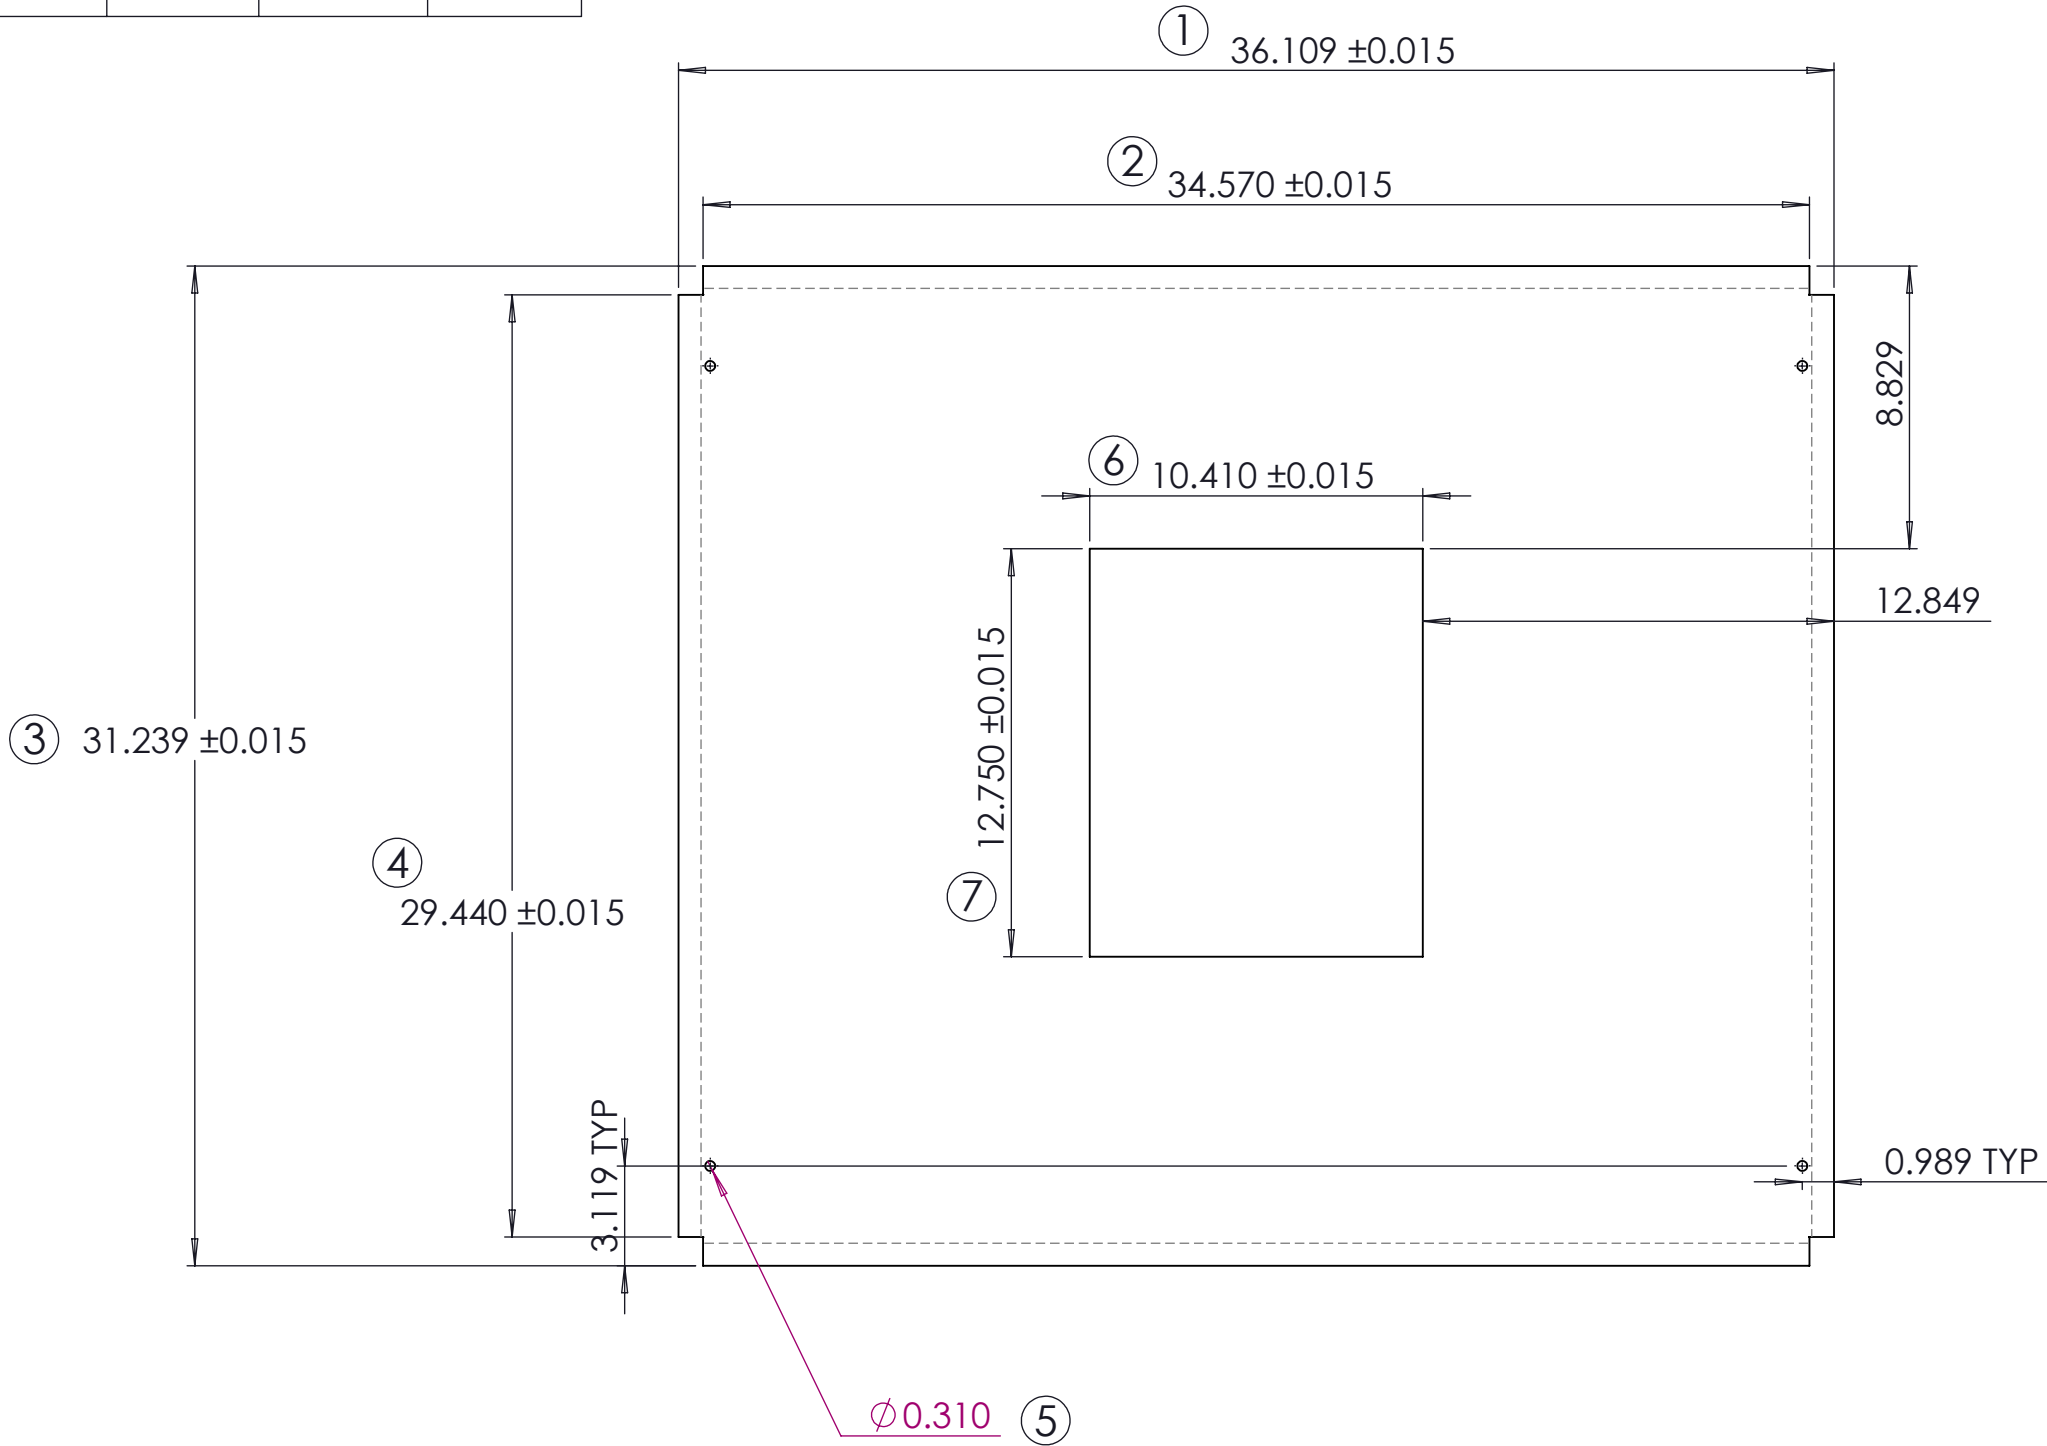

OC:

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches				3WL - BREAKER COVER				Dwn No: 12-D-6348-12-(16gacr ANSI-61) - K48 - V12-R0		Rev: 00	
				Dwn: AWV	04/03/2026	Chk: AWV	04/03/2026	Apvd: AWV	04/03/2026	Sht 1 of 1	