

DOBLEZ

MEDIDA	MEDICION	LIM. I	LIM. S	VALOR MFG	BoVo MFG	VALOR CAL	BoVo CAL
A	0.340	0.325	0.355				
B	7.350	7.335	7.365				
C	15.000	14.985	15.015				
D	21.810	21.795	21.825				
E	29.880	29.865	29.895				
F	0.750	0.735	0.765				
G	0.120	0.105	0.135				
H	0.250	0.235	0.265				



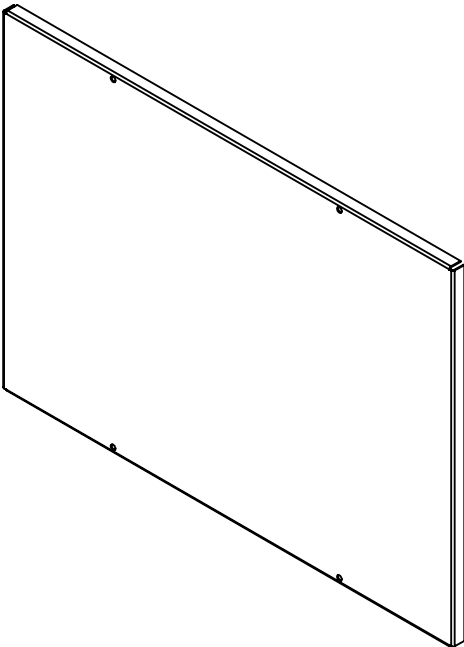


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

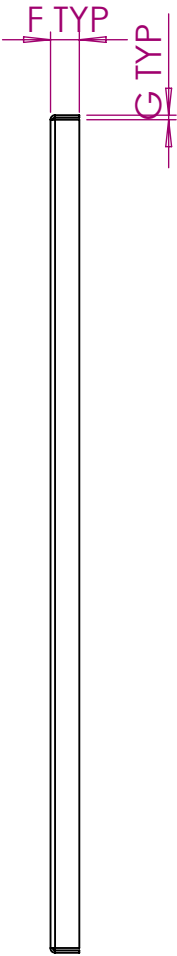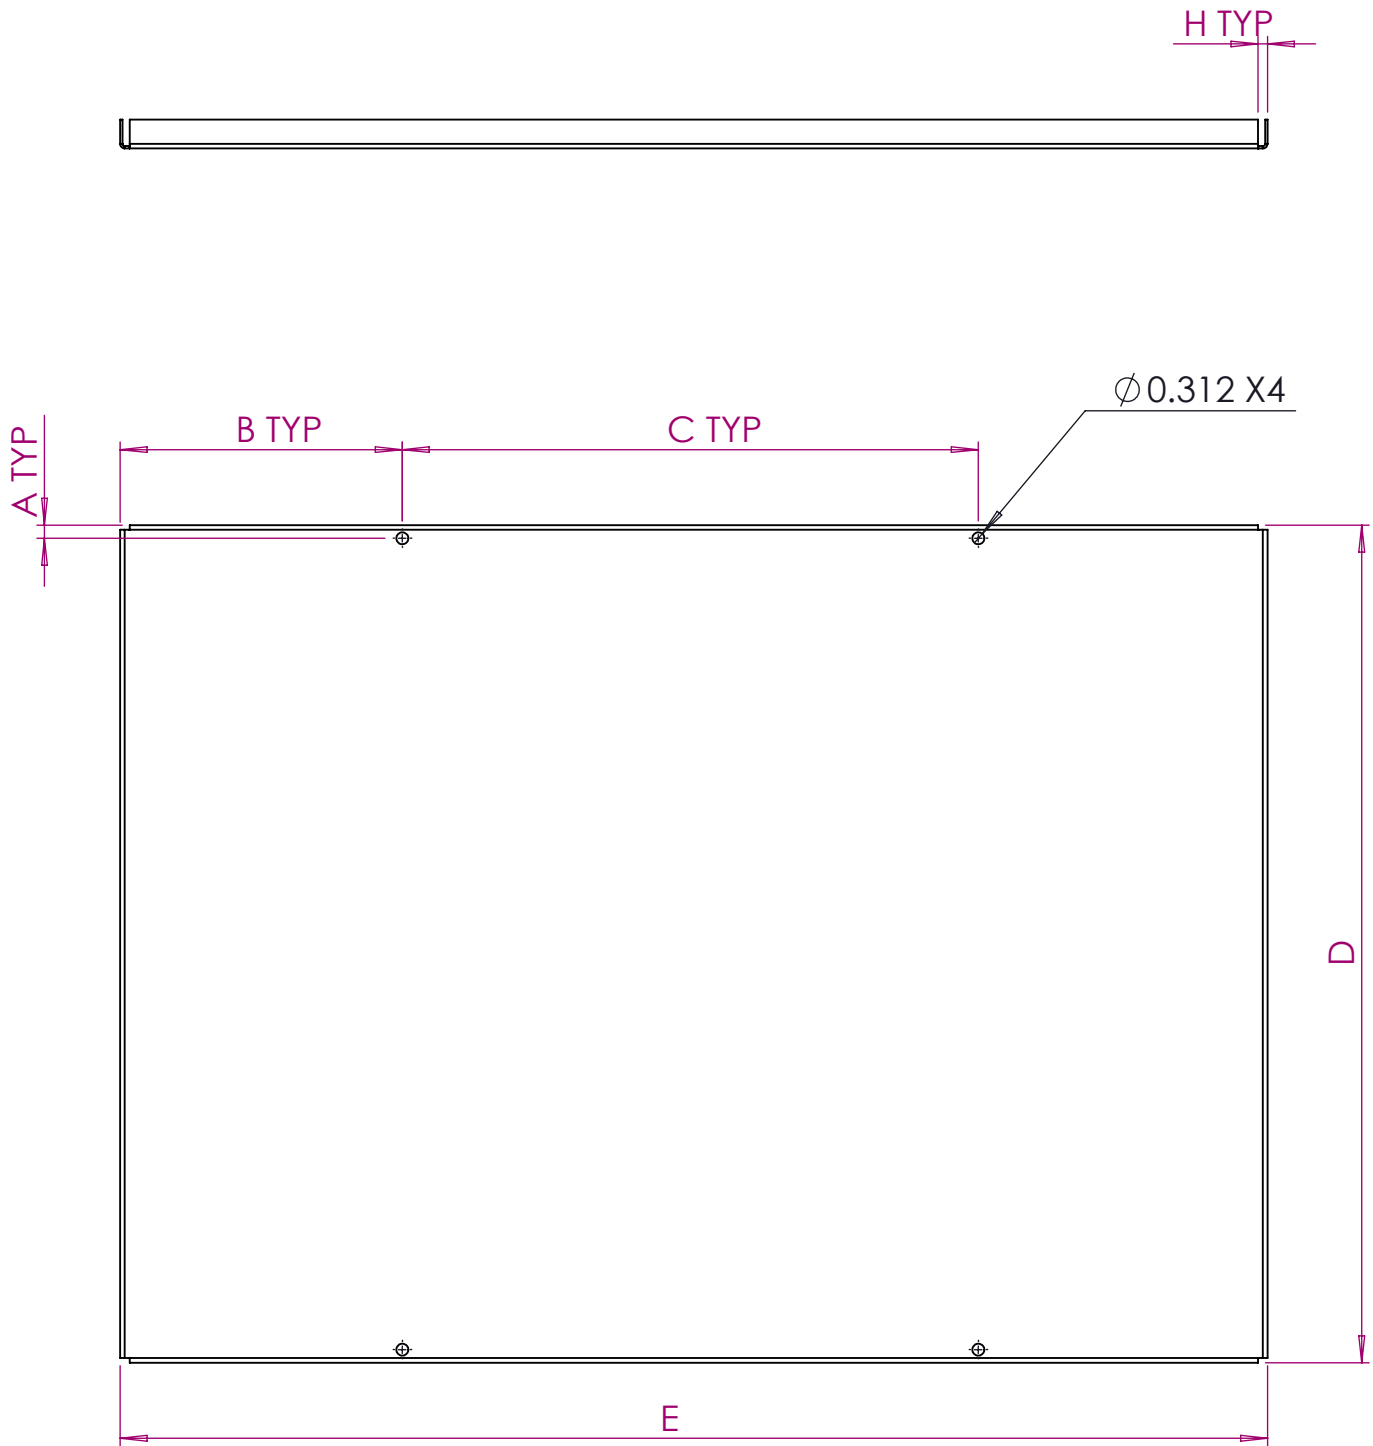


25"W COVER				Dwn No: 17-D-6004-02-(16ga ANSI-61) - K48 - V2-R0		Rev: 00
Dwn: AWV	04/03/2026	Chk: AWV	04/03/2026	Apvd: AWV	04/03/2026	Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	31.179	31.164	31.194				
2	LASER	29.380	29.365	29.395				
3	LASER	23.109	23.094	23.124				
4	LASER	21.570	21.555	21.585				
5	LASER	0.312	0.297	0.327				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	17-D-6004-02-(16ga ANSI-61) - K48 - V2-R0	04/03/26	0.48	23.109	31.179	0.060
R1						
R2						
R3						

CORTE

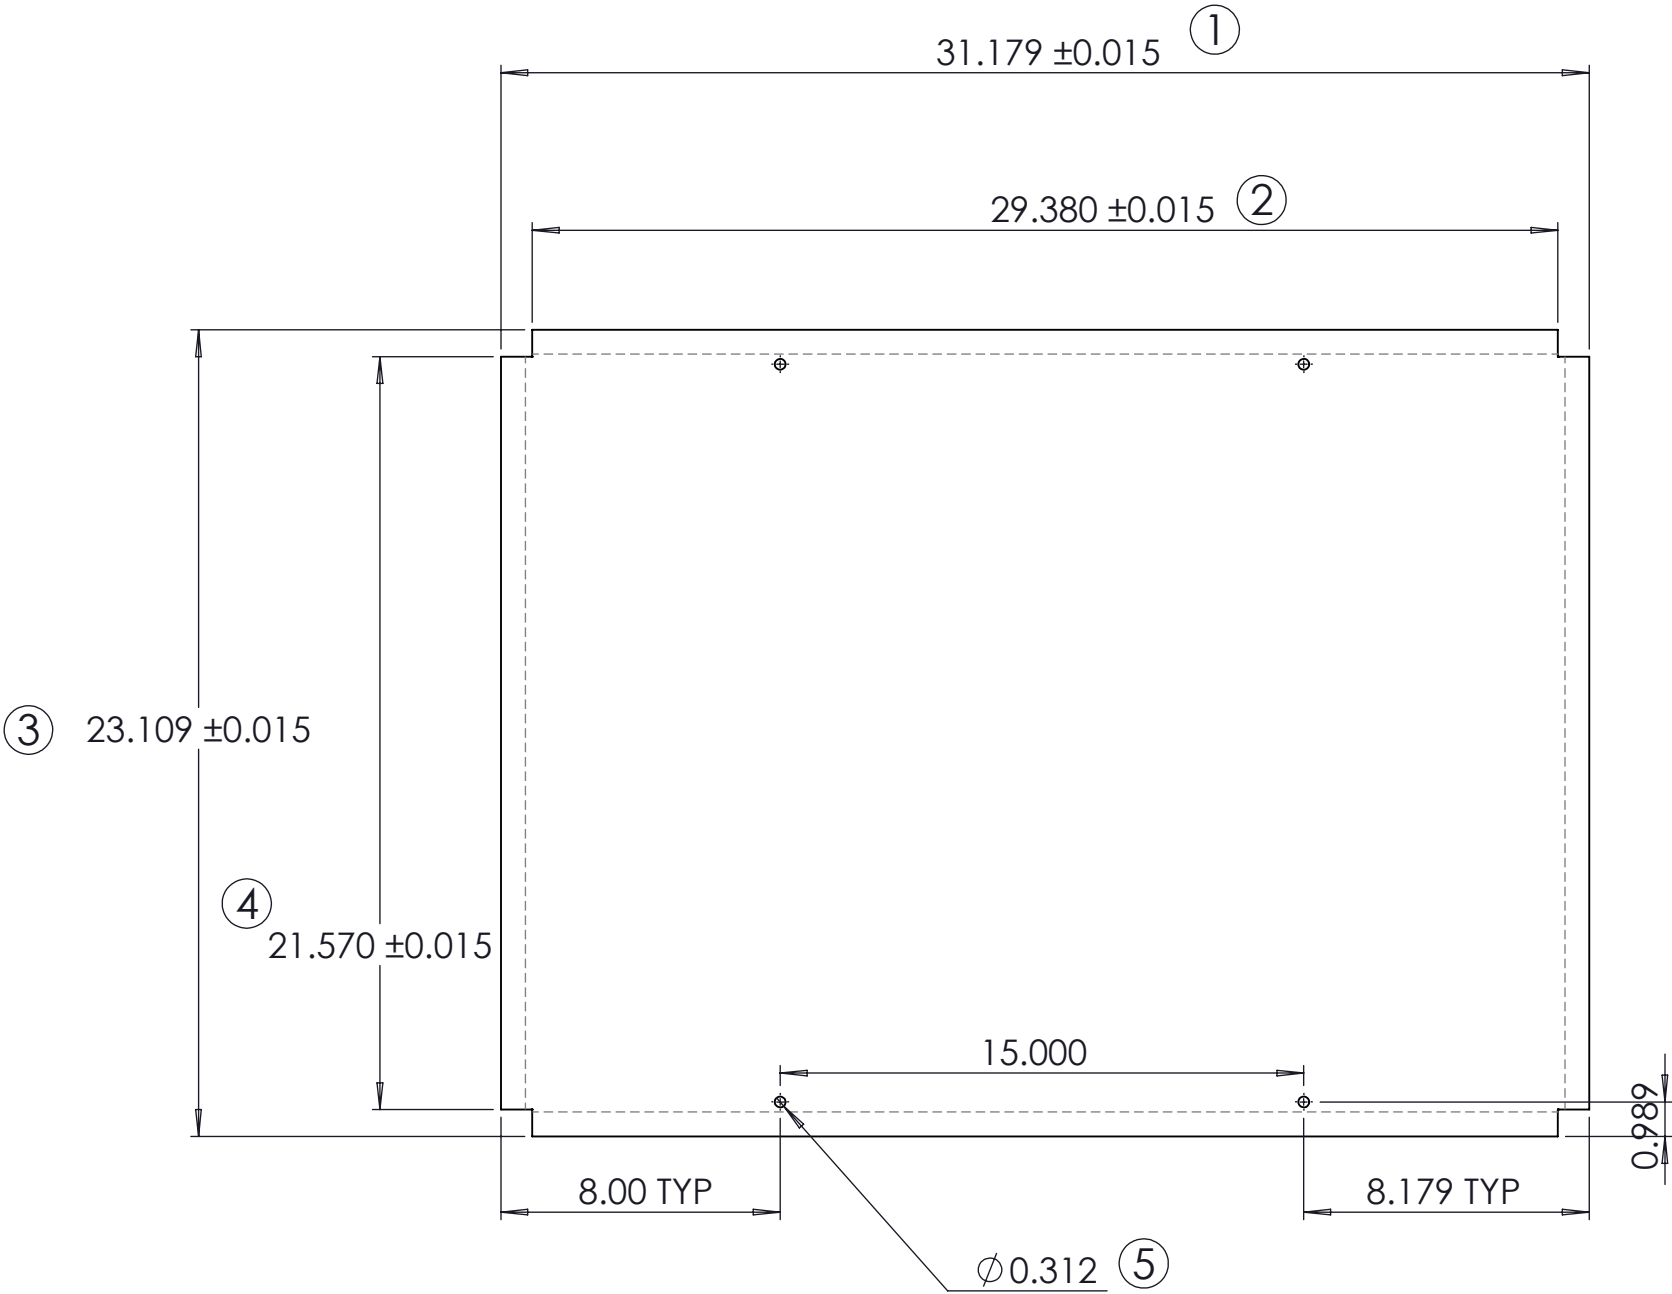

OC:

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches				25"W COVER				Dwn No: 17-D-6004-02-(16ga ANSI-61) - K48 - V2-R0		Rev: 00	
				Dwn: AWV	04/03/2026	Chk: AWV	04/03/2026	Apvd: AWV	04/03/2026	Sht 1 of 1	