


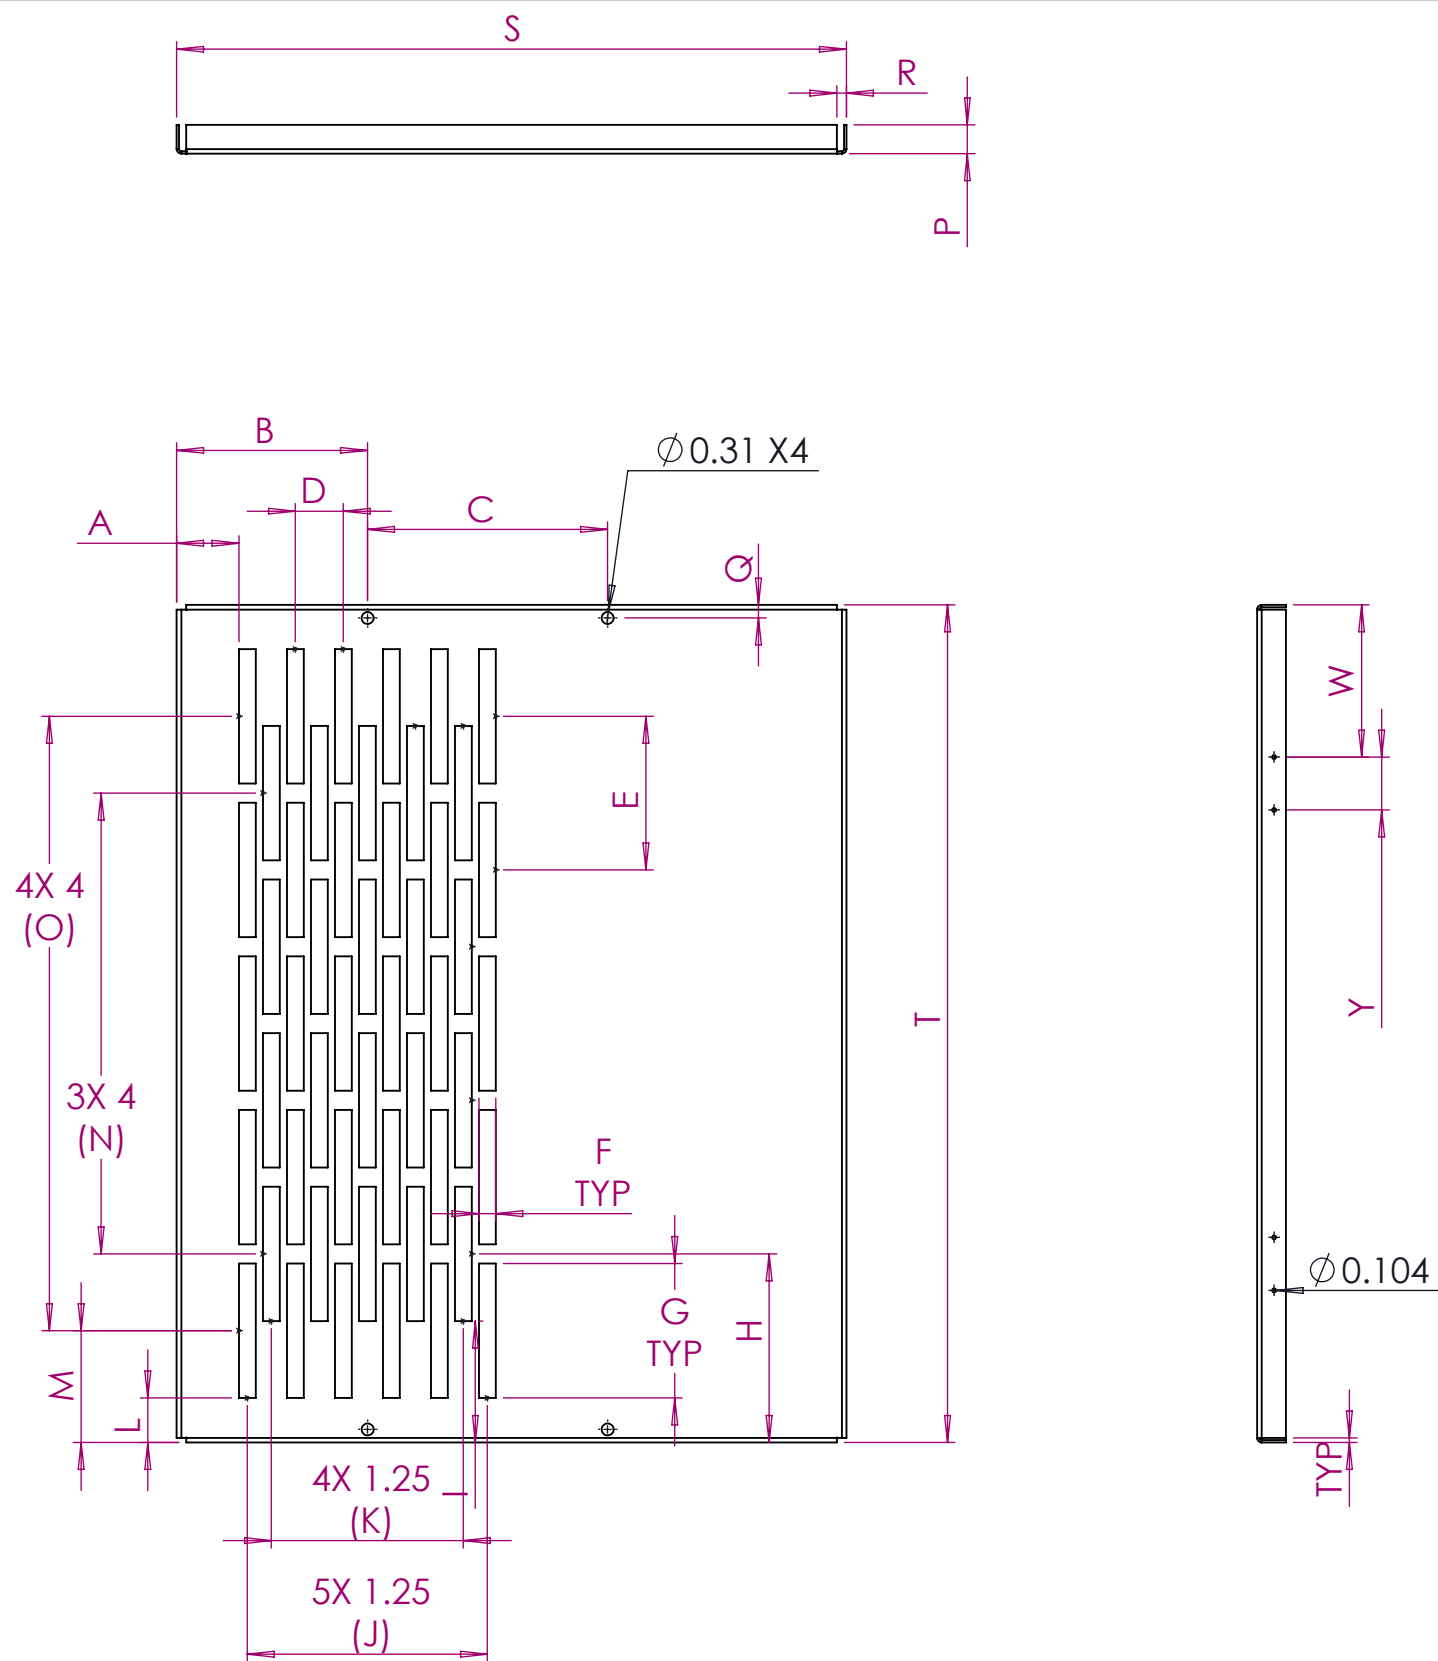

MEDIDA	DIMENSION	LIM. I	LIM. S	VALOR MFG	VoBo	VALOR CAL	VoBo CAL
A	1.620	1.605	1.635				
B	4.970	4.955	4.985				
C	6.250	6.235	6.265				
D	1.250	1.235	1.265				
E	4.000	3.985	4.015				
F	0.440	0.425	0.455				
G	3.500	3.485	3.515				
H	4.910	4.895	4.925				
I	3.160	3.145	3.175				
J	6.250	6.235	6.265				
K	5.000	4.985	5.015				
L	1.160	1.145	1.175				
M	2.910	2.895	2.925				
N	12.000	11.985	12.015				
O	16.000	15.985	16.015				
P	0.750	0.735	0.765				
Q	0.340	0.325	0.355				
R	0.250	0.235	0.265				
S	17.440	17.425	17.455				
T	21.810	21.795	21.825				
W	3.960	3.945	3.975				
Y	1.380	1.365	1.395				

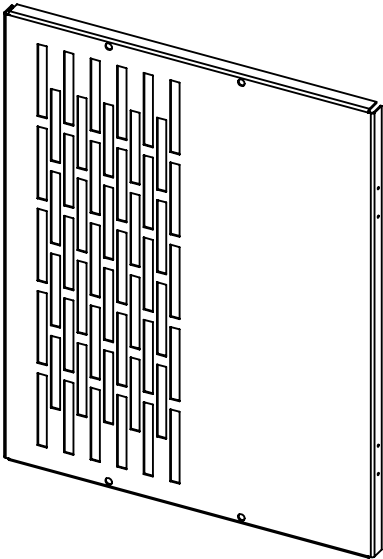


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches




25"W VENT COVER				Dwn No: 17-D-6007-01-(16gacr ANSI-61) - K48 - V1-R0		Rev: 00	
Dwn: AWV	26/05/2026	Chk: AWV	26/05/2026	Apvd: AWV	26/05/2026	Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	18.739	18.724	18.754				
2	LASER	23.109	23.094	23.124				
3	LASER	21.570	21.555	21.585				
4	LASER	16.940	16.925	16.955				
5	LASER	0.312	0.297	0.327				
6	LASER	0.104	0.089	0.119				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	17-D-6007-01-(16gacr ANSI-61) - K48 - V1-R0	26/05/26	0.48	18.739	23.109	0.060
R1						
R2						
R3						

CORTE

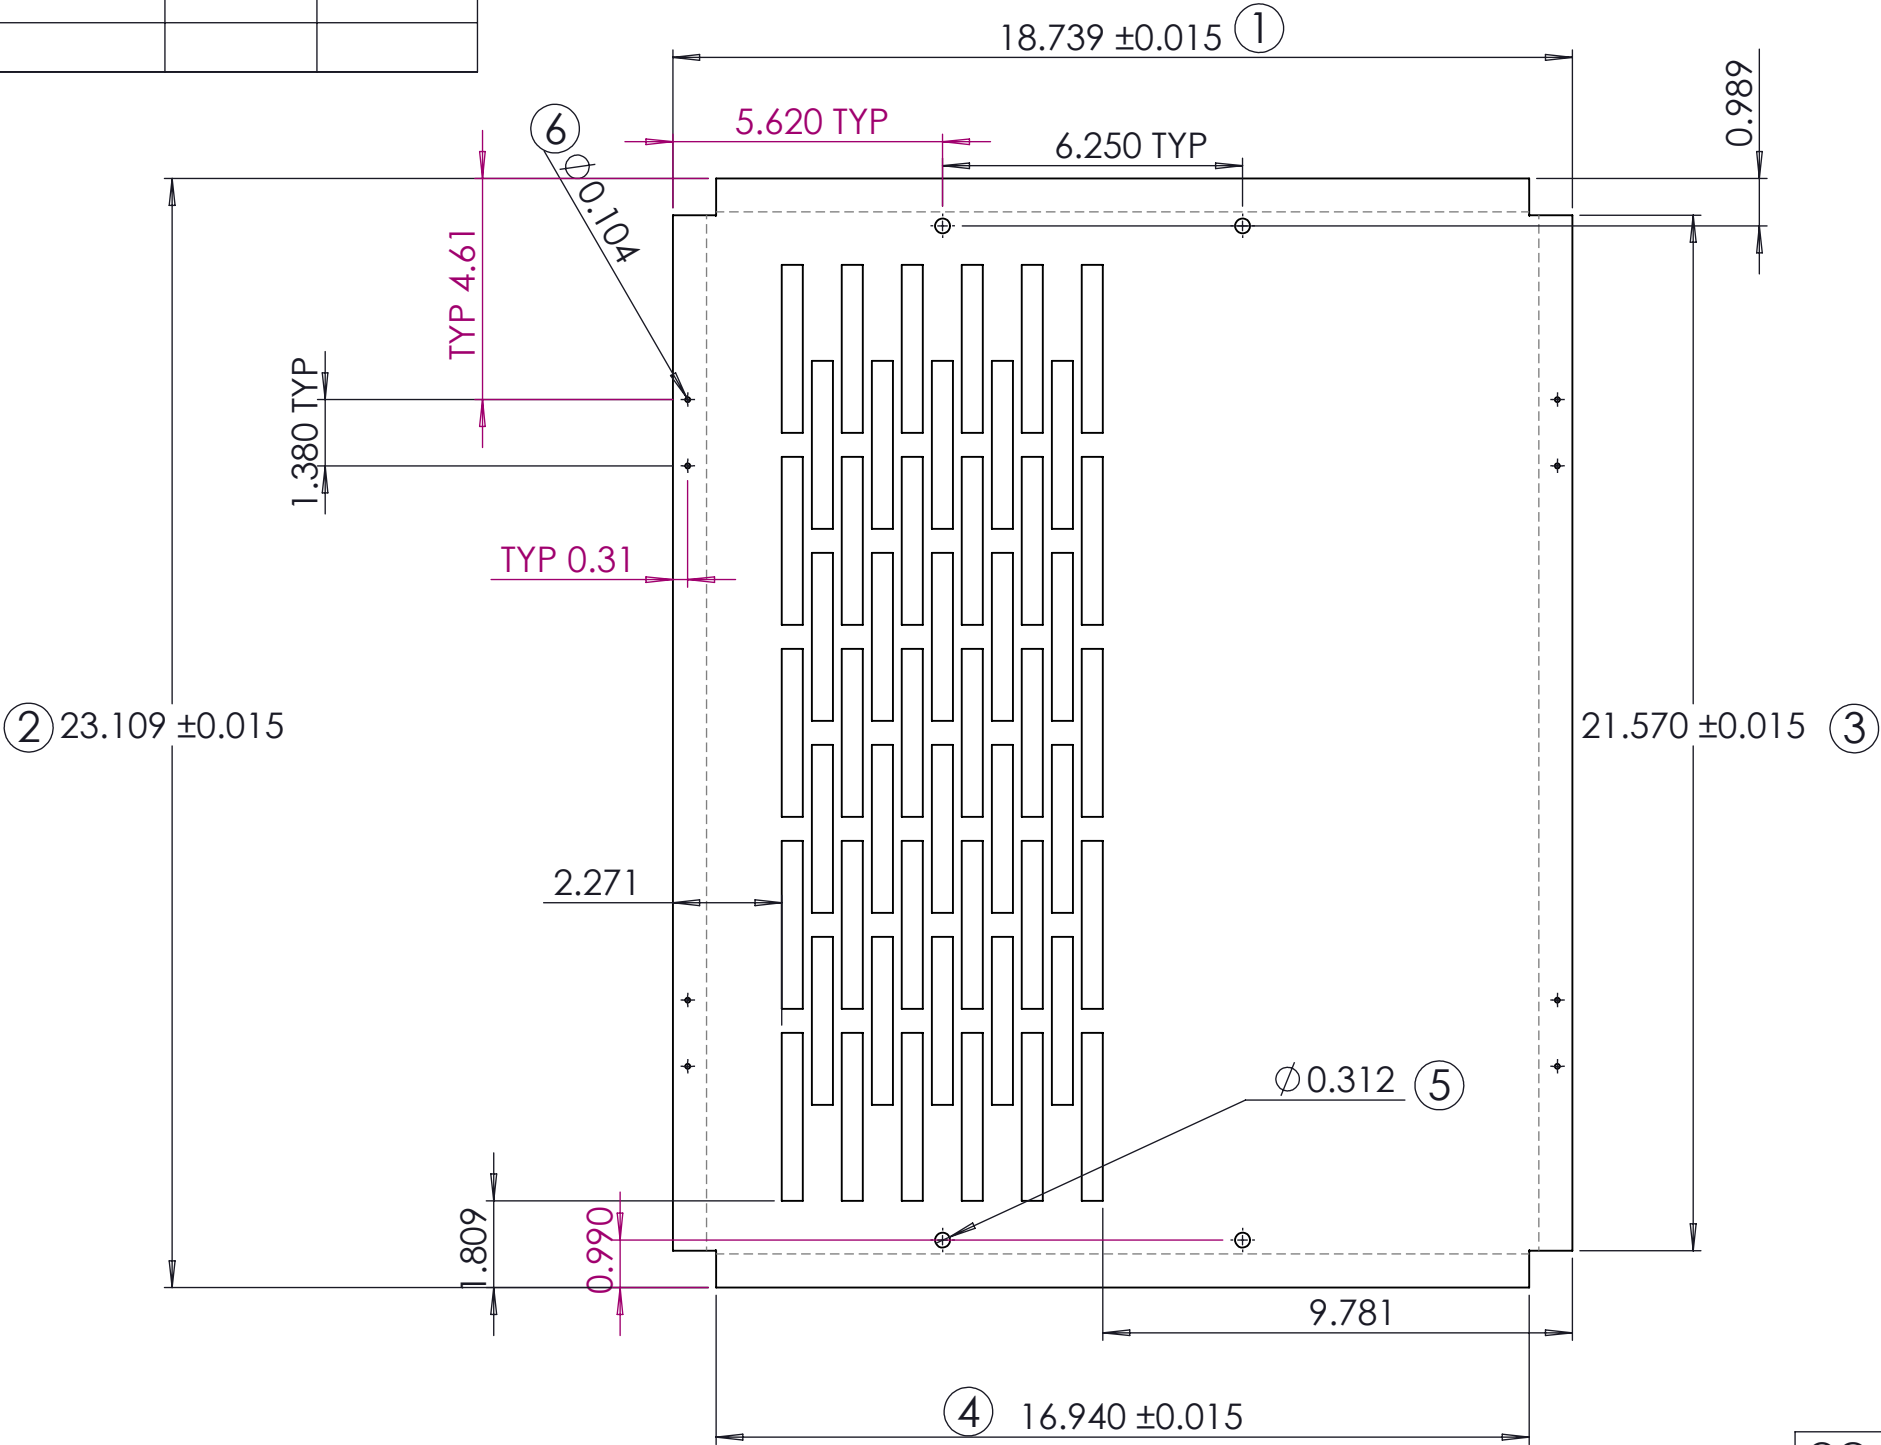

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



25"W VENT COVER

Dwn: AWV	26/05/2026	Chk: AWV	26/05/2026	Apvd: AWV	26/05/2026	Sht 1 of 1
----------	------------	----------	------------	-----------	------------	------------

Dwn No:	17-D-6007-01-(16gacr ANSI-61) - K48 - V1-R0	Rev:	00
---------	---	------	----

OC: