


DOBLEZ

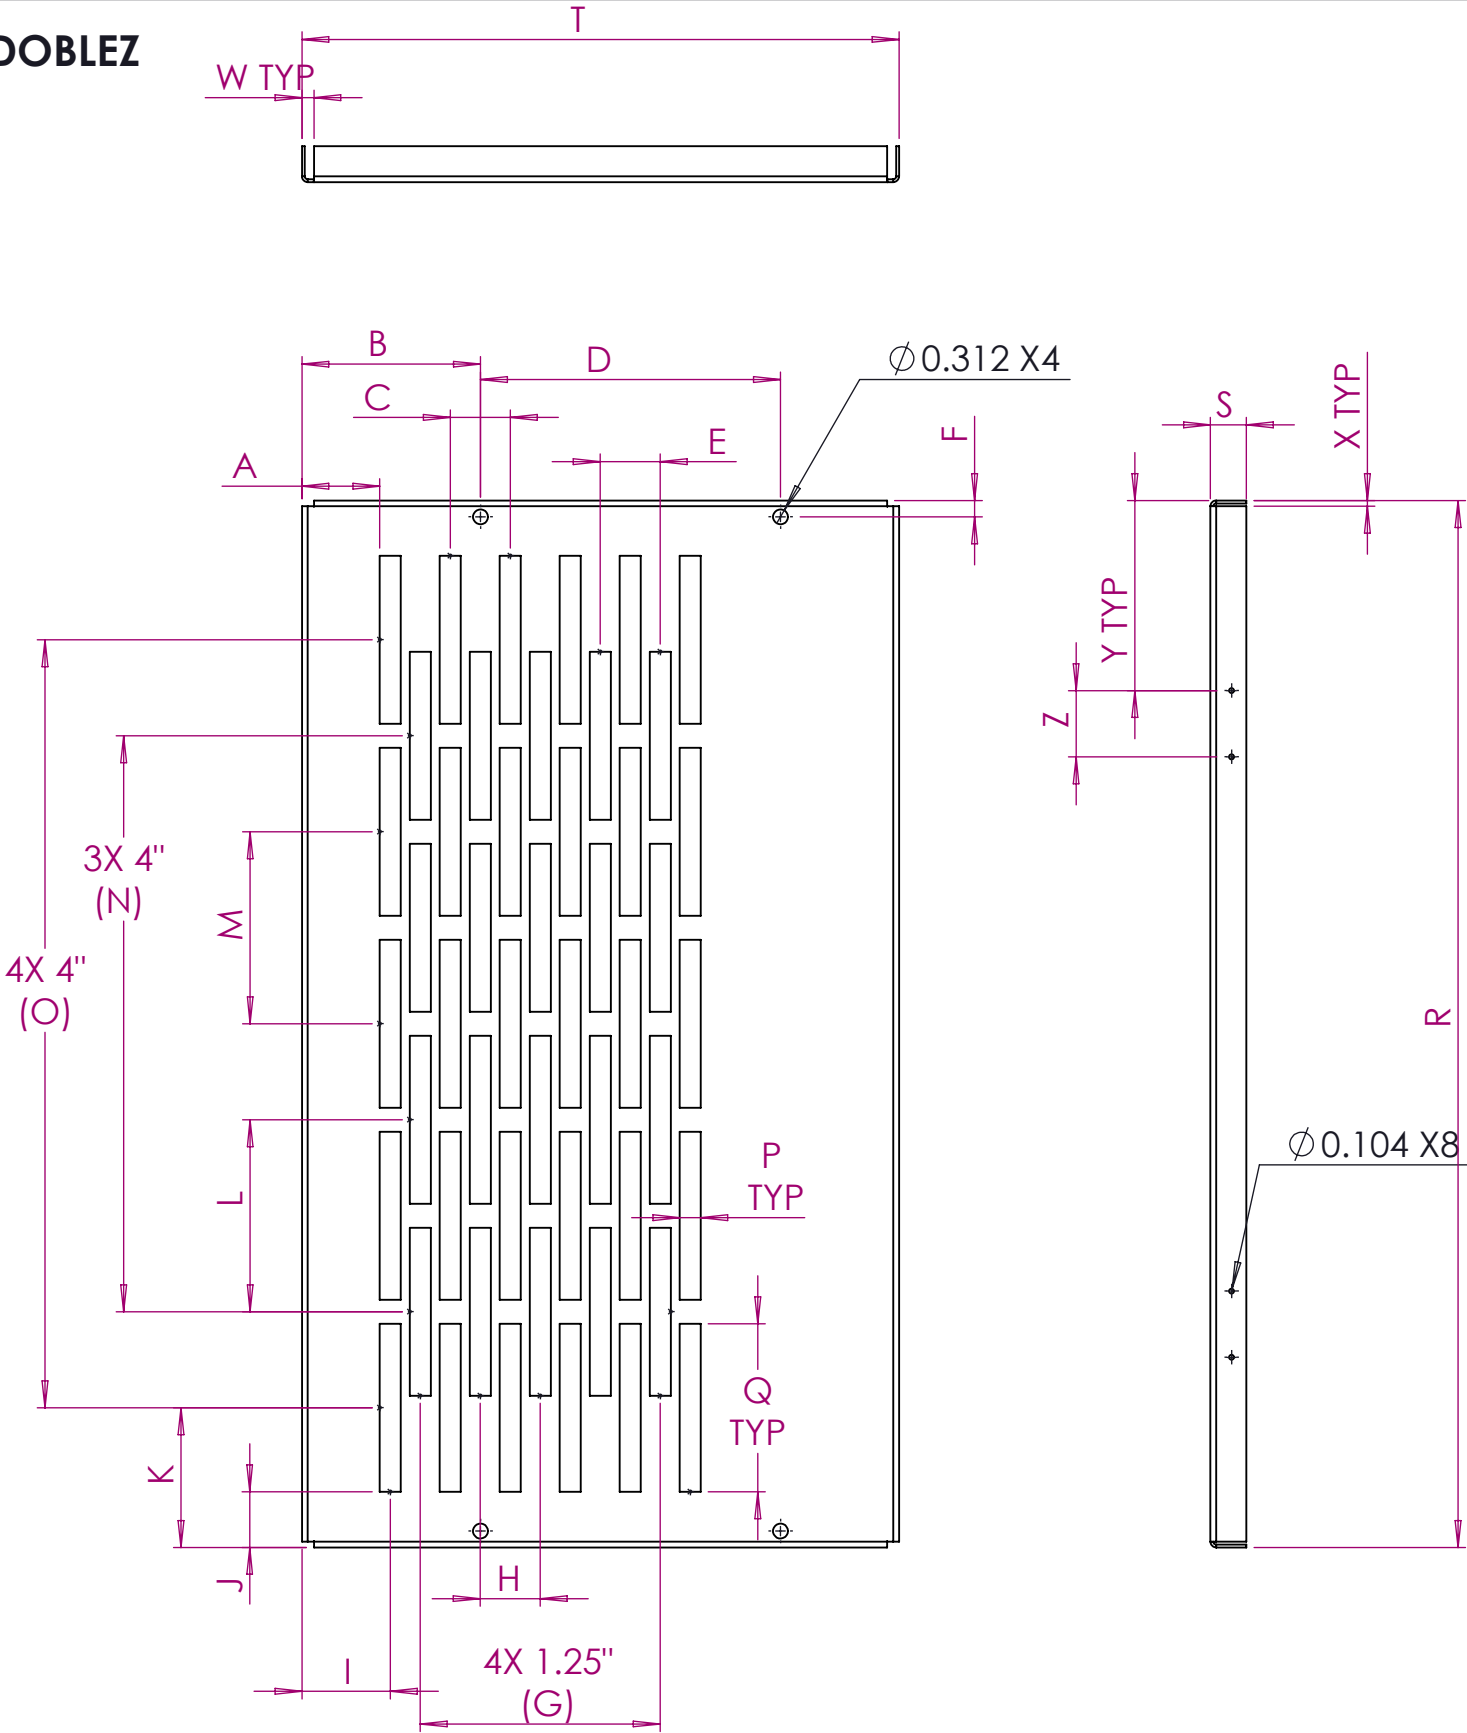

MEDIDA	DIMENCION	LIM. I	LIM. S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	1.620	1.605	1.635				
B	3.720	3.705	3.735				
C	1.250	1.235	1.265				
D	6.250	6.235	6.265				
E	1.250	1.235	1.265				
F	0.340	0.325	0.335				
G	5.000	4.895	4.925				
H	1.250	1.235	1.265				
I	1.840	1.825	1.855				
J	1.160	1.145	1.175				
K	2.910	2.895	2.925				
L	4.000	3.985	4.015				
M	4.000	3.985	4.015				
N	12.000	11.99	12.02				
O	16.000	15.99	16.02				
P	0.440	0.425	0.455				
Q	3.500	3.485	3.515				
R	21.810	21.8	21.83				
S	0.750	0.735	0.765				
T	12.440	12.43	12.46				
W	0.250	0.235	0.265				
X	0.120	0.105	0.135				
Y	3.960	3.945	3.975				
Z	1.380	1.365	1.395				

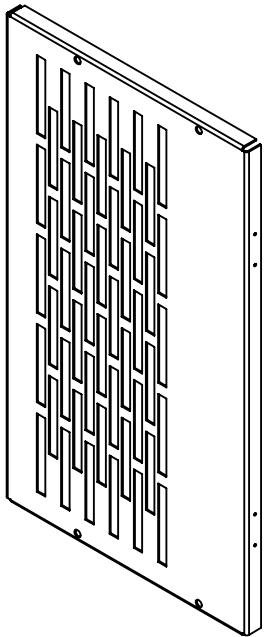


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches




25"W VENT COVER

Dwn No: 17-D-6007-02-(16gacr ANSI-61) - K48 - V1-R0 Rev: 00

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	13.739	13.724	13.754				
2	LASER	11.940	11.925	11.955				
3	LASER	23.109	23.094	23.124				
4	LASER	21.570	21.555	21.585				
5	LASER	0.312	0.297	0.327				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	17-D-6007-02-(16gacr ANSI-61) - K48 - V1-R0	04/03/26	0.48	13.739	23.109	0.060
R1						
R2						
R3						

CORTE

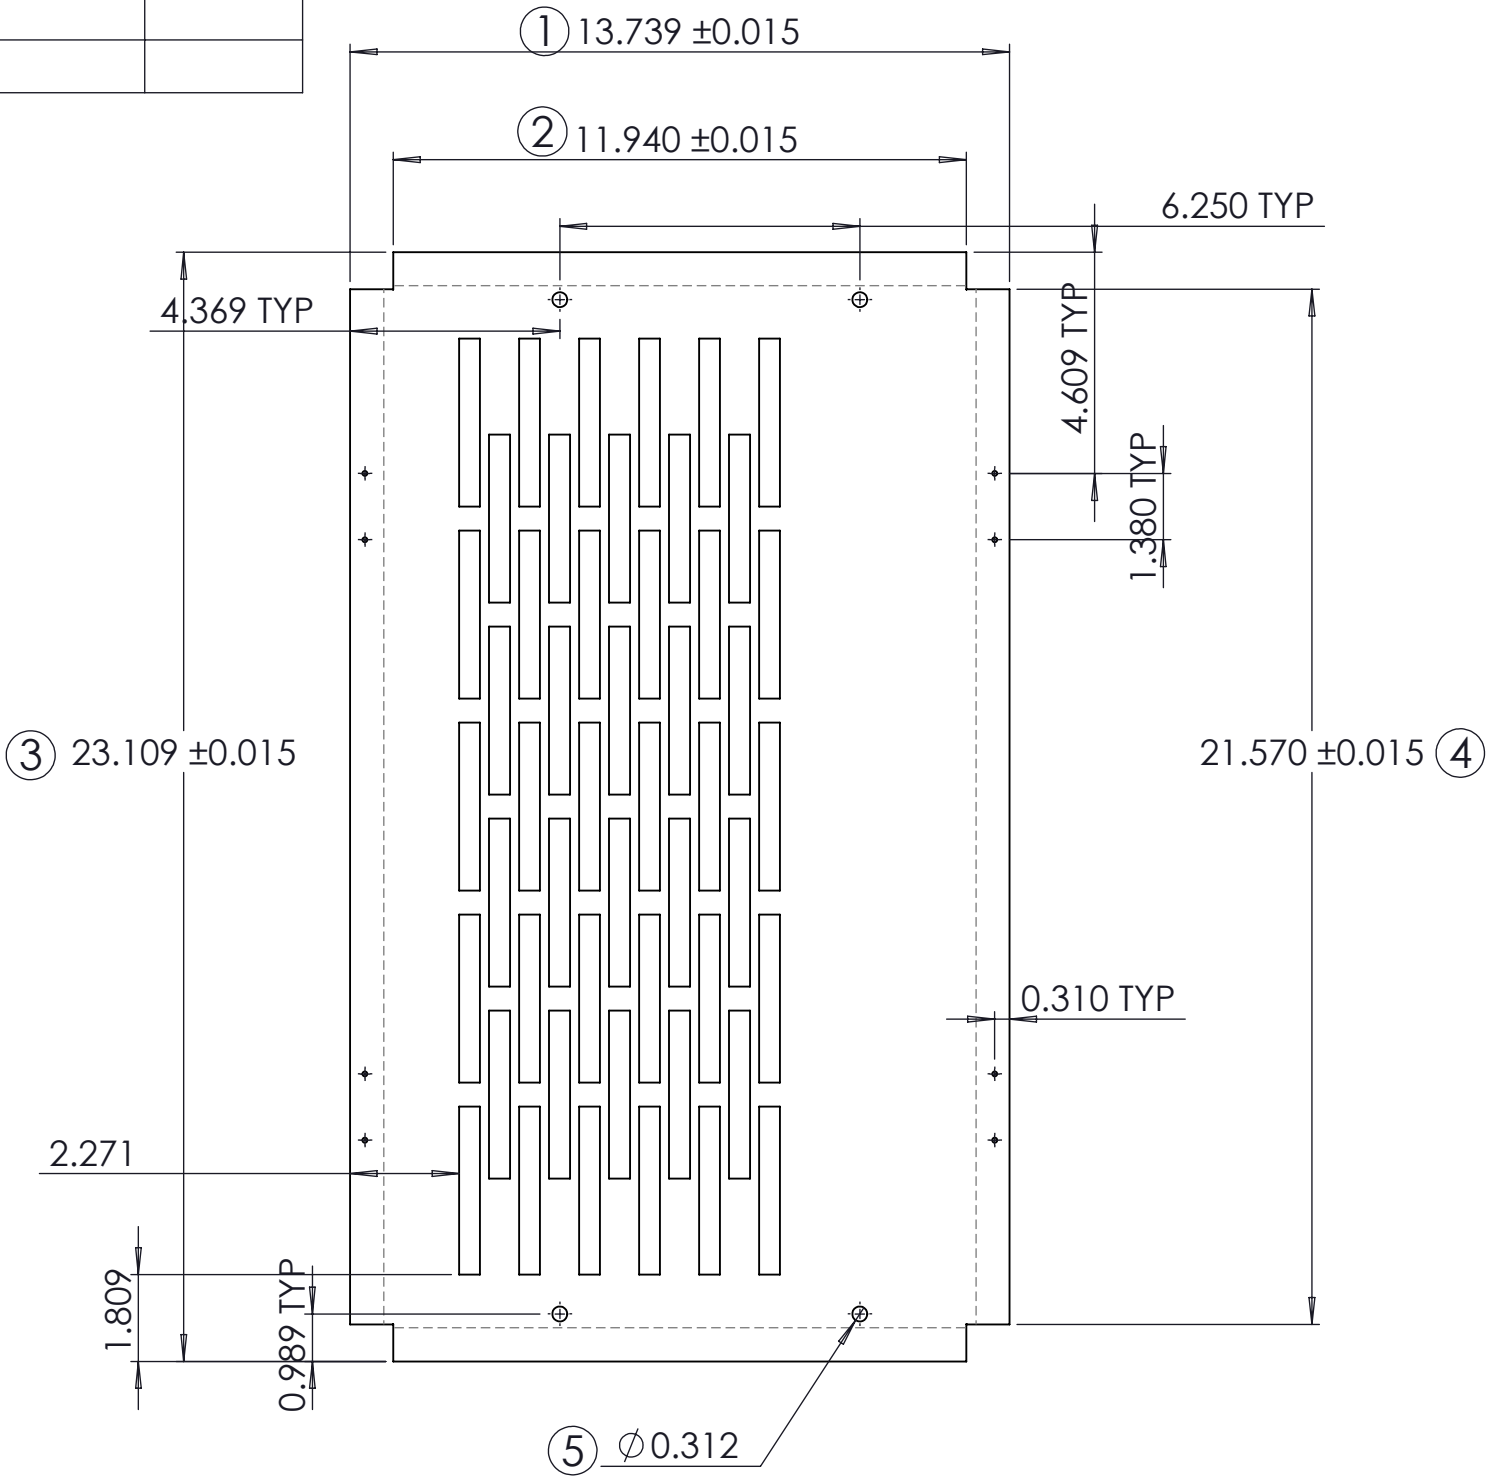

OC: