


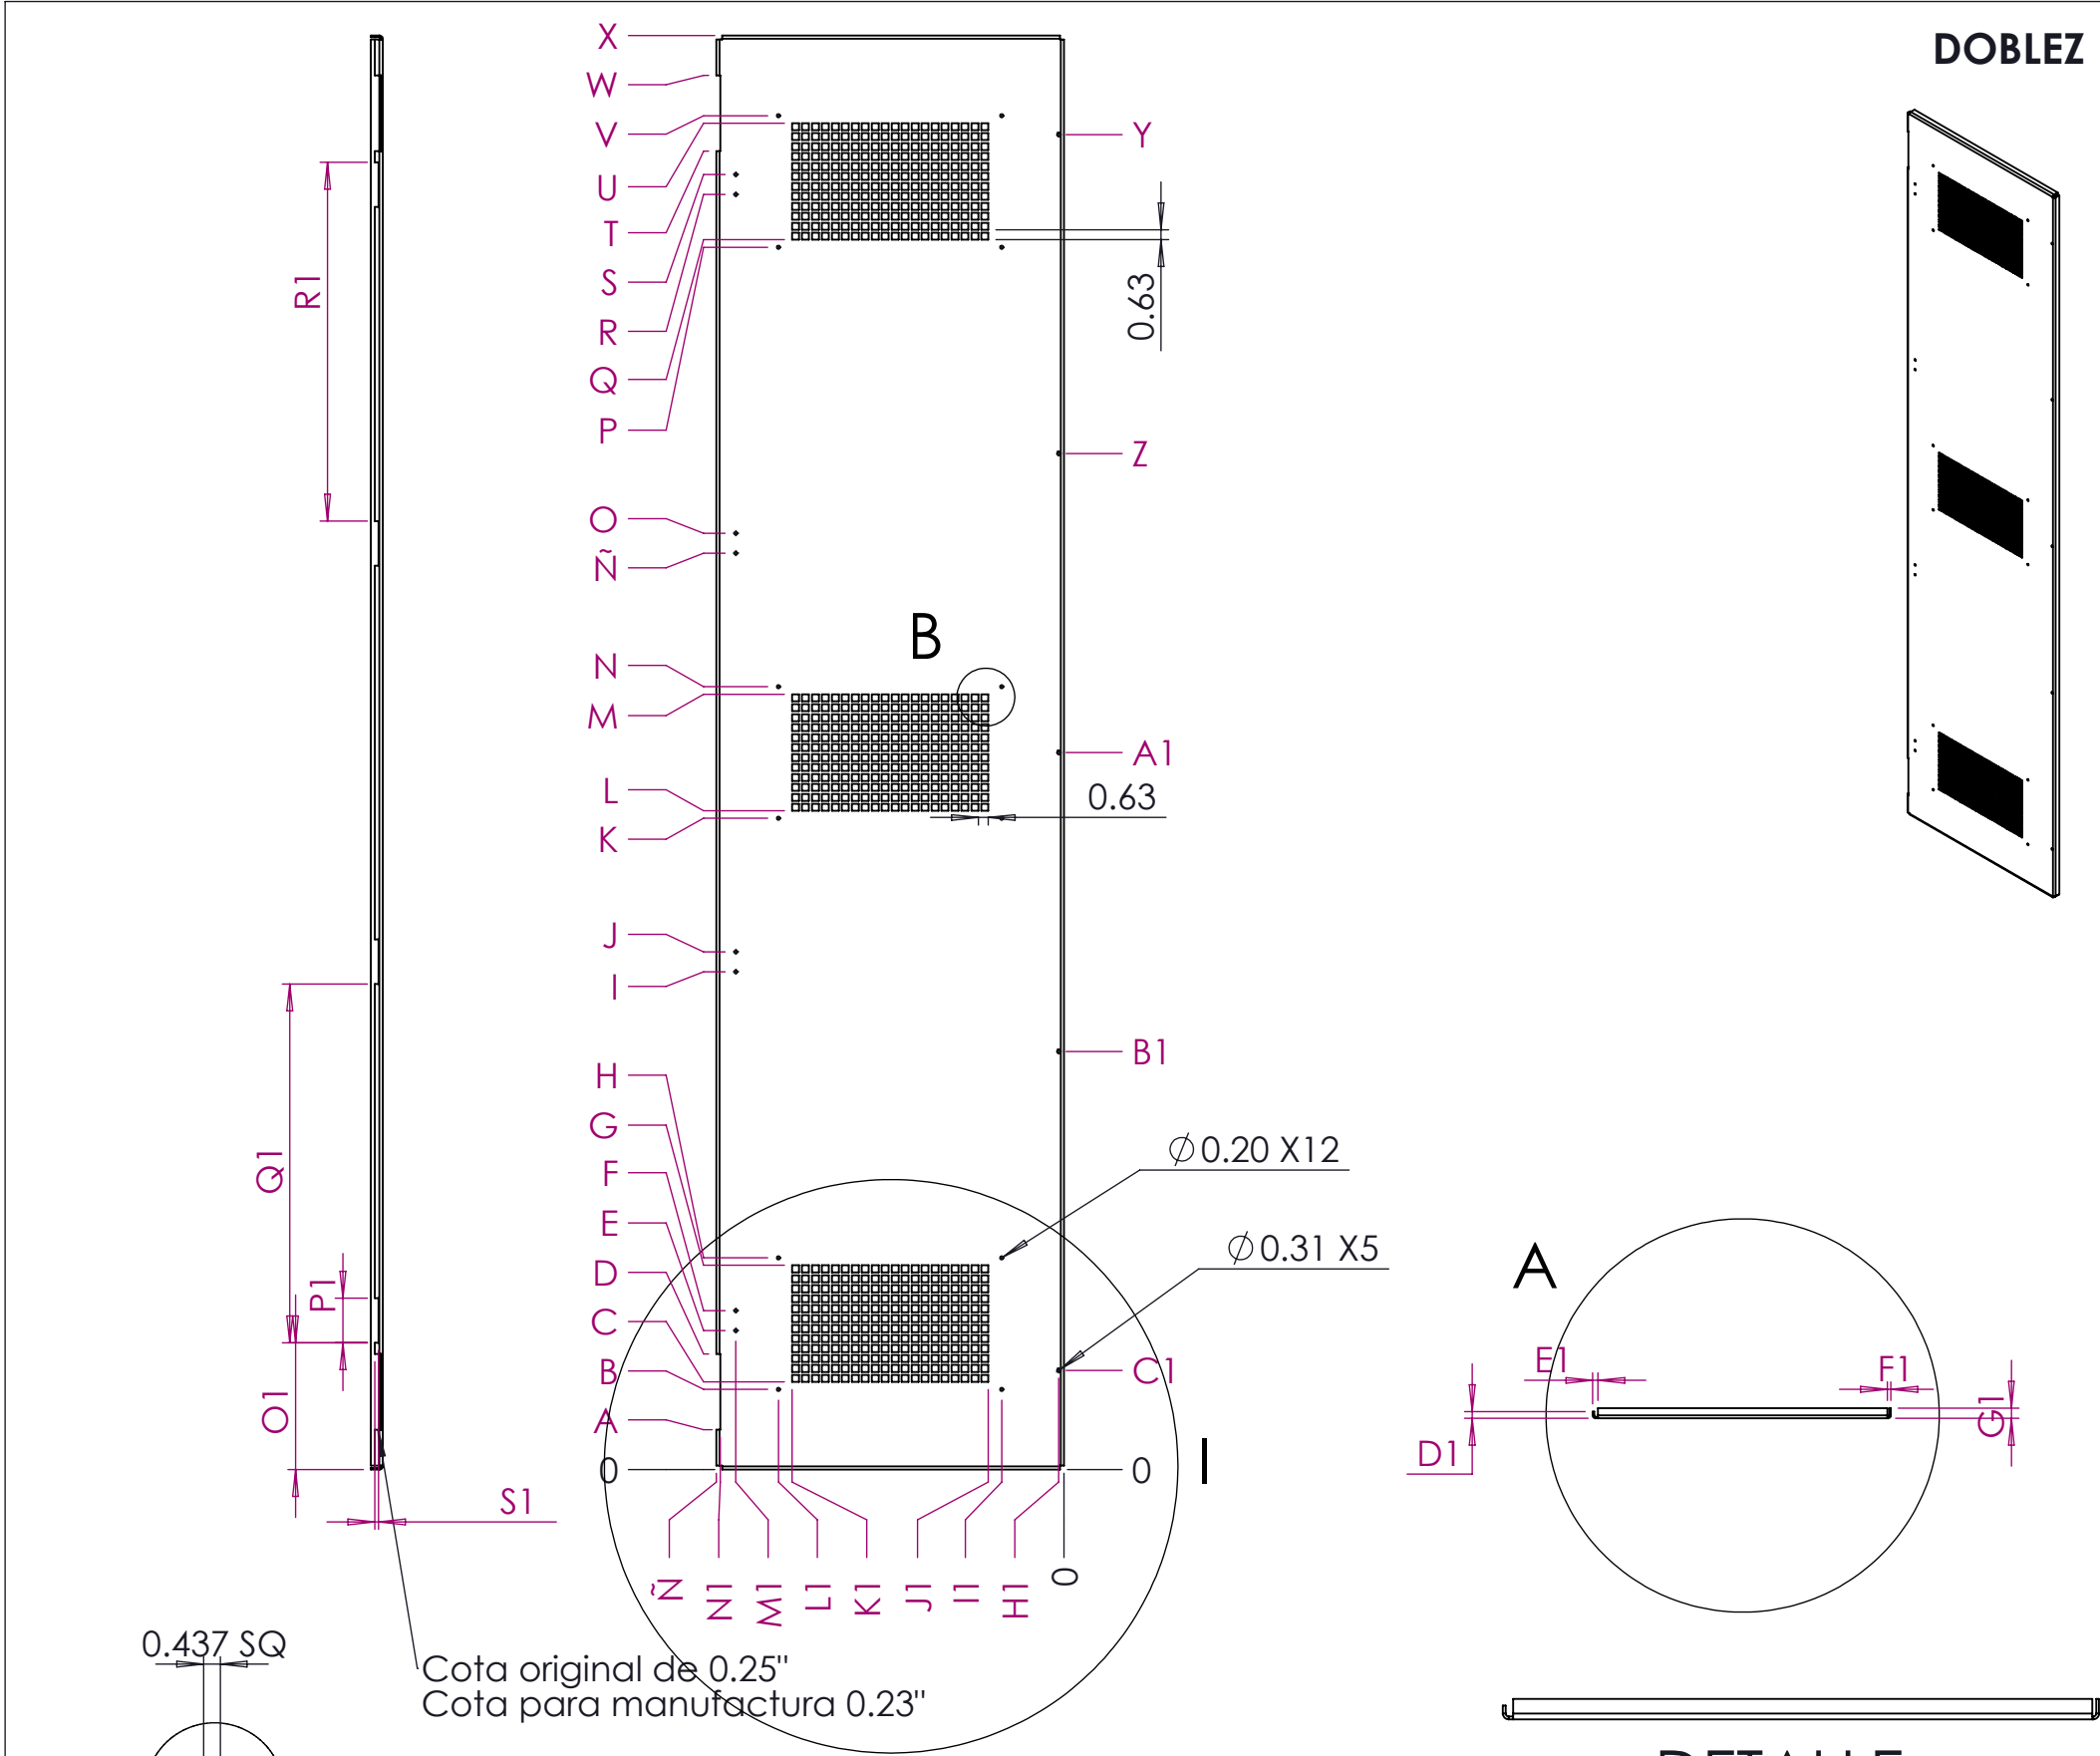

MEDIDA	DIMENSION	LIM. I	LIM. S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.500	2.485	2.515				
B	5.030	5.015	5.045				
C	5.500	5.485	5.515				
D	7.250	7.235	7.265				
E	8.720	8.705	8.735				
F	9.970	9.955	9.985				
G	12.810	12.795	12.825				
H	13.280	13.265	13.295				
I	31.220	31.205	31.235				
J	32.470	32.455	32.485				
K	40.850	40.835	40.865				
L	41.310	41.295	41.325				
M	48.630	48.615	48.645				
N	49.100	49.085	49.115				
Ñ	21.810	21.795	21.825				
O	58.720	58.705	58.735				
P	76.660	76.645	76.675				
Q	77.130	77.115	77.145				
R	79.970	79.955	79.985				
S	81.220	81.205	81.235				
T	82.690	82.675	82.705				
U	84.440	84.425	84.455				
V	84.910	84.895	84.925				
W	87.440	87.425	87.455				
X	89.940	89.925	89.955				
Y	83.720	83.705	83.735				
Z	63.720	63.705	63.735				
AI	44.970	44.955	44.985				
BI	26.220	26.205	26.235				
CI	6.220	6.205	6.235				
DI	0.500	0.485	0.515				
EI	0.380	0.365	0.395				
FI	0.250	0.235	0.265				
GI	0.750	0.735	0.765				
HI	0.340	0.325	0.355				
II	3.910	3.895	3.925				
JI	4.750	4.735	4.765				
KI	17.060	17.045	17.075				
LI	17.910	17.895	17.925				
MI	20.580	20.565	20.595				
NI	21.560	21.545	21.575				
ÑI	21.810	21.795	21.825				
OI	7.950	7.935	7.965				
PI	2.800	2.785	2.815				
QI	22.500	22.485	22.515				
RI	22.500	22.485	22.515				
SI	0.230	0.215	0.245				

DETALLE B

DETALLE A
ESCALA 1 : 7

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	16 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches




25W90H DOOR				Dwn No: P13704-152-(12gacr ANSI-61) - K47 - V0-R0		Rev: 00
Dwn: AWW	25/03/2026	Chk: AWW	25/03/2026	Apvd: AWW	25/03/2026	Sht 1 of 1


TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	22.705	22.690	22.720				
2	LASER	21.180	21.165	21.195				
3	LASER	89.440	89.425	89.455				
4	LASER	91.085	91.070	91.100				
5	LASER	0.437	0.422	0.452				
6	LASER	0.200	0.185	0.215				
7	LASER	0.190	0.175	0.205				
8	LASER	0.310	0.295	0.325				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R1	P13704-152-(12gacr ANSI-61) - K47 - V0-R0	20/02/26	0.61	22.751	91.131	0.105
R2	P13704-152-(12gacr ANSI-61) - K47 - V0-R0	18/03/26	0.42	22.688	91.068	0.105
R3	P13704-152-(12gacr ANSI-61) - K47 - V0-R0	25/03/26	0.47	22.705	91.085	0.105
R4						

CORTE

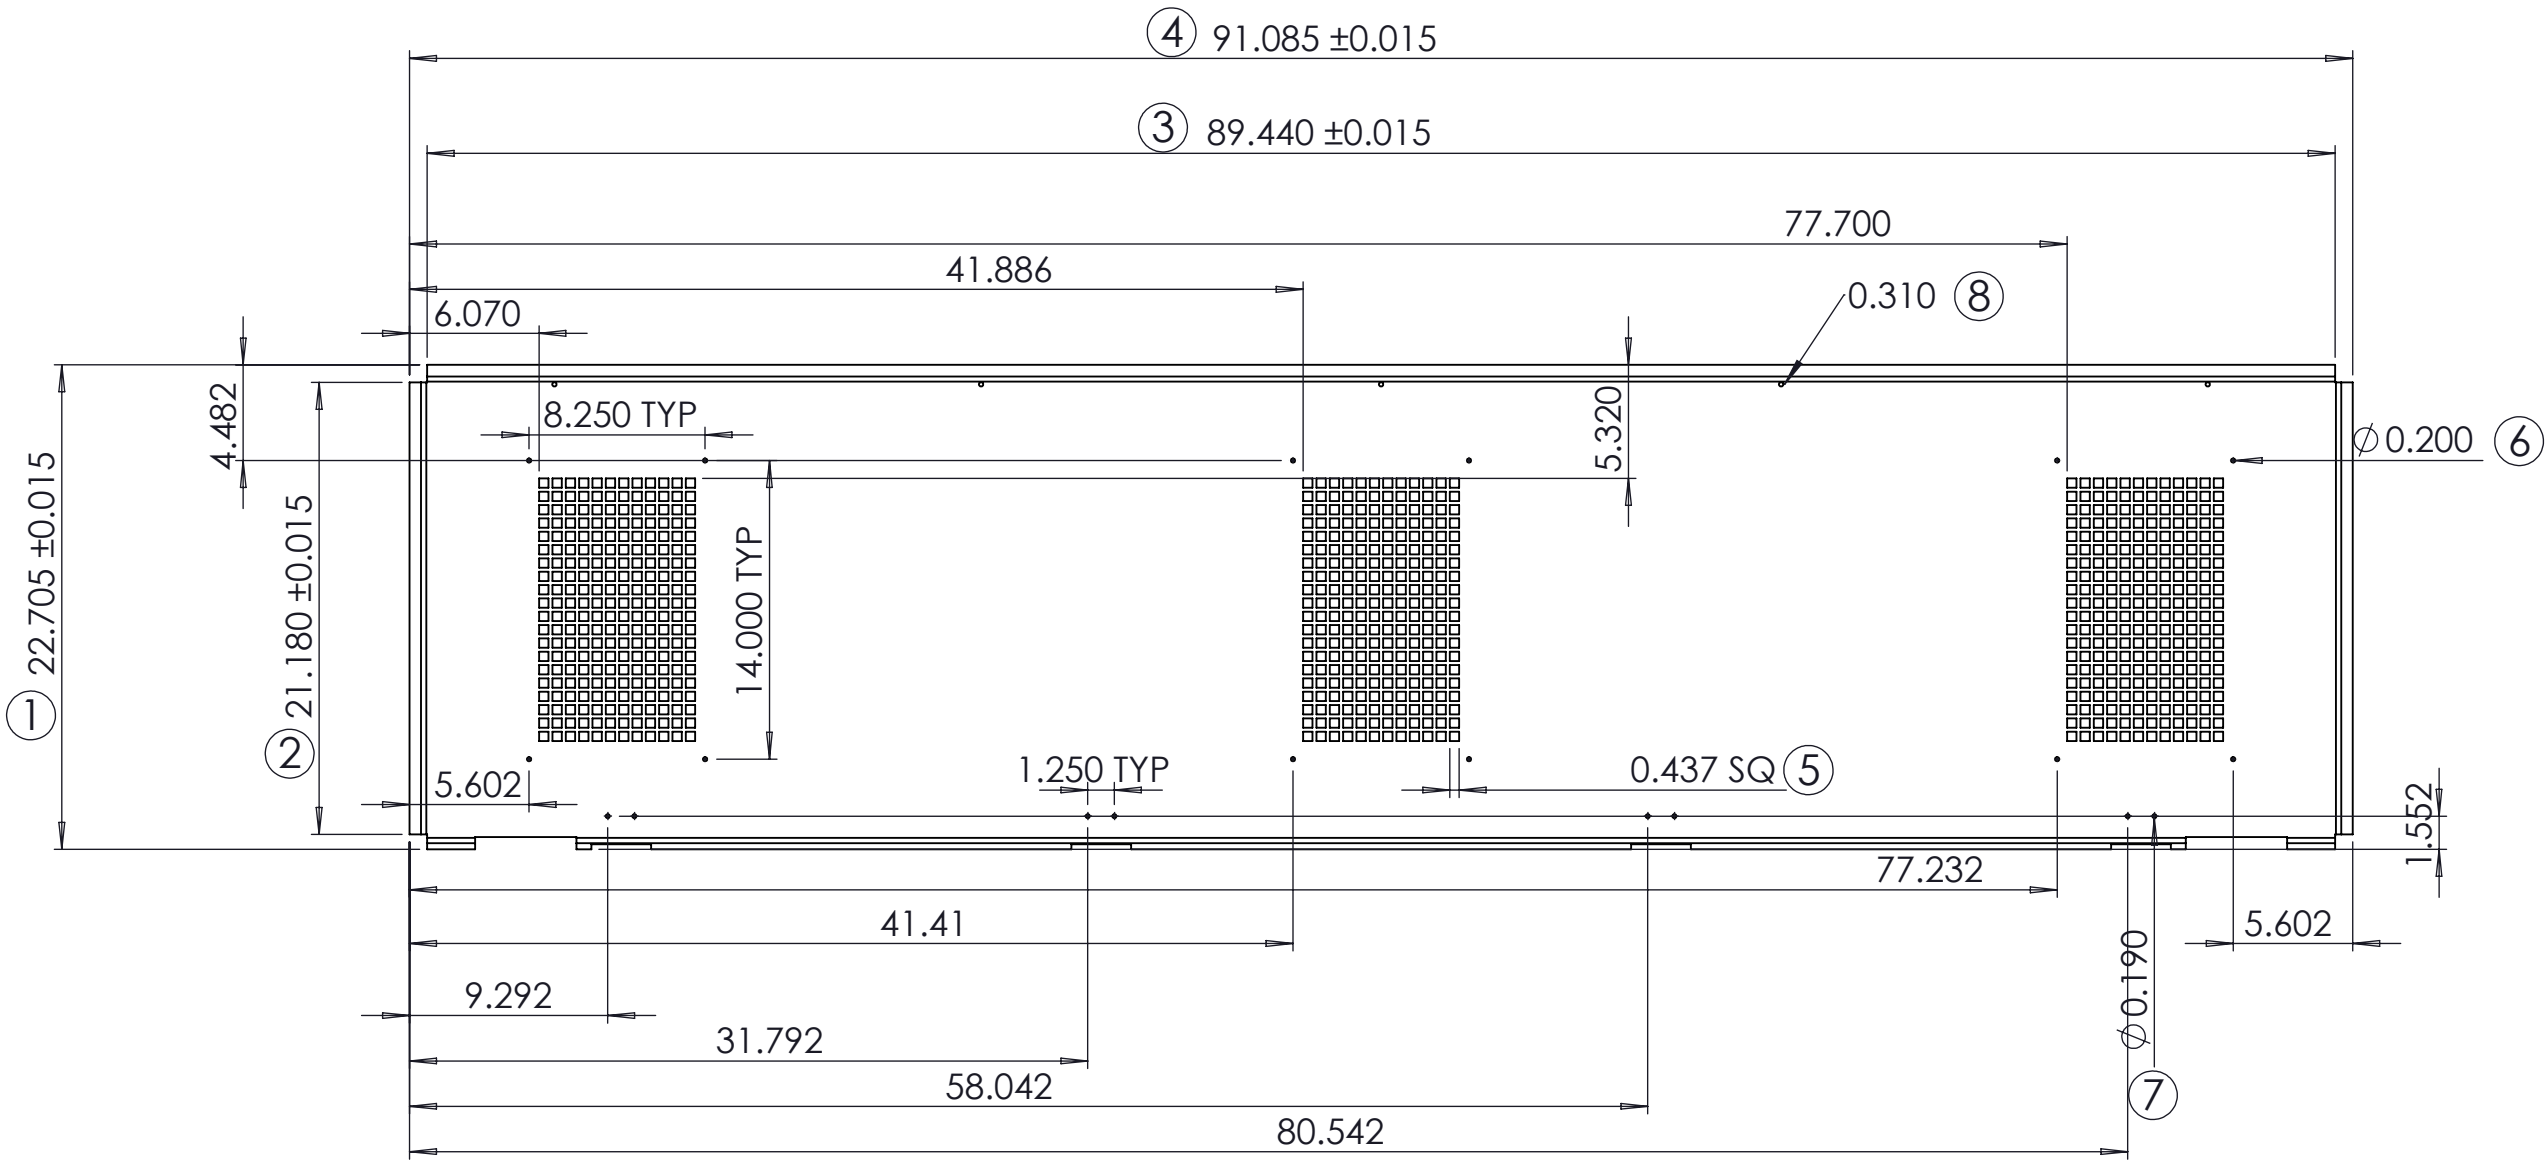

MEDIDA	MEDICION	LIM. I	LIM. S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
D1	0.500	0.485	0.515				
E1	0.380	0.365	0.395				
F1	0.250	0.235	0.265				
G1	0.750	0.735	0.765				
H1	0.340	0.325	0.355				
I1	3.910	3.895	3.925				
J1	4.750	4.735	4.765				
K1	17.060	17.045	17.075				
L1	17.910	17.895	17.925				
M1	20.580	20.565	20.595				
N1	21.560	21.545	21.575				
Ñ1	21.810	21.795	21.825				

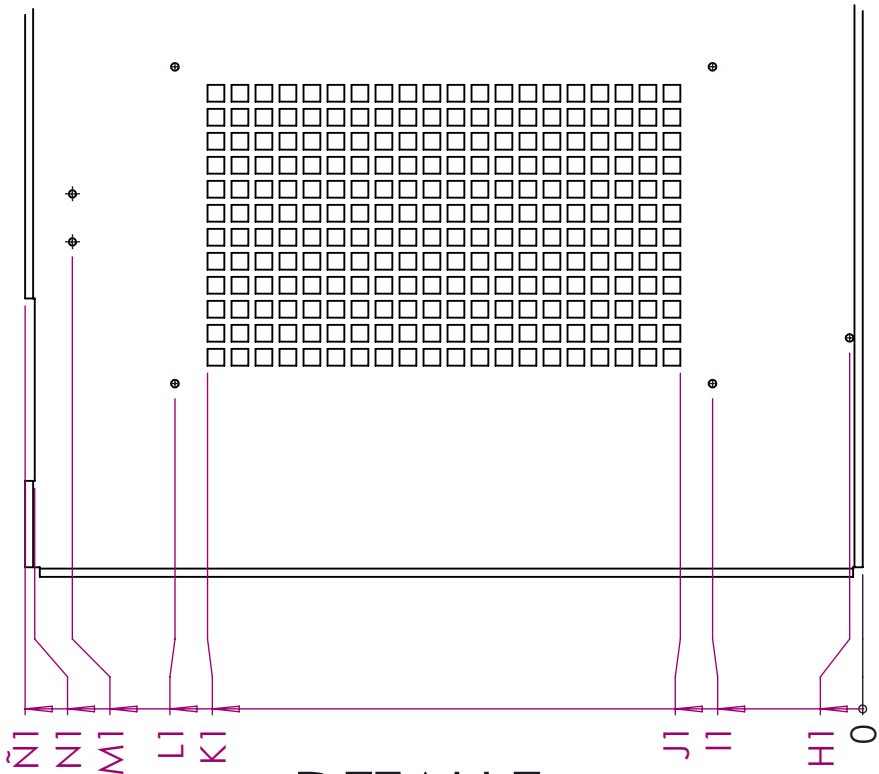

DETALLE J
ESCALA 1 : 5

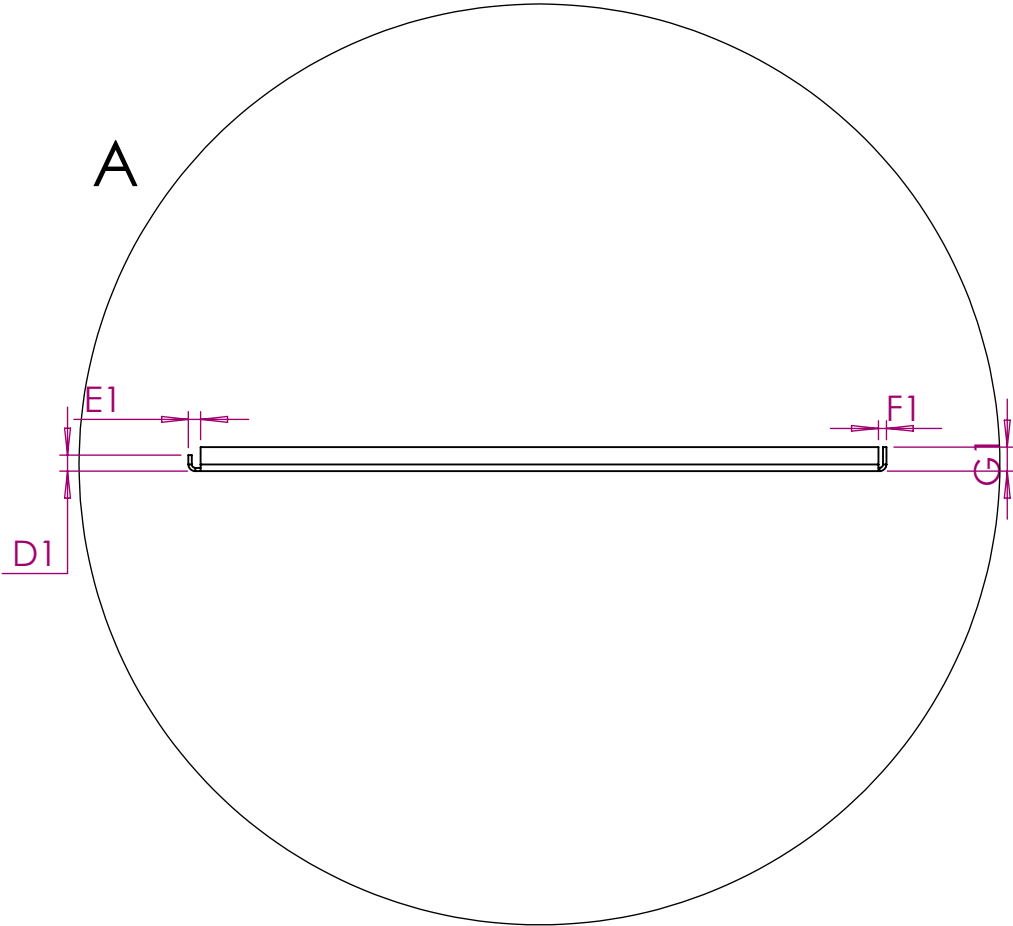


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	16 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



25W90H DOOR				Dwn No: P13704-152-(12gacr ANSI-61) - K47 - V0-R0			Rev: 00
Dwn:AWV	25/03/2026	Chk: AWV	25/03/2026	Apvd: AWV	25/03/2026	Sht 1 of 1	